

# Tipping points in diversified farming systems

Supplementary materials: Full code base for simulations and figures

Melissa Chapman      Serge Wiltshire      Timothy Bowles      Liz Carlisle  
Fredrico Castillo      David Gonthier      Alastair Iles      Daniel Karp  
Claire Kremen      Jeff Liebert      Elissa Olimpi      Matthew Ryan      Amber Sciligo  
Jennifer Thompson      Hannah Waterhouse      Kenzo Eszquivel      Sasha Gennet  
Carl Boettiger

2020-07-02

## Initializations

### Load libraries

```
rm(list = ls(all.names = TRUE)) # clean environment

# data / MDP libraries
library(tidyverse)
library(Hmisc)
library(dplyr)
library(quantmod) # for findPeaks fxn
library(MDPtoolbox)

# plotting libraries
library(corrplot)
library(RColorBrewer)
library(ggthemes)
library(ggpubr)
library(ggplot2)
library(hrbrthemes)
library(Cairo)
library(extrafont)
extrafont::loadfonts()
ggplot2::theme_set(hrbrthemes::theme_ipsum_rc())
library(patchwork) # devtools::install_github("thomasp85/patchwork")
library(ggtext) # install cli, gh, devtools::install_github("clauswilke/ggtext")
```

### Global settings

```
pal <- solarized_pal()(7) # global color palette
set.seed(4) # random seed
```

## Set MDP parameters

```
# define action and state space
actions <- seq(0, 1, length = 100) # vector of possible action values
states <- seq(0, 1.5, length = 100) # vector of possible state values

# set global mdp parameters
params <- list(
  benefit = 1.57, # benefit param for MDP
  cost = 1, # cost param for MDP
  sigma = 0.1, # ecological change stochasticity
  r = 0.1, # ecological change rate
  discount = 0.97, # myopic discount factor
  Tmax = 20 # max simulation time
)
```

## Define state transition probability and utility functions

```
#' Calculate transition probability based on current state and action.
#'
#' @param s The current state.
#' @param a The current action.
#' @param params Must be a list with element r.
#' @return The state transition probability.
transition_fn <- function(s, a, params) s + params$r * (a - s)

#' Calculate utility based on current state and action.
#'
#' @param s The current state.
#' @param a The current action.
#' @param params Must be a list with elements [benefit, cost].
#' @return The state utility.
utility_fn <- function(s, a, params) params$benefit * s - params$cost * a
```

## Define MDP model function to calculate P and U matrices

```
#' Calculate transition probability matrix and utility matrix based on MDP parameters.
#'
#' @param states A vector representing the state space.
#' @param actions A vector representing the action space.
#' @param params Must be a list with elements [benefit, cost, sigma].
#' @param transition_fn A function(state, action, params) giving the transition
#' probability to the next state.
#' @param utility_fn A function(state, action, params) giving the value of the next state.
#' @return A list containing the transition probability matrix \code{P} and utility
#' matrix \code{U}.
continuous_model <- function(states, actions, params, transition_fn, utility_fn){

  transition_matrix <- function(states, actions, f, params){
```

```

n_s <- length(states)
n_a <- length(actions)
transition <- array(0, dim = c(n_s, n_s, n_a))
for(i in 1:n_a){
  for (k in 1:n_s) {
    nextpop <- transition_fn(states[k], actions[i], params)
    if (nextpop <= 0) {
      x <- c(1, rep(0, n_s - 1))
    } else {
      x <- truncnorm::dtruncnorm(
        states, 0, max(states), nextpop, params$sigma) # assumes truncated normal error
      if(sum(x) <= 0){
        x <- c(1, rep(0, n_s - 1))
      } else {
        x <- x / sum(x)
      }
    }
    transition[k, , i] <- x
  }
}
if(any(is.na(transition))) stop("error creating transition matrix")
transition
}

utility_matrix <- function(states, actions, utility_fn, params){
  utility <- array(dim=c(length(states), length(actions)))
  for(i in 1:length(states)){
    for(j in 1:length(actions)){
      utility[i,j] <- utility_fn(states[i], actions[j], params)
    }
  }
  utility
}

list(P = transition_matrix(states, actions, f, params),
     U = utility_matrix(states, actions, utility_fn, params))
}

```

## Define main simulation function

```

#' Run DFS-MDP simulation for a single agent based on MDP simulation parameters.
#'
#' @param P Transition probability matrix, output from continuous_model().
#' @param U Utility matrix, output from continuous_model().
#' @param policy Optimal decision policy.
#' @param discount Myopic discount factor.
#' @param x0 A vector of initial states.
#' @param Tmax Max time for the simulation.
#' @return A dataframe with time, state, action, and value.
sim_mdp <- function(P, U, policy, discount, x0, Tmax){

  n_states <- dim(P)[1]

```

```

state <- action <- value <- numeric(Tmax+1)
state[1] <- x0
tsteps <- 1:(Tmax+1)

for(t in tsteps){
  # select action, determine value, transition to next state
  action[t] <- policy[state[t]]
  value[t] <- U[state[t], action[t]] * discount^(t-1)
  state[t+1] <- sample(1:n_states, 1, prob = P[state[t], , action[t]])
}
data.frame(time = 0:Tmax, state = state[tsteps],
           action = action[tsteps], value = value[tsteps])
}

```

## Set global simulation parameters

```

reps <- 500 # number of replicate simulations to run
init <- truncnorm::rtruncnorm(reps, 0, 1, 0.5, 0.2) %>% # sample init s from norm dist
  map_int(function(x) which.min(abs(x - states))) # map to values in states vector

```

## “Base-case” simulation

### Define and solve MDP for base-case

```

# compute P and U matrices for the MDP
model <- continuous_model(states, actions, params, transition_fn, utility_fn)

# solve the MDP to find the optimal decision policy
base_soln <- MDPtoolbox::mdp_value_iteration(model$P, model$U, params$discount)

## [1] "MDP Toolbox: iterations stopped, epsilon-optimal policy found"

base_soln_df <- tibble(state = states, action = actions[base_soln$policy])

```

### Run base-case simulation

### Define timeseries and density plotting functions

```

# timeseries plot of multiple repetitions
sim_plot_ts <- function(sims, title = ggtitle(NULL), tpos = "plot", ytxtoff = FALSE,
                        endcol = pal[1], annotate = FALSE, an_x = NULL, an_lab = NULL,
                        dnmarmod = 0, upmarmod = 0, lmarmod = 0, rmarmod = 0){
  df <- sims %>%
    select(-value) %>% # tidy
    mutate(state = states[state], action = actions[action]) # rescale

```

```

Tmax <- max(sims$time)

stcol <- col2rgb(endcol)
stcol <- stcol/5
stcol <- rgb(t(stcol), maxColorValue=255)

ytitc <- "black"
ytxtc = "gray30"
if (yttxtoff) {
  ytitc <- NA
  ytxtc <- NA
}

p <- df %>%
  ggplot(aes(time, state, group = reps, col = time)) +
  geom_path(alpha = 0.1, show.legend = FALSE) +
  title +
  labs(x="Sim. year", y="ES state") +
  scale_x_continuous(limits = c(0,Tmax), breaks = seq(0, Tmax, by=5),
    expand = c(.01,.01)) +
  scale_y_continuous(limits = c(0,1.5), expand = c(.02,.02)) +
  scale_color_gradient(low=stcol, high=endcol) +
  theme(axis.text.x=element_text(size=10),
    axis.text.y=element_text(size=10, color = ytxtc),
    axis.title.x=element_text(size=10),
    axis.title.y=element_text(size=10, color = ytitc),
    plot.title = element_text(size = 10, face = "bold"),
    plot.title.position = tpos,
    panel.grid.minor = element_blank(),
    plot.margin=grid::unit(c(5+upmarmod,5+rmarmod,5+dnmarmod,5+lmarmod), "mm"))
if(annotate) {
  p <- p +
    geom_vline(xintercept = an_x, linetype="dashed", color = "red3", size=.5) +
    annotate('label', x = an_x + 2, y = 1.3, label = an_lab, hjust = 0, vjust = .5,
      family = "Roboto", size = 3.25, label.padding = unit(.15, "lines"),
      label.size = 0, alpha = .6) +
    annotate("segment", x = an_x + 1.75, xend = an_x + .5, y = 1.3, yend = 1.3,
      size=.5, arrow=arrow(length = unit(0.22, "cm")))
}
p
}

# density plot showing initial ES distribution and final distribution
sim_plot_dens <- function(sims, title = ggtitle(NULL), tpos = "plot", endcol = pal[1],
  lab_lo_peak = FALSE, lab_hi_peak = FALSE,
  dnmarmod = 0, upmarmod = 0, lmarmod = 0, rmarmod = 0){

df <- sims %>%
  mutate(state = states[state]) %>% # rescale
  select(state, time)
Tmax <- max(sims$time)

```

```

stcol <- col2rgb(endcol)
stcol <- stcol/5
stcol <- rgb(t(stcol), maxColorValue=255)

p <- df %>% filter(time %in% c(0, Tmax)) %>%
  ggplot() + geom_density(aes(state, group = time, fill = time, color = time),
    alpha=0.8) +

  coord_flip() +
  title +
  labs(x="", y="Density", fill="Time") +
  scale_x_continuous(limits = c(0,1.5), expand = c(.02,.02)) +
  scale_y_continuous(breaks = scales::pretty_breaks(n = 2)) +
  scale_fill_gradient(low=stcol, high=endcol, guide = guide_colorbar(barwidth = .5),
    breaks=c(0, Tmax)) +
  scale_color_gradient(low=stcol, high=endcol, guide = NULL) +
  theme(axis.text.x=element_text(size=10),
    axis.text.y=element_blank(),
    axis.title.x=element_text(size=10),
    axis.title.y=element_text(size=10),
    legend.text = element_text(size=10),
    legend.title = element_text(size=10),
    legend.box.margin=margin(0,0,0,-5),
    plot.title = element_text(size = 10, face = "bold"),
    plot.title.position = tpos,
    panel.grid.minor = element_blank(),
    plot.margin=grid::unit(c(5+upmarmod,5+rmarmod,5+dnmarmod,5+lmarmod), "mm"))

if(lab_lo_peak) {
  ymax <- ggplot_build(p)$layout$panel_scales_y[[1]]$range$range[2]
  peak_lo <- ggplot_build(p)$data[[1]] %>%
    filter(group == 2, x < .4) %>%
    arrange(desc(y)) %>%
    select(x,y) %>%
    filter(row_number()==1)
  # dotted line
  p <- p +
    annotate('segment', x = peak_lo$x, xend = peak_lo$x, y = peak_lo$y - .1 * ymax,
      yend = peak_lo$y + .1 * ymax, linetype="dotted")
  # text annotation (decide whether to place left or right of line)
  if(peak_lo$y > .7 * ymax) {
    p <- p +
      annotate('label', x = peak_lo$x, y = peak_lo$y - .32 * ymax,
        label = sprintf('%.2f', peak_lo$x), hjust = .5, vjust = .5,
        family = "Roboto Condensed", size = 3,
        label.padding = unit(.15, "lines"), label.size = 0, alpha = .8)
  } else {
    p <- p +
      annotate('label', x = peak_lo$x, y = peak_lo$y + .26 * ymax,
        label = sprintf('%.2f', peak_lo$x), hjust = .5, vjust = .5,
        family = "Roboto Condensed", size = 3,
        label.padding = unit(.15, "lines"), label.size = 0, alpha = .8)
  }
}

```

```

if(lab_hi_peak){
  ymax <- ggplot_build(p)$layout$panel_scales_y[[1]]$range$range[2]
  peak_hi <- ggplot_build(p)$data[[1]] %>%
    filter(group == 2, x > .6) %>%
    arrange(desc(y)) %>%
    select(x,y) %>%
    filter(row_number()==1)
  # dotted line
  p <- p +
    annotate('segment', x = peak_hi$x, xend = peak_hi$x, y = peak_hi$y - .1 * ymax,
      yend = peak_hi$y + .1 * ymax, linetype="dotted")
  # text annotation (decide whether to place left or right of line)
  if(peak_hi$y > .7 * ymax) {
    p <- p +
      annotate('label', x = peak_hi$x, y = peak_hi$y - .32 * ymax,
        label = sprintf('%.2f', peak_hi$x), hjust = .5, vjust = .5,
        family = "Roboto Condensed", size = 3,
        label.padding = unit(.15, "lines"), label.size = 0, alpha = .8)
  } else {
    p <- p +
      annotate('label', x = peak_hi$x, y = peak_hi$y + .26 * ymax,
        label = sprintf('%.2f', peak_hi$x), hjust = .5, vjust = .5,
        family = "Roboto Condensed", size = 3,
        label.padding = unit(.15, "lines"), label.size = 0, alpha = .8)
  }
}
p
}

```

## Generate base-case simulation figure

```

ggarrange(
  sim_plot_ts(sims_baseline, title = ggtitle("A. ES state timeseries"), rmarmod = -5),
  sim_plot_dens(sims_baseline, title = ggtitle("B. Initial and final state"),
    tpos = "panel", lab_lo_peak = TRUE, lab_hi_peak = TRUE, lmarmod = -5),
  widths = c(2.75, 2), nrow = 1, ncol = 2
)

```

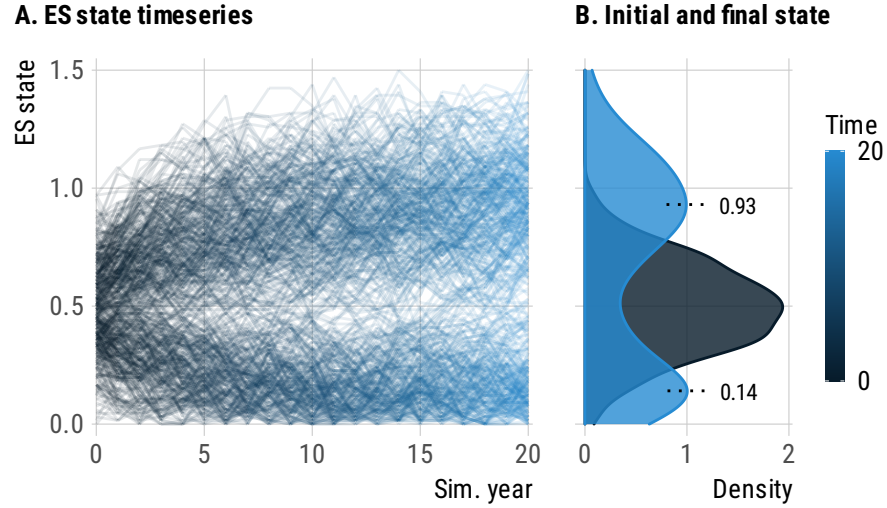


Figure 1: Initial ecosystem states are distributed normally (mean = 0.5; S.D. = 0.2; truncated at  $[0,1]$ ). Agents follow decision strategy  $\pi$  as shown in Fig 2 until  $t = 20$ . (A) Ecosystem state of each agent over time (500 simulations). (B) Initial ES distribution (dark blue) and final bimodal distribution at  $t = 20$  (light blue).

## Define base-base optimal decision strategy plotting function

```
# solution point plot with threshold annotated
soln_plot <- function(soln_df, tpt) {
  ggplot(soln_df, aes(state,action)) +
    geom_point(size = 1) +
    geom_vline(xintercept = tpt, linetype="dashed", color = "red3", size=.7) +
    annotate('label', x = tpt + .15, y = .375, label = "Tipping point",
             hjust = 0, vjust = .5, family = "Roboto", size = 3.25,
             label.padding = unit(.15, "lines"), label.size = 0, alpha = .65) +
    annotate("segment", x = tpt + .15, xend = tpt + .025, y = .375, yend = .375,
             size=.5, arrow=arrow(length = unit(0.22, "cm"))) +
    labs(x="ES state", y="Optimal DP adoption") +
    scale_x_continuous(limits = c(0,NA), expand = c(.01,.01)) +
    scale_y_continuous(limits = c(0,1), expand = c(.01,.01),
                       labels = scales::percent_format(accuracy = 1)) +
    theme(axis.text.x=element_text(size=10),
          axis.text.y=element_text(size=10),
          axis.title.x=element_text(size=10),
          axis.title.y=element_text(size=10),
          panel.grid.minor = element_blank(),
          plot.margin=grid::unit(c(5,5,5,5), "mm"))
}
```



## Generate optimal policy plot

```
state99th <- sims_baseline %>%  
  mutate(state = states[state]) %>%  
  pull(state) %>%  
  quantile(.99) %>%  
  unname()  
tpt <- 0  
for(si in 1:length(states)-1) {  
  if(base_soln_df$action[si] < .1 && base_soln_df$action[si+1] > .9) {  
    tpt <- base_soln_df$state[si] + ((base_soln_df$state[2] - base_soln_df$state[1]) / 2)  
  }  
}  
  
soln_plot(base_soln_df %>% filter(state <= state99th), tpt = tpt)
```

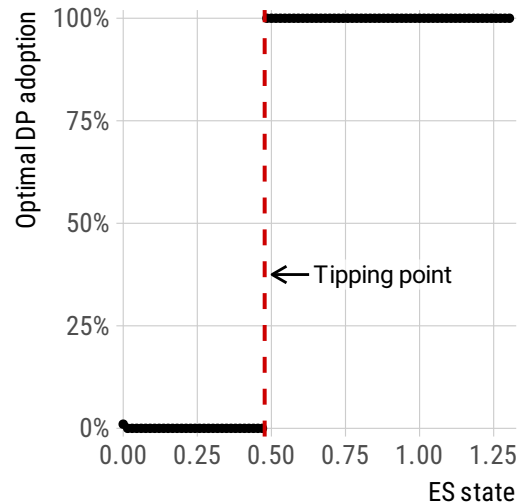


Figure 2: Optimal decision strategy  $\pi$  as a function of ES state, showing a tipping point at  $s \approx 0.48$ . The upper  $x$  axis limit is the 99th percentile of observed states in our simulation results ( $s \approx 1.3$ ).

## Land tenure experiment

### Calculate short-tenure MDP solution

### Define density curve comparison plotting function

```
# plot formatting helper functions  
# increase vertical spacing between legend keys  
# written by @clauswilke  
draw_key_polygon3 <- function(data, params, size) {  
  lwd <- min(data$size, min(size) / 4)  
}
```

```

grid::rectGrob(
  width = grid::unit(0.3, "npc"),
  height = grid::unit(0.8, "npc"),
  gp = grid::gpar(
    col = data$colour,
    fill = alpha(data$fill, data$alpha),
    lty = data$linetype,
    lwd = lwd * .pt,
    linejoin = "mitre"
  ))
}
# register new key drawing function,
# the effect is global & persistent throughout the R session
GeomDensity$draw_key = draw_key_polygon3

# plot comparing final and initial density curves of two simulations
sim_plot_dens_comp <- function(sims1, sims2, sims_base = "init",
  label1 = "Gp. A Final", label2 = "Gp. B Final",
  label_base = "Initial", title = ggtitle(NULL),
  tpos = "plot", cvec = c(pal[2], pal[1], pal[3]),
  dnmarmod = 0, upmarmod = 0, lmarmod = 0, rmarmod = 0){

  if (sims_base == "init") {
    df_base <- sims1 %>%
      mutate(state = states[state]) %>% # rescale
      filter(time %in% 0) %>%
      select(state) %>%
      add_column(id = label_base)
  } else {
    Tmax_base <- max(sims_base$time)
    df_base <- sims_base %>%
      mutate(state = states[state]) %>% # rescale
      filter(time %in% Tmax_base) %>%
      select(state) %>%
      add_column(id = label_base)
  }

  Tmax1 <- max(sims1$time)
  df1 <- sims1 %>%
    mutate(state = states[state]) %>% # rescale
    filter(time %in% Tmax1) %>%
    select(state) %>%
    add_column(id = label1)

  Tmax2 <- max(sims2$time)
  df2 <- sims2 %>%
    mutate(state = states[state]) %>% # rescale
    filter(time %in% Tmax1) %>%
    select(state) %>%
    add_column(id = label2)

  rbind(df_base, df1, df2) %>% mutate(id = factor(id, unique(id))) %>%
    ggplot() + geom_density(aes(state, group = id, fill = id, color = id), alpha=0.4) +

```

```

coord_flip() +
title +
labs(x="", y="Density") +
scale_x_continuous(limits = c(0,1.5), expand = c(.02,.02)) +
scale_y_continuous(breaks = scales::pretty_breaks(n = 2)) +
scale_fill_manual(values = cvec) +
scale_color_manual(values = cvec) +
theme(axis.text.x=element_text(size=10),
      axis.text.y=element_blank(),
      axis.title.x=element_text(size=10),
      axis.title.y=element_text(size=10),
      legend.text=element_text(size=9),
      legend.title = element_blank(),
      legend.key.size = unit(12, "mm"),
      legend.spacing.x = unit(-3, 'mm'),
      legend.box.margin=margin(0,0,0,-18),
      plot.title = element_text(size = 10, face = "bold"),
      plot.title.position = tpos,
      panel.grid.minor = element_blank(),
      plot.margin=grid::unit(c(5+upmarmod,5+rmarmod,5+dnmarmod,5+lmarmod), "mm"))
}

```

## Generate land tenure experiment plot

```

ggarrange(
  sim_plot_ts(sims_short_tenure,
    title = ggtitle("A. Short-tenure ES state timeseries"),
    endcol = pal[3], rmarmod = -5),
  sim_plot_dens_comp(sims_baseline, sims_short_tenure,
    label1 = "Long\ntenure\nfinal",
    label2 = "Short\ntenure\nfinal",
    title = ggtitle("B. ES state distribution"),
    tpos = "panel", lmarmod = -5),
  widths = c(2.75, 2), nrow = 1, ncol = 2
)

```

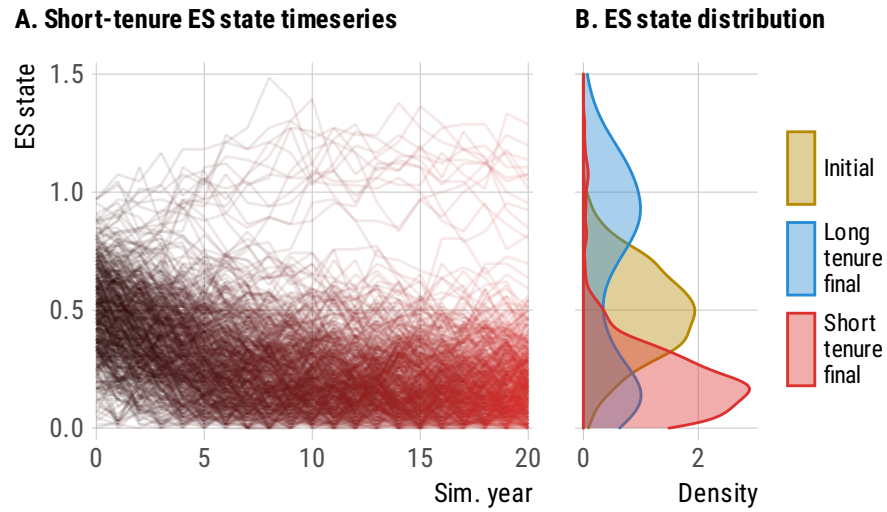


Figure 3: The simulation is identical to that in Fig 1, but the MDP is solved under a finite, 20-year time horizon. (A) Result of short land tenure on ES state over time. (B) Comparison between final state distribution of short- vs. long-tenure model runs.

## Incentive duration experiment

### Incentive simulation parameters and setup

```
# set incentive simulation parameters
T_incent_1 <- 2
T_incent_2 <- 10

# calc modified cost during incentive = 1 - 2 / T_incent
C_incent_1 <- 1 - 2 / T_incent_1
C_incent_2 <- 1 - 2 / T_incent_2

# incentive simulation fxn
incent_sim <- function(params) {
  incent_model <- continuous_model(states, actions, params,
                                   transition_fn, utility_fn)
  incent_soln <- MDPToolbox::mdp_value_iteration(incent_model$P,
                                                  incent_model$U, params$discount)

  # simulate incentive period
  start <- sim(incent_soln, Tmax = params$T_incent, x0 = init)
  xi <- start %>% filter(time == params$T_incent) %>% pull(state)
  # pad to Tmax with baseline decision rule
  rest <- sim(base_soln, Tmax = params$Tmax - params$T_incent, x0 = xi) %>%
    filter(time!=0) %>% mutate(time = time + params$T_incent)
  bind_rows(start, rest)
}
```

## Run incentives simulation

```
# run incentive simulation
sims_incent_abrupt <- incent_sim(list(benefit = params$benefit,
                                     cost = C_incent_1,
                                     sigma = params$sigma,
                                     r = params$r,
                                     discount = params$discount,
                                     T_incent = T_incent_1, Tmax = params$Tmax))
```

```
## [1] "MDP Toolbox: iterations stopped, epsilon-optimal policy found"
```

```
sims_incent_sust <- incent_sim(list(benefit = params$benefit,
                                     cost = C_incent_2,
                                     sigma = params$sigma,
                                     r = params$r,
                                     discount = params$discount,
                                     T_incent = T_incent_2, Tmax = params$Tmax))
```

```
## [1] "MDP Toolbox: iterations stopped, epsilon-optimal policy found"
```

## Plot incentive simulation

```
ggarrange(
  sim_plot_ts(sims_incent_abrupt, title = ggtitle("A. Abrupt incentive"),
             annotate = TRUE, an_x = T_incent_1,
             an_lab = sprintf("%i year\n%i%% off", T_incent_1,
                              round((1-C_incent_1)*100)),
             rmarmod = -10, endcol = pal[5]),
  sim_plot_ts(sims_incent_sust, title = ggtitle("B. Sustained incentive"),
             annotate = TRUE, an_x = T_incent_2,
             an_lab = sprintf("%i year\n%i%% off", T_incent_2,
                              round((1-C_incent_2)*100)),
             tpos = "panel", ytxttoff = T, endcol = pal[6], rmarmod = -5, lmarmod = -5),
  sim_plot_dens_comp(sims_incent_abrupt, sims_incent_sust, sims_base = sims_baseline,
                    label1 = "Abrupt\nincentive", label2 = "Sustained\nincentive",
                    label_base = "No\nincentive",
                    title = ggtitle("C. Final ES state distribution"), tpos = "panel",
                    cvec = c(pal[2], pal[5], pal[6]), lmarmod = -5, rmarmod = -5),
  nrow = 1, ncol = 3, widths = c(1,1,1)
)
```

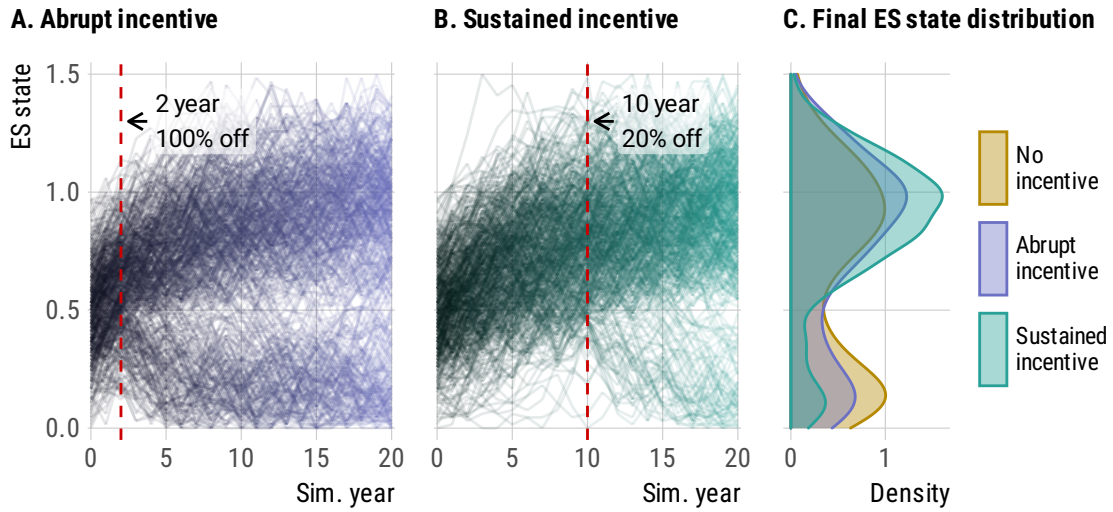


Figure 4: Starting from the same initial states as Fig 1, ES state timeseries are shown for (A) a large, abrupt incentive (100% of adoption expenses are covered for two years) vs. (B) a smaller, more sustained incentive (adoption cost is 80% of baseline for 10 years). Ignoring discounting, both packages have the same total cost to the funder (the equivalent of 2 years' worth of full adoption cost offsets). After the incentive period, agents adjust their decision rules to that of the base case (i.e. no incentive) until  $t = 20$ . (C) Shows that the sustained incentive ultimately drove more DP adoption.

## Temporal dynamics experiment

### Define “benefit sweep” simulation function

```
sim_b_sweep <- function(scenarios, inf_fin, t_horiz = 2) {

  sim_b_sweep_scenario <- function(params) {
    model <- continuous_model(states, actions, params, transition_fn, utility_fn)
    if(inf_fin == "infinite") {
      soln <- MDPtoolbox::mdp_value_iteration(model$P, model$U, params$discount)
    } else if(inf_fin == "finite") {
      soln <- MDPtoolbox::mdp_finite_horizon(model$P, model$U, params$discount,
                                             N = t_horiz)
    } else stop('inf_fin must be "infinite" or "finite"')
    sim(soln, Tmax = params$Tmax) %>%
      filter(time == params$Tmax)
  }

  scenarios %>%
    purrr::transpose() %>%
    furrr::future_map_dfr(sim_b_sweep_scenario, .id = "id") %>%
    left_join(scenarios, by = "id") %>%
    mutate(state = states[state])
}
```

## Parameterize and run “benefit-sweep” simulation scenarios

```
chans_scenarios <-
  tidyr::crossing(cbr = seq(.55, .7, length.out = 40),
    cost = params$cost,
    sigma = params$sigma,
    r = params$r,
    discount = params$discount,
    Tmax = params$Tmax) %>%
  tibble::rownames_to_column("id") %>%
  mutate(benefit = cost / cbr)
chans_sims <- sim_b_sweep(chans_scenarios, "infinite")
```

[illegible]

```
fast_r_scenarios <-
  tidyr::crossing(cbr = seq(.825, .975, length.out = 40),
    cost = params$cost,
    sigma = params$sigma,
    r = 0.95,
    discount = params$discount,
    Tmax = params$Tmax) %>%
  tibble::rownames_to_column("id") %>%
  mutate(benefit = cost / cbr)
fast_r_sims <- sim_b_sweep(fast_r_scenarios, "infinite")
```

[illegible]



```

myopic_d_scenarios <-
  tidyr::crossing(cbr = seq(.025, .175, length.out = 40),
    cost = params$cost,
    sigma = params$sigma,
    r = params$r,
    discount = params$discount,
    Tmax = params$Tmax) %>%
  tibble::rownames_to_column("id") %>%
  mutate(benefit = cost / cbr)
myopic_d_sims <- sim_b_sweep(myopic_d_scenarios, "finite", t_horiz = 2)

```

## Define “benefit sweep” simulation helper and plotting functions

```

# find peaks fcn for benefit sweep experiment
b_sweep_peaks <- function(sims, smoothing = 1.5,
  ythresh = 0.125, output_bizone = FALSE) {

  bimin = 0
  bimax = 0
  peaks <- tibble(cbr = numeric(), peak = numeric())
  for(this_cbr in unique(sims$cbr)) {
    dens <- density((sims %>% filter(cbr == this_cbr))$state, adjust = smoothing)
    dens <- tibble(x = dens$x, y = dens$y) %>% filter(y >= ythresh)
    ps <- dens$x[findPeaks(dens$y)]
    for(p in ps) {
      peaks <- add_row(peaks, cbr = this_cbr, peak = p)
    }
    if(output_bizone && length(ps) > 1) {
      if(bimin == 0) {
        bimin = this_cbr
      }
      bimax = this_cbr
    }
  }
  if(output_bizone) {
    c(bimin, bimax)
  } else {
    peaks
  }
}

# plot benefit sweep experiment results
plt_sim_b_sweep <- function(sims, title = ggtitle(NULL), ylab = "",
  tpos = "plot", col = pal[1],
  upmarmod = 0, lmarmod = 0, dnmarmod = 0, rmarmod = 0) {

  dkcol <- col2rgb(col)
  dkcol <- dkcol/5
  dkcol <- rgb(t(dkcol), maxColorValue=255)

  sims %>%

```

```

ggplot(aes(x = state, group = cbr, color = cbr)) +
geom_line(stat='density', size=.5, alpha=.4) +
title +
labs(x = "ES state", y = ylab, color = "c:b") +
scale_x_continuous(limits = c(0, 1.5),
                    breaks = scales::pretty_breaks(n = 3), expand = c(.01,.01)) +
scale_y_continuous(breaks = scales::pretty_breaks(n = 2), expand = c(.01,.01)) +
scale_color_gradient(low = dkcol, high = col, guide = guide_colorbar(barwidth = .5),
                     breaks=c(min(sims$cbr), max(sims$cbr))) +
theme(axis.text.x=element_text(size=10),
      axis.text.y=element_text(size=10),
      axis.title.x=element_text(size=10),
      axis.title.y=element_text(size=10),
      legend.text = element_text(size=10),
      legend.title = element_text(size=10),
      legend.box.margin=margin(0,0,0,-5),
      plot.title = element_text(size = 10, face = "bold"),
      plot.title.position = tpos,
      panel.grid.minor = element_blank(),
      plot.margin=grid::unit(c(5+upmarmod,5+rmarmod,5+dnmarmod,5+lmarmod), "mm"))
}

# plot benefit sweep experiment peaks by cbr
plt_b_sweep_peaks <- function(peaks, bizone = NULL, title = ggtitle(NULL), ylab = "",
                              tpos = "plot", col = pal[1],
                              upmarmod = 0, lmarmod = 0, dnmarmod = 0, rmarmod = 0) {

  dkcol <- col2rgb(col)
  dkcol <- dkcol/5
  dkcol <- rgb(t(dkcol), maxColorValue=255)

  p <- peaks %>%
    ggplot(aes(x = peak, y = cbr, color = cbr)) +
    geom_point(size=1) +
    title +
    labs(x = "ES state density peak(s)", y = ylab) +
    scale_x_continuous(limits = c(0, 1.5),
                      breaks = scales::pretty_breaks(n = 3), expand = c(.01,.01)) +
    scale_y_continuous(limits = c(min(peaks$cbr), max(peaks$cbr)),
                      breaks = scales::pretty_breaks(n = 3), expand = c(.01,.01)) +
    scale_color_gradient(low = dkcol, high = col, guide = NULL) +
    theme(axis.text.x=element_text(size=10),
          axis.text.y=element_text(size=10),
          axis.title.x=element_text(size=10),
          axis.title.y=element_text(size=10),
          plot.title = element_text(size = 10, face = "bold"),
          plot.title.position = tpos,
          panel.grid.minor = element_blank(),
          plot.margin=grid::unit(c(5+upmarmod,5+rmarmod,5+dnmarmod,5+lmarmod), "mm"))

  if(!is.null(bizone)) {
    p <- p +
      geom_hline(yintercept = bizone[1], linetype="dashed", color = "red3", size=.5) +

```

```

    geom_hline(yintercept = bizone[2], linetype="dashed", color = "red3", size=.5) +
    annotate('label', x = .55, y = mean(bizone), label = "Bimodal\nregion",
             hjust = .5, vjust = .5, family = "Roboto", size = 3,
             label.padding = unit(.15, "lines"), label.size = 0, alpha = .65)
  }
  p
}

```

## Generate “benefit sweep” simulation plot

```

ggarrange(
  ggarrange(
    plt_sim_b_sweep(chans_sims,
                    title = ggtitle("A. Forward-looking decision-maker
                                     \n      and adaptive ecological system"),
                    ylab = "Density", col = pal[1], rmarmod = -7, dnmarmod = -2.75) +
    theme(legend.position="none"),
    plt_b_sweep_peaks(b_sweep_peaks(chans_sims),
                    bizone = b_sweep_peaks(chans_sims, output_bizone = TRUE),
                    ylab = "Cost/benefit ratio", col = pal[1],
                    rmarmod = -7, upmarmod = -2.75),
    nrow = 2, ncol = 1, heights = c(1.1,1), align = "v"
  ),
  ggarrange(
    plt_sim_b_sweep(myopic_d_sims,
                    title = ggtitle("B. Unrealistically short-term
                                     \n      decision strategy"),
                    tpos = "panel", col = pal[4],
                    lmarmod = -3.5, rmarmod = -3.5, dnmarmod = -2.75) +
    theme(legend.position="none"),
    plt_b_sweep_peaks(b_sweep_peaks(myopic_d_sims),
                    col = pal[4], lmarmod = -3.5, rmarmod = -3.5, upmarmod = -2.75),
    nrow = 2, ncol = 1, heights = c(1.1,1), align = "v"
  ),
  ggarrange(
    plt_sim_b_sweep(fast_r_sims,
                    title = ggtitle("C. Unrealistically fast
                                     \n      ecological change rate"),
                    tpos = "panel", col = pal[7], lmarmod = -7, dnmarmod = -2.75) +
    theme(legend.position="none"),
    plt_b_sweep_peaks(b_sweep_peaks(fast_r_sims),
                    col = pal[7], lmarmod = -7, upmarmod = -2.75),
    nrow = 2, ncol = 1, heights = c(1.1,1), align = "v"
  ),
  nrow = 1, ncol = 3, widths = c(1,1,1)
)

```

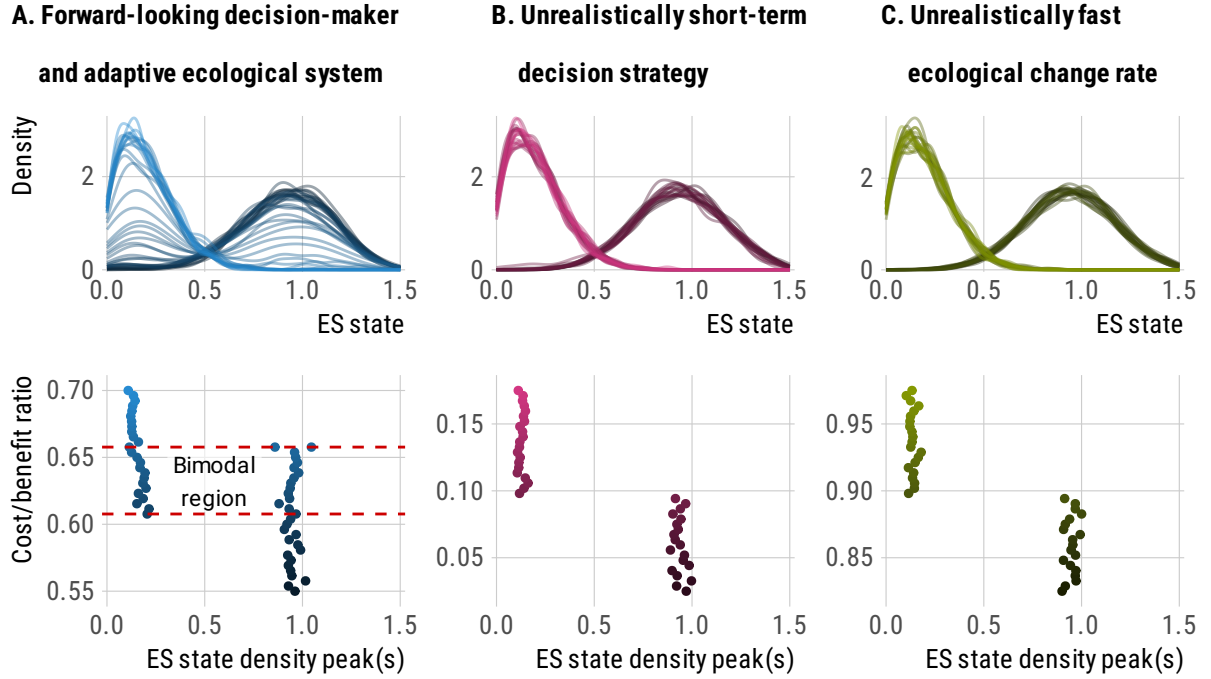


Figure 5: For three scenarios (coupled human/natural system, overly-myopic decision maker, and overly-fast ecological change), cost/benefit ratio was varied incrementally over 40 values, indicated by color shade, across a  $c : b$  range of width 0.15, encompassing the transition between a “never invest” to an “always invest” policy. For each  $c : b$ , 500 replicate simulations were conducted as in Fig 1. Upper plots show distribution of ES state at  $t = 20$  for each  $c : b$ . Lower plots show density curve peak(s). (A) By coupling a forward-looking decision-maker and a slowly-adapting environment, complex dynamics like alternate stable states can emerge. However, with (B) a short-term decision strategy (solving the MDP over a 2-year time horizon), or (C) a fast ecological change rate ( $r = 0.95$ ), no bimodality is observed.