

Problem List

Submit

Premium

Description

Accepted

Editorial

Solutions

Submissions

All Submissions

Submit

Ctrl

Enter

Accepted 85 / 85 testcases passed

Analysis

Solution


gouthamboga submitted at Apr 10, 2026 15:53

Runtime

25 ms Beats 76.67%

Memory

17.68 MB Beats 30.56%

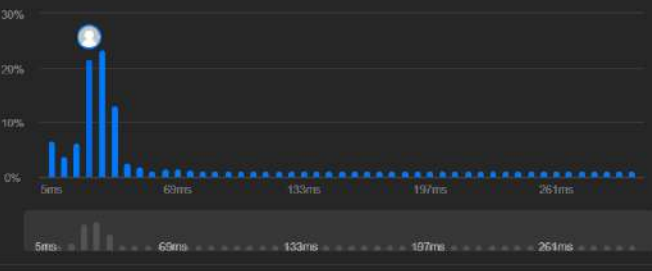

C

Auto

```
1 #include <stdio.h>
2 #include <stdlib.h>
3
4 // comparison function for qsort
5 int cmp(const void* a, const void* b) {
6     return (*(int*)a - *(int*)b);
7 }
8
9 int longestConsecutive(int* nums, int numsSize) {
10     if (numsSize == 0) return 0;
11
12     // sort the array
13     qsort(nums, numsSize, sizeof(int), cmp);
14
15     int longest = 1;
16     int count = 1;
17
18     for (int i = 1; i < numsSize; i++) {
19         if (nums[i] == nums[i - 1]) {
20             continue; // skip duplicates
21         }
22         if (nums[i] == nums[i - 1] + 1) {
23             count++;
24         } else {
25             longest = count;
26             count = 1;
27         }
28     }
29     return longest;
30 }
```

Saved

Ln 33, Col 2

Test Result

Testcase

Case 1 Case 2 Case 3 +

Source

Problem List

Submit

Submit

Ctrl

Enter

88

0

0

0

0

0

Premium

Description

Accepted

Editorial

Solutions

Submissions

All Submissions

Accepted 85 / 85 testcases passed

gouthamboga submitted at Apr 10, 2026 15:53

Analysis


Solution

Runtime

25 ms Beats 76.67%

Memory

17.68 MB Beats 30.56%

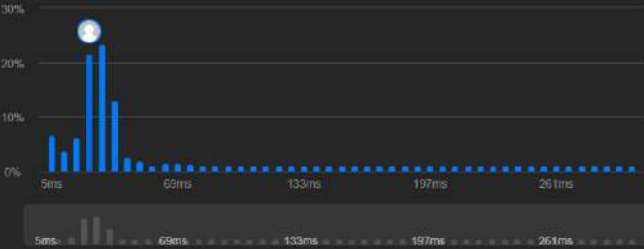

Test Result

Testcase

Case 1 Case 2 Case 3 +

Source

17

18

19

20

21

22

23

24

25

26

27

28

29

30

31

32

33

for (int i = 1; i < numsSize; i++) {

if (nums[i] == nums[i - 1]) {

continue; // skip duplicates

}

else if (nums[i] == nums[i - 1] + 1) {

count++;

}

else {

if (count > longest) longest = count;

count = 1;

}

}

if (count > longest) longest = count;

return longest;

Saved

Ln 33, Col 2