
Part A – HTML Lists

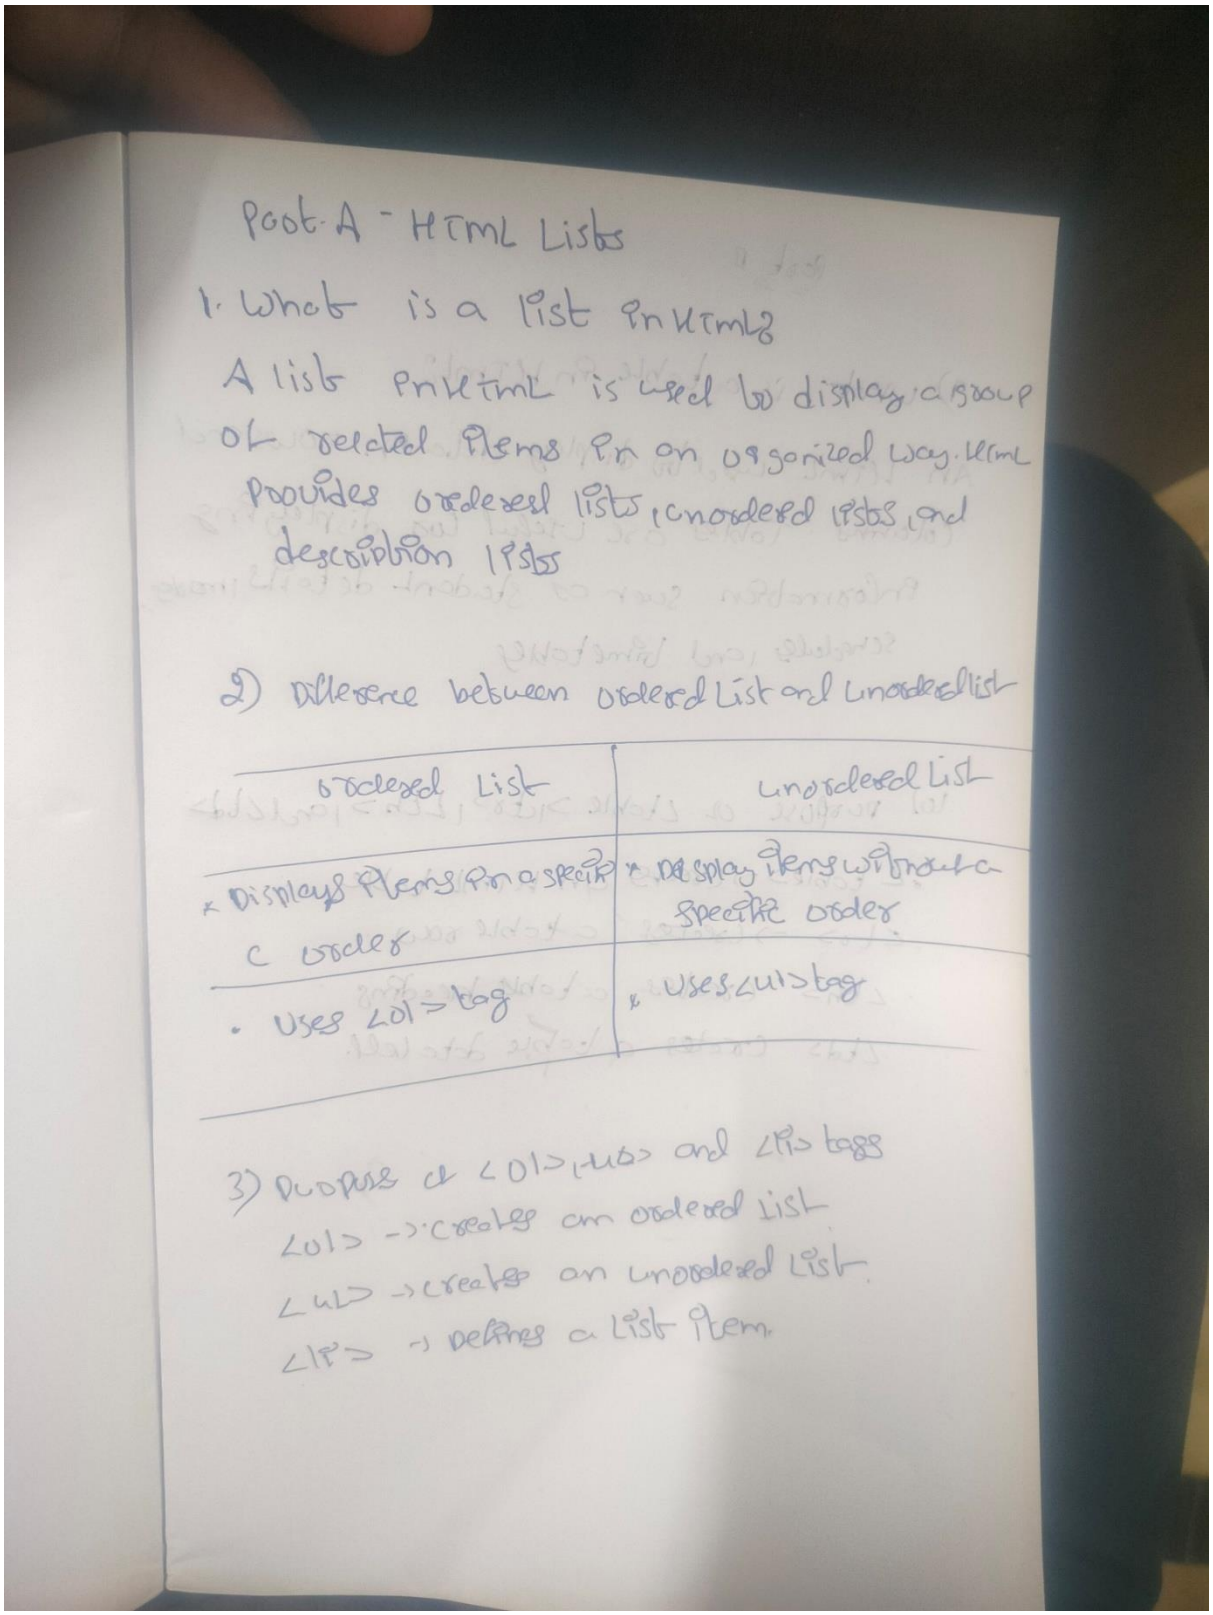

Part A - HTML Lists

1. What is a list in HTML?

A list in HTML is used to display a group of related items in an organized way. HTML provides ordered lists, unordered lists, and description lists.

2) Difference between ordered List and Unordered list

Ordered List	Unordered List
• Displays items in a specific order	• Display items without a specific order.
• Uses tag	• Uses tag

3) Purpose of <ol>, <ul> and <li> tags

 -> creates an ordered list

 -> creates an unordered list

 -> defines a list item.


4. Create an ordered list of 5 subjects

```html
<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Ordered List</title>
</head>
<body>
    <h1>Ordered List</h1>
    <ol>
    <li>Java</li>
    <li>Web Development</li>
    <li>Database Management</li>
    <li>Operating Systems</li>
    <li>Computer Networks</li>
</ol>
</body>
</html>
```



5. Create an unordered list of 5 programming languages.

```html
<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Unordered List</title>
</head>
<body>
    <h1>Unordered List</h1>
    <ul>
    <li>Java</li>
    <li>Python</li>
    <li>JavaScript</li>
    <li>C</li>
    <li>C++</li>
</ul>
</body>
</html>
```



6. Create an ordered list using different numbering types.

```
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>different numbers</title>
</head>
<body>
    <h1>Different Numbers</h1>
    <ol type="1">
    <li>Java</li>
    <li>Python</li>
    <li>C</li>
</ol>

<ol type="A">
    <li>Java</li>
    <li>Python</li>
    <li>C</li>
</ol>

<ol type="a">
    <li>Java</li>
    <li>Python</li>
    <li>C</li>
</ol>

<ol type="I">
    <li>Java</li>
    <li>Python</li>
    <li>C</li>
</ol>

<ol type="i">
    <li>Java</li>
    <li>Python</li>
    <li>C</li>
</ol>

</body>
</html>
```

Different Numbers

1. Java
2. Python
3. C

A. Java
B. Python
C. C

a. Java
b. Python
c. C

I. Java
II. Python
III. C

i. Java
ii. Python
iii. C

8. Create a nested list containing

* Frontend: * HTML * CSS * JavaScript

* Backend: * Java * Python

```html
<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Nested List</title>
</head>
<body>
    <h1>Nested List</h1>
    <ul>
    <li>Frontend
        <ul>
            <li>HTML</li>
            <li>CSS</li>
            <li>JavaScript</li>
        </ul>
    </li>

    <li>Backend
        <ul>
            <li>Java</li>
            <li>Python</li>
        </ul>
    </li>
</ul>

</body>
</html>
```

Nested List

- Frontend
  - HTML
  - CSS
  - JavaScript
- Backend
  - Java
  - Python

Part B

9) What is a table in HTML?

An HTML used to display data in rows and columns. Tables are useful for displaying information such as student details, marks, schedules, and timetables.

10) purpose of <table>, <tr>, <th>, and <td>

- <table> → creates an HTML table.
- <tr> → creates a table row.
- <th> creates a table heading.
- <td> creates a table data cell.

11. Create a table with 3 rows and 3 columns.

```
<!DOCTYPE html>
<html>
<head>
    <title>Student Table</title>
</head>
<body>
<h1>Student Details</h1>

    <table border="1">

        <tr>
            <th>Student ID</th>
            <th>Name</th>
            <th>Marks</th>
        </tr>
        <tr>
            <td>100</td>
            <td>Maheswar Reddy</td>
            <td>95</td>
        </tr>

        <tr>
            <td>101</td>
            <td>Ravi</td>
            <td>85</td>
        </tr>

        <tr>
            <td>102</td>
            <td>Rahul</td>
            <td>90</td>

        </tr>
    </table>

</body>
</html>
```

Student Details

Student ID	Name	Marks
100	Maheswar Reddy	95
101	Ravi	85
102	Rahul	90

12. Create a Student Details table with:

* Student ID

* Name

* Course


* Marks

```html
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Student Details</title>
</head>
<body>
    <h1>Student Details</h1>
    <table border="1">
    <tr>
        <th>Student ID</th>
        <th>Name</th>
        <th>Course</th>
        <th>Marks</th>
    </tr>

    <tr>
        <td>101</td>
        <td>Maheswar Reddy</td>
        <td>CSE</td>
        <td>85</td>
    </tr>

    <tr>
        <td>102</td>
        <td>Rahul</td>
        <td>CSE</td>
        <td>90</td>
    </tr>

    <tr>
        <td>103</td>
        <td>Suresh</td>
        <td>IT</td>
        <td>78</td>
    </tr>
</table>
</body>
</html>
```

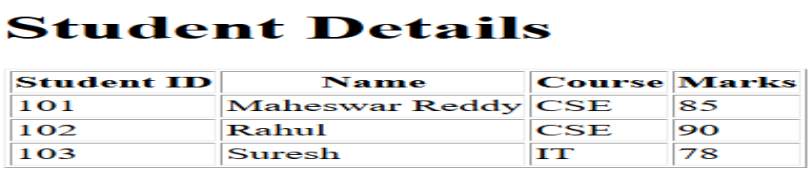

Student Details

Student ID	Name	Course	Marks
101	Maheswar Reddy	CSE	85
102	Rahul	CSE	90
103	Suresh	IT	78

13. Create a table using <th> for headings.

```html
<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Headings</title>
</head>
<body>
    <h1>Headings</h1>
    <table border="1">
    <tr>
        <th>Student ID</th>
        <th>Student Name</th>
        <th>Age</th>
    </tr>


    <tr>
        <td>101</td>
        <td>Maheswar Reddy</td>
        <td>21</td>

    </tr>

    <tr>
        <td>102</td>
        <td>Priya</td>
        <td>20</td>

    </tr>
</table>

</body>
</html>
```

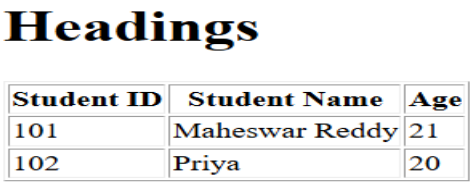

14. Create a table using rowspan.

```
<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>rowspan</title>
</head>
<body>
    <h1>Row Span</h1>
    <table border="1">
    <tr>
        <th>Name</th>
        <th>Subject</th>
        <th>Marks</th>
    </tr>

    <tr>
        <td rowspan="2">Ravi</td>
        <td>Java</td>
        <td>85</td>
    </tr>

    <tr>
        <td>HTML</td>
        <td>90</td>
    </tr>
</table>

</body>
</html>
```

Row Span

Name	Subject	Marks
Ravi	Java	85
	HTML	90

15.Create a table using colspan.

```
span.html > html > body > table > tr > td
<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Col Span</title>
</head>
<body>
    <h1>Col Span</h1>
    <table border="1">
    <tr>
        <th colspan="3">Student Information</th>
    </tr>

    <tr>
        <th>Name</th>
        <th>Course</th>
        <th>Marks</th>
    </tr>

    <tr>
        <td>Ravi</td>
        <td>CSE</td>
        <td>85</td>

    </tr>
    <tr>
        <td>Maheswar Reddy</td>
        <td>CSE</td>
        <td>80</td>

    </tr>
    <tr>
        <td>Shekar</td>
        <td>CSE</td>
        <td>70</td>

    </tr>
</table>
</body>
</html>
```

Col Span

Student Information		
Name	**Course**	**Marks**
Ravi	CSE	85
Maheswar Reddy	CSE	80
Shekar	CSE	70

15. Create a 5 × 5 timetable using HTML tables

```html
<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Timetable</title>
</head>
<body>
    <h1>Timetable</h1>
    <table border="1">
    <tr>
        <th>Day</th>
        <th>9:00 - 10:00</th>
        <th>10:00 - 11:00</th>
        <th>11:00 - 12:00</th>
        <th>12:00 - 1:00</th>
    </tr>

    <tr>
        <td>Monday</td>
        <td>Java</td>
        <td>HTML</td>
        <td>Maths</td>
        <td>DBMS</td>
    </tr>

    <tr>
        <td>Tuesday</td>
        <td>Python</td>
        <td>CSS</td>
        <td>Java</td>
        <td>OS</td>
    </tr>

    <tr>
        <td>Wednesday</td>
        <td>DBMS</td>
        <td>JavaScript</td>
        <td>Maths</td>
        <td>CN</td>
    </tr>

    <tr>
        <td>Thursday</td>
        <td>Java</td>
        <td>Python</td>
        <td>HTML</td>
        <td>DBMS</td>
    </tr>
</table>
</body>
</html>
```

Timetable

Day	9:00 - 10:00	10:00 - 11:00	11:00 - 12:00	12:00 - 1:00
Monday	Java	HTML	Maths	DBMS
Tuesday	Python	CSS	Java	OS
Wednesday	DBMS	JavaScript	Maths	CN
Thursday	Java	Python	HTML	DBMS