







source row →

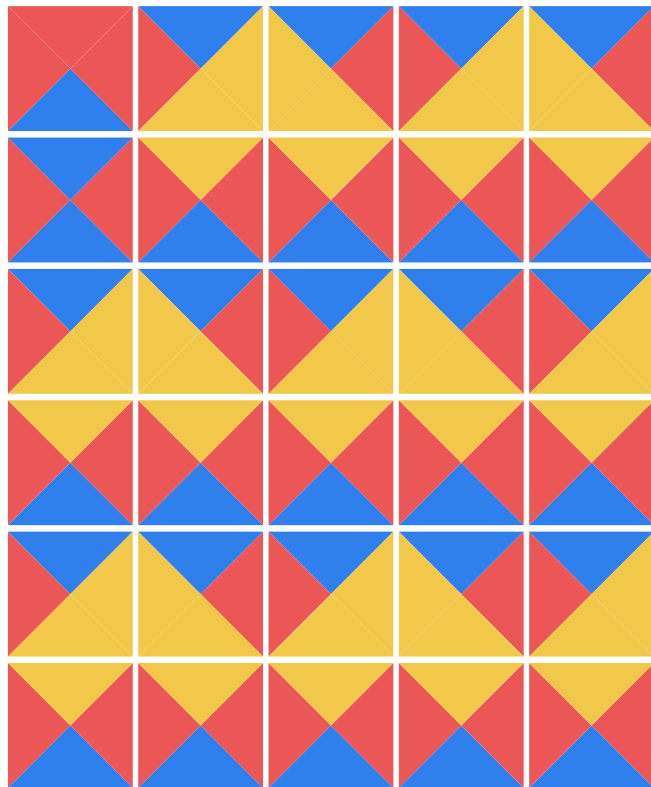

m



target row →

n




...










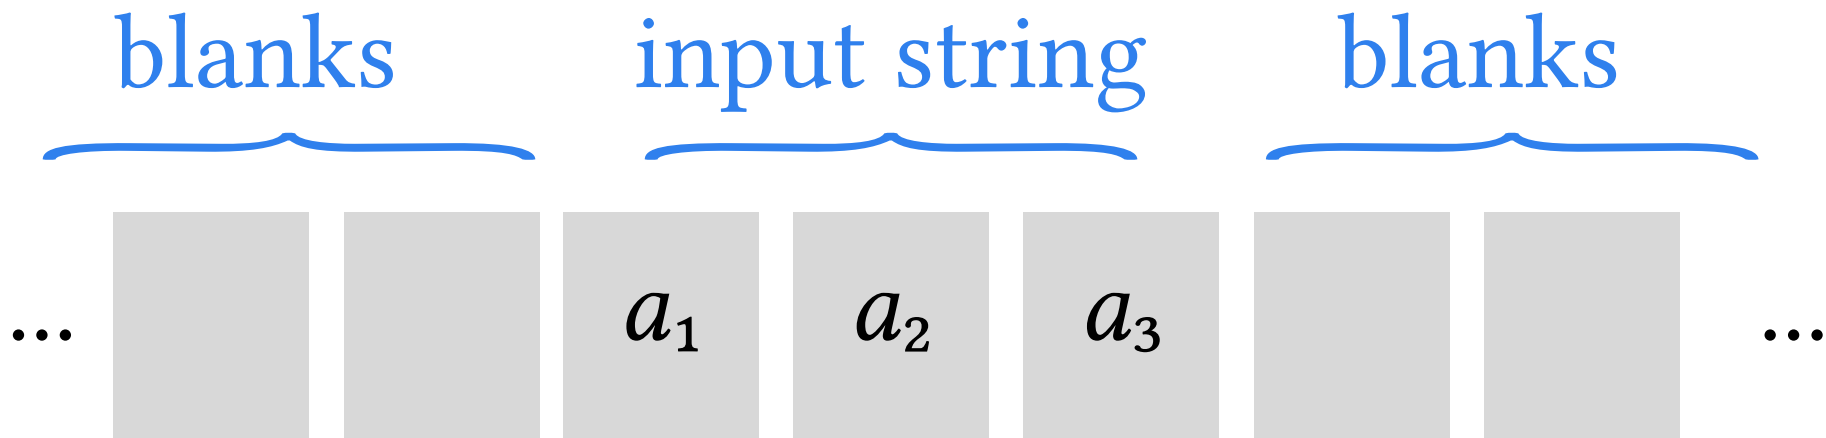


q_0


head is in initial state,
and just before the first
input letter

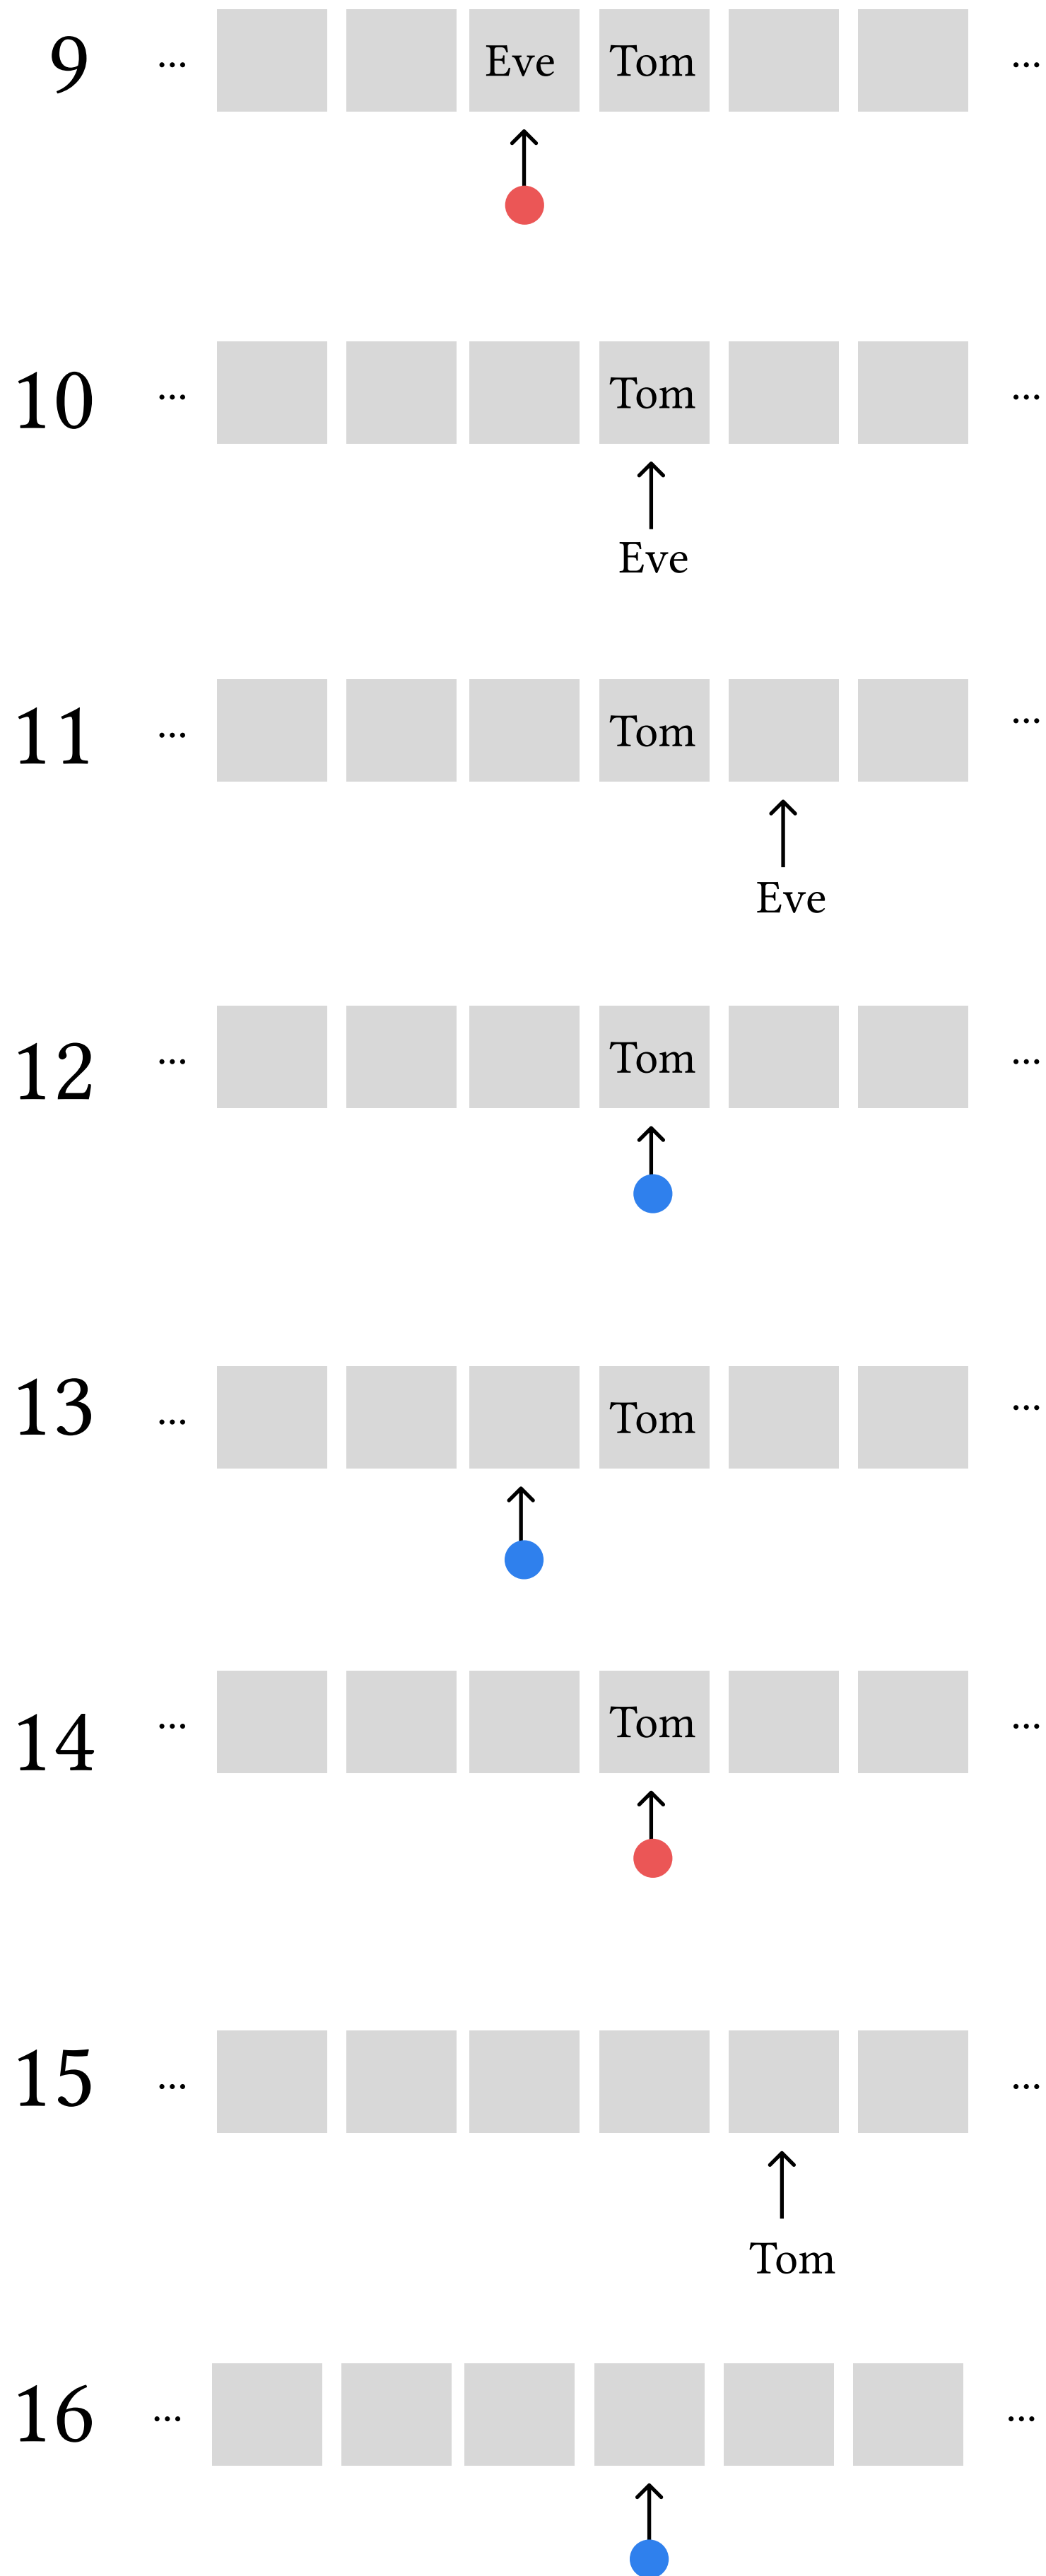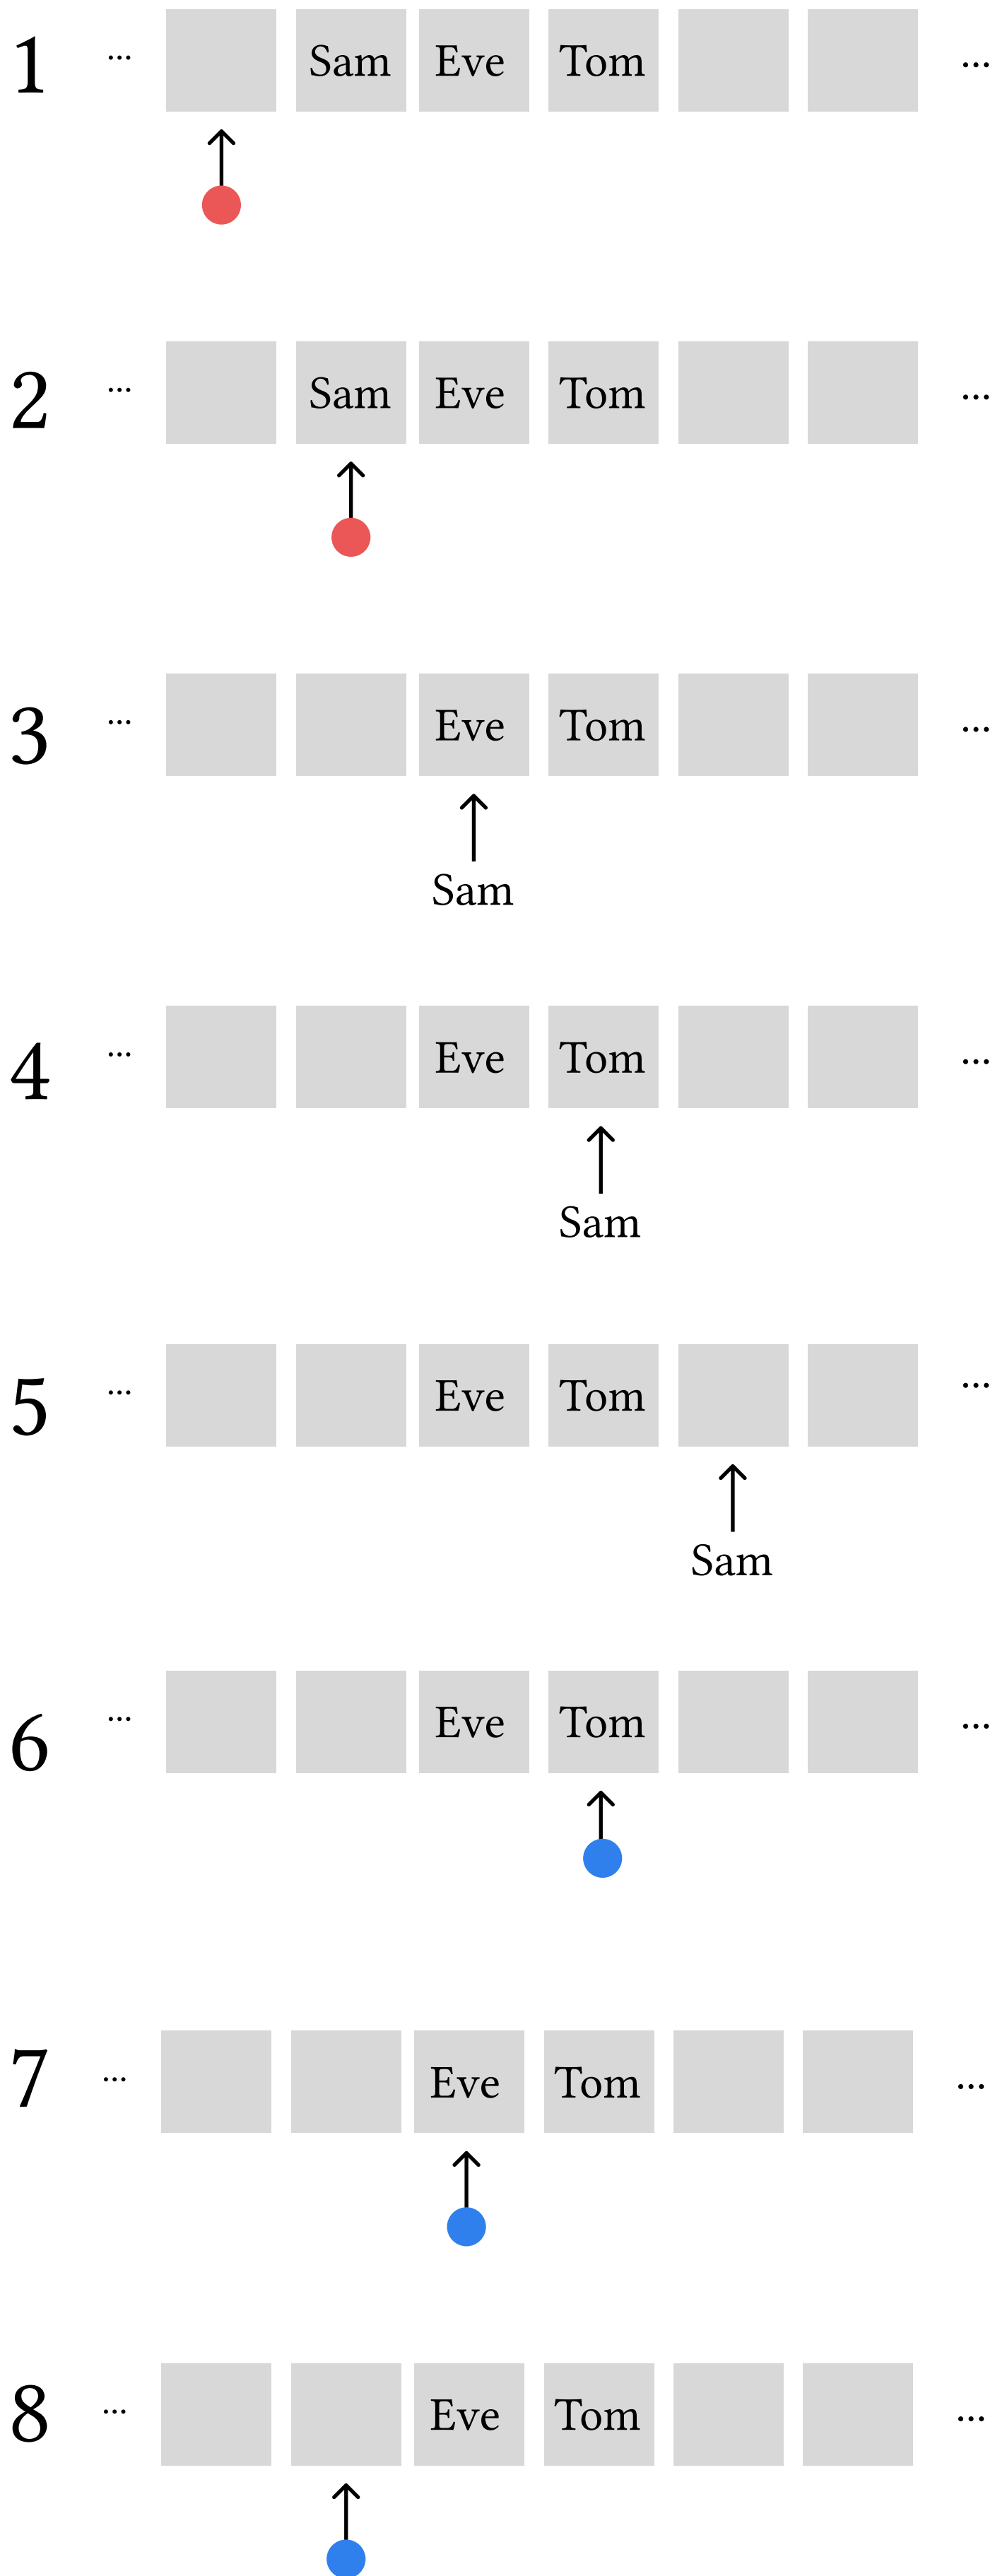

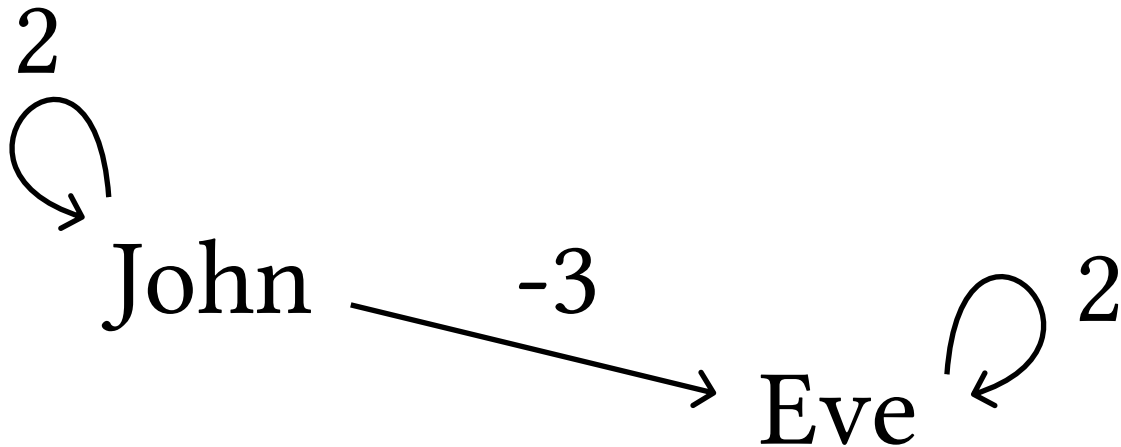

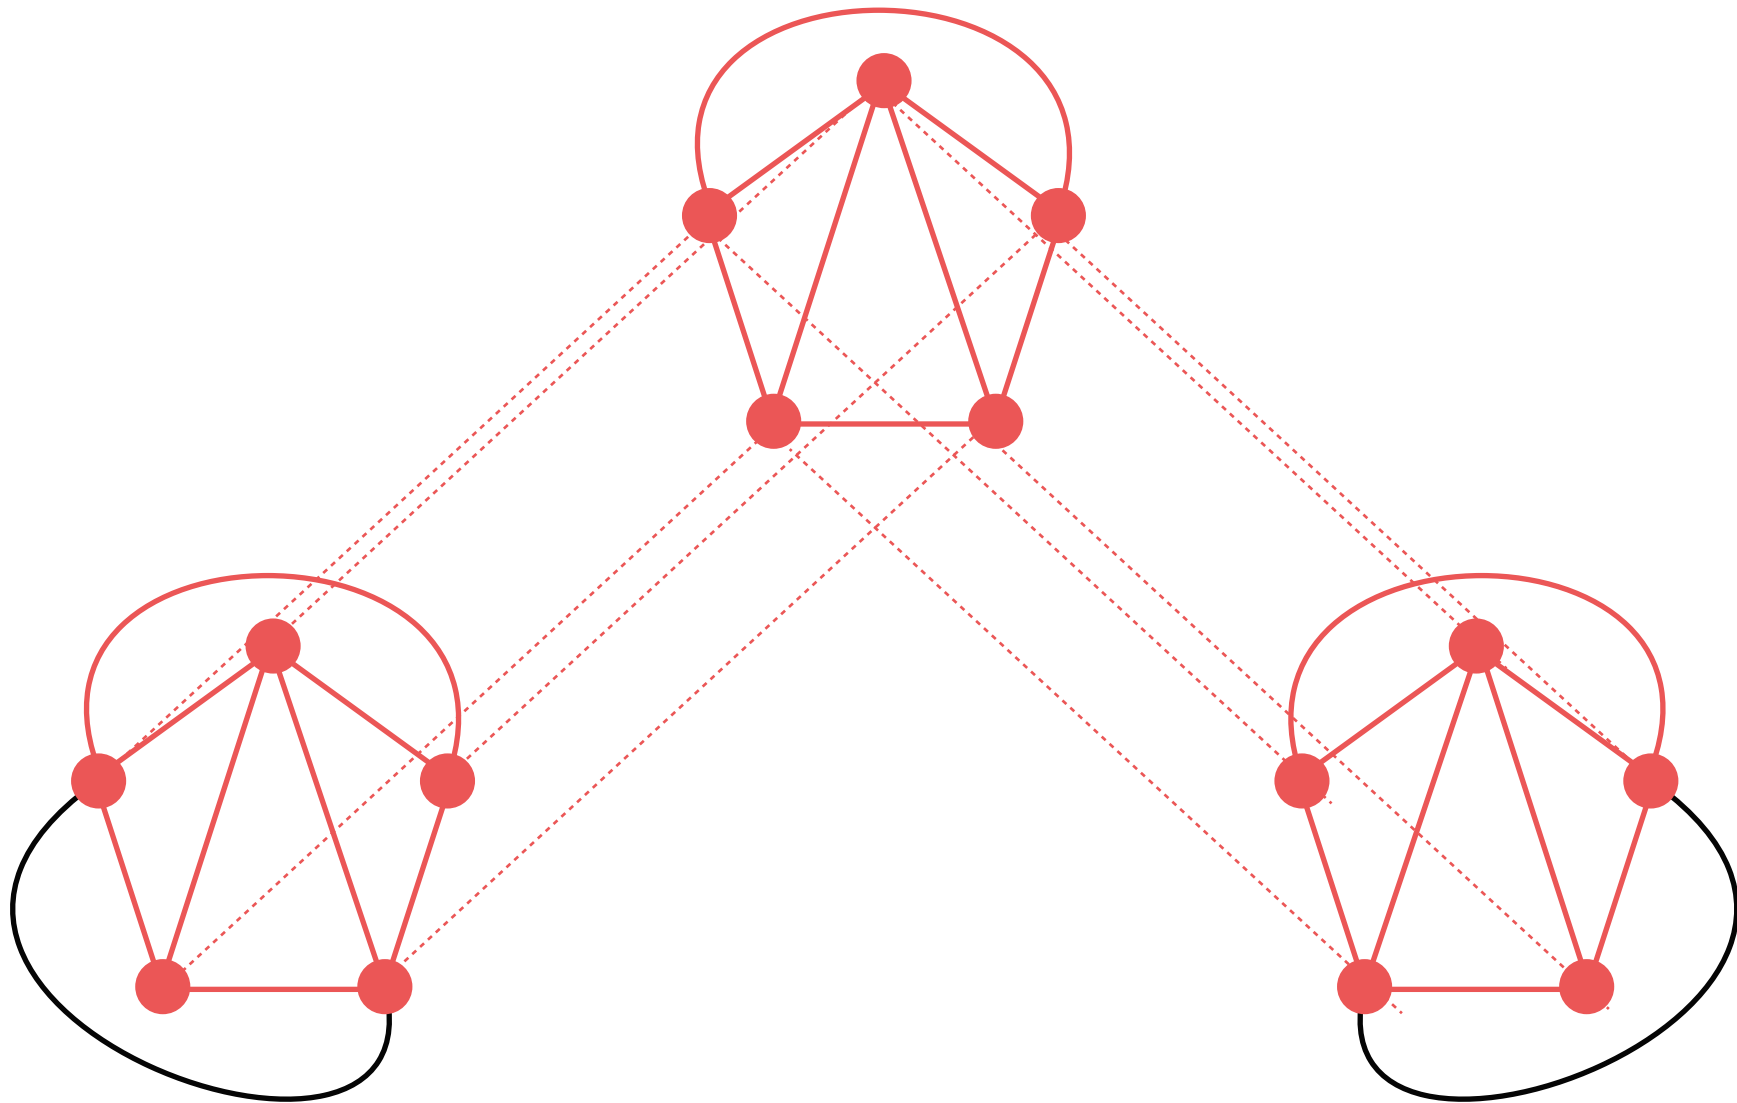

the input word is extended
with endmarkers

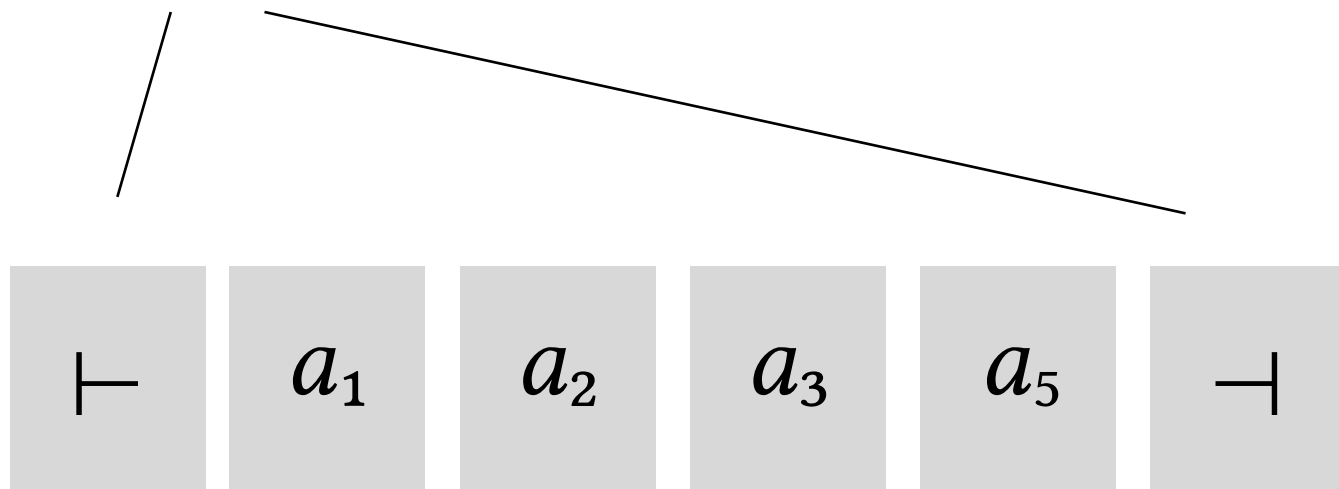

head of the automaton,
which is in some state q

