DOKUMENTACIJA

http://php3.bojanmaksimovic.com/

Web Programiranje PHP 2

Bojan Maksimović 92/19

Smer: Internet tehnologije

Modul: Web programiranje

Predmet: Web Programiranje PHP 2

SADRŽAJ

Contents

1. Uvod	6
1.1 Korišćeni programski jezici i tehnologije	6
1.2 Opis funkcionalnosti	6
1.3 Template	6
2. Organizacija	7
2.1 Dizajn baze podataka	7
2.2 Mapa sajta	8
2.3 Slike stranica i opis funkcionalnosti	9
/ ili /home	9
/restaurants	10
/restaurants/{id}	11
/contact	12
/author	13
/login	14
/register	
/admin ili /admin/dashboard	16
/admin/actions	17
/admin/users	
/admin/restaurants	
/admin/food	20
/admin/categories	21
/admin/orders	22
3. Kodovi	23
3.1 Routes	23
web.php	23
3.2 Kernel	25
Kernel.php	25
3.3 Controllers	
AdminController	27
AuthController	
AuthorController	31
ClientController	
ContactController	
FoodCategoryController	
FoodController	37
HomeController	40
MailController	
MyController	
OrderController	
RestaurantController	45

UserController	50
3.4 Middleware	53
IsLoggedIn	53
IsNotLoggedIn	54
IsAdmin	55
3.5 Requests	56
ChangeCartRequest	56
ContactRequest	57
LoginUserRequest	58
RegisterUserRequest	59
StoreCategoryRequest	60
StoreFoodRequest	61
StoreOrderRequest	62
StoreRestaurantRequest	63
StoreUserRequest	64
UpdateCategoryRequest	65
UpdateFoodRequest	66
UpdateRestaurantRequest	
UpdateUserRequest	68
3.6 Models	
AccessLog	69
ActionLog	70
Cart	71
Food	73
FoodCategory	74
ImageUpload	75
Nav	76
Order	77
Restaurant	79
Role	82
Social	83
User	84
3.7 Migrations	85
create_nav_table	85
create_social_table	86
create_user_table	87
create_role_table	88
create_access_log_table	89
create_restaurant_table	90
create_food_category_table	91
create_food_table	
create_action_log_table	
create_cart_table	
create_order_table	
create_order_detail_table	

3.8 Seeders	97
FoodCategorySeeder	97
FoodSeeder	99
NavSeeder	116
RestaurantSeeder	118
RoleSeeder	120
SocialSeeder	121
UserSeeder	123
3.9 Components	124
Food	124
Restaurant	125
3.10 Blade	126
components.client.food	126
compontents.client.restaurant	127
emails.contact	128
fixed.admin.footer	129
fixed.admin.head	130
fixed.admin.nav	131
fixed.admin.scripts	132
fixed.admin.sidebar	133
fixed.client.footer	135
fixed.client.head	136
fixed.client.header	137
fixed.client.scripts	139
layouts.admin	140
layouts.client	141
pages.admin.dashboard	142
pages.admin.actions.index	
pages.admin.food.create	145
pages.admin.food.edit	146
pages.admin.food.index	147
pages.admin.foodCategories.create	149
pages.admin.foodCategories.edit	150
pages.admin.foodCategories.index	151
pages.admin.orders.details	152
pages.admin.orders.index	153
pages.admin.restaurants.create	154
pages.admin.restaurants.edit	155
pages.admin.restaurants.index	156
pages.admin.users.create	158
pages.admin.users.edit	159
pages.users.admin.index	160
pages.client.author	161
pages.client.contact	162
pages.client.home	164

	pages.client.login	165
	pages.client.register	166
	pages.client.restaurants.index	167
	pages.client.restaurants.show	169
3.1	1 JavaScript	171
	client.js	171
	common.js	172
	contact.js	173
	food.js	174
	form-validation.js	178
	home.js	179
	login.js	181
	register.js	182
	restaurants.js	183
	admin/categories.js	186
	admin/food.js	187
	admin/restaurants.js	188
	admin/users.js	189
3.1	2 SCSS	190
	admin.scss	190
	app.scss	191

1. Uvod

1.1 Korišćeni programski jezici i tehnologije

Za izradu sajta korišćen je Laravel, PHP, HTML, SASS/CSS, JavaScript/jQuery i XML(sitemap). Radno okruženje Visual Studio Code.

1.2 Opis funkcionalnosti

Sajt predstavlja veb aplikaciju za naručivanje hrane iz različitih restorana u ponudi

- Registracija I logovanje sa validacijom na klijentu I server
- Zaštita stranica uz pomoć middleware-a
- Dinamičko ispisivanje menija, restorana i najzastupljenih kategorija proizvoda u njima i samih proizvoda
- Pretraga restorana na početnoj stranici pomoću ajax-a
- Filtriranje I sortiranje I paginacija restorana pomoću ajax-a
- Filtriranje I sortiranje I paginacija proizvoda svakog restorana pomoću ajax-a
- Dodavanje proizvoda u korpu (porudžbinu) I izmena korpe pomoću ajax-a
- Slanje mejla administratoru preko kontakt forme
- Uvid u bitne statistike sajta u admin panel-u
- Izveštaj o ključnim aktivnostima korisnika u admin panel-u
- Mogućnost upravljanja sadržajem sajta u admin panel-u
- Resize slika pri upload-u uz pomoć Intervention Image-a


1.3 Template

Korisnički deo: Nije korišćen template

Admin panel: https://adminite.io/

2. Organizacija

2.1 Dizajn baze podataka

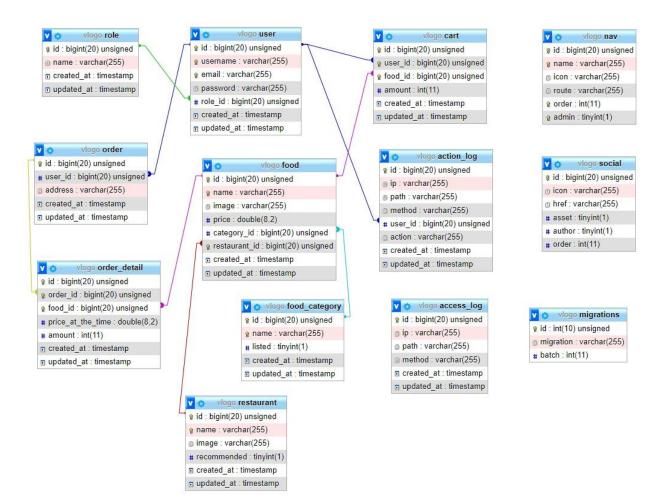


2.2 Mapa sajta

```
<?xml version="1.0" encoding="UTF-8"?>
   <url>
       <changefreq>monthly</changefreq>
   </url>
   <url>
   </url>
   <url>
   </url>
   <url>
       <changefreq>yearly</changefreq>
   </url>
</urlset>
```

2.3 Slike stranica i opis funkcionalnosti

/ ili /home

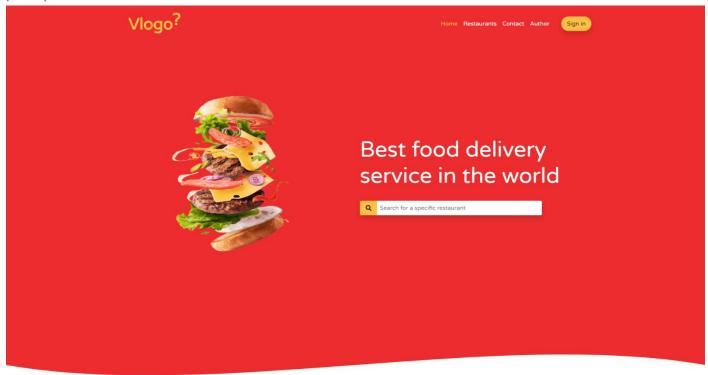


Recommended by Vlogo




Na početnoj stranici korisnici imaju mogućnost pretrage restorana u ponudi uz pomoć ajax-a. Na ovoj stranici se takođe ispisuju neki od restorana koje vlasnici sajta preporučuju.

/restaurants

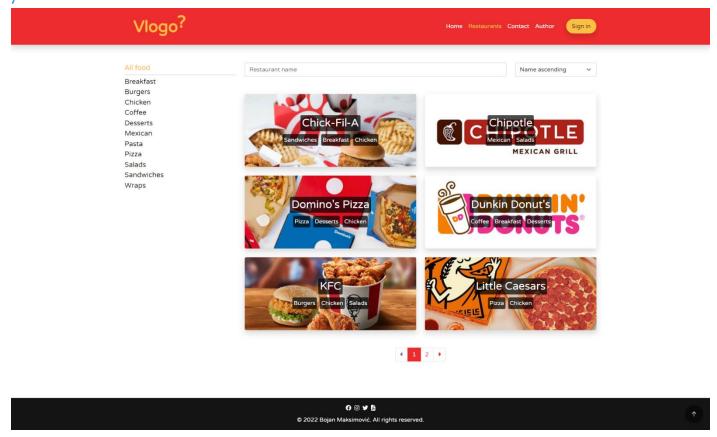


Na stranici restaurants je odrađeno filtriranje, sortiranje i paginacija restorana uz pomoć ajax-a.

/restaurants/{id}

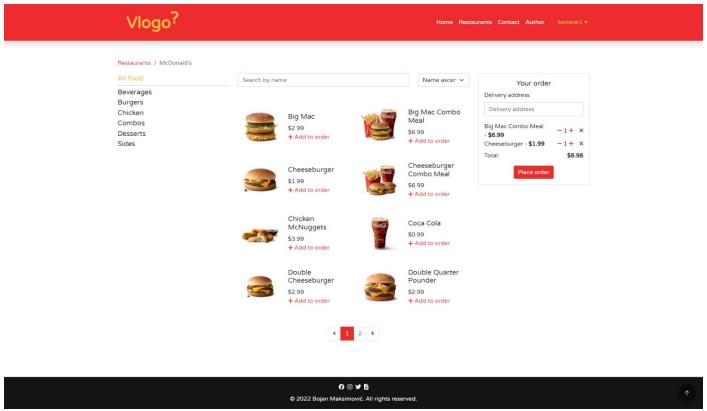

Na ovoj stranici ispisuju se sve kategorija proizvoda unutar izabranog restorana I svi proizvodi koji pripadaju njemu. Takođe je omogućeno filtriranje, sortiranje I paginacija proizvoda kao I to da korisnik može da dodaje proizvode u svoju porudžbinu I da ih menja. Sadržaj porudžbine se čuva za svaki restoran zasebno jer korisnik ne može u jednoj porudžbini da naruči proizvode iz više restorana. Ova stranica je zaštićena middleware-om koji proverava da li je korisnik ulogovan.

/contact

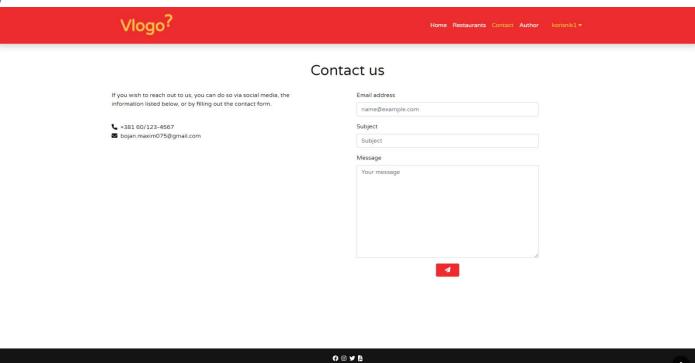

Na kontakt stranici se nalazi forma za kontaktiranje administratora sa proverom na klijentskoj I serverskoj strani. Ako je provera uspešna administratoru se podaci šalju na mejl.

© 2022 Bojan Maksimović. All rights reserved.



Bojan Maksimović 92/19

About me


Hello! I am Bojan, an aspiring back-end web developer. I'm a driven individual with the ability to learn and collaborate in rapidly changing environments and compositions. I am eager to tackle web development challenges to achieve lasting impacts on user experience.



Portfolio Website

Stranica sa slikom I nekim podacima o autoru.




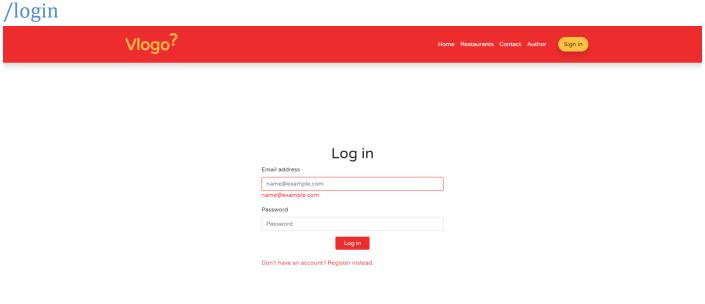




Stranica sa formom za logovanje kao I linkom koji vodi do stranice za registrovanje. Podaci iz forme se proveravaju na klijentu I serveru. Stranica je zaštićena middleware-om koji proverava da korisnike NIJE ulogovan.



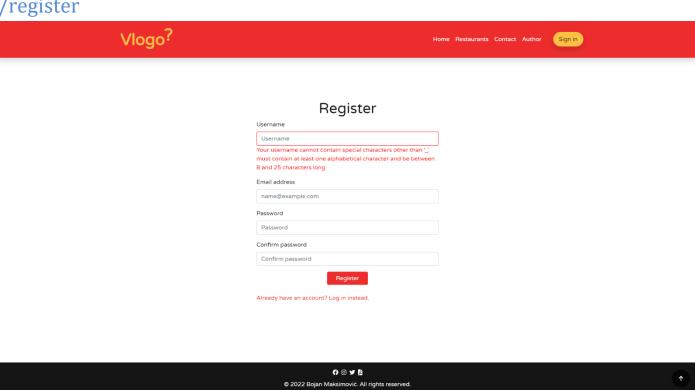

Stranica sa formom za registrovanje kao I linkom koji vodi do stranice za logovanje. Podaci iz forme se proveravaju na klijentu I serveru. Stranica je zaštićena middleware-om koji proverava da korisnike NIJE ulogovan.


/admin ili /admin/dashboard

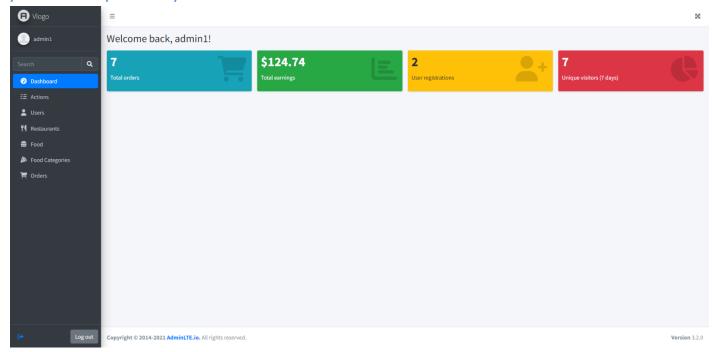

Kao I sve stranice u admin panelu, stranica je zaštićena middleware-ovima koji proveravaju da je korisnik ulogovan I da je uloga tog korisnika 'admin'.


Na ovoj stranici korisnik ima uvid u neke ključne statistike sajta kao što su: broj porudžbina, totalna zarada, broj registracija i broj jedinstvenih posetioca u poslednjih 7 dana.

/admin/actions

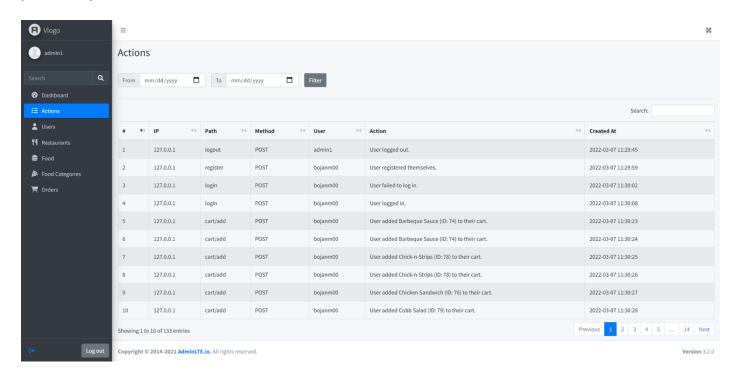


Na ovoj stranici korisnici mogu da vide izveštaj o ključnim aktivnostima svih korisnika kao i da filtriraju ispisane aktivnosti po datumu.

/admin/users

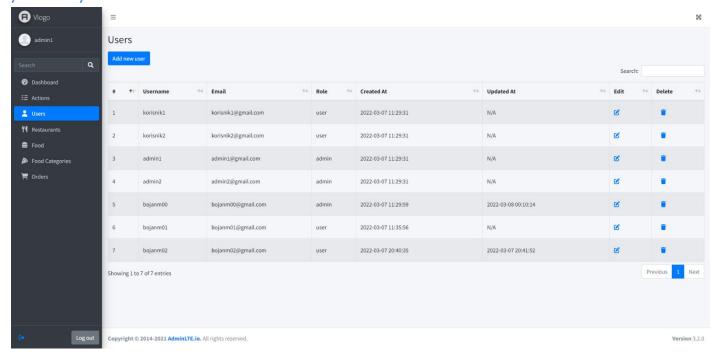


Na ovoj stranici korisnici mogu da vide sve registorane korisnike na sajtu, da ih menjaju, brišu ili da dodaju nove. Ako korisnik izmeni svoje podatke, sajt će ga izlogovati.

/admin/restaurants

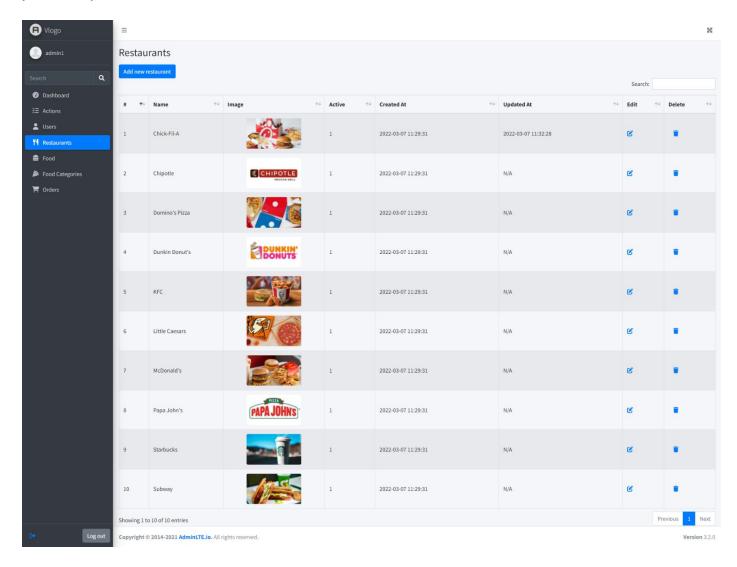


Na ovoj stranici korisnici mogu da vide sve restorane, da ih menjaju, brišu i da kreiraju nove. Pri dodavanju novog restorana ili izmeni postojećeg, uploadovana slika se resize-uje.

/admin/food

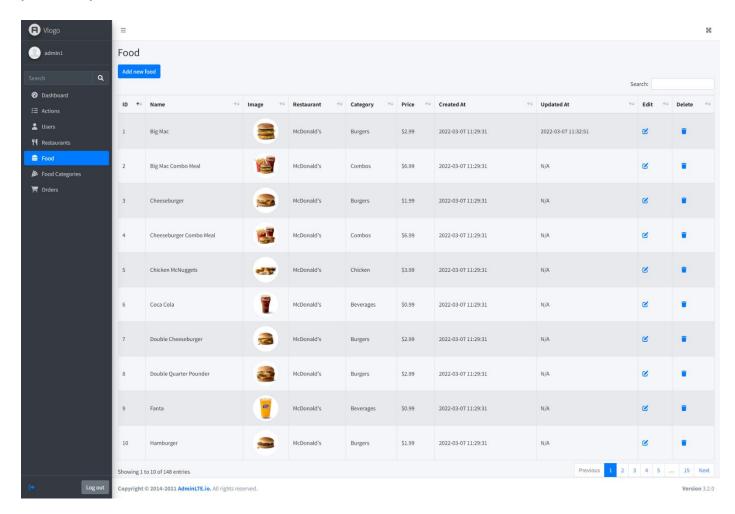


Na ovoj stranici korisnici mogu da vide sve proizvode iz restorana, da ih menjaju, brišu i da kreiraju nove. Pri dodavanju novog proizvoda ili izmeni postojećeg, upload-ovana slika se resize-uje.

/admin/categories

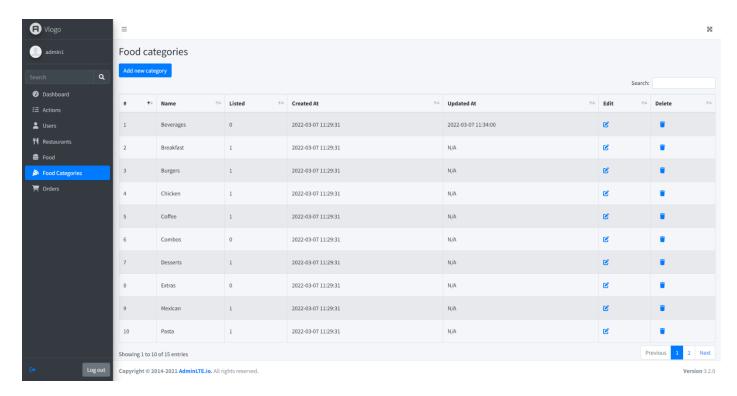

Na ovoj stranici korisnici mogu da vide sve kategorije proizvoda, da ih menjaju, brišu i da kreiraju nove.

/admin/orders

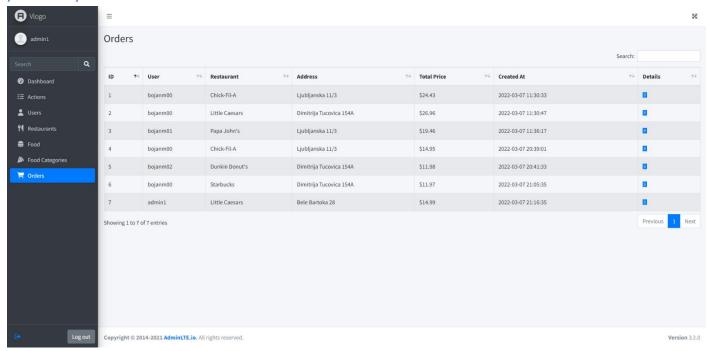

Na ovoj stranici korisnici imaju uvid I sve porudžbine. Mogu da kliknu na ikonicu za detalje da vide šta je sve bilo poručeno.

3. Kodovi

3.1 Routes

web.php

```
use Illuminate\Support\Facades\Route;
Route::get('/', [\App\Http\Controllers\HomeController::class, "index"])->name("home");
Route::get('/home', function() {
    return redirect()->route("home");
Route::post('/restaurants/filter', [\App\Http\Controllers\RestaurantController::class,
'getFiltered']) -> name ("restaurants.filter");
Route::post('/restaurants/food', [\App\Http\Controllers\RestaurantController::class,
Route::get('/contact', [\App\Http\Controllers\ContactController::class, "index"])-
Route::post('/contact', [\App\Http\Controllers\MailController::class, "contact"])-
Route::get('/author', [\App\Http\Controllers\AuthorController::class, "index"])-
Route::middleware('isNotLoggedIn')->group(function() {
    Route:: get('/login', [\App\Http\Controllers\AuthController::class, "login"]) - \\
    Route::post('/login', [\App\Http\Controllers\AuthController::class, "doLogin"])-
    Route::post('/register', [\App\Http\Controllers\AuthController::class,
Route::middleware('isLoggedIn')->group(function() {
    Route::post('/logout', [\App\Http\Controllers\AuthController::class, "logout"])-
>name("logout");
    Route::post('/cart/add', [\App\Http\Controllers\OrderController::class,
"addItem"]) ->name("cart.add");
    Route::post('/cart/items', [\App\Http\Controllers\OrderController::class,
"store"])->name('orders.store');
>group(function() {
```

```
Route::get('/', [\App\Http\Controllers\AdminController::class, 'index'])-
>name('dashboard');
   Route::get('/dashboard', function() {
        return redirect()->route('admin.dashboard');
   });
   Route::resource('/users', \App\Http\Controllers\UserController::class, ['except' =>
['show']]);
   Route::get('/restaurants', [\App\Http\Controllers\AdminController::class,
'restaurants'])->name('restaurants');
   Route::resource('/restaurants', \App\Http\Controllers\RestaurantController::class,
['except' => ['index', 'show']]);
   Route::resource('/food', \App\Http\Controllers\FoodController::class, ['except' =>
'show']);
   //Route::get('/categories', [\App\Http\Controllers\AdminController::class,
'foodCategories'])->name('categories'),
   Route::get('/orders', [\App\Http\Controllers\FoodCategoryController::class,
['except' => ['show']]);
   Route::get('/orders', [\App\Http\Controllers\AdminController::class, 'orders'])-
>name('orders');
   Route::get('/orders/{id}', [\App\Http\Controllers\OrderController::class,
'details'])->name('orders.details');
   Route::get('/actions', [\App\Http\Controllers\AdminController::class, 'actions'])-
>name('actions');
});
```

3.2 Kernel

Kernel.php

```
namespace App\Http;
use App\Http\Middleware\LogAccess;
      @var array<int, class-string|string>
     * @var array<string, array<int, class-string|string>>
            \Illuminate\View\Middleware\ShareErrorsFromSession::class,
```

```
*

* @var array<string, class-string|string>

*/

protected $routeMiddleware = [
    'auth' => \App\Http\Middleware\Authenticate::class,
    'auth.basic' => \Illuminate\Auth\Middleware\AuthenticateWithBasicAuth::class,
    'cache.headers' => \Illuminate\Http\Middleware\SetCacheHeaders::class,
    'can' => \Illuminate\Auth\Middleware\Authorize::class,
    'guest' => \App\Http\Middleware\RedirectIfAuthenticated::class,
    'password.confirm' => \Illuminate\Auth\Middleware\RequirePassword::class,
    'signed' => \Illuminate\Routing\Middleware\ValidateSignature::class,
    'throttle' => \Illuminate\Routing\Middleware\ThrottleRequests::class,
    'verified' => \Illuminate\Auth\Middleware\EnsureEmailIsVerified::class,
    'isLoggedIn' => IsLoggedIn::class,
    'isNotLoggedIn' => IsNotLoggedIn::class,
    'isAdmin' => IsAdmin::class
];
}
```

3.3 Controllers

AdminController

```
use App\Models\AccessLog;
use App\Models\ActionLog;
use App\Models\Food;
use App\Models\FoodCategory;
use App\Models\Nav;
use Illuminate\Http\Request;
       $this->data['nav'] = $this->navModel->getAdminNav();
       $orderModel = new Order();
       $accessLogModel = new AccessLog();
                "value" => $this->actionLogModel->getRegistrationsCount(),
                "value" => $accessLogModel->getUniqueVisitors(),
       $actionLogModel = new ActionLog();
```

```
$this->data['actions'] = $actionLogModel->get($request);

return view('pages.admin.actions.index', $this->data);
}

public function restaurants() {
    $restaurantModel = new Restaurant();
    $this->data['restaurants'] = $restaurantModel->getAll();

return view('pages.admin.restaurants.index', $this->data);
}

public function orders() {
    $orderModel = new Order();
    $this->data['orders'] = $orderModel->get();

return view('pages.admin.orders.index', $this->data);
}
}
```

AuthController

```
use App\Http\Requests\LoginUserRequest;
use App\Http\Requests\RegisterUserRequest;
use App\Models\User;
class AuthController extends ClientController
    public function register() {
             $userModel = new User();
                  $this->logAction("User failed to log in.", $request, $userId);
return redirect()->back()->withErrors(["Invalid credentials."]);
             $this->logAction("User registered themselves.", $request, $userId);
```

```
public function logout(Request $request) {
    try {
        $userId = $request->session()->get("user")->id;
        $request->session()->remove("user");
        $this->logAction("User logged out.", $request, $userId);
} catch(\Exception $e) {
        $uniqueId = uniqid();
        \Log::error($uniqueId . " " . $e->getMessage());
}

return redirect()->back();
}
```

AuthorController

```
namespace App\Http\Controllers;
use Illuminate\Http\Request;

class AuthorController extends ClientController
{
    public function __construct() {
        parent::__construct();
        $this->data['authorSocials'] = $this->socialsModel->getAuthorSocials();
    }

    public function index() {
        return view("pages.client.author", $this->data);
    }
}
```

ClientController

```
namespace App\Http\Controllers;
use App\Models\Nav;
use App\Models\Restaurant;
use App\Models\Social;
use Illuminate\Http\Request;

class ClientController extends MyController
{
    protected $socialsModel;
    protected $navModel;

    public function __construct() {
        parent::__construct();

        $this->socialsModel = new Social();
        $this->data["socials"] = $this->socialsModel->getSocials();

        $this->navModel = new Nav();
        $this->data['nav'] = $this->navModel->getClientNav();
    }
}
```

ContactController

```
<?php

namespace App\Http\Controllers;

use Illuminate\Http\Request;

class ContactController extends ClientController
{
    public function index() {
        return view("pages.client.contact", $this->data);
    }
}
```

FoodCategoryController

```
use App\Http\Requests\StoreCategoryRequest;
use App\Http\Requests\UpdateCategoryRequest;
use App\Models\FoodCategory;
   public function construct()
   public function create()
     * @param \Illuminate\Http\Request $request
   public function store(StoreCategoryRequest $request)
           $this->foodCategoryModel->insert($request->get('name'), $request-
>has('listed'));
           $this->logAction("Admin created the " . $request->get('name') . " food
"Category " . $request->get('name') . " was created successfully."]);
```

```
\Log::error(\uniqueId . " " . \uniqueSex->getMessage());
        return redirect()->back()->withErrors(['We encountered an error.', 'Error
 * @param int $id
 * @return
 * @param int $id
 * @return \Illuminate\Http\RedirectResponse
public function update(UpdateCategoryRequest $request, $id)
        $this->foodCategoryModel->myUpdate($id, $request->get('name'), $request-
       $this->logAction("Admin updated the " . $request->get('name') . " food
        \Log::error($uniqueId . " " . $ex->getMessage());
        return redirect()->back()->withErrors(["We encountered an error.", "Error
 * @param int $id
 * @return \Illuminate\Http\RedirectResponse
public function destroy($id)
```

```
{
    try {
        $this->foodCategoryModel->myDelete($id);

        $this->logAction("Admin deleted a food category.", request());

        return redirect()->route('admin.categories.index')->with('messages',

["Category was deleted successfully."]);
    } catch(\Exception $ex) {
        return redirect()->back()->withErrors(["We encountered an error."]);
    }
}
```

FoodController

```
use App\Http\Requests\StoreFoodRequest;
use App\Http\Requests\UpdateFoodRequest;
use App\Models\Food;
use App\Models\FoodCategory;
use App\Models\ImageUpload;
use App\Models\Restaurant;
class FoodController extends AdminController
   public function construct() {
       $this->foodModel = new Food();
   public function index()
       $this->data['food'] = $this->foodModel->get();
   public function create()
       $this->data['restaurants'] = $restaurantsModel->getAll();
       $this->data['categories'] = $categoriesModel->get();
```

```
* @param \Illuminate\Http\Request $request
 * @return \Illuminate\Http\RedirectResponse
public function store(StoreFoodRequest $request)
        $imageName = $imageUploadModel->uploadResized($request,
       $this->foodModel->insert(
            $request->get('name'),
            $request->get('restaurant'),
            $request->get('category'),
            round($request->get('price'), 2)
        $this->logAction("Admin created the " . $request->get('name') . " food.",
        \Log::error($uniqueId . " " . $ex->getMessage());
        return redirect()->back()->withErrors(['We encountered an error.', 'Error
 * @param int $id
 * @return
    $this->data['food'] = $this->foodModel->find($id);
    $this->data['restaurants'] = $restaurantsModel->getAll();
    $categoriesModel = new FoodCategory();
    $this->data['categories'] = $categoriesModel->get();
```

```
* @param \Illuminate\Http\Request $request
 * @param int $id
 * @return \Illuminate\Http\RedirectResponse
public function update(UpdateFoodRequest $request, $id)
            $imageName = $imageUploadModel->uploadResized($request,
        $this->foodModel->myUpdate(
            $request->get('name'),
            $request->get('restaurant'),
$request->get('category'),
            round($request->get('price'), 2),
        $this->logAction("Admin updated the " . $request->get('name') . " food.",
        return redirect()->route('admin.food.index')->with('messages', ['Food was
    } catch(\Exception $ex) {
 * @param int $id
public function destroy($id)
        $this->foodModel->myDelete($id);
        $this->logAction("Admin deleted a food.", request());
        \Log::error($uniqueId . " " . $ex->getMessage());
        return redirect()->back()->withErrors(['We encountered an error.', 'Error
```

HomeController

```
class HomeController extends ClientController
{
   private $restaurantModel;

   public function __construct()
   {
      parent::__construct();
        $this->restaurantModel = new Restaurant();
        $this->data["recommendedRestaurants"] = $this->restaurantModel->get(true);
   }

   public function index() {
        return view("pages.client.home", $this->data);
   }
}
```

MailController

MyController

```
camespace App\Http\Controllers;
use App\Models\ActionLog;
use Illuminate\Http\Request;

class MyController extends Controller
{
    protected $data;
    protected $actionLogModel;

    public function __construct() {
        $this->actionLogModel = new ActionLog();
    }

    protected function logAction($action, Request $request, $user_id = null) {
        $ip = $request->ip();
        $path = $request->path();
        $method = $request->method();
        $user_id = $request->session()->has("user") ? $request->session()->get("user")-
>id : $user_id;

        try {
            $this->actionLogModel->insert($ip, $path, $method, $action, $user_id);
        } catch(\Exception $ex) {
            \Log::error($ex->getMessage());
        }
}
```

OrderController

```
use App\Models\Cart;
use App\Models\Food;
use App\Models\Order;
use Illuminate\Http\Request;
class OrderController extends ClientController
   public function construct()
           $userId = $request->session()->get('user')->id;
         $this->cartModel->addItem($userId, $foodId);
           $foodModel = new Food();
           $this->logAction('User added ' . $foodModel->find($foodId)->name . " (ID:
       } catch(\Exception $ex) {
           \Log::error($ex->getMessage());
           $cartId = $request->get('id');
           $action = $request->get('action');
          $userId = $request->session()->get('user')->id;
              $this->logAction('User altered their cart.', $request, $userId);
           \Log::error($ex->getMessage());
   public function getItems(Request $request) {
```

```
$items = $this->cartModel->getItems($userId, $restaurantId);
             return response()->json($items);
   public function store(StoreOrderRequest $request) {
             $userId = $request->session()->get('user')->id;
             $restaurantId = $request->get('restaurantId');
             $address = $request->get('address');
             $items = $this->cartModel->getItems($userId, $restaurantId);
             \DB::beginTransaction();
             $this->cartModel->empty($items);
             \DB::commit();
             $this->logAction('User created an order. Order id: ' . $orderId, $request,
             return redirect()->back()->with('messages', ['Your order was created
successfully.']);
} catch(\Exception $ex) {
              DB::rollBack();
             \Log::error($ex->getMessage());
   public function details($id) {
   $this->data['details'] = $this->orderModel->details($id);
   $this->data['nav'] = $this->navModel->getAdminNav();
```

RestaurantController

```
use App\Models\FoodCategory;
use App\Models\ImageUpload;
use App\Models\Restaurant;
use Illuminate\Http\Request;
use Intervention\Image\Facades\Image;
class RestaurantController extends ClientController
   public function construct()
       parent:: construct();
       $this->middleware(['isLoggedIn', 'isAdmin'], ['except' => ['index', 'show',
       $this->data["restaurants"] = $this->restaurantModel->get();
   public function search(Request $request) {
           \Log::error($uniqueId . " " . $ex->getMessage());
```

```
>input("categories");
           $restaurants = $this->restaurantModel->getFiltered($keyword, $sortOrder,
   public function filterFood(Request $request) {
            $id = $request->get("id");
           $food = $this->restaurantModel->filterFood($id, $keyword, $sortOrder,
           foreach($food->items() as $f) {
                ])->render();
           return response()->json($response);
        } catch(\Exception $ex) {
```

```
return response ("We encountered an error.", 500);
public function create()
    $this->data['nav'] = $this->navModel->getAdminNav();
 * @param \Illuminate\Http\Request $request
  @return \Illuminate\Http\RedirectResponse
        $this->restaurantModel->insert(
        $this->logAction("Admin created the " . $request->get('name') . "
        return redirect()->back()->withErrors(['We encountered an error.', 'Error
```

```
@param int
  $restaurant = $this->restaurantModel->find($id);
  return view("pages.client.restaurants.show", $this->data);
* @param int $id
  $this->data['nav'] = $this->navModel->getAdminNav();
  $this->data['restaurant'] = $this->restaurantModel->find($id);
  return view('pages.admin.restaurants.edit', $this->data);
* @param \Illuminate\Http\Request $request
* @param int $id
* @return \Illuminate\Http\RedirectResponse
          $imageName = $imageUploadModel->uploadResized($request,
      $this->restaurantModel->myUpdate(
          $request->get('name'),
          $request->has('recommended'),
          $request->has('active'),
      $this->logAction("Admin updated the " . $request->get('name') . "
```

UserController

```
use App\Models\Role;
use App\Models\User;
class UserController extends AdminController
    * @return
   public function construct() {
       parent:: construct();
       $this->roleModel = new Role();
   public function create()
       $this->data['roles'] = $this->roleModel->get();
    * @param \Illuminate\Http\Request $request
    * @return \Illuminate\Http\RedirectResponse
   public function store(StoreUserRequest $request)
           $this->userModel->insert(
               $request->get('role')
```

```
$this->logAction("Admin created the " . $request->get('username') . "
        return redirect()->route('admin.users.index')->with('messages', ['User ' .
        \Log::error($uniqueId . " " . $ex->getMessage());
 * @param int $id
 * @return
    return view('pages.admin.users.edit', $this->data);
 * @param \Illuminate\Http\Request $request
 * @param int $id
public function update(UpdateUserRequest $request, $id)
        $this->userModel->myUpdate(
            $request->get('username'),
        $this->logAction("Admin updated the " . $request->get('username') . "
        if(session()->get('user')->id == $id)
            session()->remove('user');
```

3.4 Middleware

IsLoggedIn

```
<?php

namespace App\Http\Middleware;

use Closure;
use Illuminate\Http\Request;

class IsLoggedIn
{
    /**
        * Handle an incoming request.
        *
        * @param \Illuminate\Http\Request $request
        * @param \Closure(\Illuminate\Http\Request);
(\Illuminate\Http\Response|\Illuminate\Http\RedirectResponse) $next
        * @return \Illuminate\Http\Response|\Illuminate\Http\RedirectResponse
        */
    public function handle(Request $request, Closure $next)
        if($request->session()->has("user"))
            return $next($request);
        else
            return redirect()->route("form.login")->withErrors(["You need to be logged in in order to access that page."]);
        }
}
```

IsNotLoggedIn

```
<?php
namespace App\Http\Middleware;
use Closure;
use Illuminate\Http\Request;

class IsNotLoggedIn
{
    /**
    * Handle an incoming request.
    *
    * @param \Illuminate\Http\Request $request
    * @param \Closure(\Illuminate\Http\Request);
(\Illuminate\Http\Response|\Illuminate\Http\RedirectResponse) $next
    * @return \Illuminate\Http\Response|\Illuminate\Http\RedirectResponse
    */
    public function handle(Request $request, Closure $next)
    {
        if ($request->session()->has("user"))
            return redirect()->route("home");
        else
            return $next($request);
    }
}
```

IsAdmin

3.5 Requests

ChangeCartRequest

ContactRequest

LoginUserRequest

RegisterUserRequest

```
namespace App\Http\Requests;
     * @return bool
```

StoreCategoryRequest

StoreFoodRequest

```
namespace App\Http\Requests;
use Illuminate\Foundation\Http\FormRequest;
    * @return bool
   public function rules()
            'name' => ['required', Rule::unique('food')->where(function($query) {
                return $query->where('restaurant id', request()->get('restaurant'));
```

StoreOrderRequest

Store Restaurant Request

StoreUserRequest

```
namespace App\Http\Requests;
     * @return bool
```

UpdateCategoryRequest

```
namespace App\Http\Requests;
    * @return array
               Rule::unique('food category')->ignore($this->category)
```

UpdateFoodRequest

```
namespace App\Http\Requests;
    * @return bool
    * @return array
            'name' => ['required', Rule::unique('food')->where(function($query) {
                return $query->where('restaurant id', request()->get('restaurant'));
```

UpdateRestaurantRequest

UpdateUserRequest

```
namespace App\Http\Requests;
      * @return bool
Rule::unique('user')->ignore($this->user)],
"email" => ["required", "regex:" . $this->emailPattern,
Rule::unique('user')->ignore($this->user)],
```

3.6 Models

AccessLog

ActionLog

```
public function get(Request $request) {
          $query = $query->where('al.created_at', '>', $request->get('from'));
     if($request->has('to') && $request->get('to'))
          $query = $query->where('al.created at', '<', $request->get('to'));
     \DB::table("action log")->insert([
          "created at" => now()
public function getRegistrationsCount() {
     return \DB::table('action_log')
   ->where('path', 'register')
   ->where('method', 'POST')
   ->where('action', 'User registered themselves.')
         ->count();
```

Cart

```
$alreadyInCart = \DB::table('cart')
        $newAmount = $this->cartLimit;
    \DB::table('cart')
            'updated at' => now()
            'created at' => now()
```

Food

```
class Food extends Model
   public function get() {
       return \DB::table('food as f')
           ->orderBy('f.name')
           'created at' => now()
   public function myUpdate ($id, $name, $restaurant, $category, $price, $image = null)
           ->update($valuesArray);
```

FoodCategory

```
public function get($onlyListed = false) {
    $query = \DB::table("food category")->orderBy("name");
    return $query->get();
    \DB::table('food category')->insert([
        "created at" => now()
public function myUpdate($id, $name, $listed) {
    \DB::table('food_category')
->where('id', $id)
        ->update([
             "updated at" => now()
```

ImageUpload

```
camespace App\Models;
use Illuminate\Database\Eloquent\Factories\HasFactory;
use Illuminate\Database\Eloquent\Model;
use Illuminate\Http\Request;
use Intervention\Image\Facades\Image;

class ImageUpload extends Model
{
   public function uploadResized(Request $request, $path, $width, $height = null) {
        $image = $request->file('image');
        $imageName = rand(1, 9999) . time() . '.' . $image->extension();

        $filePath = public_path($path);
        $img = Image::make($image->path());
        $img = Image::make($image->path());
        $img->resize($width, $height, function ($const) {
            $const->aspectRatio();
        })->save($filePath . $imageName);

        if($width != null && $height != null) {
            $canvas = Image::canvas($width, $height);
            $canvas->insert($img, 'center');
            $canvas->save($filePath . $imageName);
        }

        return $imageName;
}
```

Nav

```
<?php
namespace App\Models;
use Illuminate\Database\Eloquent\Factories\HasFactory;
use Illuminate\Database\Eloquent\Model;

class Nav extends Model
{
    public static function getClientNav() {
        return \DB::table("nav")->where("admin", false)->orderBy("order")->get();
    }

    public static function getAdminNav() {
        return \DB::table("nav")->where("admin", true)->orderBy("order")->get();
    }
}
```

Order

```
use Illuminate\Database\Eloquent\Model;
class Order extends Model
       return \DB::table('order as o')
       $orderId = \DB::table('order')->insertGetId([]
            'created at' => now()
```

Restaurant

```
$query = \DB::table("restaurant")
    ->where('active', true);
    ->groupBy(["fc.id", "fc.name"])
->orderBy("fc.name", "asc")
$restaurant->topCategories = \DB::table("food as f")
```

```
return \DB::table("restaurant")
           ->paginate($this->perPageSearch);
           $query->orderBy("r.name", "desc");
           $query->orderBy("r.name", "asc");
       $restaurants = $query->groupBy($columns)->select($columns)->paginate($this-
>perPage);
           $this->getCategoriesForRestaurant($r);
       return $query->paginate($this->perPageFood);
```

Role

```
color color
```

Social

```
namespace App\Models;
use Illuminate\Database\Eloquent\Factories\HasFactory;
use Illuminate\Database\Eloquent\Model;

class Social extends Model
{
    public function getSocials() {
        return \DB::table("social")->where("author", false)->orderBy("order")->get();;
    }

    public function getAuthorSocials() {
        return \DB::table("social")->where("author", true)->orderBy("order")->get();
    }
}
```

User

```
public function get() {
         ->join("role as r", "u.role_id", "=", "r.id")
->select("u.*", "r.name as role_name")
public function myUpdate($id, $username, $email, $password, $role) {
public function myDelete($id) {
     \DB::table('user')->delete($id);
```

3.7 Migrations

create_nav_table

```
use Illuminate\Support\Facades\Schema;
   public function up()
           $table->id();
           $table->string("name");
           $table->integer("order");
           $table->unique(['order', 'admin']);
           $table->unique(['name', 'admin']);
     * @return void
       Schema::dropIfExists('nav links');
```

create_social_table

```
* @return void
public function up()
       $table->integer("order");
   Schema::dropIfExists('Social');
```

create_user_table

create_role_table

create_access_log_table

create_restaurant_table

create_food_category_table

create_food_table

```
* @return void
public function up()
       $table->float("price");
       $table->timestamps();
       $table->unique(['name', 'restaurant id']);
 * @return void
   Schema::dropIfExists('food');
```

create_action_log_table

create_cart_table

```
vse Illuminate\Database\Migrations\Migration;
use Illuminate\Database\Schema\Blueprint;
use Illuminate\Support\Facades\Schema;

return new class extends Migration
{
    /**
        * Run the migrations.
        *
        * @return void
        */
    public function up()
    {
        Schema::create('cart', function (Blueprint Stable) {
            $table->id();
            $table->foreignId('user id');
            $table->foreignId('food_id');
            $table->integer('amount');
            $table->timestamps();

            $table->unique(['user_id', 'food_id']);
        });
    }

/**
    * Reverse the migrations.
        *
            * @return void
            */
            public function down()
            {
                  Schema::dropIfExists('cart');
            });
};
```

create_order_table

create_order_detail_table

```
* @return void
public function up()
       $table->timestamps();
   Schema::dropIfExists('order detail');
```

3.8 Seeders

FoodCategorySeeder

```
* @return void
```

```
"name" => "Salads",
    "listed" => true

],
[
    "name" => "Wraps",
    "listed" => true

],
[
    "name" => "Extras",
    "listed" => false

],
[
    "name" => "Pasta",
    "listed" => true

]
];

public function run()
{
    foreach($this->foodCategories as $fc) {
        $fc["created at"] = now();
        \DB::table("food_category")->insert($fc);
    }
}
```

FoodSeeder

```
use Illuminate\Database\Seeder;
class FoodSeeder extends Seeder
    * @return void
```

```
"name" => "Ultimate Supreme",
    "image" => "littlecaesars_ultimate_supreme.jpg",
    "price" => 10.99,
    "category_id" => 1,
    "restaurant_id" => 10

],
[
    "name" => "Veggie",
    "image" => "littlecaesars_veggie.jpg",
    "price" => 10.99,
    "category_id" => 1,
    "restaurant_id" => 10

];

public function run()
{
    foreach($this->food as $f) {
        $f['created at'] = now();
        \DB::table("food")->insert($f);
    }
}
```

NavSeeder

```
namespace Database\Seeders;
     * @return void
```

RestaurantSeeder

```
namespace Database\Seeders;
use Illuminate\Database\Seeder;
    * @return void
```

```
"recommended" => false
]
];

public function run()
{
    foreach($this->restaurants as $r) {
        $r["created_at"] = now();
        \DB::table("restaurant")->insert($r);
    }
}
```

RoleSeeder

SocialSeeder

```
namespace Database\Seeders;
     * @return void
```

```
"order" => 3

],
[
         "icon" => "fas fa-file-pdf",
         "asset" => true,
         "href" => "documentation.pdf",
         "author" => true,
         "order" => 4

]
];

public function run()
{
    \DB::table("social")->insert($this->socials);
}
```

UserSeeder

```
* @return void
```

3.9 Components

Food

```
namespace App\View\Components;
```

Restaurant

```
namespace App\View\Components;
    * @return void
    * @return \Illuminate\Contracts\View\View|\Closure|string
```

3.10 Blade

components.client.food

compontents.client.restaurant

emails.contact

```
@component('mail::message')
# {{ $subject }}

{{ $message }}
<br/><br/>><br/><span>Sent from: {{ $email }}</span>
@endcomponent
```

fixed.admin.footer

fixed.admin.head

```
<meta charset="utf-8">
<meta name="viewport" content="width=device-width, initial-scale=1">
<title>Vlogo | Admin</title>
link rel="icon" href="{{ asset("favicon.ico") }}"/>
<!-- Google Font: Source Sans Pro -->
link rel="stylesheet"
href="https://fonts.googleapis.com/css?family=Source+Sans+Pro:300,400,400i,700&display=
fallback">
<!-- Font Awesome -->
{{--<link rel="stylesheet" href="{{ asset('assets/vendor/AdminLTE/plugins/fontawesome-
free/css/all.css') }}">--}}
<link rel="stylesheet" href="{{ asset('assets/vendor/fontawesome/css/all.min.css') }}">
<!-- overlayScrollbars -->
<link rel="stylesheet" href="{{ asset('assets/vendor/fontawesome/css/all.min.css') }}">
<!-- Theme style -->
<link rel="stylesheet" href="{{ asset('assets/vendor/AdminLTE/plugins/overlayScrollbars/css/OverlayScrollbars.min.css') }}">
<!-- Theme style -->
kink rel="stylesheet" href="{{ asset('assets/vendor/AdminLTE/dist/css/adminlte.min.css') }}">
<!-- Theme style -->
clink rel="stylesheet" href="{{ asset('assets/css/admin.min.css') }}">
<!-- Theme style -->
<!-- Theme style ---
<!-- Theme st
```

fixed.admin.nav

fixed.admin.scripts

```
<!-- jQuery -->
<script src="{{    asset('assets/vendor/AdminLTE/plugins/jquery/jquery.min.js')
}}"></script>
<!-- Bootstrap 4 -->
<script src="{{
    asset('assets/vendor/AdminLTE/plugins/bootstrap.js/bootstrap.bundle.min.js')
}}"></script>
<!-- overlayScrollbars -->
<script src="{{
    asset('assets/vendor/AdminLTE/plugins/overlayScrollbars/js/jquery.overlayScrollbars.min.js') }}"></script>
<!-- FontAwesome -->
<script src="{{    asset('assets/vendor/fontawesome/js/all.min.js') }}"></script>
<!-- AdminLTE App -->
<script src="{{    asset('assets/vendor/AdminLTE/dist/js/adminlte.min.js') }}"></script>
<!-- AdminLTE for demo purposes -->
<script src="{{    asset('assets/js/common.min.js') }}"></script>
@yield('additionalScripts')
{{--<script src="{{    asset('assets/vendor/AdminLTE/dist/js/demo.js') }}"></script>---}}
```

fixed.admin.sidebar

```
<span class="brand-text font-weight-light">Vlogo</span>
            </div>
                <a href="#!" class="d-block">{{ session()->get('user')->username }}</a>
            </div>
        </div>
placeholder="Search" aria-label="Search">
                <div class="input-group-append">
                    </button>
                </div>
            </div>
        </div>
role="menu" data-accordion="false">
                        </a>
            </div>
out-alt"></i></a>
            <input type="submit" class="btn btn-secondary hide-on-collapse pos-right"</pre>
```

fixed.client.footer

fixed.client.head

```
<meta charset="UTF-8"/>
<meta name="viewport" content="width=device-width, initial-scale=1.0"/>
<title>
    @section("title")
        Vlogo
    @show
</title>
<meta name="description" content="Vlogo is the food delivery site that will get you anything you want to your doorstep. You order online, you'll have it!"/>
<meta name="keywords" content="Vlogo, food delivery, Restaurants, Recommended, Home"/>
<meta name="csrf-token" content="{{ csrf_token() }}"/>
<link rel="icon" href="{{ asset("favicon.ico") }}"/>
<link rel="stylesheet" href="{{ asset("assets/vendor/fontawesome/css/all.min.css") }}"
<li>crossorigin="anonymous"/>
<link rel="stylesheet" href="{{ asset("assets/vendor/bootstrap/css/bootstrap.min.css") }}"/>
<link rel="stylesheet" href="{{ asset("assets/css/app.min.css") }}"/></ur>
```

fixed.client.header

```
<div id="header" class="py-2 shadow">
          </a>
      </div>
                     <a href="{{ route($n->route) }}" class="p-2 @if(request()-
<a href="{{ route("form.login") }}" id="btnSignIn" class="px-3 py-2</pre>
rounded-pill shadow font-small">Sign in</a>
             <div id="userHoverMenu" class="position-absolute shadow rounded py-1">
2">Admin</a>
                     <1i>
                 </div>
             </span>
          <span id="hamburgerMenu" class="ms-4 me-2">
             </a>
          </span>
      </nav>
   </div>
      </div>
/div>
```

<div id="sidenavCover" class="cover">
</div>

fixed.client.scripts

```
<script src="{{ asset("assets/vendor/bootstrap/js/bootstrap.min.js") }}"></script>
<script src="{{ asset("assets/vendor/jquery/jquery.min.js") }}"></script>
<script src="{{ asset("assets/vendor/jquery/jquery.easing.min.js") }}"></script>
<script src="{{ asset('assets/vendor/fontawesome/js/all.min.js') }}"></script>
<script src="{{ asset("assets/js/common.min.js") }}"></script>
<script src="{{ asset("assets/js/client.min.js") }}"></script></script>
```

layouts.admin

```
<!DOCTYPE html>
   </head>
                            <nav aria-label="breadcrumb" class="mb-4">
                                </nav>
                    </div>
               </section>
                    </div>
               </section>
           </div>
       </div>
```

layouts.client

pages.admin.dashboard

pages.admin.actions.index

```
<h1>Food</h1>
<form id="actionsForm" class="mt-4 mb-4" action="{{ route('admin.actions') }}"</pre>
                  <span class="input-group-text">From</span>
              </div>
              <input class="form-control" type="date" name="from" @if(request()-</pre>
          </div>
       </div>
                  <span class="input-group-text">To</span>
              </div>
       </div>
       <div class="col-12 col-md-2 mb-2">
           <input type="submit" value="Filter" class="btn btn-secondary"/>
       </div>
   </div>
          #
          IP
          Path
          Method
          Created At
```

pages.admin.food.create

```
<label for="name">Name</label>
    </div>
        <span class="font-small error-message">Image is required</span>
    </div>
        <label for="restaurant">Restaurant
                <option value="{{ $r->id }}">{{ $r->name }}</option>
    </div>
        </select>
    </div>
        <input class="form-control" type="number" name="price" id="price"</pre>
    </div>
        <input id="btnSubmit" class="btn btn-primary" type="submit" value="Submit"</pre>
   </div>
</form>
</script>
<script src="{{ asset('assets/js/admin/food.min.js') }}"></script>
```

pages.admin.food.edit

```
}}" method="POST" class="standard-form" enctype="multipart/form-data">
            <label for="name">Name
       </div>
            <input class="form-control-file" type="file" name="image" id="image"/>
       </div>
            <label for="restaurant">Restaurant</label>
                    <option @if($r->id == $food->restaurant id) selected @endif
value="{{ $r->id }}">{{ $r->name }}</option>
            </select>
        </div>
                @foreach($categories as $c)
                    <option @if($c->id == $food->category id) selected @endif value="{{
            </select>
        </div>
            <span class="font-small error-message">This field is required</span>
        </div>
            <input id="btnSubmit" class="btn btn-primary" type="submit" value="Submit"</pre>
       </div>
   </form>
   <script src="{{ asset('assets/js/form-validation.min.js') }}"></script>
   <script>
       const edit = true;
   </script>
```

pages.admin.food.index

```
<h1>Food</h1>
         ID
         Name
         Image
         Restaurant
         Category
         Price
         Created At
         Edit
         Delete
      </thead>
           >id]) }}" method="POST">
hidden="true"></i></button>
           </div>
```

pages.admin.foodCategories.create

pages.admin.foodCategories.edit

pages.admin.foodCategories.index

```
category</a>
             #
             Name
             Listed
             Created At
             Edit
             Delete
         </thead>
                {{ $c->updated_at ? : 'N/A' }}
{ td>{{ $c->updated_at ? : 'N/A' }}
{cd><a href="{{ route('admin.categories.edit', ["category" => $c-
hidden="true"></i></button>
                </div>
   <script>
```

pages.admin.orders.details

```
<h1>Order details</h1>
          #
          Food
          Image
       </thead>
asset('assets/images/food/' . $d->image) }}" alt="{{ $d->name }}"/>
               </div>
            </div>
  <script>
  </script>
```

pages.admin.orders.index

```
<h1>Orders</h1>
      ID
      User
      Restaurant
      Address
      Created At
      Details
    </thead>
        {{ $0->address }}
          </a>
      </div>
<script>
```

pages.admin.restaurants.create

```
method="POST" class="standard-form" enctype="multipart/form-data">
            <label for="name">Name</label>
        </div>
            <label for="image">Image</label>
            <input class="form-control-file" type="file" name="image" id="image"/>
            <span class="font-small error-message">Image is required</span>
        </div>
            <label class="form-check-label" for="recommended">Recommended</label>
       </div>
            <input class="form-check-input" type="checkbox" name="active" id="active"/>
        </div>
        </div>
   <script src="{{ asset('assets/js/form-validation.min.js') }}"></script>
   <script>
```

pages.admin.restaurants.edit

```
<h1>Edit restaurant</h1>
            <label for="name">Name</label>
            <span class="font-small error-message">This field is required</span>
       </div>
            <label for="image">Image (Leave empty if unchanged)</label>
       </div>
       </div>
@if($restaurant->active) checked @endif/>
            <label class="form-check-label" for="active">Active</label>
       </div>
       </div>
   </script>
   <script src="{{ asset('assets/js/admin/restaurants.min.js') }}"></script>
```

pages.admin.restaurants.index

```
<h1>Restaurants</h1>
restaurant</a>
    #
          Name
          Image
          Created At
          Updated At
        </thead>
            </div>
          <button class="btn btn-link"><i class="fa fa-trash" aria-</pre>
hidden="true"></i></button>
            </form>
          </div>
```

</script>
 @include('partials.datatables-scripts')
@endsection

pages.admin.users.create

```
class="standard-form">
            <label for="username">Username</label>
be between 8 and 25 characters long</span>
        </div>
            <input class="form-control" type="email" name="email" id="email"</pre>
            <span class="font-small error-message">name@example.com</span>
        </div>
            <span class="font-small error-message">User's password needs to be at least
8 characters long and contain at least one letter and one number</span>
        </div>
            <label for="role">Role</label>
                    <option @if($r->name === 'user') selected @endif value="{{ $r->id
}}">{{ $r->name }}</option>
            </select>
        </div>
        </div>
    </form>
    </script>
```

pages.admin.users.edit

```
}}" method="POST" class="standard-form">
            <label for="username">Username</label>
be between 8 and 25 characters long</span>
        </div>
            <input class="form-control" type="email" name="email" id="email"</pre>
        </div>
8 characters long and contain at least one letter and one number</span>
        </div>
            <label for="role">Role</label>
                    <option @if($user->role id === $r->id) selected @endif value="{{
            </select>
        </div>
        </div>
    </form>
    <script src="{{ asset('assets/js/admin/users.min.js') }}"></script>
```

pages.users.admin.index

```
<h1>Users</h1>
user</a>
    #
       Username
       Email
       Role
       Created At
       Updated At
       Edit
       Delete
     </thead>
}}"><i class="fas fa-edit"></i></a>
>id]) }}" method="POST">
hidden="true"></i></button>
         </div>
 <script>
 </script>
```

pages.client.author

```
</div>
                <span class="mt-3 font-medium">Bojan Maksimović 92/19</span>
                <span class="font-small opacity-75">Web Developer</span>
            </div>
                <br class="d-block d-lq-none"/>
                <h2 class="font-large">About me</h2>
                            <1i>>
                    </div>
            </div>
        </div>
    </div>
</div>
```

pages.client.contact

```
<h2 class="text-center font-x1">Contact us</h2>
                         <1i>>
                             <i class="fas fa-envelope me-1"></i></i>
bojan.maxim075@gmail.com
                     <hr class="d-block d-lg-none w-100 my-5"/>
                </div>
                     <form id="contactForm" class="font-small mx-auto" action="{{</pre>
small">name@example.com</span>
                         </div>
                             <span class="error-message font-small">This field is
required</span>
                         </div>
}}"></textarea>
required</span>
                         </div>
d-block mx-auto px-4">
                     </form>
                </div>
            </div>
```

pages.client.home

```
<div id="mainSlider" class="vh-100 d-flex align-items-center">
                     </div>
                </div>
                     <h1 class="font-xxl">Best food delivery service in the world</h1>
                    <form id="homepageForm" class="mt-4" onsubmit="return false;">
                             <span class="input-group-text font-small py-2 px-3 rounded-</pre>
left-0 w-100 rounded">
                                 </div>
                         </div>
                    </form>
                </div>
            </div>
        </div>
    </div>
        <h2 class="font-xl text-center mb-5">Recommended by <span class="color-</pre>
secondary">Vlogo</span></h2>
:categories="$r->topCategories" />
            </div>
        </div>
    </div>
    <script src="{{ asset("assets/js/home.min.js") }}"></script>
```

pages.client.login

```
<form id="loginForm" class="font-small mx-auto" action="{{ route("login")}</pre>
}}" method="POST">
                     <input type="email" class="form-control font-small" id="email"</pre>
                     <span class="font-small error-message">name@example.com</span>
                </div>
least 8 characters long and contain at least one letter and one number /span>
                <button id="btnLogin" class="btn btn-primary text-center d-block mx-</pre>
                </button>
        </div>
    </div>
```

pages.client.register

```
route("register") }}" method="POST">
                    <label for="username" class="form-label">Username/label>
                    <span class="font-small error-message">Your username cannot contain
special characters other than ' ', must contain at least one alphabetical character and
be between 8 and 25 characters long</span>
                </div>
                    <input type="email" class="form-control font-small" id="email"</pre>
                    <span class="font-small error-message">name@example.com</span>
                </div>
                </div>
                    <label for="confirmPassword" class="form-label">Confirm
                    <input type="password" class="form-control font-small"</pre>
                    <span class="font-small error-message">Your passwords don't
match</span>
                </div>
                </button>
            </form>
        </div>
    </div>
    <script src="{{ asset("assets/js/form-validation.min.js") }}"></script>
```

pages.client.restaurants.index

```
<a href="#" id="allCategories" class="active">All food</a>
                <1i>>
            </div>
                         <input type="text" id="tbName" class="form-control font-</pre>
                    </div>
                             <option value="nameDesc">Name descending</option>
                         </select>
                    </div>
                </div>
            </form>
                </div>
                    </div>
                </div>
            </div>
        </div>
    </div>
</div>
```

pages.client.restaurants.show

```
route("restaurants.index") }}">Restaurants</a>
</nav>
                     <a href="#" id="allCategories" class="active">All food</a>
                 @foreach($restaurant->categories as $fc)
</div>
                         <input type="text" id="tbName" class="form-control font-</pre>
                     </div>
                        </select>
                     </div>
                 </div>
                 </div>
                     </div>
                 </div>
              </div>
              <div id="foodPagination" class="mt-4 d-flex justify-content-center">
```

```
</div>
            </div>
                <form action="{{ route('orders.store') }}" method="POST" id="orderForm"</pre>
                     <h3 class="font-medium text-center">Your order</h3>
                         <label for="address" class="form-label">Delivery
address</label>
                         <span class="error-message font-small">(Street Name) (Home
Number)/[Apartment Number]</span>
                         </div>
                     </div>
            </div>
        </div>
    </div>
```

3.11 JavaScript

client.js

common.js

```
$("body").append(`<div id="scrollTop">
$("#scrollTop").hide();
   dataType: 'json',
```

contact.js

food.js

```
getFood();
    e.preventDefault();
    getFood();
    e.preventDefault();
    getFood();
    getFood();
        categories.push($(el).data('id'));
function printFood(data) {
```

```
$('#foodWrapper').html(html);
   updatePagination(data);
   enableAddingToOrder();
function updatePagination(data) {
   $('#foodPagination').html(html);
   enablePagination();
function enablePagination() {
    $('.pagination a').click(function(e) {
       e.preventDefault();
   $('.page-link.number-link').click(function() {
       const currentPage = $('.page-item.active .page-link').data('page');
        if(currentPage <= 1)</pre>
        getFood(currentPage - 1);
    $('.pagination-next').click(function() {
```

```
getFood(currentPage + 1);
function enableAddingToOrder() {
    $('.add-food').on('click', async function(e) {
        e.preventDefault();
async function getCart() {
    const urlParts = window.location.href.split('/');
    const restaurantId = parseInt(urlParts[urlParts.length - 1]);
    const result = await ajaxCallback(base url + "/cart/items", "POST", {
    printCart(result);
function printCart(data) {
    let totalPrice = 0;
            totalPrice += parseFloat(el.price) * parseInt(el.amount);
    $('#orderItems ul').html(html);
```

```
function enableChangingCart() {
    $('.btn-amount').click(async function(e) {
       e.preventDefault();
       const id = $(this).data('id');
       const result = await ajaxCallback(base url + '/cart/change', 'POST', {
   const result = submitForm([checkAddress], 'orderForm');
```

form-validation.js

```
$('.error-message').hide();
function fieldCorrect(field) {
   $(field).addClass('border-correct');
   noErrors = false;
function fieldNeutral(field) {
   $(field).removeClass('border-incorrect');
   $(field).removeClass('border-correct');
   $(field).siblings('.error-message').slideUp();
```

home.js

```
function setHeaderShadow() {
        $("#header").removeClass("shadow");
$(window).click(function() {
const searchField = $('#tbSearch');
    if(keyword === '') {
searchResultsList.hide();
```

login.js

```
$ (document).ready(() => {
    $ ('#email').focus();

const emailPattern = /^\w+([\.-]?\w+)*@\w+([\.-]?\w+)*(\.\w{2,3})+$/;

const passwordPattern = /^(?=.*\d) (?=.*[a-z]).{8,}$/;

function checkEmail() {
    validateField($('#email'), emailPattern);
}

function checkPassword() {
    validateField($('#password'), passwordPattern);
}

$ ('#email').blur(checkEmail);
$ ('#password').blur(checkPassword);

$ ('#password').blur(checkPassword);

$ ('#btnLogin').click(function() {
    const result = submitForm([checkEmail, checkPassword], 'loginForm');

    if(result)
        $ (this).addClass('disabled');

    return result;
});

});
```

register.js

```
$('#username').focus();
   checkConfirmPassword();
        fieldIncorrect($('#confirmPassword'));
```

restaurants.js

```
$ (document) .ready(() => {
   getRestaurants();
   $('#allCategories').click(function(e) {
       getRestaurants();
   $('.food-category').click(function(e) {
       e.preventDefault();
        if($(this).hasClass('active')) {
   async function getRestaurants(page = 1) {
        $('.restaurantDiv').removeClass('shadow');
```

```
$('#restaurantsWrapper').html(html);
   updatePagination(data);
function updatePagination(data) {
   const disabledBack = currentPage === 1 ? 'disabled' : '';
    for(let i = 0; i < lastPage; i++) {</pre>
    $('#restaurantsPagination').html(html);
   enablePagination();
function enablePagination() {
    $('.pagination a').click(function(e) {
        e.preventDefault();
    $('.page-link.number-link').click(function() {
        const currentPage = $('.page-item.active .page-link').data('page');
    $('.pagination-back').click(function() {
        if(currentPage <= 1)</pre>
        getRestaurants(currentPage - 1);
    $('.pagination-next').click(function() {
        const currentPage = $('.page-item.active .page-link').data('page');
        const numberOfPages = $('.page-link').length - 2;
        if(currentPage >= numberOfPages)
```

admin/categories.js

admin/food.js

admin/restaurants.js

```
$(document).ready(() => {
    const nameField = $('#name');
    function checkName() {
        if (nameField.val() === '') {
            fieldIncorrect(nameField)
        } else {
            fieldCorrect(nameField);
        }
}

const imageField = $('#image');
    function checkImage() {
        if (!edit) {
            if (imageField.val() === '') {
                 fieldIncorrect(imageField);
            } else {
                 fieldCorrect(imageField);
            }
        }
}

nameField.blur(checkName);
imageField.on('input', checkImage);

$('#btnSubmit').click(function() {
        const result = submitForm([checkName, checkImage], 'restaurantForm');

        if (result)
            $(this).addClass('disabled');

        return result;
        });
});
```

admin/users.js

```
$(document).ready(() => {
    const usernamePattern = /^(?=.*[a-z])[a-zA-Z0-9\]{8,25}$/;
    const emailPattern = /^\w+([\.-]?\w+)*@\w+([\.-]?\w+)*(\.\w{2,3})+$/;
    let passwordPattern;

if (edit)
        passwordPattern = /^$|^((?=.*\d)(?=.*[a-z]).(8,))$/;

else
        passwordPattern = /^((?=.*\d)(?=.*[a-z]).(8,))$/;

function checkUsername() {
        validateField($('#username'), usernamePattern);
    }

function checkEmail() {
        validateField($('#email'), emailPattern);
    }

function checkPassword() {
        validateField($('#password'), passwordPattern);
    }

$('#username').blur(checkEmail);
    $('#password').blur(checkEmail);
    $('#password').blur(checkEmail);
    $('#btnSubmit').click(function() {
        const result = submitForm([checkUsername, checkEmail, checkPassword],
    'userForm');

    if (result)
        $(this).addClass('disabled');
        return result;
    });
});
```

3.12 SCSS

admin.scss

```
$screen-xs: 575px;
   vertical-align: middle !important;
.large-column {
```

app.scss

```
$color-error: red;
$screen-xs: 575px;
.font-large {
```

```
.font-xxl {
.btn-primary, .btn-primary.disabled, .btn-primary:disabled {
.btn-secondary, .btn-secondary.disabled, .btn-secondary:disabled {
```

```
.color-primary {
   color: $color-primary !important;
   color: $color-secondary !important;
           display: none !important;
#hamburgerMenu {
       display: block !important;
```

```
#sideNav {
        &:hover {
            background-color: $color-white;
#userDivFront {
#userHoverMenu {
    left: 0;
   a, input[type=submit] {
       color: $color-white !important;
            color: $color-black !important;
#mainSlider {
```

```
#homepageForm {
       border: none !important;
       border: none !important;
#searchResults {
#restaurantsWrapper {
.restaurantDiv {
   background-position: center;
.restaurantText {
```

```
.active {
        &.active {
                background-color: $color-primary !important;
                border-color: $color-primary !important;
               color: $color-white !important;
#foodWrapper {
.food-image {
.food-text {
```

```
&:hover {
#authorSocials {
        &:hover {
.border-correct {
#contactForm, #loginForm, #registerForm {
.signInFormLink {
    &:hover {
```

```
filter: brightness(.5);
}

// footer
#footer {
    background-color: $color-black;
    color: $color-white;
    ul {
        a {
            color: $color-white;
        }
}

#scrollTop {
    position: fixed;
      right: 20px;
    bottom: 20px;
    a {
        width: 48px;
        height: 48px;
        color: $color-white;
        background-color: $color-black-t;
    }
}
```