

THE FLORIDA STATE UNIVERSITY
COLLEGE OF ARTS AND SCIENCE

MULTI-GPU SOLUTIONS OF GEOPHYSICAL PDES WITH RADIAL BASIS
FUNCTION-GENERATED FINITE DIFFERENCES

By

EVAN F. BOLLIG

A Dissertation submitted to the
Department of Scientific Computing
in partial fulfillment of the
requirements for the degree of
Doctor of Philosophy

Degree Awarded:
Fall Semester, 2012

Evan F. Bollig defended this dissertation on October 1, 2012.

The members of the supervisory committee were:

Gordon Erlebacher
Professor Directing Thesis

Natasha Flyer
Outside University Representative

Mark Sussman
University Representative

Dennis Slice
Committee Member

Ming Ye
Committee Member

Janet Peterson
Committee Member

The Graduate School has verified and approved the above-named committee members, and certifies that the dissertation has been approved in accordance with the university requirements.

TABLE OF CONTENTS

List of Tables	iv
List of Figures	v
Abstract	vii
1 An Alternative Stencil Generation Algorithm for RBF-FD	1
1.1 k -D Tree	2
1.2 A Fixed-Grid Hashing Algorithm	6
1.2.1 ANN	6
1.2.2 k -NN vs k -ANN	7
1.2.3 Integer Dilation and Node Reordering	8
1.3 Performance Comparison	9
1.3.1 Hashing	10
1.4 On Space Filling Curves and Other Orderings	16
1.4.1 Integer Dilation	16
1.5 Conclusions on Stencil Generation	17

LIST OF TABLES

LIST OF FIGURES

<p>1.1 A stencil center in green finds neighboring stencil nodes in blue. Two ball queries are shown as dashed and dash-dot circles to demonstrate the added difficulty of finding the right query radius to obtain the k-nearest neighbors.</p> <p>1.2 An example k-D Tree in 2-Dimensions. Nodes are partitioned with a cyclic dimension splitting rule (i.e., splits occur first in X, then Y, then X, etc.); all splits occur at the median node in each dimension.</p> <p>1.3 High level overview of the <i>Fixed-Grid Bucket</i> (a.k.a. Hash) Algorithm. A coarse regular grid is overlaid on the domain. Nodes coordinates are hashed to containing cell indices and pushed onto a list for the appropriate cell. The cells are reordered in memory according to a space filling curve (i.e., Raster (IJK), Morton (Z), Graycode (U), etc.). Stencil queries start search with the cell containing the stencil center and expand to neighboring cells until at least n candidate nodes are found. The candidate list is truncated to the n closest neighbors.</p> <p>1.4 A stencil generated with k-ANN satisfies the required stencil size, but is not guaranteed to choose the true nearest neighbors.</p> <p>1.5 Example effects of node reordering within neighbor query algorithm for MD node set $N = 6400$ with $n = 50$. Matrix is 0.78% full. k-D Tree maintains original ordering of the nodes and deceptively appears nearly dense. LSH algorithm reorders nodes according to raster ordering and reveals sparsity of the problem.</p> <p>1.6 In order: a) node ordering test cases; b) original ordering of regular grid (raster); c) coarse grid overlay for hash functions ($hnx = 6$); d) example stencil ($n = 31$) spanning multiple Z's; e) spy of DM after orderings. Author's Note: REGENERATE FIGURES WITH RANDOM/HALTON NODES</p> <p>1.7 In order: a) node ordering test cases; b) original ordering of regular grid (raster); c) coarse grid overlay for hash functions ($hnx = 6$); d) example stencil ($n = 31$) spanning multiple Z's; e) spy of DM after orderings.</p>	<p>2</p> <p>3</p> <p>7</p> <p>8</p> <p>9</p> <p>11</p> <p>11</p>
---	--

1.8	Querying the $n = 50$ nearest neighbors on a regular grid up to $N = 160^3$ demonstrates the significant gains achieved by our spatially binned neighbor query. While KDTree queries grow as $O(N \log N)$	12
1.9	Querying the $n = 50$ nearest neighbors on a regular grid up to $N = 160^3$ demonstrates the significant gains achieved by our spatially binned neighbor query. While KDTree queries grow as $O(N \log N)$	13
1.10	Querying the $n = 50$ nearest neighbors on a regular grid up to $N = 160^3$ demonstrates the significant gains achieved by our spatially binned neighbor query. While KDTree queries grow as $O(N \log N)$	14
1.11	Generating stencils for increasing subsets of the $N = 1e6$ CVT nodes mesh.	14
1.12	Based on the proper choice of overlay resolution, the hash stencil query can accelerate stencil generation, but the sophistication of the algorithm is low enough that negative impact is more likely. On the other hand, the impact on SpMV performance is always positive with the routine accelerated up to 4.9x faster.	15
1.13	As the coarse grid resolution increases the hashing algorithm achieves both 2x faster than KDTree in stencil generation, with greater than 4x gain in SpMV performance (for free).	15
1.14	In order: a) node ordering test cases; b) original ordering of regular grid (raster); c) coarse grid overlay for hash functions ($hnx = 6$); d) example stencil ($n = 31$) spanning multiple Z's; e) spy of DM after orderings.	16

ABSTRACT

Many numerical methods based on Radial Basis Functions (RBFs) are gaining popularity in the geosciences due to their competitive accuracy, functionality on unstructured meshes, and natural extension into higher dimensions. One method in particular, the Radial Basis Function-generated Finite Differences (RBF-FD), has drawn significant attention due to its comparatively low computational complexity versus other RBF methods, high-order accuracy (6th to 10th order is common), and parallel nature.

Similar to classical Finite Differences (FD), RBF-FD computes weighted differences of stencil node values to approximate derivatives at stencil centers. The method differs from classical FD in that the test functions used to calculate the differentiation weights are n -dimensional RBFs rather than one-dimensional polynomials. This allows for generalization to n -dimensional space on completely scattered node layouts.

Although RBF-FD was first proposed nearly a decade ago, it is only now gaining a critical mass to compete against well known competitors in modeling like FD, Finite Volume and Finite Element. To truly contend, RBF-FD must transition from single threaded MATLAB environments to large-scale parallel architectures.

Many HPC systems around the world have made the transition to Graphics Processing Unit (GPU) accelerators as a solution for added parallelism and higher throughput. Some systems offer significantly more GPUs than CPUs. As the problem size, N , grows larger, it behooves us to work on parallel architectures, be it CPUs or GPUs. In addition to demonstrating the ability to scale to hundreds or thousands of compute nodes, this work introduces parallelization strategies that span RBF-FD across multi-GPU clusters. The stability and accuracy of the parallel implementations are tested in explicit and implicit modes to verify correctness.

This work establishes RBF-FD as a contender in the arena of distributed HPC numerical methods.

CHAPTER 1

AN ALTERNATIVE STENCIL GENERATION ALGORITHM FOR RBF-FD

Like all RBF methods, RBF-FD is designed to handle irregular node distributions, so the emphasis in literature focuses on how the method manages point clouds. While nothing prevents implementations of RBF-FD from utilizing existing meshes/lattices, most work in the field concentrates on simple geometries like the sphere [4, 5, 6, 7] and quadrilateral/prism [?] to better understand properties of the method and develop extensions.

Without mesh/lattice connectivity available, stencils are generated by choosing the n -nearest neighbors to each node, including the query node. This is known more formally as a *k-nearest neighbor (k-NN)* problem [14] (a.k.a. ℓ -nearest neighbor search [17]). Here “nearest” is defined with the Euclidean distance metric, although it is possible to generalize to other metrics (see e.g., [1]).

In contrast to RBF-FD, global RBF methods with infinite support connect all nodes to all other nodes, so there is no need to query for nearest neighbors. Methods based on compact RBFs require all nodes—with no limit on the count—that lie within the support/radius of the RBF centered at each node. The neighbor query for compact RBFs is referred to as a *ball query* (a.k.a. range query [17]) due to the closed ball created by the radius of support in Equation ??.

The *k*-NN and ball query problems are similar, but the former is harder to solve. Consider, for example, the scenario in Figure 1.1. Two ball queries around a green stencil center are represented as dashed and dash-dot circles. The inner query returns four neighbors, and the outer returns six. If a stencil of size $n = 6$ is desired, then the outer query can be truncated to give the five required neighbors shown in blue. In this example the red node and the farthest blue node are equidistant from the center, but ties are broken arbitrarily. Although *k*-NN is simply a truncated ball query, the real challenge lies in finding the proper search radius to enclose at least the k desired neighbors.

A naïve approach to neighbor queries would be a brute-force search that checks distances from all nodes to every other node. Obviously the cost of such a method is high: $O(N^2)$ for all stencils. Multi-dimensional data structures can limit the scope of searching and reduce the cost of stencil generation to $O(N \log N)$.

For the most part, investigations in RBF communities that delve into efficient neighbor queries are limited methods that depend on ball queries. For example, the Partition of Unity method for approximation (e.g., [16, 17]), and particle methods like the Fast Multipole

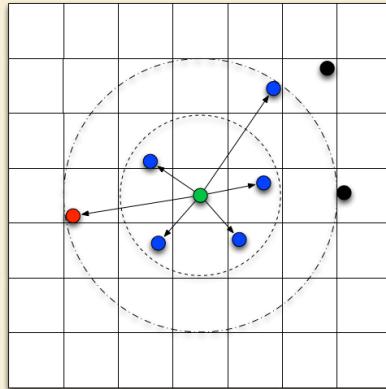


Figure 1.1: A stencil center in green finds neighboring stencil nodes in blue. Two ball queries are shown as dashed and dash-dot circles to demonstrate the added difficulty of finding the right query radius to obtain the k -nearest neighbors.

Method (e.g., [10, 18]) or Smoothed Particle Hydrodynamics (e.g., [11]). Examples of fast algorithms employed in these fields include the fixed-grid method [11, 17], k -D Trees [17], Range Trees [16, 17], and 2^d -Trees (i.e., Quad- and Octrees) [10, 18]. Surprisingly, while other communities continue the quest for fast neighbor queries, RBF collocation and RBF-FD communities have been slow on the uptake. For many years, the standard in the community has been to use k -D Trees (see e.g., [3, 5, 8]).

This chapter considers the use of an alternative algorithm to generate stencils for RBF-FD. It is based loosely on the fixed-grid method from [11]. [12] would classify the algorithm as a *fixed grid “bucket” method with one-dimensional spatial ordering*. However, due to the use of spatial hashing to order nodes in memory it is referred to here as the *Hash Algorithm*.

The Hash Algorithm loosens the requirements for k -nearest neighbors (k -NN) stencils to allow k -“approximately nearest” neighbors (k -ANN). It also reorders nodes according to space-filling curves. In what follows, the Hash Algorithm is compared to an efficient implementation of k -D Tree ([14]). Benchmarks demonstrate that with the proper choice of parameters the Hash Algorithm is up to 2x faster than k -D Tree, and it comes with a free bonus: up to 5x faster SpMV on quasi-random nodes due to the spatial reordering that occurs during stencil generation.

1.1 k -D Tree

A k -D Tree is a spatial data structure that generally decomposes a space/volume into a small number of cells. All k -D Trees are binary and iteratively subdivide volumes and sub-volumes into two parts. The “ k ” in k -D Tree refers to the dimensionality of the data/volume partitioned—that is $k \equiv d$.

Given a set of points bounded by a d -dimensional volume, a k -D Tree subdivides the volume through a hierarchy of $(d - 1)$ -dimensional axis parallel lines/planes/hyperplanes referred to as *splitting planes*. At each level of the hierarchy the splitting planes partition the volume into two partitions or *half-planes* [13]. Consecutive splits intercept one another

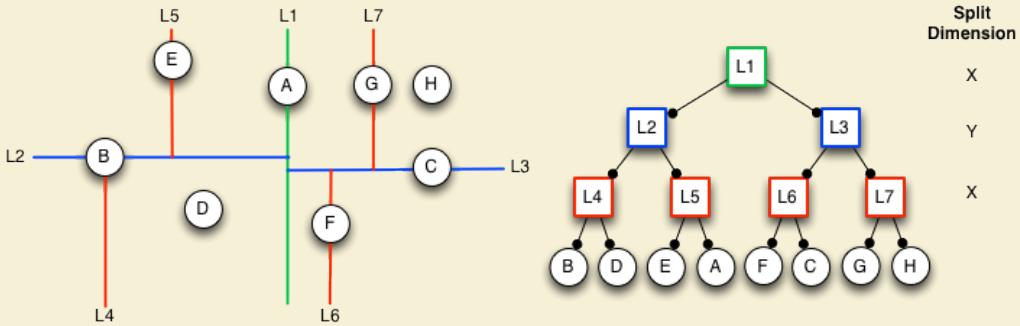


Figure 1.2: An example k -D Tree in 2-Dimensions. Nodes are partitioned with a cyclic dimension splitting rule (i.e., splits occur first in X , then Y , then X , etc.); all splits occur at the median node in each dimension.

at a *splitting value*. k -D Trees do not require that half-planes equally subdivide a volume; more often it is the data contained within the volume that is equally partitioned. The choice of dimension for the splitting plane, in conjunction with a variety of methods for choosing the splitting values allows for many flavors of k -D Trees (see e.g., [2, 12, 13] for comprehensive lists). *Point k -D Trees*, 2^d *Trees* (i.e., quad-/octrees), *BSP-Trees*, and *R-trees* are all members of the general k -D Tree class [13, 18].

This work considers *Point k -D Trees* [12], which partition a set of discrete points/nodes as outlined by the recursive procedure in Algorithm 1.1. Point k -D Trees assume that splitting planes intercept nodes rather than occur arbitrarily along the half-plane. The splitting value at each level of the tree is set to the *median* coordinate of the points in the half-plane, which ensures the tree is well balanced on initial construction. All nodes with coordinate (in the current dimension) less than or equal to the splitting value are contained by the left half-plane, and all nodes with coordinate greater than the splitting value are contained by the right. Half-planes containing only one element correspond to leaves of the tree. The median coordinate of a half-plane is found by sorting the n node coordinates contained by the partition and selecting the $\lceil \frac{n}{2} \rceil$ -th element [2].

Algorithm 1.1 BuildKDTree(P , $depth$)

- 1: **Input:** A set of d -dimensional points P and the current $depth$.
 - 2: **Output:** The root of the k -D Tree for P .
 - 3: **if** $size(P) = 1$ **then return** a new leaf storing P
 - 4: **end if**
 - 5: $L_i := median(coord(P, depth))$
 - 6: $v_l := \text{BuildKDTree}(coord(P, depth) \leq L_i, (depth + 1) \bmod d)$
 - 7: $v_r := \text{BuildKDTree}(coord(P, depth) > L_i, (depth + 1) \bmod d)$
 - 8: **return** A new node $v := \begin{pmatrix} \text{value} := L_i \\ \text{left} := v_l \\ \text{right} := v_r \end{pmatrix}$
-

The k -D Tree in Figure 1.2 is an example of a Point k -D Tree. Given a set of eight nodes in two dimensions, the tree is constructed by applying one-dimensional cuts along

the x -dimension, then the y -dimension, then back to the x -dimension. This approach is referred to as *cyclic splitting*, as consecutive cuts are applied by iterating dimensions in a round-robin fashion [12]. The first cut, $L1$, shown in green, splits the nodes into two sets on either side of A . The corresponding tree in the center of Figure 1.2 shows $L1$ as the tree root with all nodes having x -coordinates less than or equal to A to the left, and all nodes having x -coordinates greater than A to the right. The second level of the tree, $L2$ and $L3$ (in blue), splits the half-planes on either side of A at nodes B and C . The axis parallel splits for each half-plane intercept $L1$ independently to partition half-planes along the y -dimension; once again, nodes with coordinates less than or equal (i.e., below the cut) to the splitting value branch left in the tree, and y -coordinates greater than (i.e., above) the value branch right. The third level (red) returns to splitting half-planes in the x -dimension. Nodes D and H are not intersected by a splitting plane; their half-planes contain only one node so they immediately become leaves of the tree. This process to build a Point k -D Tree has a complexity of $O(N \log N)$ with $O(N)$ storage required [2, 12].

Frequently, the terms *k -D Tree* and *Point k -D Tree* are used synonymously by the RBF community (see e.g., [3, 5, 8]); the same is convention adopted here.

Generating an RBF-FD stencil with a k -D Tree can be efficiently accomplished in $O(n \log N)$ time—where n is the stencil size—following an approach introduced in [9], and presented in Algorithm 1.2. The k -NN search starts a depth-first recursive search of the k -D Tree to find the nearest neighbor to a query point, X_q . Traversal of the tree occurs by following branches left or right based on comparison of X_q coordinates to the splitting value stored at each node of the tree. The search traverses the height of the tree in $O(\log N)$ steps to find the leaf that stores the nearest neighbor to X_q . The neighbor point plus its distance from X_q are inserted into a global priority queue, pq . Points in the priority queue are sorted in descending order according to distance.

After finding the nearest neighbor the algorithm returns to the previous node in the tree and onto the opposing half-plane (i.e., down the far branch) to look for other leaves. So long as the size of pq is at less than capacity (n) the search automatically adds points to the queue. If pq reaches capacity the algorithm starts to pop off excess points with the understanding that the action removes those farthest away.

In order to prune branches from the search, Algorithm 1.2 makes use of a routine called “BoundsOverlapBall”, which checks if any boundaries of the current level half-plane intersect/overlap with a closed ball centered at X_q . The ball is given a radius equal to the maximum distance in pq . Then, if the ball and a boundary intersect, the search will continue onto the half-plane on the opposite side of the boundary. This step handles the possibility that nearer nodes occur within the overlapped region in the other half-plane. If the ball and boundary do not intersect, the opposing half-plane and its related subtree are pruned from the search. Additional details on the implementation of “BoundsOverlapBall” can be found in [9, 15].

The authors of [9] find Algorithm 1.2 capable of efficiently querying the n -nearest neighbors with a complexity proportional to $O(\log N)$ (dominated by the cost of tree traversal). The relationship between stencil size n , and grid size, N , is better expressed as $O(n \log N)$ for one stencil.

RBF-FD only needs to generate stencils once, so the overall time for the step subsumes the cost of tree construction and N queries. The resulting overall complexity is proportional

Algorithm 1.2 KNNSearchKDTree($X_q, n, root, depth$)

- 1: **Input:** A query node X_q , number of desired neighbors (n), the current *root* of the k -D Tree, and the current *depth* of traversal.
- 2: **Output:** A global priority queue, pq , containing the n -nearest neighbors to X_q sorted by distance from X_q in descending order.
- 3: **Assume:** A routine named “BoundsOverlapBall” exists to determine if the boundaries of the current half-plane are intersected by the ball centered at X_q with radius equal to the maximum distance in pq . As long as $pq.size < n$, “BoundsOverlapBall” defaults to true.

4:
5: **if** *root* is leaf **then**
6: Insert $\{root, \text{dist}(X_q, root)\}$ into pq
7: **if** $pq.size > n$ **then**
8: *pq.pop* ▷ Keep only n -nearest neighbors
9: **end if**
10: **return**
11: **end if**
12:
13: **if** $\text{coord}(X_q, depth) \leq root.value$ **then**
14: KNNSearchKDTree($X_q, n, root.left, (depth + 1) \% d$)
15: **else**
16: KNNSearchKDTree($X_q, n, root.right, (depth + 1) \% d$)
17: **end if**
18:
19: **if** $\text{coord}(X_q, depth) \leq root.value$ **then**
20: **if** BoundsOverlapBall(X_q) **then**
21: KNNSearchKDTree($X_q, n, root.right, (depth + 1) \% d$)
22: **end if**
23: **else**
24: **if** BoundsOverlapBall(X_q) **then**
25: KNNSearchKDTree($X_q, n, root.left, (depth + 1) \% d$)
26: **end if**
27: **end if**

to $O(N \log N)$.

1.2 A Fixed-Grid Hashing Algorithm

While a k -D Tree functions well for queries, the cost to build the tree structure is unnecessary overhead. Among the many data-structures that exist for nearest neighbor queries, some alternatives like fixed-grid methods can bypass construction and focus directly on performing nearest neighbor queries.

to solve the k -NN problem; most based on trees, but others [17] suggests

For moving nodes, such as in Lagrangian schemes, this cost is prohibitively high. In an attempt to reduce the cost, lagrangian schemes introduced approximate nearest neighbor queries based on

The algorithm introduced here is the same as the Fixed-Grid Method in [17].

1.2.1 ANN

Our benchmarks and testing focus on the more challenging problem of k -NN

As part of the preprocessing stage for RBF-FD, the scattered point cloud must be analyzed to generate stencils. To generate a stencil, any collection of nodes can be selected. However, by choosing nodes close to the stencil center and well balanced around it, we stand to get the best possible approximations to derivatives.

Why? well, the approximations are based on differences. Similar to classic FD, draw a secant connecting two nodes of a stencil. The slope of the secant determines the gradient at either point or a point in between. In the limit as the points are moved closer to the same spot, the approximation to the derivative at that point becomes exact.

So ideally every RBF-FD stencil will operate on nearest neighbors.

can be described as a *fixed grid “bucket” method with one-dimensional spatial ordering* as classified by [12].

The implementation runs entirely on the CPU ([11] runs on the GPU).

The k -D tree implementation compared in this work is the *kd-Tree Matlab* library from Tagliasacchi [14, 15]. Originally posted to the Matlab FileExchange and now maintained as a Google Code project. Until the addition of *KNNsearcher* in Matlab

Tagliasacchi [15] uses the standard split by median in each dimension, with alternating chosen by incrementing the dimension by one, modulo the number of dimensions (e.g., in 2D the order is X, Y, X, Y, \dots). Wendland [17] suggests a number of more advanced median cuts such as

[14]. [1]

Hashing, shown in Figure ?? overlays a regular grid. This is equivalent to an axis aligned bounding box AABB, with refinement. In other words, we form a quad-tree in 2D, an octree in 3D. The neighbor query starts with the cell in which x_c resides. Since we use an axis aligned bounding box, this cell index is easily calculated given the coordinate and number of subdivisions in each dimension. Once the cell index is resolved, the stencil is populated by taking the n nearest neighbors from within the current cell. If the cell does not contain sufficient number of nodes to fill the stencil, the search for neighbors expands to include the cells immediately adjoining the center cell, taking only the nearest nodes in the provided cells. The search continues to expand outward in a rasterized circle/sphere until n is satisfied. This search is considered approximate because it can happen that a

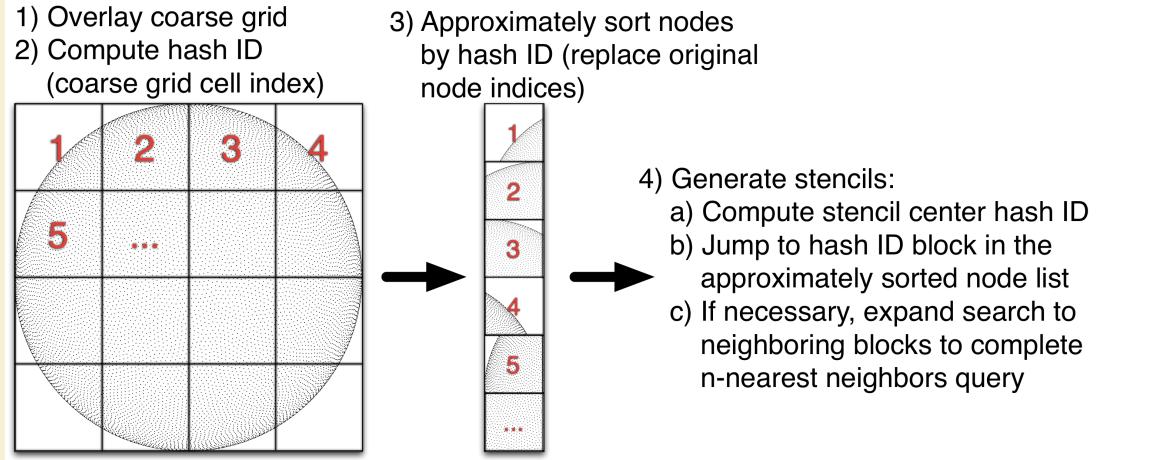


Figure 1.3: High level overview of the *Fixed-Grid Bucket* (a.k.a. Hash) Algorithm. A coarse regular grid is overlaid on the domain. Nodes coordinates are hashed to containing cell indices and pushed onto a list for the appropriate cell. The cells are reordered in memory according to a space filling curve (i.e., Raster (IJK), Morton (Z), Graycode (U), etc.). Stencil queries start search with the cell containing the stencil center and expand to neighboring cells until at least n candidate nodes are found. The candidate list is truncated to the n closest neighbors.

true nearest neighbor would lie in a cell that is not included in the rasterized circle, and other nodes are substituted from the far reaches of the discretized grid.

The complexity of the method is still higher than the more efficient implementations used by Lagrangian methods, but as demonstrated in Figure ?? the savings are significant. Generating stencils for RBF-FD is a preprocessing cost, so we do not dedicate an excessive amount of attention to this algorithm. However, a few ideas that would improve: hilbert ordering, choose AABB resolution based on N not user parameters, faster sorting, GPU implementation

In the benchmarks below, a k -D Tree implementation by Tagliasacchi [14, 15]. The implementation follows the construction process and

it was a popular package offered on the MATLAB FileExchange and garnered attention due to its MEX compiled interface that allowed use as both a C++ and MATLAB library.

Most of the RBF community leverages the k -D tree, due to its low computational complexity for querying neighbors and its wide availability as standalone software in the public domain (e.g., matlab central has a few implementations for download, and the MATLAB Statistics Toolbox includes an efficient k-D Tree).

The Matlab central k -D Tree is MEX compiled and efficient. We integrated the standalone C++ code into our library.

1.2.2 k -NN vs k -ANN

Start at the center cell and add the 8 cells immediately surrounding it. Add to this the 16 cells in the second halo for a total of 25 cells.

So while a k -NN stencil of size $n = 8$ in Figure 1.1 would contain the black node in the

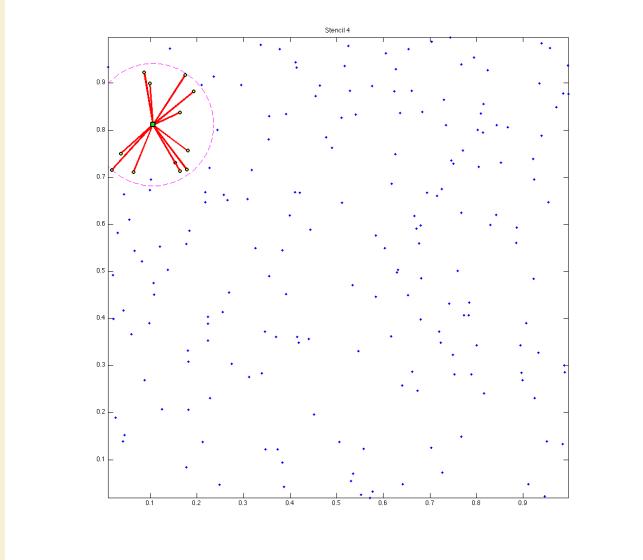


Figure 1.4: A stencil generated with k -ANN satisfies the required stencil size, but is not guaranteed to choose the true nearest neighbors.

right-most column of the grid. The k -ANN generated a stencil of size $n = 8$ would opt for the black node to the top right because it is in the second halo and accepted as “closer” because the stencil can be satisfied without querying the extra 24 cells on the outermost halo.

Therefore, it is not essential that stencils contain only nearest neighbors. Instead, one can acquire the *approximate nearest neighbors*. Figure ?? demonstrates a case where a does not contain all nearest neighbors. As illustrated in the Figure, the ANN stencil and true nearest neighbor stencil differ by one node. THis is not dire

The query is approximate because nodes such as the white node in Figure 1.1 could be included in the stencil before

RBF-FD operates on general node distributions. Historically, stencils are uniform in size (n) and generated by selecting the $(n - 1)$ true nearest neighbors to a node x_c . This is a k -NN query.

Alternative queries are possible: ball query and approximate nearest neighbor. The approximate is of particular interest because nodes closest to the stencil will always be selected, whereas the nodes further away have minimal influence so swapping out cant hurt. The justification in altering the selection is for reduced complexity in neighbor queries.

1.2.3 Integer Dilation and Node Reordering

[?] found that reordering nodes via RCM and space filling curves offer similar benefits in terms of reduced TLB misses and better cache coherency.

[12] labels this type of algorithm as a *fixed grid bucket algorithm* with the twist that it also has *one dimensional ordering*

- Algorithm to hash each node, push onto queue for each hash, sort by hash

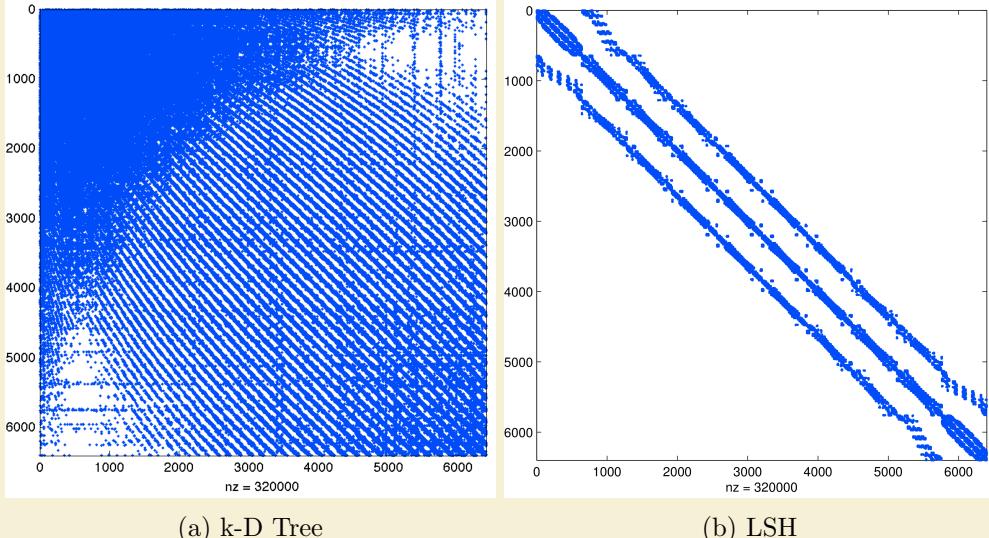


Figure 1.5: Example effects of node reordering within neighbor query algorithm for MD node set $N = 6400$ with $n = 50$. Matrix is 0.78% full. k-D Tree maintains original ordering of the nodes and deceptively appears nearly dense. LSH algorithm reorders nodes according to raster ordering and reveals sparsity of the problem.

- Query by jumping to hash, building raster spheres
- Need a good handle on the complexity.
- possibility to use space filling curves

1.3 Performance Comparison

At the start of this dissertation, the most widely used k -D Tree implementation in the RBF community was [14]. As a MEX-compiled

- Performance improvement
- SpMV impact
- impact from space filling curves

Many algorithms exist to query the k -nearest neighbors (equivalently all nodes in the minimum/smallest enclosing circle). Some algorithms overlay a grid similar to Locality Sensitive Hashing and query such as... [?].

For the purpose of generating RBF-FD stencils the k D-Tree is built and all queries are made once. There is no reuse of the tree so the build and query times are combined into one.

impact from ordering on matrix sparsity. Bandwidth impact. Bandwidth impact on condition considered in future chapter.

what is best overlay resolution? based on time to generate. choose resolution as $n/2$, $n/9$? etc?

perform neighbor queries on raster order because its easiest to jump cells. then each cell can be reordered according to z,x,u, etc. for better memory locality. Matlab script to do this (can be ported to C)

http://www.vincentgarcia.org/data/Garcia_2010_ICIP.pdf

GPU version of Locality Sensitive Hashing could reduce complexity further [?]

This can be done efficiently using neighbor query algorithms or spatial partitioning data-structures such as Locality Sensitive Hashing (LSH) and k D-Tree. Different query algorithms often have a profound impact on the DM structure and memory access patterns. We choose a Raster (ijk) ordering LSH algorithm [?] leading to the matrix structure in Figures ?? and ?. While querying neighbors for each stencil is an embarrassingly parallel operation, the node sets used here are stationary and require stencil generation only once. Efficiency and parallelism for this task has little impact on the overall run-time of tests, which is dominated by the time-stepping. We preprocess node sets and generate stencils serially, then load stencils and nodes from disk at run-time. In contrast to the RBF-FD view of a static grid, Lagrangian/particle based PDE algorithms promote efficient parallel variants of LSH in order to accelerate querying neighbors at each time-step [? ?].

At the onset of our work on RBF-FD, the most commonly used KDTTree implemtation used by the RBF community was [?]. Recently, improvements were made to the KDTTree algorithm to reduce the cost of building the KDTTree to $O(N \log^2 N)$.

Figure ?? compares the total time to generate N stencils of size $n = 50$ with three methods: [?], our hash-based neighbor query, and the improved KDTTree from [?]. Until the new release of KDTTree, our algorithm was a major improvement to the performance of stencil generation. The hash-based approach achieved greater than

Our work in [?] leveraged an alternative to k -D tree, based loosely on space-filling curve orderings common in Lagrangian schemes like Smoothed Particle Hydrodynamics (e.g., [?], [?]).

1.3.1 Hashing

[?] provide a fast parallel

[?] is working on parallel generation. [?] has OpenCL neighbor queries

We started with a CPU implementation to test appropriateness.

Approximate nearest neighbors will be nearly balanced. We observe that RBF-FD functions as well on stencils of true nearest neighbors as it does on approximate nearest neighbors.

To demonstrate the savings in choice of stencil generation method, we provide Figure ??.

The impact of our neighbor query also extends influence on the structure of the RBF-FD DMs. has is to To quantify the sparsity of a Differentiation Matrix we consider the ratio of non-zeros ($N * n$) to total elements in the matrix (N^2). For example, a problem of size $N = 10,000$ with stencil size $n = 31$ has a ratio of 0.0031 and is 99.69% empty.

Querying neighbors requires searching at least the immediate cell one layer of neighbors. by including one extra layer we ensure that small stencils near the border of the immediate cell can pick up neighbors in adjacent cells.

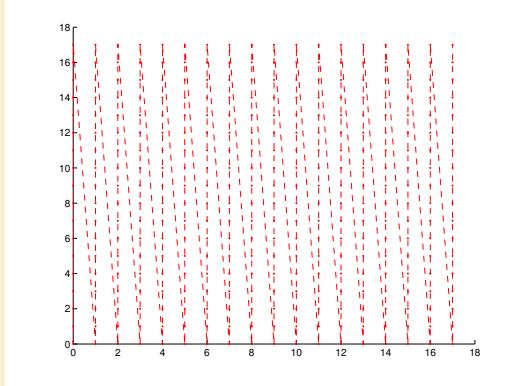


Figure 1.6: In order: a) node ordering test cases; b) original ordering of regular grid (raster); c) coarse grid overlay for hash functions ($hnx = 6$); d) example stencil ($n = 31$) spanning multiple Z's; e) spy of DM after orderings. Author's Note: [REGENERATE FIGURES WITH RANDOM/HALTON NODES](#)

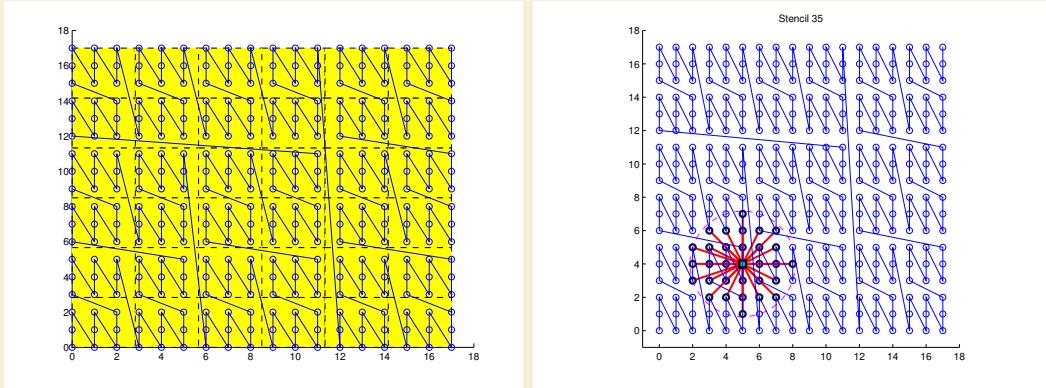


Figure 1.7: In order: a) node ordering test cases; b) original ordering of regular grid (raster); c) coarse grid overlay for hash functions ($hnx = 6$); d) example stencil ($n = 31$) spanning multiple Z's; e) spy of DM after orderings.

A prototype implementation of this method allowed for a variety of space filling curves to reorder the cells. The curves are created through integer dilation [?]

The KDTree implementation used in this work is from

Original data showed our algorithm as wildly successful against a version

The Cuthill McKee algorithms can be equated to a breadth-first search. The algorithm queues nodes in order of degree at each level of the search and traverses the lowest degree priority. The Reverse variant of Cuthill-McKee inverts the node order so that the lowest degree and top level node are at the end of the matrix rather than the beginning. Aside from ordering, the Reverse and Standard Cuthill McKee algorithms are identical processes. RCM is the more popular of the variants though, due to storage savings and reduced fill-in for some decompositions [?]. .

Obviously, the ideal case for bandwidth is when all rows contain the $\frac{n}{2}$ nodes corre-

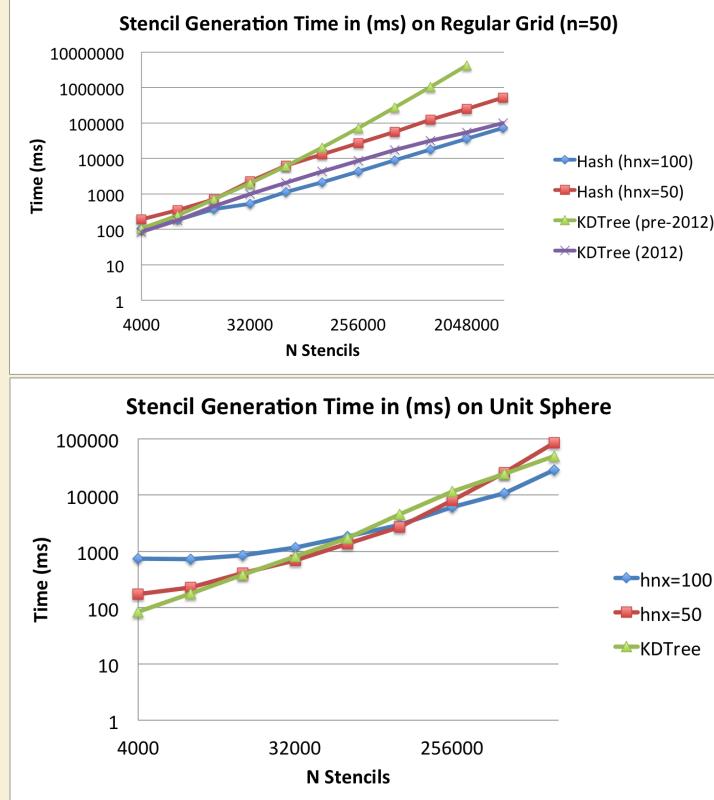


Figure 1.8: Querying the $n = 50$ nearest neighbors on a regular grid up to $N = 160^3$ demonstrates the significant gains achieved by our spatially binned neighbor query. While KDTree queries grow as $O(N \log N)$

sponding to solution value to either side of u_j . In 1-D this corresponds to every node containing the $\frac{n}{2}$ nodes to the left and right of x_j . In 2-D this is only possible if the nodes in the domain are properly indexed such that stencils contain the proper set of neighbors—a stringent requirement that will

The early implementation of k -D tree had an $O(n^2)$ growth in complexity. This algorithm was developed to alleviate that cost. It took a few hours to implement but has had some surprising impacts. Note that the complexity of k -D tree was reduced to $O(N \log^2 N)$ in 2012. On a regular grid (generated with raster/IJK ordering), the cost of k -D tree grows at the same rate as the hashing method.

At $N = 32000$ the cost of hashing drops below k -D Tree due to the decreasing number of empty hash cells. Likewise, at $N = 1000000$ and beyond, the gap between hashing and k -D Tree begins to close as cells contain more than one

Q: why does the curve drop for $hnx = 100$? Q: the complexity of the algorithm? Q: the sphere I understand: its localizing the search to small patches on the sphere, and

For every N there is an optimal hnx . This is depicted for $N = 500000$ CVT and $hnx = 100$.

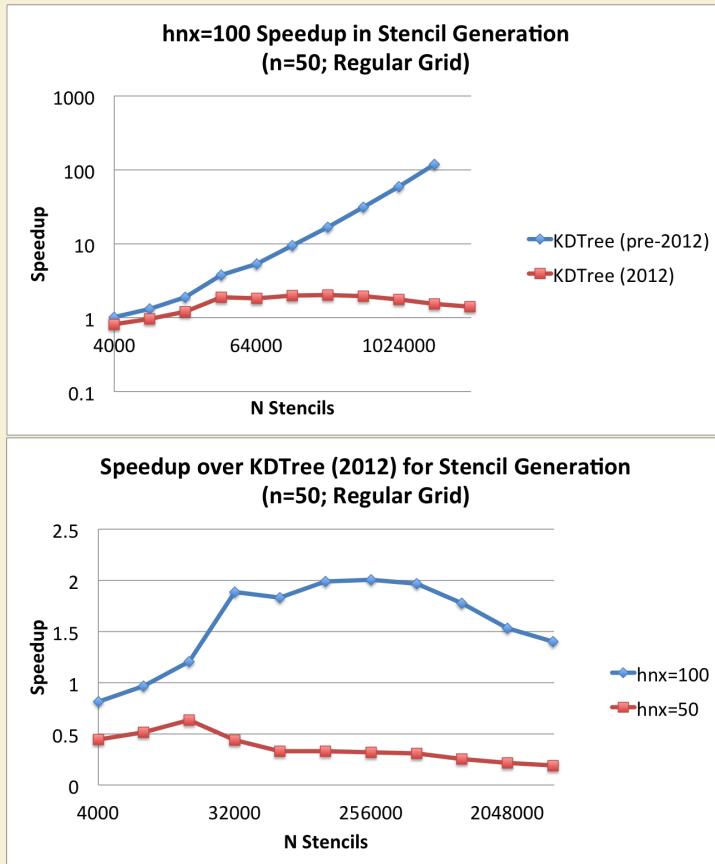


Figure 1.9: Querying the $n = 50$ nearest neighbors on a regular grid up to $N = 160^3$ demonstrates the significant gains achieved by our spatially binned neighbor query. While KDTree queries grow as $O(N \log N)$

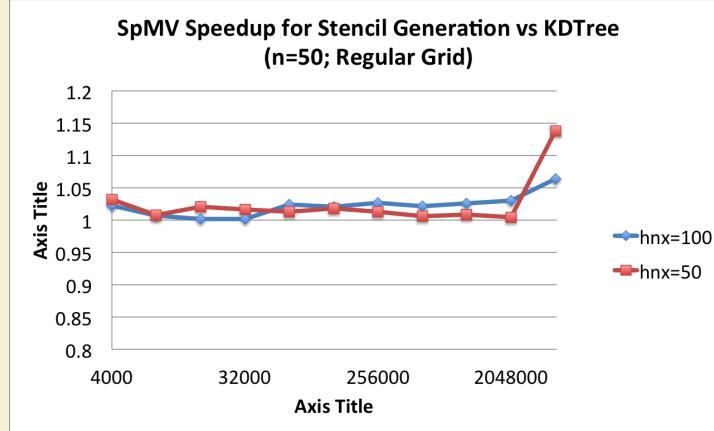


Figure 1.10: Querying the $n = 50$ nearest neighbors on a regular grid up to $N = 160^3$ demonstrates the significant gains achieved by our spatially binned neighbor query. While KDTree queries grow as $O(N \log N)$

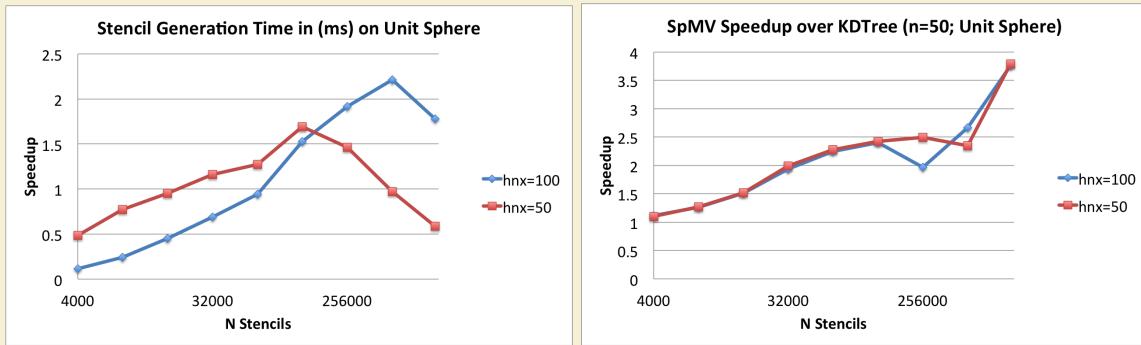


Figure 1.11: Generating stencils for increasing subsets of the $N = 1e6$ CVT nodes mesh.

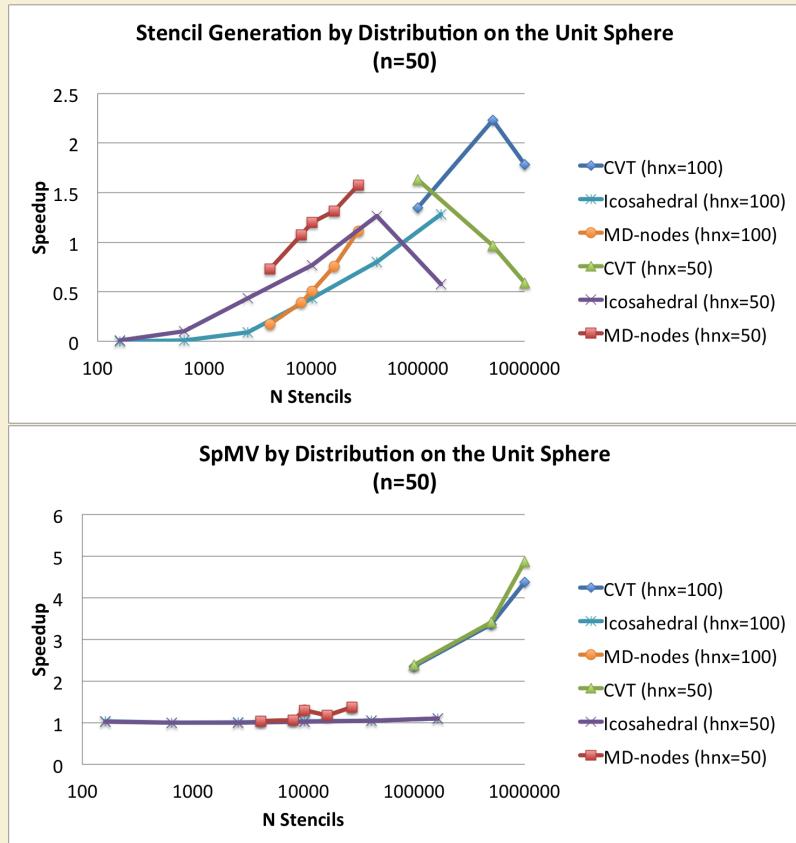


Figure 1.12: Based on the proper choice of overlay resolution, the hash stencil query can accelerate stencil generation, but the sophistication of the algorithm is low enough that negative impact is more likely. On the other hand, the impact on SpMV performance is always positive with the routine accelerated up to 4.9x faster.

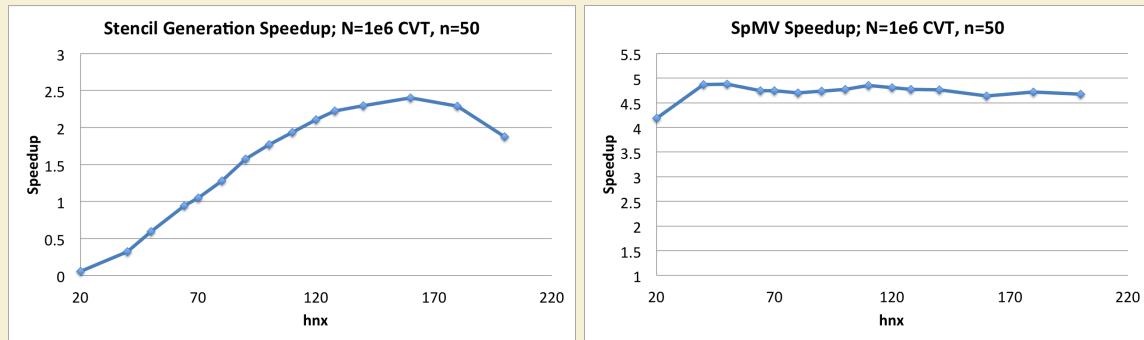


Figure 1.13: As the coarse grid resolution increases the hashing algorithm achieves both 2x faster than KDTree in stencil generation, with greater than 4x gain in SpMV performance (for free).

1.4 On Space Filling Curves and Other Orderings

1.4.1 Integer Dilation

One frequently hears that ordering via space filling curves like Morton Ordering and/or gray codes can benefit memory access patterns.

(Related? <http://publish.uwo.ca/~shaque4/presentationSONAD.pdf> <http://www.cs.duke.edu/~alvy/papers/sc98/> <http://www.cs.indiana.edu/~dswise/Arcee/Papers/medea06.pdf> <http://citeseerx.ist.psu.edu/viewdoc/download?doi=10.1.1.118.7720&rep=rep1&type=pdf> <http://stackoverflow.com/questions/4260002/benefits-of-nearest-neighbor-search>)

[?] mentions the impact of ordering on conditioning.

Algorithms like Reverse Cuthill McKee and Approximate Minimum Degree ordering allow general restructuring of matrices.

Author's Note: NEed to compare conditioning of LSH and other algorithms in Matlab

Q: what is an ideal ordering? Q: what is the best conditioning from ordering? Q: what is the relative cost of ordering?

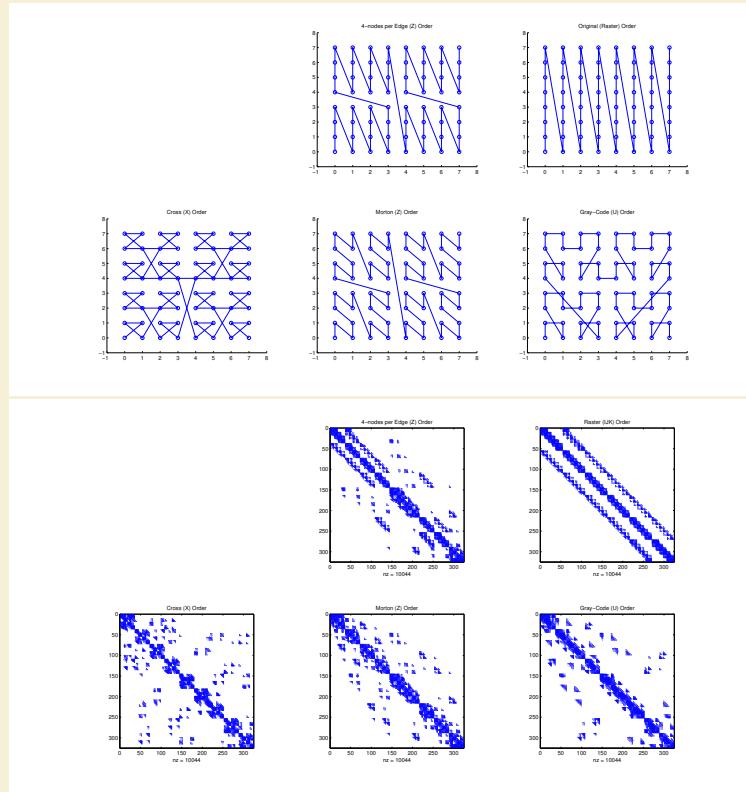


Figure 1.14: In order: a) node ordering test cases; b) original ordering of regular grid (raster); c) coarse grid overlay for hash functions ($hnx = 6$); d) example stencil ($n = 31$) spanning multiple Z's; e) spy of DM after orderings.

1.5 Conclusions on Stencil Generation

BIBLIOGRAPHY

- [1] Kdtreesearcher class. MATLAB R2013a Documentation (<http://www.mathworks.com/help/stats/kdtreesearcherclass.html>), Aug 2013. 1, 6
- [2] Mark de Berg, Otfried Cheong, Marc van Kreveld, and Mark Overmars. *Computational Geometry: Algorithms and Applications*. Springer-Verlag, 3rd edition, 2008. 3, 4
- [3] Gregory E. Fasshauer. *Meshfree Approximation Methods with MATLAB*, volume 6 of *Interdisciplinary Mathematical Sciences*. World Scientific Publishing Co. Pte. Ltd., 5 Toh Tuck Link, Singapore 596224, 2007. 2, 4
- [4] Natasha Flyer and Erik Lehto. Rotational transport on a sphere: Local node refinement with radial basis functions. *Journal of Computational Physics*, 229(6):1954–1969, March 2010. 1
- [5] Natasha Flyer, Erik Lehto, Sebastien Blaise, Grady B. Wright, and Amik St-Cyr. Rbf-generated finite differences for nonlinear transport on a sphere: shallow water simulations. *Submitted to Elsevier*, pages 1–29, 2011. 1, 2, 4
- [6] Natasha Flyer and Grady B. Wright. Transport schemes on a sphere using radial basis functions. *Journal of Computational Physics*, 226(1):1059 – 1084, 2007. 1
- [7] Natasha Flyer and Grady B. Wright. A Radial Basis Function Method for the Shallow Water Equations on a Sphere. In *Proc. R. Soc. A*, volume 465, pages 1949–1976, December 2009. 1
- [8] Bengt Fornberg and Erik Lehto. Stabilization of RBF-generated finite difference methods for convective PDEs. *Journal of Computational Physics*, 230(6):2270–2285, March 2011. 2, 4
- [9] Jerome H. Friedman, Jon Louis Bentley, and Raphael Ari Finkel. An algorithm for finding best matches in logarithmic expected time. *ACM Trans. Math. Softw.*, 3(3):209–226, September 1977. 4
- [10] N. A. Gumerov, R. Duraiswami, and E. A. Borovikov. Data structures, optimal choice of parameters, and complexity results for generalized multilevel fast multipole methods in d dimensions. Technical Report UMIACS-TR-2003-28, University of Maryland (College Park, Md.), Apr 2003. 2
- [11] Øystein E. Krog. GPU-based Real-Time Snow Avalanche Simulations. Master’s thesis, Norwegian University of Science and Technology, June 2010. 2, 6

- [12] Hanan Samet. *Foundations of Multidimensional and Metric Data Structures (The Morgan Kaufmann Series in Computer Graphics and Geometric Modeling)*. Morgan Kaufmann Publishers Inc., San Francisco, CA, USA, 2005. [2](#), [3](#), [4](#), [6](#), [8](#)
- [13] Steven Skiena. *The Algorithm Design Manual* (2. ed.). Springer, 2008. [2](#), [3](#)
- [14] Andrea Tagliasacchi. kd-tree for matlab. <http://www.mathworks.com/matlabcentral/fileexchange/21512-kd-tree-for-matlab>, Sep 2010. [1](#), [2](#), [6](#), [7](#), [9](#)
- [15] Andrea Tagliasacchi. kd-tree matlab. <https://code.google.com/p/kdtree-matlab>, Jun 2012. [4](#), [6](#), [7](#)
- [16] Holger Wendland. Fast evaluation of radial basis functions: Methods based on partition of unity. In *Approximation Theory X: Wavelets, Splines, and Applications*, pages 473–483. Vanderbilt University Press, 2002. [1](#), [2](#)
- [17] Holger Wendland. *Scattered Data Approximation*. Cambridge Monographs on Applied and Computational Mathematics. Cambridge University Press, 2005. [1](#), [2](#), [6](#)
- [18] Lexing Ying. A kernel independent fast multipole algorithm for radial basis functions. *Journal of Computational Physics*, 213(2):451 – 457, 2006. [2](#), [3](#)