

Optimizing smallpt

Davean Scies, Siddharth Bhat

Haskell Exchange

November 4th, 2020

What is smallpt anyway?


Optimizing smallpt

2020-11-02

What is smallpt anyway?

What is smallpt anyway?


What is smallpt anyway?

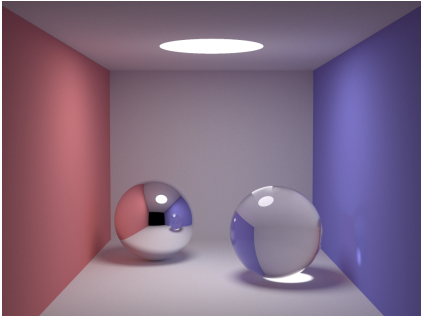


Optimizing smallpt

2020-11-02

What is smallpt anyway?



What is smallpt anyway?

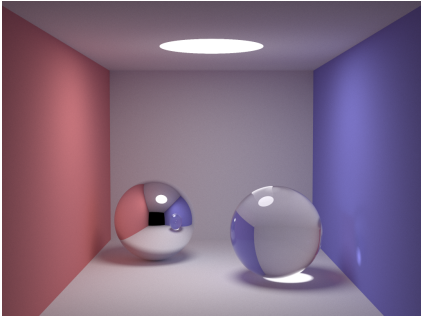


► 100 LoC C demo of a raytracer

2020-11-02


Optimizing smallpt

What is smallpt anyway?



► 100 LoC C demo of a raytracer

What is smallpt anyway?

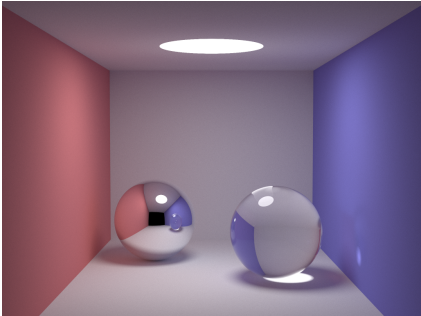


- ▶ 100 LoC C demo of a raytracer
- ▶ Perfect for an optimization case study

Optimizing smallpt

2020-11-02

What is smallpt anyway?



- ▶ 100 LoC C demo of a raytracer
- ▶ Perfect for an optimization case study

Note for first slide: what is smallpt anyway?

What is smallpt anyway?

```
#include <math.h>
#include <stdlib.h>
#include <stdio.h>
struct Vec {
    double x, y, z; // position, also color (r,g,b)
    ... methods...
};
struct Ray { Vec o, d; Ray(Vec o_, Vec d_) : o(o_), d(d_) {} };
enum Refl_t { DIFF, SPEC, REFR }; // material types, used in radiance()
struct Sphere {
    double rad; // radius
    Vec p, e, c; // position, emission, color
    Refl_t refl; // reflection type (DIFFuse, SPECular, REFRactive)
    ... methods ...
    double intersect(const Ray &r) const // returns distance, 0 if nohit
};
Sphere spheres[] = { //Scene: radius, position, emission, color, material
    Sphere(1e5, Vec( 1e5+1,40.8,81.6), Vec(),Vec(.75,.25,.25),DIFF), //Left
    ... initialization ...
};
inline bool intersect(const Ray &r, double &t, int &id)
```

Optimizing smallpt

2020-11-02

What is smallpt anyway?

What is smallpt anyway?

```
#include <math.h>
#include <stdlib.h>
#include <stdio.h>
struct Vec {
    double x, y, z; // position, also color (r,g,b)
    ... methods...
};
struct Ray { Vec o, d; Ray(Vec o_, Vec d_) : o(o_), d(d_) {} };
enum Refl_t { DIFF, SPEC, REFR }; // material types, used in radiance()
struct Sphere {
    double rad; // radius
    Vec p, e, c; // position, emission, color
    Refl_t refl; // reflection type (DIFFuse, SPECular, REFRactive)
    ... methods ...
    double intersect(const Ray &r) const // returns distance, 0 if nohit
};
Sphere spheres[] = { //Scene: radius, position, emission, color, material
    Sphere(1e5, Vec( 1e5+1,40.8,81.6), Vec(),Vec(.75,.25,.25),DIFF), //Left
    ... initialization ...
};
inline bool intersect(const Ray &r, double &t, int &id)
```

What is smallpt anyway?

```
Vec radiance(const Ray &r, int depth, unsigned short *Xi){
    double t; // distance to intersection
    int id=0; // id of intersected object
    if (!intersect(r, t, id)) return Vec(); // if miss, return black
    const Sphere &obj = spheres[id]; // the hit object
    Vec x=r.o+r.d*t, n=(x-obj.p).norm(), nl=n.dot(r.d)<0?n:n*-1, f=obj.c;
    double p = f.x>f.y && f.x>f.z ? f.x : f.y>f.z ? f.y : f.z; // max refl
    if (++depth>5) if (erand48(Xi)<p) f=f*(1/p); else return obj.e; //R.R.
    if (obj.refl == DIFF){ // Ideal DIFFUSE reflection
        double r1=2*M_PI*erand48(Xi), r2=erand48(Xi), r2s=sqrt(r2);
        Vec w=nl, u=((fabs(w.x)>.1?Vec(0,1):Vec(1))%w).norm(), v=w%u;
        Vec d = (u*cos(r1)*r2s + v*sin(r1)*r2s + w*sqrt(1-r2)).norm();
        return obj.e + f.mult(radiance(Ray(x,d),depth,Xi));
    } else if (obj.refl == SPEC) // Ideal SPECULAR reflection
        return obj.e + f.mult(radiance(Ray(x,r.d-n*2*n.dot(r.d)),depth,Xi));
    Ray reflRay(x, r.d-n*2*n.dot(r.d)); // Ideal dielectric REFRACTION
    bool into = n.dot(nl)>0; // Ray from outside going in?
    double nc=1, nt=1.5, nnt=into?nc/nt:nt/nc, ddn=r.d.dot(nl), cos2t;
    if ((cos2t=1-nnt*nnt*(1-ddn*ddn))<0) // Total internal reflection
        return obj.e + f.mult(radiance(reflRay,depth,Xi));
    Vec tdir = (r.d*nnt - n*((into?1:-1)*(ddn*nnt+sqrt(cos2t)))).norm();
    double a=nt-nc, b=nt+nc, R0=a*a/(b*b), c = 1-(into?-ddn:tdir.dot(n));
    double Re=R0+(1-R0)*c*c*c*c*c,Tr=1-Re,P=.25+.5*Re,RP=Re/P,TP=Tr/(1-P);
    return obj.e + f.mult(depth>2 ? (erand48(Xi)<P ? // Russian roulette
        radiance(reflRay,depth,Xi)*RP:radiance(Ray(x,tdir),depth,Xi)*TP) :
        radiance(reflRay,depth,Xi)*Re+radiance(Ray(x,tdir),depth,Xi)*Tr);
}
```

Optimizing smallpt

2020-11-02

What is smallpt anyway?

What is smallpt anyway?

```
For radiance(const Ray &r, int depth, unsigned short *Xi){
    double t; // distance to intersection
    int id=0; // id of intersected object
    if (!intersect(r, t, id)) return Vec(); // if miss, return black
    const Sphere &obj = spheres[id]; // the hit object
    Vec x=r.o+r.d*t, n=(x-obj.p).norm(), nl=n.dot(r.d)<0?n:n*-1, f=obj.c;
    double p = f.x>f.y && f.x>f.z ? f.x : f.y>f.z ? f.y : f.z; // max refl
    if (++depth>5) if (erand48(Xi)<p) f=f*(1/p); else return obj.e; //R.R.
    if (obj.refl == DIFF){ // Ideal DIFFUSE reflection
        double r1=2*M_PI*erand48(Xi), r2=erand48(Xi), r2s=sqrt(r2);
        Vec w=nl, u=((fabs(w.x)>.1?Vec(0,1):Vec(1))%w).norm(), v=w%u;
        Vec d = (u*cos(r1)*r2s + v*sin(r1)*r2s + w*sqrt(1-r2)).norm();
        return obj.e + f.mult(radiance(Ray(x,d),depth,Xi));
    } else if (obj.refl == SPEC) // Ideal SPECULAR reflection
        return obj.e + f.mult(radiance(Ray(x,r.d-n*2*n.dot(r.d)),depth,Xi));
    Ray reflRay(x, r.d-n*2*n.dot(r.d)); // Ideal dielectric REFRACTION
    bool into = n.dot(nl)>0; // Ray from outside going in?
    double nc=1, nt=1.5, nnt=into?nc/nt:nt/nc, ddn=r.d.dot(nl), cos2t;
    if ((cos2t=1-nnt*nnt*(1-ddn*ddn))<0) // Total internal reflection
        return obj.e + f.mult(radiance(reflRay,depth,Xi));
    Vec tdir = (r.d*nnt - n*((into?1:-1)*(ddn*nnt+sqrt(cos2t)))).norm();
    double a=nt-nc, b=nt+nc, R0=a*a/(b*b), c = 1-(into?-ddn:tdir.dot(n));
    double Re=R0+(1-R0)*c*c*c*c*c,Tr=1-Re,P=.25+.5*Re,RP=Re/P,TP=Tr/(1-P);
    return obj.e + f.mult(depth>2 ? (erand48(Xi)<P ? // Russian roulette
        radiance(reflRay,depth,Xi)*RP:radiance(Ray(x,tdir),depth,Xi)*TP) :
        radiance(reflRay,depth,Xi)*Re+radiance(Ray(x,tdir),depth,Xi)*Tr);
}
```

Establishing baselines

```
main :: IO ()
main = smallptM 200 200 256

smallptM :: Int -> Int -> Int -> IO ()
smallptM !w !h !nsamps = do
  -- ... processing
  withFile "image.ppm" WriteMode $ \hdl -> do
    hPrintf hdl "P3\n%d %d\n%d\n" w h (255::Int)
    flip mapM_ [0..w*h-1] $ \i -> do
      Vec r g b <- VM.unsafeRead c i
      hPrintf hdl "%d %d %d " (toInt r) (toInt g) (toInt b)
```

Optimizing smallpt

2020-11-02

Establishing baselines

Establishing baselines

```
main :: IO ()
main = smallptM 200 200 256

smallptM :: Int -> Int -> Int -> IO ()
smallptM !w !h !nsamps = do
  -- ... processing
  withFile "image.ppm" WriteMode $ \hdl -> do
    hPrintf hdl "P3\n%d %d\n%d\n" w h (255::Int)
    flip mapM_ [0..w*h-1] $ \i -> do
      Vec r g b <- VM.unsafeRead c i
      hPrintf hdl "%d %d %d " (toInt r) (toInt g) (toInt b)
```


Haskell: the first stab

```
radiance :: Ray -> CInt -> Ptr CUSHort -> IO Vec
radiance ray@(Ray o d) depth xi = case intersects ray of
  (Nothing,_) -> return zeroV
  (Just t,Sphere _r p e c refl) -> do
    let x = o `addv` (d `mulvs` t)
        n = norm $ x `subv` p
        nl = if n `dot` d < 0 then n else n `mulvs` (-1)
        pr = maxv c
        depth' = depth + 1
        continue f = case refl of
          DIFF -> do
            r1 <- ((2*pi)* `fmap` erand48 xi)
            r2 <- erand48 xi
            let r2s = sqrt r2
                w@(Vec wx _ _) = nl
                u = norm $ (if abs wx > 0.1 then (Vec 0 1 0) else (Vec 1 0 0)) `cross` w
                v = w `cross` u
                d' = norm $ (u`mulvs`(cos r1*r2s)) `addv` (v`mulvs`(sin r1*r2s)) `addv` (w
            rad <- radiance (Ray x d') depth' xi
            return $ e `addv` (f `mulv` rad)

          SPEC -> do
            let d' = d `subv` (n `mulvs` (2 * (n`dot`d)))
                rad <- radiance (Ray x d') depth' xi
            return $ e `addv` (f `mulv` rad)

          REFR -> do
            let reflRay = Ray x (d `subv` (n `mulvs` (2* n`dot`d))) -- Ideal dielectric RE.
                into = n`dot`nl > 0 -- Ray from outside going in?
                nc = 1
                nt = 1.5
```

Optimizing smallpt

2020-11-02

Haskell: the first stab

```
Haskell: the first stab
radiance :: Ray -> CInt -> Ptr CUSHort -> IO Vec
radiance ray@(Ray o d) depth xi = case intersects ray of
  (Nothing,_) -> return zeroV
  (Just t,Sphere _r p e c refl) -> do
    let x = o `addv` (d `mulvs` t)
        n = norm $ x `subv` p
        nl = if n `dot` d < 0 then n else n `mulvs` (-1)
        pr = maxv c
        depth' = depth + 1
        continue f = case refl of
          DIFF -> do
            r1 <- ((2*pi)* `fmap` erand48 xi)
            r2 <- erand48 xi
            let r2s = sqrt r2
                w@(Vec wx _ _) = nl
                u = norm $ (if abs wx > 0.1 then (Vec 0 1 0) else (Vec 1 0 0)) `cross` w
                v = w `cross` u
                d' = norm $ (u`mulvs`(cos r1*r2s)) `addv` (v`mulvs`(sin r1*r2s)) `addv` (w
            rad <- radiance (Ray x d') depth' xi
            return $ e `addv` (f `mulv` rad)

          SPEC -> do
            let d' = d `subv` (n `mulvs` (2 * (n`dot`d)))
                rad <- radiance (Ray x d') depth' xi
            return $ e `addv` (f `mulv` rad)

          REFR -> do
            let reflRay = Ray x (d `subv` (n `mulvs` (2* n`dot`d))) -- Ideal dielectric RE.
                into = n`dot`nl > 0 -- Ray from outside going in?
                nc = 1
                nt = 1.5
```

Restrict export list to 'main'

```
-module Main where
+module Main (main) where
```

Optimizing smallpt

2020-11-02

Restrict export list to 'main'

Restrict export list to 'main'

```
-module Main where
+module Main (main) where
```

Knowing what functions are used how enables many optimizations that could otherwise would be detrimental or unsound (eg: changing signatures based on demands)

Mark entries of Ray and Sphere as UNPACK and Strict.

```
-data Ray = Ray Vec Vec -- origin, direction
+data Ray = Ray {-# UNPACK #-} !Vec {-# UNPACK #-} !Vec -- origin, direction

data Refl = DIFF | SPEC | REFR -- material types, used in radiance

-- radius, position, emission, color, reflection
-data Sphere = Sphere Double Vec Vec Vec !Refl
+data Sphere = Sphere {-# UNPACK #-} !Double
+                      {-# UNPACK #-} !Vec
+                      {-# UNPACK #-} !Vec
+                      {-# UNPACK #-} !Vec !Refl
```

Optimizing smallpt

2020-11-02

Mark entries of Ray and Sphere as UNPACK and Strict.

```
Mark entries of Ray and Sphere as UNPACK and Strict.

--data Ray = Ray Vec Vec -- origin, direction
--data Ray = Ray {-# UNPACK #-} !Vec {-# UNPACK #-} !Vec -- origin, direction

data Refl = DIFF | SPEC | REFR -- material types, used in radiance

-- radius, position, emission, color, reflection
data Sphere = Sphere Double Vec Vec Vec !Refl
data Sphere = Sphere {-# UNPACK #-} !Double
                    {-# UNPACK #-} !Vec
                    {-# UNPACK #-} !Vec
                    {-# UNPACK #-} !Vec !Refl
```

This optimization removes indirection and laziness.

Use a pattern synonym to unpack Refl in Sphere.

```
+{-# LANGUAGE PatternSynonyms #-}

-data Refl = DIFF | SPEC | REFR -- material types, used in radiance
+newtype Refl = Refl Int -- material types, used in radiance
+pattern DIFF,SPEC,REFR :: Refl
+pattern DIFF = Refl 0
+pattern SPEC = Refl 1
+pattern REFR = Refl 2
+{-# COMPLETE DIFF, SPEC, REFR #-}

-- radius, position, emission, color, reflection
data Sphere = Sphere {-# UNPACK #-} !Double
                    {-# UNPACK #-} !Vec
                    {-# UNPACK #-} !Vec
-                    {-# UNPACK #-} !Vec !Refl
+                    {-# UNPACK #-} !Vec {-# UNPACK #-} !Refl
```

2020-11-02

Use a pattern synonym to unpack Refl in Sphere.

```
Use a pattern synonym to unpack Refl in Sphere.

+{-# LANGUAGE PatternSynonyms #-}

-data Refl = DIFF | SPEC | REFR -- material types, used in radiance
+newtype Refl = Refl Int -- material types, used in radiance
+pattern DIFF,SPEC,REFR :: Refl
+pattern DIFF = Refl 0
+pattern SPEC = Refl 1
+pattern REFR = Refl 2
+{-# COMPLETE DIFF, SPEC, REFR #-}

-- radius, position, emission, color, reflection
data Sphere = Sphere {-# UNPACK #-} !Double
                    {-# UNPACK #-} !Vec
                    {-# UNPACK #-} !Vec
-                    {-# UNPACK #-} !Vec !Refl
+                    {-# UNPACK #-} !Vec {-# UNPACK #-} !Refl
```

While we weren't able to unpack Refl in the last step because it is a sum type, we can if we use a trick modeled after an C Enum. The use of COMPLETE is unsafe here because other values could be constructed. For this small example though we rely on the fact that we create values of Refl via the patterns.

Change from maximum on a list to max

```
-maxv (Vec a b c) = maximum [a,b,c]
```

```
+maxv (Vec a b c) = max a (max b c)
```

```
@@ -84,7 +85,6 @@ radiance ray@(Ray o d) depth xi = case intersects ray of
    let x = o `addv` (d `mulvs` t)
        n = norm $ x `subv` p
        nl = if n `dot` d < 0 then n else n `mulvs` (-1)
-    pr = maxv c
    depth' = depth + 1
    continue f = case refl of
        DIFF -> do
@@ -140,6 +140,7 @@ radiance ray@(Ray o d) depth xi = case intersects ray of
    if depth'>5
    then do
        er <- erand48 xi
+    let !pr = maxv c
```

Optimizing smallpt

2020-11-02

Change from maximum on a list to max

```
Change from maximum on a list to max

-maxv (Vec a b c) = maximum [a,b,c]
+maxv (Vec a b c) = max a (max b c)
@@ -84,7 +85,6 @@ radiance ray@(Ray o d) depth xi = case intersects ray of
    let x = o `addv` (d `mulvs` t)
        n = norm $ x `subv` p
        nl = if n `dot` d < 0 then n else n `mulvs` (-1)
-    pr = maxv c
    depth' = depth + 1
    continue f = case refl of
        DIFF -> do
@@ -140,6 +140,7 @@ radiance ray@(Ray o d) depth xi = case intersects ray of
    if depth'>5
    then do
        er <- erand48 xi
+    let !pr = maxv c
```

This is a finicky optimization. At first it actually benched worse than the maximum version. The strictness on the binding is required for reliable performance, but it seemed sensible to only do that where it was actually used since its in a single branch and no longer lazy.

Convert erand48 to pure Haskell

```
-radiance :: Ray -> CInt -> Ptr CUSHort -> IO Vec
+radiance :: Ray -> Int -> IORef Word64 -> IO Vec
radiance ray@(Ray o d) depth xi = case intersects ray of
  (Nothing,_) -> return zeroV
  (Just t,Sphere _r p e c refl) -> do
@@ -153,9 +153,8 @@ smallpt w h nsamps = do
    cx = Vec (fromIntegral w * 0.5135 / fromIntegral h) 0 0
    cy = norm (cx `cross` dir) `mulvs` 0.5135
    c <- VM.replicate (w * h) zeroV
-  allocaArray 3 $ \xi ->
-   flip mapM_ [0..h-1] $ \y -> do
+   xi <- newIORef 0
+   flip mapM_ [0..h-1] $ \y -> do
     writeXi xi y
```

TODO: add better version of erand48 into this commit

Optimizing smallpt

2020-11-02

Convert erand48 to pure Haskell

```
Convert erand48 to pure Haskell

--radiance :: Ray -> CInt -> Ptr CUSHort -> IO Vec
--radiance :: Ray -> Int -> IORef Word64 -> IO Vec
radiance ray@(Ray o d) depth xi = case intersects ray of
  (Nothing,_) -> return zeroV
  (Just t,Sphere _r p e c refl) -> do
    cx = Vec (fromIntegral w * 0.5135 / fromIntegral h) 0 0
    cy = norm (cx `cross` dir) `mulvs` 0.5135
    c <- VM.replicate (w * h) zeroV
-  allocaArray 3 $ \xi ->
-   flip mapM_ [0..h-1] $ \y -> do
+   xi <- newIORef 0
+   flip mapM_ [0..h-1] $ \y -> do
     writeXi xi y

TODO: add better version of erand48 into this commit
```

Change erand48 to IORefU.

```
-radiance :: Ray -> Int -> IORef Word64 -> IO Vec
+radiance :: Ray -> Int -> IORefU Word64 -> IO Vec
radiance ray@(Ray o d) depth xi = case intersects ray of
  (Nothing,_) -> return zeroV
  (Just t,Sphere _r p e c refl) -> do
@@ -153,7 +154,7 @@ smallpt w h nsamps = do
    cx = Vec (fromIntegral w * 0.5135 / fromIntegral h) 0 0
    cy = norm (cx `cross` dir) `mulvs` 0.5135
    c <- VM.replicate (w * h) zeroV
-  xi <- newIORef 0
+  xi <- newIORefU 0
    flip mapM_ [0..h-1] $ \y -> do
      writeXi xi y
      flip mapM_ [0..w-1] $ \x -> do
@@ -181,8 +182,8 @@ smallpt w h nsamps = do
      Vec r g b <- VM.unsafeRead c i
      hPrintf hdl "%d %d %d " (toInt r) (toInt g) (toInt b)

-writeXi :: IORef Word64 -> Int -> IO ()
-writeXi !xi !y = writeIORef xi (mkErand48Seed' y)
+writeXi :: IORefU Word64 -> Int -> IO ()
+writeXi !xi !y = writeIORefU xi (mkErand48Seed' y)

TODO: change to new shorter erand48
```

Optimizing smallpt

2020-11-02

Change erand48 to IORefU.

```
Change erand48 to IORefU.

-radiance :: Ray -> Int -> IORef Word64 -> IO Vec
-radiance :: Ray -> Int -> IORefU Word64 -> IO Vec
radiance ray@(Ray o d) depth xi = case intersects ray of
  (Nothing,_) -> return zeroV
  (Just t,Sphere _r p e c refl) -> do
@@ -153,7 +154,7 @@ smallpt w h nsamps = do
    cx = Vec (fromIntegral w * 0.5135 / fromIntegral h) 0 0
    cy = norm (cx `cross` dir) `mulvs` 0.5135
    c <- VM.replicate (w * h) zeroV
-  xi <- newIORef 0
+  xi <- newIORefU 0
    flip mapM_ [0..h-1] $ \y -> do
      writeXi xi y
      flip mapM_ [0..w-1] $ \x -> do
@@ -181,8 +182,8 @@ smallpt w h nsamps = do
      Vec r g b <- VM.unsafeRead c i
      hPrintf hdl "%d %d %d " (toInt r) (toInt g) (toInt b)

-writeXi :: IORef Word64 -> Int -> IO ()
-writeXi !xi !y = writeIORef xi (mkErand48Seed' y)
+writeXi :: IORefU Word64 -> Int -> IO ()
+writeXi !xi !y = writeIORefU xi (mkErand48Seed' y)

TODO: change to new shorter erand48
```

This just removes yet one more layer of indirection, but on a fairly hot function this time.

Rewrite the remaining IORef into a foldM

```
@@ -161,8 +161,7 @@ smallpt w h nsamps = do
    let i = (h-y-1) * w + x
    flip mapM_ [0..1] $ \sy -> do
      flip mapM_ [0..1] $ \sx -> do
-
-      r <- newIORef zerov
-      flip mapM_ [0..samps-1] $ \_s -> do
+      Vec rr rg rb <- (\f -> foldM f zerov [0..samps-1]) $ \ !r _s -> do
        r1 <- (2*) `fmap` erand48 xi
        let dx = if r1<1 then sqrt r1-1 else 1-sqrt(2-r1)
        r2 <- (2*) `fmap` erand48 xi
@@ -171,9 +170,8 @@ smallpt w h nsamps = do
-      modifyIORef r (`addv` (rad `mulvs` (1 / fromIntegral samps)))
+      pure (r `addv` (rad `mulvs` (1 / fromIntegral samps)))
-      ci <- VM.unsafeRead c i
-      Vec rr rg rb <- readIORef r
```

Optimizing smallpt

2020-11-02

└ Rewrite the remaining IORef into a foldM

```
Rewrite the remaining IORef into a foldM

@@ -161,8 +161,7 @@ smallpt w h nsamps = do
    let i = (h-y-1) * w + x
    flip mapM_ [0..1] $ \sy -> do
      flip mapM_ [0..1] $ \sx -> do
-
-      r <- newIORef zerov
-      flip mapM_ [0..samps-1] $ \_s -> do
+      Vec rr rg rb <- (\f -> foldM f zerov [0..samps-1]) $ \ !r _s -> do
        r1 <- (2*) `fmap` erand48 xi
        let dx = if r1<1 then sqrt r1-1 else 1-sqrt(2-r1)
        r2 <- (2*) `fmap` erand48 xi
@@ -171,9 +170,8 @@ smallpt w h nsamps = do
-      modifyIORef r (`addv` (rad `mulvs` (1 / fromIntegral samps)))
+      pure (r `addv` (rad `mulvs` (1 / fromIntegral samps)))
-      ci <- VM.unsafeRead c i
-      Vec rr rg rb <- readIORef r
```

This removes another source of mutability, and potentially indirection. This use of an IORef wasn't very Haskellly, so unlike erand48 where the IORef was in a way appropriate, it made more sense to just remove this one.

Remove the Data.Vector.Mutable by being purer

```
-radiance :: Ray -> Int -> IORefU Word64 -> IO Vec
+radiance :: Ray -> Int -> STRefU s Word64 -> ST s Vec
radiance ray@(Ray o d) depth xi = case intersects ray of
  (Nothing,_) -> return zerov
  (Just t,Sphere _r p e c refl) -> do
@@ -153,14 +154,10 @@ smallpt w h nsamps = do
  dir = norm $ Vec 0 (-0.042612) (-1)
  cx = Vec (fromIntegral w * 0.5135 / fromIntegral h) 0 0
  cy = norm (cx `cross` dir) `mulvs` 0.5135
- c <- VM.replicate (w * h) zerov
- xi <- newIORefU 0
- flip mapM_ [0..h-1] $ \y -> do
-   writeXi xi y
-   flip mapM_ [0..w-1] $ \x -> do
-     let i = (h-y-1) * w + x
-     flip mapM_ [0..1] $ \sy -> do
-       flip mapM_ [0..1] $ \sx -> do
+ img = (`concatMap` [(h-1),(h-2)..0]) $ \y -> runST $ do
+   xi <- newSTRefU (mkErand48Seed' y)
+   forM [0..w-1] $ \x -> do
+     (\pf -> foldM pf zerov [(sy, sx) | sy <- [0,1], sx <- [0,1]]) $ \ci
-     ci <- VM.unsafeRead c i
-     VM.unsafeWrite c i $ ci `addv` (Vec (clamp rr) (clamp rg) (clamp r
+ pure $ ci `addv` (Vec (clamp rr) (clamp rg) (clamp rb) `mulvs` 0.2
withFile "image.ppm" WriteMode $ \hdl -> do
  hPrintf hdl "P3\n%d %d\n%d\n" w h (255::Int)
```

Optimizing smallpt

2020-11-02

Remove the Data.Vector.Mutable by being purer

```
Remove the Data.Vector.Mutable by being purer
-radiance :: Ray -> Int -> IORefU Word64 -> IO Vec
+radiance :: Ray -> Int -> STRefU s Word64 -> ST s Vec
radiance ray@(Ray o d) depth xi = case intersects ray of
  (Nothing,_) -> return zerov
  (Just t,Sphere _r p e c refl) -> do
@@ -153,14 +154,10 @@ smallpt w h nsamps = do
  dir = norm $ Vec 0 (-0.042612) (-1)
  cx = Vec (fromIntegral w * 0.5135 / fromIntegral h) 0 0
  cy = norm (cx `cross` dir) `mulvs` 0.5135
- c <- VM.replicate (w * h) zerov
- xi <- newIORefU 0
- flip mapM_ [0..h-1] $ \y -> do
-   writeXi xi y
-   flip mapM_ [0..w-1] $ \x -> do
-     let i = (h-y-1) * w + x
-     flip mapM_ [0..1] $ \sy -> do
-       flip mapM_ [0..1] $ \sx -> do
+ img = (`concatMap` [(h-1),(h-2)..0]) $ \y -> runST $ do
+   xi <- newSTRefU (mkErand48Seed' y)
+   forM [0..w-1] $ \x -> do
+     (\pf -> foldM pf zerov [(sy, sx) | sy <- [0,1], sx <- [0,1]]) $ \ci
-     ci <- VM.unsafeRead c i
-     VM.unsafeWrite c i $ ci `addv` (Vec (clamp rr) (clamp rg) (clamp r
+ pure $ ci `addv` (Vec (clamp rr) (clamp rg) (clamp rb) `mulvs` 0.2
withFile "image.ppm" WriteMode $ \hdl -> do
  hPrintf hdl "P3\n%d %d\n%d\n" w h (255::Int)
```

Theres a few things going on here. First we stop being in IO and create a new STRefU for each Y row. This is slightly more allocation but breaks the dependency between y rows which would be useful if parallel. Second remove the vector, and instead directly accumulate into the result. Third, since we're generating results directly, we just produce a list, and don't bother with the 'i' variable placement, which means we want to reorder which y rows we generate first. So we generate them in the reverse order (but this does potentially change edge cases and parameter validation should be added to cover).

This notably removes a decent number of lines of code and might even be clearer.

Optimizing smallpt

2020-11-02

- Set everything in smallpt to be strict

This does make a difference but a small one. The question is which ones matter.

Set everything in smallpt to be strict

[illegible]

Reduce to only effectful strictnesses

```
- let !samps = nsamps `div` 4
- !org = Vec 50 52 295.6
- !dir = norm $ Vec 0 (-0.042612) (-1)
- !cx = Vec (fromIntegral w * 0.5135 / fromIntegral h) 0 0
- !cy = norm (cx `cross` dir) `mulvs` 0.5135
+ let samps = nsamps `div` 4
+ org = Vec 50 52 295.6
+ dir = norm $ Vec 0 (-0.042612) (-1)
+ cx = Vec (fromIntegral w * 0.5135 / fromIntegral h) 0 0
+ cy = norm (cx `cross` dir) `mulvs` 0.5135

- !r1 <- (2*) `fmap` erand48 xi
+ r1 <- (2*) `fmap` erand48 xi

- !r2 <- (2*) `fmap` erand48 xi
+ r2 <- (2*) `fmap` erand48 xi

- !rad <- radiance (Ray (org`addv`(d`mulvs`140)) (norm d)) 0 xi
+ rad <- radiance (Ray (org`addv`(d`mulvs`140)) (norm d)) 0 xi

- pure $! (r `addv` (rad `mulvs` (1 / fromIntegral samps)))
- pure $! ci `addv` (Vec (clamp rr) (clamp rg) (clamp rb) `mulvs` 0.25)
+ pure $ (r `addv` (rad `mulvs` (1 / fromIntegral samps)))
+ pure $ ci `addv` (Vec (clamp rr) (clamp rg) (clamp rb) `mulvs` 0.25)
```

Optimizing smallpt

2020-11-02

Reduce to only effectful strictnesses

Reduce to only effectful strictnesses

```
- let !samps = nsamps `div` 4
- !org = Vec 50 52 295.6
- !dir = norm $ Vec 0 (-0.042612) (-1)
- !cx = Vec (fromIntegral w * 0.5135 / fromIntegral h) 0 0
- !cy = norm (cx `cross` dir) `mulvs` 0.5135
+ let samps = nsamps `div` 4
+ org = Vec 50 52 295.6
+ dir = norm $ Vec 0 (-0.042612) (-1)
+ cx = Vec (fromIntegral w * 0.5135 / fromIntegral h) 0 0
+ cy = norm (cx `cross` dir) `mulvs` 0.5135

- !r1 <- (2*) `fmap` erand48 xi
- !r2 <- (2*) `fmap` erand48 xi
+ r1 <- (2*) `fmap` erand48 xi
+ r2 <- (2*) `fmap` erand48 xi

- !rad <- radiance (Ray (org`addv`(d`mulvs`140)) (norm d)) 0 xi
- rad <- radiance (Ray (org`addv`(d`mulvs`140)) (norm d)) 0 xi
+ pure $! (r `addv` (rad `mulvs` (1 / fromIntegral samps)))
+ pure $! ci `addv` (Vec (clamp rr) (clamp rg) (clamp rb) `mulvs` 0.25)
+ pure $! (r `addv` (rad `mulvs` (1 / fromIntegral samps)))
+ pure $! ci `addv` (Vec (clamp rr) (clamp rg) (clamp rb) `mulvs` 0.25)
```

Some inspection shows us which bang patters are actually carrying the weight. Most are unnecessary.

Remove Maybe from intersect(s)

```
-intersect :: Ray -> Sphere -> Maybe Double
+intersect :: Ray -> Sphere -> Double
intersect (Ray o d) (Sphere r p _e _c _refl) =
-   if det<0 then Nothing else f (b-sdet) (b+sdet)
+   if det<0 then (1/0.0) else f (b-sdet) (b+sdet)
  where op = p `subv` o
        eps = 1e-4
        b = op `dot` d
        det = b*b - (op `dot` op) + r*r
        sdet = sqrt det

-   f a s = if a>eps then Just a else if s>eps then Just s else Nothing
+   f a s = if a>eps then a else if s>eps then s else (1/0.0)

-intersects :: Ray -> (Maybe Double, Sphere)
+intersects :: Ray -> (Double, Sphere)
intersects ray = (k, s)
-   where (k,s) = foldl' f (Nothing,undefined) spheres
-         f (k',sp) s' = case (k',intersect ray s') of
-             (Nothing,Just x) -> (Just x,s')
-             (Just y,Just x) | x < y -> (Just x,s')
-             _ -> (k',sp)
+   where (k,s) = foldl' f (1/0.0,undefined) spheres
+         f (k', sp) s' = let !x = intersect ray s' in if x < k' then (x, s') else (k', sp)

radiance :: Ray -> Int -> STRefU s Word64 -> ST s Vec
radiance ray@(Ray o d) depth xi = case intersects ray of
-   (Nothing,_) -> return zeroV
-   (Just t,Sphere _r p e c refl) -> do
+   (t,_) | t == (1/0.0) -> return zeroV
+   (t,Sphere _r p e c refl) -> do
```

Optimizing smallpt

2020-11-02

Remove Maybe from intersect(s)

Our innermost functions are of critical importance. Here we remove a Maybe which significantly reduces the boxing (which could have been mitigated with a StrictMaybe) and the cases. Since a Ray that fails to intersect something can be said to intersect at infinity, Double already actually covers the structure at play. This also reduces allocation.

```
Remove Maybe from intersect(s)

intersect :: Ray -> Sphere -> Maybe Double
intersect :: Ray -> Sphere -> Double
intersect (Ray o d) (Sphere r p _e _c _refl) =
-   if det<0 then Nothing else f (b-sdet) (b+sdet)
+   if det<0 then (1/0.0) else f (b-sdet) (b+sdet)
  where op = p `subv` o
        eps = 1e-4
        b = op `dot` d
        det = b*b - (op `dot` op) + r*r
        sdet = sqrt det

-   f a s = if a>eps then Just a else if s>eps then Just s else Nothing
+   f a s = if a>eps then a else if s>eps then s else (1/0.0)

-intersects :: Ray -> (Maybe Double, Sphere)
+intersects :: Ray -> (Double, Sphere)
intersects ray = (k, s)
-   where (k,s) = foldl' f (Nothing,undefined) spheres
-         f (k',sp) s' = case (k',intersect ray s') of
-             (Nothing,Just x) -> (Just x,s')
-             (Just y,Just x) | x < y -> (Just x,s')
-             _ -> (k',sp)
+   where (k,s) = foldl' f (1/0.0,undefined) spheres
+         f (k', sp) s' = let !x = intersect ray s' in if x < k' then (x, s') else (k', sp)

radiance :: Ray -> Int -> STRefU s Word64 -> ST s Vec
radiance ray@(Ray o d) depth xi = case intersects ray of
-   (Nothing,_) -> return zeroV
-   (Just t,Sphere _r p e c refl) -> do
+   (t,_) | t == (1/0.0) -> return zeroV
+   (t,Sphere _r p e c refl) -> do
```

Hand unroll the fold in intersects

```
intersects :: Ray -> (Double, Sphere)
-intersects ray = (k, s)
-   where (k,s) = foldl' f (1/0.0,undefined) spheres
-   where f (k',sp) s' = let !x = intersect ray s' in if x < k' then (x, s') else (k', sp)
+intersects ray =
+   f (f (f (f (f (f (f (intersect ray sphLeft, sphLeft) sphRight) sphBack) sphFrnt) sphBotm) sphTop) sphMirr) sphGlas) sph
+   where
+   f (k', sp) s' = let !x = intersect ray s' in if x < k' then (x, s') else (k', sp)

-spheres :: [Sphere]
-spheres = let s = Sphere ; z = zerov ; (.*) = mulvs ; v = Vec in
-   [ s 1e5 (v (1e5+1) 40.8 81.6)      z (v 0.75 0.25 0.25) DIFF --Left
-   , s 1e5 (v (-1e5+99) 40.8 81.6)    z (v 0.25 0.25 0.75) DIFF --Right
-   , s 1e5 (v 50 40.8 1e5)            z (v 0.75 0.75 0.75) DIFF --Back
-   , s 1e5 (v 50 40.8 (-1e5+170))     z z                               DIFF --Frnt
-   , s 1e5 (v 50 1e5 81.6)            z (v 0.75 0.75 0.75) DIFF --Botm
-   , s 1e5 (v 50 (-1e5+81.6) 81.6)    z (v 0.75 0.75 0.75) DIFF --Top
-   , s 16.5(v 27 16.5 47)             z ((v 1 1 1).* 0.999) SPEC --Mirr
-   , s 16.5(v 73 16.5 78)             z ((v 1 1 1).* 0.999) REFR --Glas
-   , s 600 (v 50 (681.6-0.27) 81.6)   (v 12 12 12)                z DIFF]--Lite
+sphLeft, sphRight, sphBack, sphFrnt, sphBotm, sphTop, sphMirr, sphGlas, sphLite :: Sphere
+sphLeft  = Sphere 1e5 (Vec (1e5+1) 40.8 81.6)      zerov (Vec 0.75 0.25 0.25) DIFF --Left
+sphRight = Sphere 1e5 (Vec (-1e5+99) 40.8 81.6)    zerov (Vec 0.25 0.25 0.75) DIFF --Right
+sphBack  = Sphere 1e5 (Vec 50 40.8 1e5)            zerov (Vec 0.75 0.75 0.75) DIFF --Back
+sphFrnt  = Sphere 1e5 (Vec 50 40.8 (-1e5+170))     zerov zerov          DIFF --Frnt
+sphBotm  = Sphere 1e5 (Vec 50 1e5 81.6)            zerov (Vec 0.75 0.75 0.75) DIFF --Botm
+sphTop   = Sphere 1e5 (Vec 50 (-1e5+81.6) 81.6)    zerov (Vec 0.75 0.75 0.75) DIFF --Top
+sphMirr  = Sphere 16.5 (Vec 27 16.5 47)            zerov (Vec 0.999 0.999 0.999) SPEC --Mirr
+sphGlas  = Sphere 16.5 (Vec 73 16.5 78)            zerov (Vec 0.999 0.999 0.999) REFR --Glas
+sphLite  = Sphere 600 (Vec 50 (681.6-0.27) 81.6)   (Vec 12 12 12)                zerov DIFF --Lite
```

Optimizing smallpt

2020-11-02

Hand unroll the fold in intersects

This removes the list and this a potential level of indirections and branches. Sadly GHC did not do this for us even though the list was static.

```
Hand unroll the fold in intersects
intersects :: Ray -> (Double, Sphere)
intersects ray = (k, s)
  where (k,s) = foldl' f (1/0.0,undefined) spheres
  where f (k',sp) s' = let !x = intersect ray s' in if x < k' then (x, s') else (k', sp)
intersects ray =
  f (f (f (f (f (f (f (intersect ray sphLeft, sphLeft) sphRight) sphBack) sphFrnt) sphBotm) sphTop) sphMirr) sphGlas) sph
  where
  f (k', sp) s' = let !x = intersect ray s' in if x < k' then (x, s') else (k', sp)

spheres :: [Sphere]
spheres = let s = Sphere ; z = zerov ; (.*) = mulvs ; v = Vec in
  [ s 1e5 (v (1e5+1) 40.8 81.6)      z (v 0.75 0.25 0.25) DIFF --Left
  , s 1e5 (v (-1e5+99) 40.8 81.6)    z (v 0.25 0.25 0.75) DIFF --Right
  , s 1e5 (v 50 40.8 1e5)            z (v 0.75 0.75 0.75) DIFF --Back
  , s 1e5 (v 50 40.8 (-1e5+170))     z z                               DIFF --Frnt
  , s 1e5 (v 50 1e5 81.6)            z (v 0.75 0.75 0.75) DIFF --Botm
  , s 1e5 (v 50 (-1e5+81.6) 81.6)    z (v 0.75 0.75 0.75) DIFF --Top
  , s 16.5(v 27 16.5 47)             z ((v 1 1 1).* 0.999) SPEC --Mirr
  , s 16.5(v 73 16.5 78)             z ((v 1 1 1).* 0.999) REFR --Glas
  , s 600 (v 50 (681.6-0.27) 81.6)   (v 12 12 12)                z DIFF]--Lite
sphLeft, sphRight, sphBack, sphFrnt, sphBotm, sphTop, sphMirr, sphGlas, sphLite :: Sphere
sphLeft  = Sphere 1e5 (Vec (1e5+1) 40.8 81.6)      zerov (Vec 0.75 0.25 0.25) DIFF --Left
sphRight = Sphere 1e5 (Vec (-1e5+99) 40.8 81.6)    zerov (Vec 0.25 0.25 0.75) DIFF --Right
sphBack  = Sphere 1e5 (Vec 50 40.8 1e5)            zerov (Vec 0.75 0.75 0.75) DIFF --Back
sphFrnt  = Sphere 1e5 (Vec 50 40.8 (-1e5+170))     zerov zerov          DIFF --Frnt
sphBotm  = Sphere 1e5 (Vec 50 1e5 81.6)            zerov (Vec 0.75 0.75 0.75) DIFF --Botm
sphTop   = Sphere 1e5 (Vec 50 (-1e5+81.6) 81.6)    zerov (Vec 0.75 0.75 0.75) DIFF --Top
sphMirr  = Sphere 16.5 (Vec 27 16.5 47)            zerov (Vec 0.999 0.999 0.999) SPEC --Mirr
sphGlas  = Sphere 16.5 (Vec 73 16.5 78)            zerov (Vec 0.999 0.999 0.999) REFR --Glas
sphLite  = Sphere 600 (Vec 50 (681.6-0.27) 81.6)   (Vec 12 12 12)                zerov DIFF --Lite
```

Marking intereseects' f parameters strict

```
intersects ray = ...
  where
-   f (k', sp) s' = let !x = intersect ray s' in if x < k' then (x, s') else (k', sp)
+   f !(k', !sp) !s' = let !x = intersect ray s' in if x < k' then (x, s') else (k', sp)
```

2020-11-02

Marking intereseects' f parameters strict

```
intersects ray = ...
  where
-   f (k', sp) s' = let !x = intersect ray s' in if x < k' then (x, s') else (k', sp)
+   f !(k', !sp) !s' = let !x = intersect ray s' in if x < k' then (x, s') else (k', sp)
```

Marking intereseects' f parameters strict. Again, its clear these will get used.

Strategic application of strictness

TODO: This diff looks very bad

```
- if det<0 then (1/0.0) else f (b-sdet) (b+sdet)
- where op = p `subv` o
-     eps = 1e-4
-     b = op `dot` d
-     det = b*b - (op `dot` op) + r*r
-     sdet = sqrt det
-     f a s = if a>eps then a else if s>eps then s else (1/0.0)
+ if det<0
+ then (1/0.0)
+ else
+   let !eps = 1e-4
+   !sdet = sqrt det
+   !a = b-sdet
+   !s = b+sdet
+   in if a>eps then a else if s>eps then s else (1/0.0)
+ where
+   !det = b*b - (op `dot` op) + r*r
+   !b = op `dot` d
+   !op = p `subv` o

- (t,_) | t == (1/0.0) -> return zerov
- (t,Sphere _r p e c refl) -> do
-   let x = o `addv` (d `mulvs` t)
-   n = norm $ x `subv` p
-   nl = if n `dot` d < 0 then n else n `mulvs` (-1)
-   depth' = depth + 1
+ (!t,_) | t == (1/0.0) -> return zerov
+ (!t,!Sphere _r p e c refl) -> do
+   let !x = o `addv` (d `mulvs` t)
+   !n = norm $ x `subv` p
+   !nl = if n `dot` d < 0 then n else n `mulvs` (-1)
+   !depth' = depth + 1

-       a=nt-nc
-       b=nt+nc
-       r0=a*a/(b*b)
-       c' = 1-(if into then -ddn else tdir`dot`n)
-       re=r0+(1-r0)*c'*c'*c'*c'*c'
-       tr=1-re
-       pp=0.25+0.5*re
-       rp=re/pp
```

Optimizing smallpt

2020-11-02

Strategic application of strictness

Here we go through the program and apply some considered strictness to it. Forcing computation we don't need to do, or often forcing it to far before we need it is a loss. When we put a bang pattern in, GHC doesn't move it so we have to hand float it to an appropriate location.



Use LLVM backend

```
+packages: .  
+  
+package smallpt-opt  
+  ghc-options: -fllvm
```

Optimizing smallpt

2020-11-02

Use LLVM backend

```
+packages: .  
+  
+package smallpt-opt  
+  ghc-options: -fllvm
```



The LLVM backend can pick up assembly level optimizations that GHC has missed.

The view from the mountaintop

Optimizing smallpt

2020-11-02

The view from the mountaintop

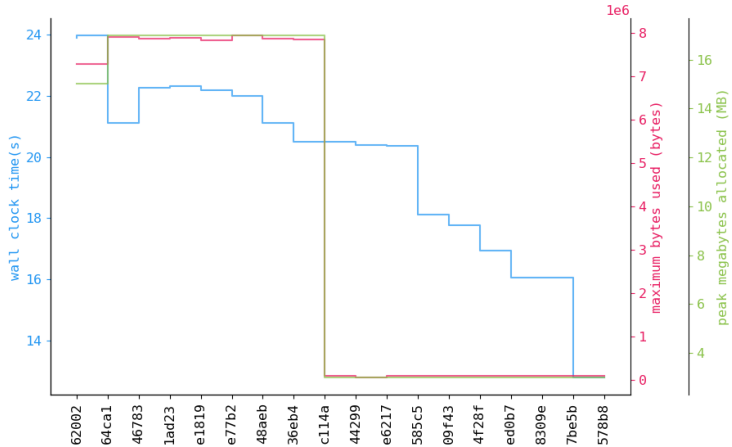

Takeaways

Optimizing smallpt

2020-11-02

Takeaways

Takeaways

Takeaways

- ▶ Haskell can be fast

2020-11-02

Takeaways

- ▶ Haskell can be fast

Takeaways

- ▶ Haskell can be fast
- ▶ ... with a lot of work!

2020-11-02

Takeaways

- ▶ Haskell can be fast
- ▶ ... with a lot of work!

Takeaways

- ▶ Haskell can be fast
- ▶ ... with a lot of work!
- ▶ Accumulate optimizations to accrue performance wins.

2020-11-02

Takeaways

- ▶ Haskell can be fast
- ▶ ... with a lot of work!
- ▶ Accumulate optimizations to accrue performance wins.

Takeaways

- ▶ Haskell can be fast
- ▶ ... with a lot of work!
- ▶ Accumulate optimizations to accrue performance wins.

2020-11-02

Takeaways

- ▶ Haskell can be fast
- ▶ ... with a lot of work!
- ▶ Accumulate optimizations to accrue performance wins.