



**Linux for OSINT. 21-day course for
beginners**

@cyb_detective 28 December 2023

While working on this course, I called a friend and asked:

- *Remember six months ago when you said you started reading a book about using Kali Linux for forensics?*

- *Yes.*

- *How much have you read?*

- *I stopped at chapter 5.*

- *What's it called?*

- *Installing Kali Linux*

After our conversation ended, I opened the file of this book and cut out all the chapters that require the use of Linux Virtual Machines. To give the reader no reason to stop, for the first 20 days, we will work in a browser only. It's not until day 21 that we think about whether it's time to install Linux.

Table of contents

Who Is This Course For?

Who should avoid this course?

Day 0. Getting ready to work

Day 1. Basic skills of working with files and directories in command line

Day 2. Basic bash script syntax

Day 3. Install and run utilities

Day 4. Batch file processing

Day 5. Downloading files and working with APIs. Curl.

Day 6. Search in files. Grep

Day 7. Sed and Awk

Day 8. Vim text editor

Day 9. Screen and Crone

Day 10. Text analyzing and editing utilities

Day 11. Video, audio and images

Day 12. Analyze PDF

Day 13. MS Office files

Day 14. JSON, XML, CSV

Day 15. Scraping

Day 16. Web search automation tools

Day 17. File sharing sites, torrents, FTP

Day 18. Domain investigation

Day 19. Git and Github

Day 20. Tools to make Linux easier to use

Day 21. Which Linux distribution is better to use?

What to do next?

Application. Is it possible to do the same thing on Windows?

Who Is This Course For?

The course is primarily intended for those **who are professionally involved in or simply interested in OSINT**. And you will find in it a lot about automation of collection and analysis of various data.

On my Twitter (https://twitter.com/cyb_detective) account, I regularly write about useful tools for OSINT, including various Linux utilities. And many times readers have asked, "Cool! Is it possible to run this on Windows?".

Yes, there are different methods of running Linux utilities on Windows. But they are more complicated than running Linux on a VM (virtual machine), VPS (virtual private server) or in an online development environment.

This short tutorial is created to show you clearly that:

- Linux and the command line are very easy to use. Really easy. Extremely easy.
- hundreds of tasks (OSINT related and not only) can be simplified and automated with Linux.
- using Linux command line is a real, unparalleled pleasure.

This course is designed **for the total beginners**. I won't even ask you to install a VM with Linux until the last day, all examples can be tried in a browser. You also won't need any special knowledge. If you know how to use e-mail, you will be able to handle this course. Just relax and follow the instructions carefully.

When reading, keep in mind that this is a short course and so many things are left out. And really important things have been left out. It is designed primarily to show you the capabilities of Linux and to show you "which way to look" when faced with different tasks.

Who should avoid this course?

Linux is good because you can solve the same problem in many different ways. I am not sure that the ways described in this course are the best and fastest ways to solve problems. They are written to visually show you the magic of the command line and stimulate your inner inventor (but all examples work and solve the stated problems).

I would advise the following categories of readers to treat this book as critically as possible and certainly read other Linux books:

- students who are preparing for exams
- IT specialists who are preparing for Linux-related job interviews
- people who want to become real Linux experts
- pentesters and bug hunters

This book is primarily about OSINT.

Day 0. Getting ready to work

Eric Raymond, in his article "How to become a hacker" (1 December 1997, <https://cs.fit.edu/~wds/classes/cdc/Readings/BecomeAHacker.pdf>), recommended going to a local Linuxoid meeting and asking to burn discs of some distro in exchange for beer (I found this article, but link "where to get Linux" no longer working now).


In the last 26 years progress has gone a long way and I'll just ask you to open a new tab in your browser.

Gitpod is a service that provides online development environments based on the Linux distribution Ubuntu (<https://ubuntu.com>). You can use it for 50 hours a month for free. This is definitely enough time for you to take this course **many times**.

You should use a Github (<https://github.com/>) account for authorization (registration is very fast and also free).

Open this link and create a workspace with standard settings:

<https://gitpod.io#https://github.com/cipher387/linux-for-OSINT-21-day>

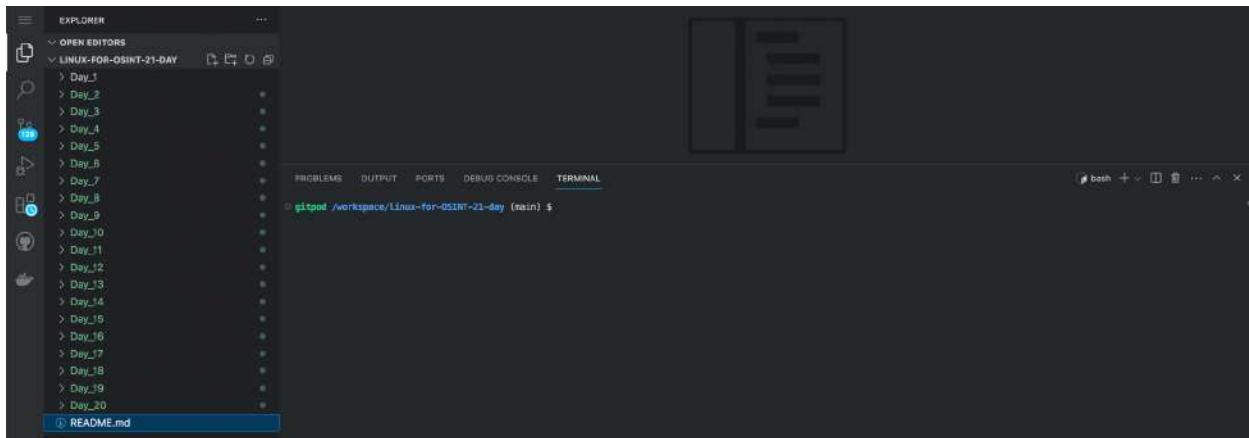

Welcome to Gitpod! Now you're ready to start the first lesson!

If you are already using some Linux distribution, you can simply clone the <https://github.com/cipher387/linux-for-OSINT-21-day> repository to your computer or server.


If you don't know how to clone repositories yet, I recommend using Gitpod for now. On **Day 19** you will learn how to clone repositories, and on **Day 21** you will think about which Linux distribution is best for you.

Day 1. Basic skills of working with files and directories in command line

If you did not miss **Day 0**, you should now have the command line open and the directory **linux-for-OSINT-21-day** active.

Let's see what folders and files are inside it. Type **ls** at the command line and press **Enter**:


ls

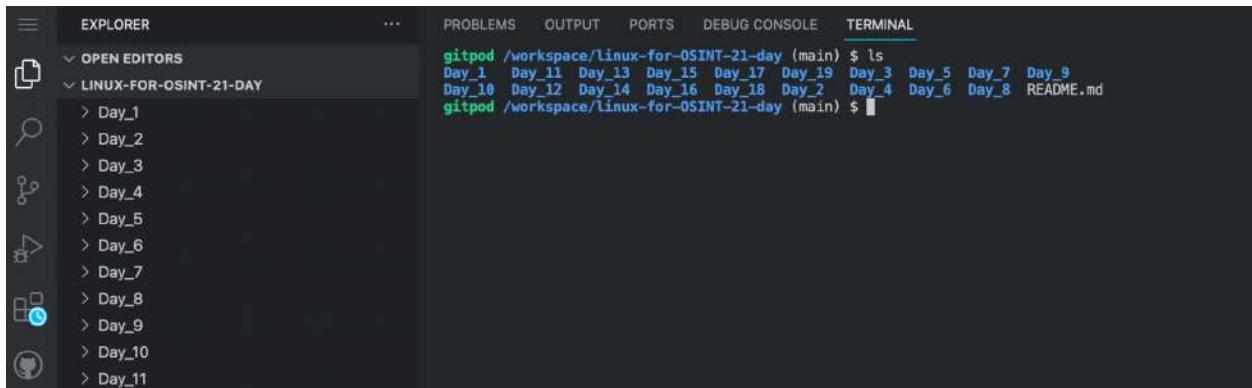

```
gitpod /workspace/linux-for-OSINT-21-day (main) $ ls
Day_1  Day_11 Day_13 Day_15 Day_17 Day_19 Day_3  Day_5  Day_7  Day_9
Day_10 Day_12 Day_14 Day_16 Day_18 Day_2  Day_4  Day_6  Day_8  README.md
```

Now let's go to the **Day_1** folder:

cd Day_1
ls

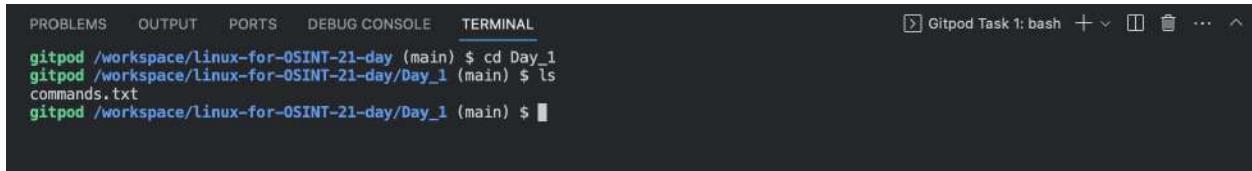

```
gitpod /workspace/linux-for-OSINT-21-day (main) $ cd Day_1
gitpod /workspace/linux-for-OSINT-21-day/Day_1 (main) $ ls
commands.txt
gitpod /workspace/linux-for-OSINT-21-day/Day_1 (main) $
```

At the moment there is only a text file with all the commands from this book. Let's add something else to the **Day_1** folder.

mkdir new_folder

ls

```
PROBLEMS OUTPUT PORTS DEBUG CONSOLE TERMINAL
● gitpod /workspace/linux-for-OSINT-21-day (main) $ cd Day_1
● gitpod /workspace/linux-for-OSINT-21-day/Day_1 (main) $ ls
  commands.txt
● gitpod /workspace/linux-for-OSINT-21-day/Day_1 (main) $ mkdir new_folder
● gitpod /workspace/linux-for-OSINT-21-day/Day_1 (main) $ ls
  commands.txt  new_folder
○ gitpod /workspace/linux-for-OSINT-21-day/Day_1 (main) $ █
```

Let's create a new empty text file in this folder.

cat>new_file.txt

Enter some text and press “**Ctrl+D**”.

Let's check if the file was created successfully:

ls

```
PROBLEMS OUTPUT PORTS DEBUG CONSOLE TERMINAL
● gitpod /workspace/linux-for-OSINT-21-day (main) $ cd Day_1
● gitpod /workspace/linux-for-OSINT-21-day/Day_1 (main) $ cat>new_file.txt
● Hello!gitpod /workspace/linux-for-OSINT-21-day/Day_1 (main) $ ls
  commands.txt  new_file.txt  new_folder
○ gitpod /workspace/linux-for-OSINT-21-day/Day_1 (main) $ █
```

To go to the parent directory use this command:

cd ..

```
● gitpod /workspace/linux-for-OSINT-21-day/Day_1 (main) $ cd ..
● gitpod /workspace/linux-for-OSINT-21-day (main) $ cd ..
○ gitpod /workspace $ █
```

Go to the directory located several levels below by specifying the path to it:

```
cd linux-for-OSINT-21-day/Day_1
```

```
PROBLEMS OUTPUT PORTS DEBUG CONSOLE TERMINAL
● gitpod /workspace/linux-for-OSINT-21-day (main) $ cd ..
● gitpod /workspace $ cd linux-for-OSINT-21-day/Day_1
```

Now let's change the text of the file new_file.txt and display it on the screen (write the results of the ls command to a file):

```
ls>new_file.txt
cat new_file.txt
```

```
● gitpod /workspace/linux-for-OSINT-21-day/Day_1 (main) $ ls>new_file.txt
● gitpod /workspace/linux-for-OSINT-21-day/Day_1 (main) $ cat new_file.txt
commands.txt
new_file.txt
new_folder
○ gitpod /workspace/linux-for-OSINT-21-day/Day_1 (main) $ █
```

Note that this is the second time we have used the > symbol to write the results of a command to a file. Pay special attention to this.

If you just want to copy text from one file to another, use the **cp** command:

```
cp new_file.txt copy_new_file.txt
```

```
PROBLEMS OUTPUT PORTS DEBUG CONSOLE TERMINAL
● gitpod /workspace/linux-for-OSINT-21-day (main) $ cd Day_1
● gitpod /workspace/linux-for-OSINT-21-day/Day_1 (main) $ cp new_file.txt copy_new_file.txt
● gitpod /workspace/linux-for-OSINT-21-day/Day_1 (main) $ ls
commands.txt copy_new_file.txt new_file.txt new_folder
● gitpod /workspace/linux-for-OSINT-21-day/Day_1 (main) $ cat copy_new_file.txt
commands.txt
new_file.txt
new_folder
○ gitpod /workspace/linux-for-OSINT-21-day/Day_1 (main) $ █
```

Directories can be copied in the same way:

```
cp -r new_folder copy_new_folder
```

```
● gitpod /workspace/linux-for-OSINT-21-day/Day_1 (main) $ cp -r new_folder copy_new_folder
● gitpod /workspace/linux-for-OSINT-21-day/Day_1 (main) $ ls
  commands.txt  copy_new_file.txt  copy_new_folder  new_file.txt  new_folder
○ gitpod /workspace/linux-for-OSINT-21-day/Day_1 (main) $ █
```

Now let's delete the file and directory copies we created:

```
rm copy_new_file.txt
rm -d copy_new_folder
```

```
● gitpod /workspace/linux-for-OSINT-21-day/Day_1 (main) $ ls
  commands.txt  copy_new_file.txt  copy_new_folder  new_file.txt  new_folder
● gitpod /workspace/linux-for-OSINT-21-day/Day_1 (main) $ rm copy_new_file.txt
● gitpod /workspace/linux-for-OSINT-21-day/Day_1 (main) $ ls
  commands.txt  copy_new_folder  new_file.txt  new_folder
● gitpod /workspace/linux-for-OSINT-21-day/Day_1 (main) $ rm -d copy_new_folder
● gitpod /workspace/linux-for-OSINT-21-day/Day_1 (main) $ ls
  commands.txt  new_file.txt  new_folder
○ gitpod /workspace/linux-for-OSINT-21-day/Day_1 (main) $ █
```

Enough for now. Today we have learned the most basic commands for working with Linux files. And we tried the simplest options to use them. But all utilities mentioned in this lesson (**cat**, **ls**, **cd**, **rm**) have many different options.

To find out all the options of any Linux command use the **man** (manual) command. For example:

```
man rm
```

```
PROBLEMS OUTPUT PORTS DEBUG CONSOLE TERMINAL
RM(1) User Commands RM(1)

NAME
  rm - remove files or directories

SYNOPSIS
  rm [OPTION]... [FILE]...

DESCRIPTION
  This manual page documents the GNU version of rm. rm removes each specified file. By default, it does not remove directories.

  If the -I or --interactive=once option is given, and there are more than three files or the -r, -R, or --recursive are given, then rm prompts the user for whether to proceed with the entire operation. If the response is not affirmative, the entire command is aborted.

  Otherwise, if a file is unwriteable, standard input is a terminal, and the -f or --force option is not given, or the -i or --interactive=always option is given, rm prompts the user for whether to remove the file. If the response is not affirmative, the file is skipped.

OPTIONS
  Remove (unlink) the FILE(s).

  -f, --force
    ignore nonexistent files and arguments, never prompt

  -i
    prompt before every removal

  -I
    prompt once before removing more than three files, or when removing recursively; less intrusive than -i, while still giving protection against most mistakes

  --interactive[=WHEN]
    prompt according to WHEN: never, once (-I), or always (-i); without WHEN, prompt always
[Manual page rm(1) line 1/92 41% (press h for help or q to quit)]
```

Layout: LSC No es

Press **q** to exit.

If you did something wrong when typing some commands, always remember that you can just create a new workspace, if you are working on Gitpod.

If you are working on your computer, VM or VPS, delete the folder with the files for this course and then copy it again from Github.

Day 2. Basic Bash syntax

What is the most important point of using the command line to perform various tasks instead of the GUI?

The ability to record and repeatedly perform different sequences of actions to automate your work.

Bash (<https://www.gnu.org/software/bash/>) is a Unix shell and command language written by Brian Fox and first released in 1989. This is what we will use to write commands to automate various tasks in Linux, combining Bash scripts with tools written in other programming languages (Python, Go etc).


Commands for later execution can be stored in files with the extension **.sh**. Let's take a look at how this works right away.

Go to current lesson folder:

```
cd Day_2
```

And run file `create_folders.sh`:

```
bash create_folders.sh
```

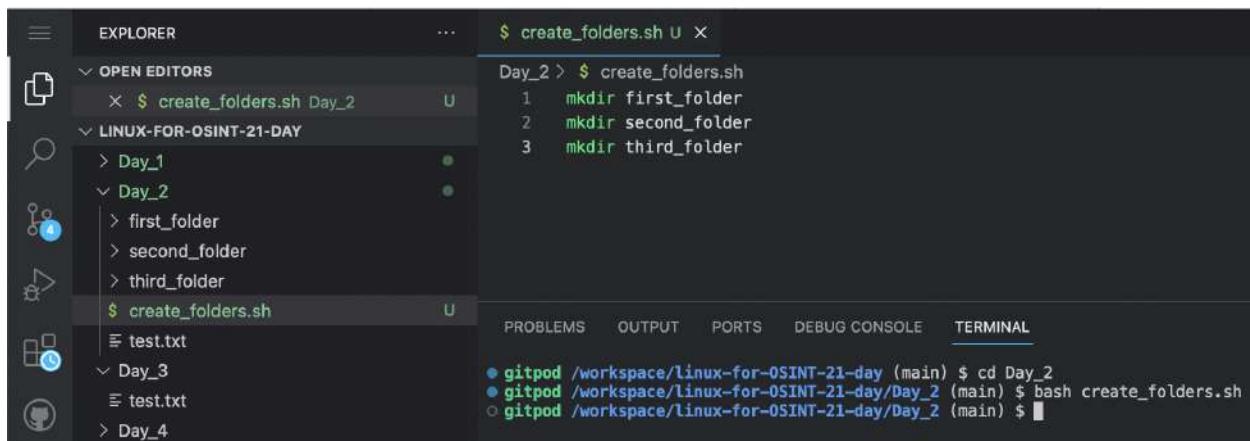

The screenshot shows a terminal window within a code editor interface. The terminal window has a dark background and displays the following text:

```
$ create_folders.sh
Day_2 > $ create_folders.sh
1  mkdir first_folder
2  mkdir second_folder
3  mkdir third_folder
```

The code editor's Explorer sidebar on the left shows a file structure:

- OPEN EDITORS: \$ create_folders.sh (Day_2)
- LINUX-FOR-OSINT-21-DAY:
 - Day_1
 - Day_2:
 - first_folder
 - second_folder
 - third_folder
 - \$ create_folders.sh
- Day_3: test.txt
- Day_4: test.txt

The terminal window also shows the command history at the bottom:

```
gitpod /workspace/linux-for-OSINT-21-day (main) $ cd Day_2
gitpod /workspace/linux-for-OSINT-21-day/Day_2 (main) $ bash create_folders.sh
gitpod /workspace/linux-for-OSINT-21-day/Day_2 (main) $
```

If you didn't miss yesterday's lesson, you can see that this script simply creates three directories with different names.


The **.sh** extension is used to store files with code written in the Shell Script language or Bash script language.

Now let's break down the most basic elements of Bash script syntax.

Variables and string concatenation

Run in command line:

bash variables.sh

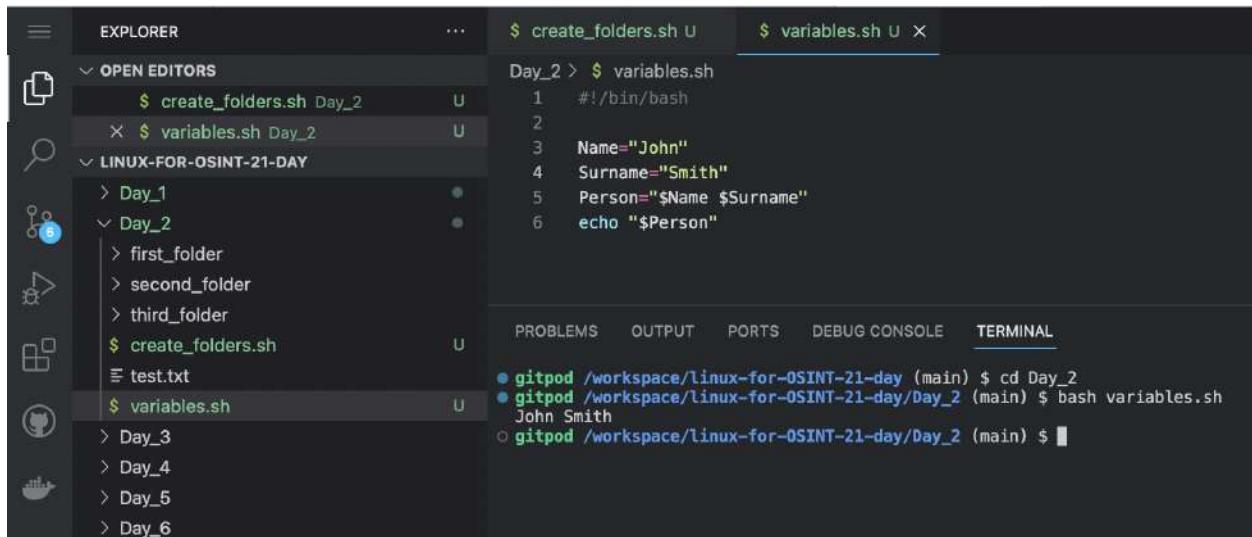

```
Day_2 > $ variables.sh
1  #!/bin/bash
2
3  Name="John"
4  Surname="Smith"
5  Person="$Name $Surname"
6  echo "$Person"

gitpod /workspace/linux-for-OSINT-21-day (main) $ cd Day_2
gitpod /workspace/linux-for-OSINT-21-day/Day_2 (main) $ bash variables.sh
John Smith
gitpod /workspace/linux-for-OSINT-21-day/Day_2 (main) $
```

Comments in the code denote by the symbol **#**.

In most cases this will not affect the scripts, but I recommend that you indicate on the first line of the **.sh** files that it is a Bash script:

#!/bin/bash

Create variable contain a string "John":

Name="John"

Create variable contain a string “Smith”:

Surname="Smith"

Create variable contain Name variable, space and Surname variable:

Person="\$Name \$Surname"


Print Person variable:

echo "\$Person"

Conditional operator

Run **conditional.sh**:

cd Day_2
bash conditional.sh

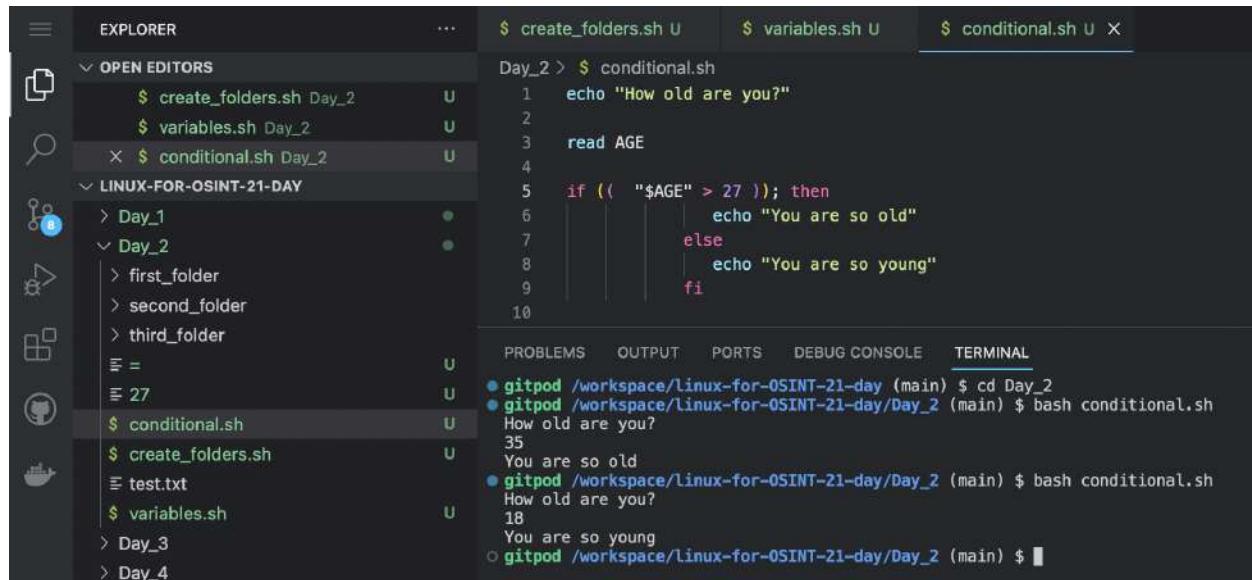

The screenshot shows a terminal window within a code editor interface. The terminal window has tabs for 'create_folders.sh', 'variables.sh', and 'conditional.sh'. The 'conditional.sh' tab is active and contains the following script:

```
Day_2 > $ conditional.sh
1 echo "How old are you?"
2
3 read AGE
4
5 if (( "$AGE" > 27 )); then
6     echo "You are so old"
7 else
8     echo "You are so young"
9 fi
10
```

Below the terminal window, the code editor's Explorer sidebar shows a file structure under 'Day_2':

- Day_1
- Day_2
 - first_folder
 - second_folder
 - third_folder
- 27
- conditional.sh
- create_folders.sh
- test.txt
- variables.sh
- Day_3
- Day_4

The terminal window also shows the execution of the script and its output:

```
gitpod /workspace/linux-for-OSINT-21-day (main) $ cd Day_2
gitpod /workspace/linux-for-OSINT-21-day/Day_2 (main) $ bash conditional.sh
How old are you?
35
You are so old
gitpod /workspace/linux-for-OSINT-21-day/Day_2 (main) $ bash conditional.sh
How old are you?
18
You are so young
gitpod /workspace/linux-for-OSINT-21-day/Day_2 (main) $
```

Ask the user how old he is:

```
echo "How old are you?"
```

Read the value of the AGE variable entered by the user:

```
read AGE
```

If AGE is greater than 27, we tell the user that he is too old:

```
if (( "$AGE" > 27 )); then
    echo "You are so old"
```

If AGE is less than 27, we tell the user that he is too young:

```
else
    echo "You are so young"
fi
```

Loops

There are three basic kinds of loops in a bash script: “while loop”, “until loop” and “for loop”.

While loop

Run in command line:

```
bash while_loop.sh
```



The screenshot shows a terminal window in a code editor. The terminal is running a script named 'while_loop.sh' located in a directory 'Day_2'. The script contains a while loop that increments a variable 'x' from 1 to 5, printing its value each iteration. The terminal output shows the script running and the numbers 1 through 5 being printed.

```
$ while_loop.sh
Day_2 > $ while_loop.sh
1 x=1
2 while [ $x -le 5 ]
3 do
4 echo "$x"
5 x=$(( $x + 1 ))
6 done
gitpod /workspace/linux-for-OSINT-21-day (main) $ cd Day_2
gitpod /workspace/linux-for-OSINT-21-day/Day_2 (main) $ bash while_loop.sh
1
2
3
4
5
gitpod /workspace/linux-for-OSINT-21-day/Day_2 (main) $
```

Assign the value 1 to the variable x:

```
x=1
```

As long as the variable x does not equal 5, perform the following action:

```
while [ $x -le 5 ]
do
```


Display the variable x on the screen and then add 1 to it:

```
echo "$x"
x=$(( $x + 1 ))
done
```

Until loop

Run:

```
bash until_loop.sh
```

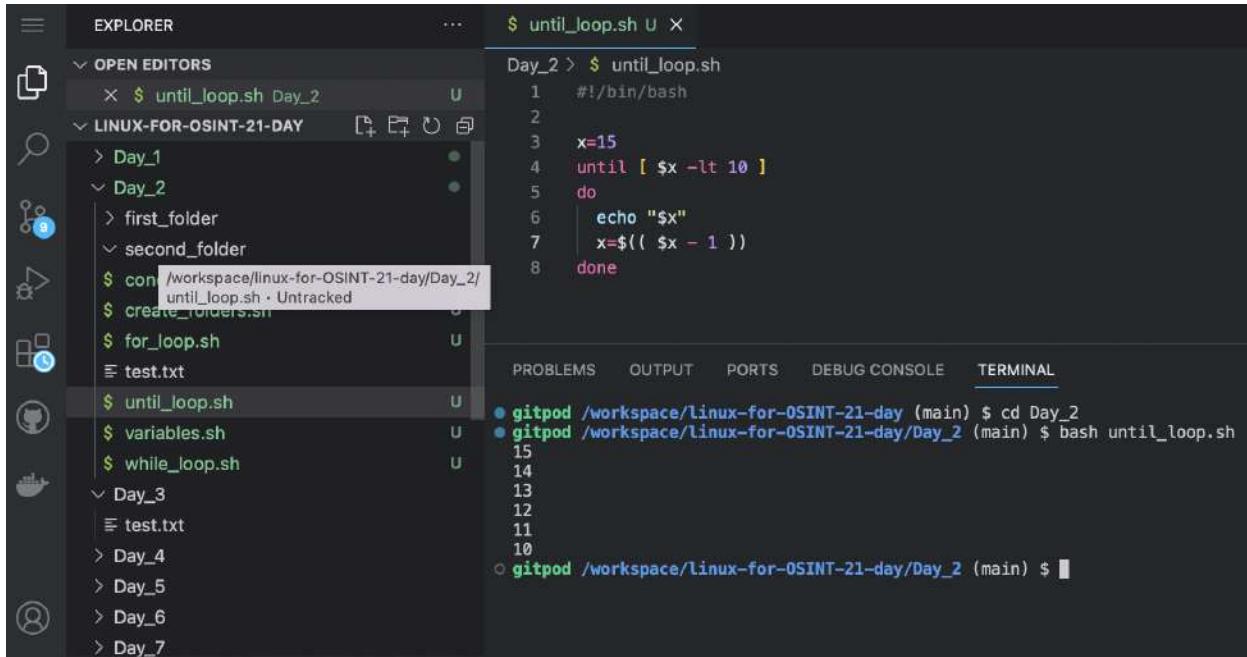

```
OPEN EDITORS
  $ until_loop.sh Day_2
  Day_1
  Day_2
    first_folder
    second_folder
    $ con /workspace/linux-for-OSINT-21-day/Day_2/
    until_loop.sh - Untracked
    $ create_folders.sh
    $ for_loop.sh
    test.txt
    $ until_loop.sh
    $ variables.sh
    $ while_loop.sh
  Day_3
    test.txt
  Day_4
  Day_5
  Day_6
  Day_7

$ until_loop.sh
  1 #!/bin/bash
  2
  3 x=15
  4 until [ $x -lt 10 ]
  5 do
  6   echo "$x"
  7   x=$(( $x - 1 ))
  8 done

PROBLEMS  OUTPUT  PORTS  DEBUG CONSOLE  TERMINAL
● gitpod /workspace/linux-for-OSINT-21-day (main) $ cd Day_2
● gitpod /workspace/linux-for-OSINT-21-day/Day_2 (main) $ bash until_loop.sh
15
14
13
12
11
10
● gitpod /workspace/linux-for-OSINT-21-day/Day_2 (main) $
```

Assign the value 15 to the variable x:

x=15

As long as the variable x greater than 1-, perform the following action:

until [\$x -lt 10]

Do

Display the variable x on the screen and then subtract 1 to it:

**echo "\$x"
x=\$((\$x - 1))
done**

For loop

Run:

bash for_loop.sh

The screenshot shows a terminal window within a code editor interface. The terminal is titled '\$ for_loop.sh' and displays a bash script. The script declares an array 'names' with four elements: 'John', 'Paul', 'Steven', and 'Bill'. It then uses a 'for' loop to iterate over the array, printing each element on a new line. The terminal window also shows the command 'gitpod /workspace/linux-for-OSINT-21-day bash for_loop.sh' being run, and the output of the script execution.

```

$ for_loop.sh
1 #!/bin/bash
2
3 declare -a names=("John", "Paul", "Steven", "Bill")
4
5 for name in ${names[@]}; do
6   echo $name;
7 done

```

Create array with list of names:

```
declare -a names=("John", "Paul", "Steven", "Bill")
```

Go through the elements of the list one by one and do the following for each one:

```
for name in ${names[@]};
do
```

Display current array element on the screen:

```
echo $name;
done
```


Functions

Like many other programming languages, bash allows you to combine long programs into functions, so that you can then trigger their execution with a short function name.

Let's look at an example.

Run in command line:

bash function.sh

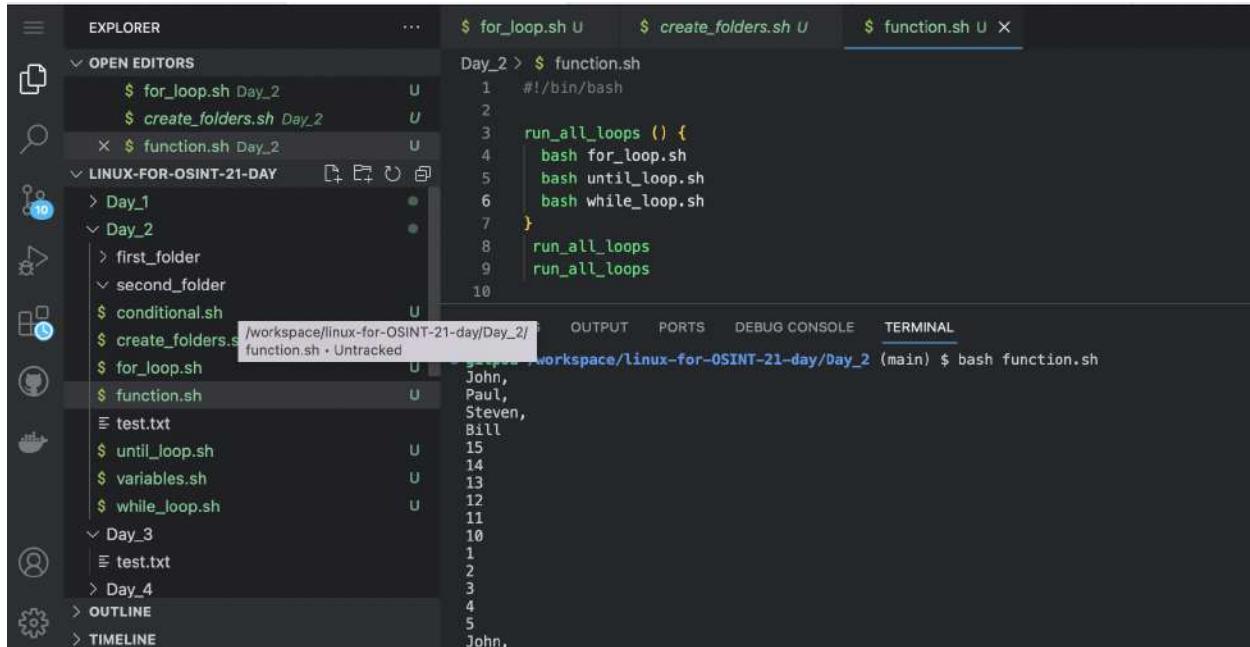

```
Day_2 > $ function.sh
1  #!/bin/bash
2
3  run_all_loops () {
4      bash for_loop.sh
5      bash until_loop.sh
6      bash while_loop.sh
7  }
8  run_all_loops
9  run_all_loops
10

/workspace/linux-for-OSINT-21-DAY/Day_2/  OUTPUT  PORTS  DEBUG CONSOLE  TERMINAL
/workspace/linux-for-OSINT-21-DAY/Day_2/  function.sh + Untracked
/workspace/linux-for-OSINT-21-DAY/Day_2/  bash function.sh
John,
Paul,
Steven,
Bill
15
14
13
12
11
10
1
2
3
4
5
John,
```

Create a function that runs scripts to demonstrate how loops work:

```
run_all_loops () {
    bash for_loop.sh
    bash until_loop.sh
    bash while_loop.sh
}
```

Call this function twice:

```
run_all_loops
Run_all_loops
```

As in other programming languages, bash allows you to use arguments in functions and return the values obtained after processing these arguments. But we will not discuss this point in detail, as it is already one of the longest lessons of this course (yes, it will be easier later).

Don't try to learn the basics of bash script syntax right now, we will barely use it in this course (except a little on **Day 4**). This lesson is created primarily to give you an overview of its basic features so that you can stimulate your brain to generate ideas in the future

The most interesting thing about Bash script functions is that you can combine scripts written in different programming languages. For example, combine different Python OSINT tools with a Nuclei scanner written in Go as well as with a wide variety of Linux utilities. Tomorrow we will finally learn how to install them.

Day 3. Install and run utilities

Linux utility is a command that can be run on the command line or on bash scripts. We have already used some of these in past lessons: **cat**, **bash**, **cd**, **man**, **cp**, **mkdir**. These are utilities that are installed by default in every Linux distribution.


You can see the full list of utilities and applications installed in your own distribution using a special command. Which one depends on the type of your distribution. For example:

Ubuntu, Debian: **dpkg -l**
Fedora, RHEL: **rpm -qa**
OpenBSD, FreeBSD: **pkg_info**
Gentoo: **equery list** or **eix -l**
Arch Linux: **pacman -Q**

If you are using Gitpod, you need to use the commands for Ubuntu.

Run in command line:

dpkg -l

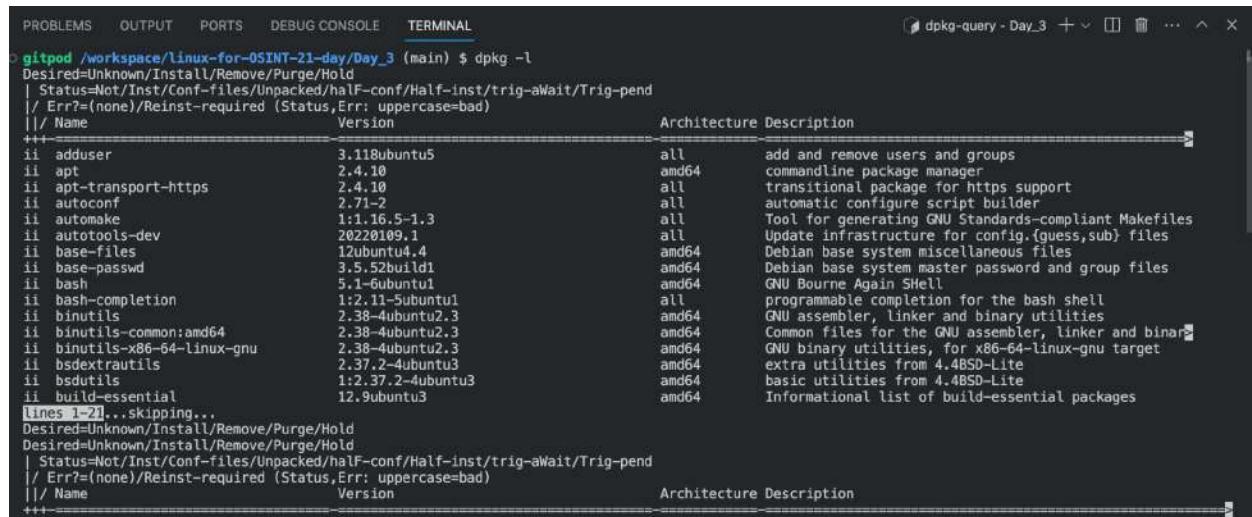

```
PROBLEMS OUTPUT PORTS DEBUG CONSOLE TERMINAL
gitpod /workspace/linux-for-OSINT-21-day/Day_3 (main) $ dpkg -l
Desired=Unknown/Install/Remove/Purge/Hold
| Status=Not/Inst/Conf-files/Unpacked/half-conf/Half-inst/trig-aWait/Trig-pend
/| Err?=(none)/Reinst-required (Status,Err: uppercase=bad)
||/ Name          Version           Architecture Description
+++-+-----+-----+-----+-----+
ii  adduser      3.11ubuntu5      all      add and remove users and groups
ii  apt          2.4.10          amd64   commandline package manager
ii  apt-transport-https  2.4.10          all      transitional package for https support
ii  autoconf      2.71-2           all      automatic configure script builder
ii  automake      1:1.16.5-1.3    all      Tool for generating GNU Standards-compliant Makefiles
ii  autotools-dev 20220109.1     all      Update infrastructure for config.{guess,sub} files
ii  base-files    12ubuntu4.4     amd64   Debian base system miscellaneous files
ii  base-passwd   3.5.52build1  amd64   Debian base system master password and group files
ii  bash          5.1-6ubuntu1    amd64   GNU Bourne Again SHell
ii  bash-completion 1:2.11-5ubuntu1  all      programmable completion for the bash shell
ii  binutils      2.38-4ubuntu2.3  amd64   GNU assembler, linker and binary utilities
ii  binutils-common:amd64  2.38-4ubuntu2.3  amd64   Common files for the GNU assembler, linker and binar...
ii  binutils-x86-64-linux-gnu  2.38-4ubuntu2.3  amd64   GNU binary utilities, for x86-64-linux-gnu target
ii  bsdxtrautils  2.37.2-4ubuntu3  amd64   extra utilities from 4.4BSD-Lite
ii  bsutils       1:2.37.2-4ubuntu3  amd64   basic utilities from 4.4BSD-Lite
ii  build-essential 12.9ubuntu3    amd64   Informational list of build-essential packages
Lines 1-21... skipping...
Desired=Unknown/Install/Remove/Purge/Hold
Desired=Unknown/Install/Remove/Purge/Hold
| Status=Not/Inst/Conf-files/Unpacked/half-conf/Half-inst/trig-aWait/Trig-pend
/| Err?=(none)/Reinst-required (Status,Err: uppercase=bad)
||/ Name          Version           Architecture Description
+++-+-----+-----+-----+
```


There are also thousands of utilities for a wide variety of purposes that you can install yourself.

As an example, let's install two utilities for working with ZIP archives:

```
sudo apt install zip unzip
```

In this example it is not necessary (we could just use **apt install**), but we add the word **sudo** before the command.

This way we run the command with superuser privileges (maximum permissions to write, read and delete files). In Gitpod, you can use it just like that, but if you are working on your own computer and are not logged in as an administrator, you may have to enter a password.

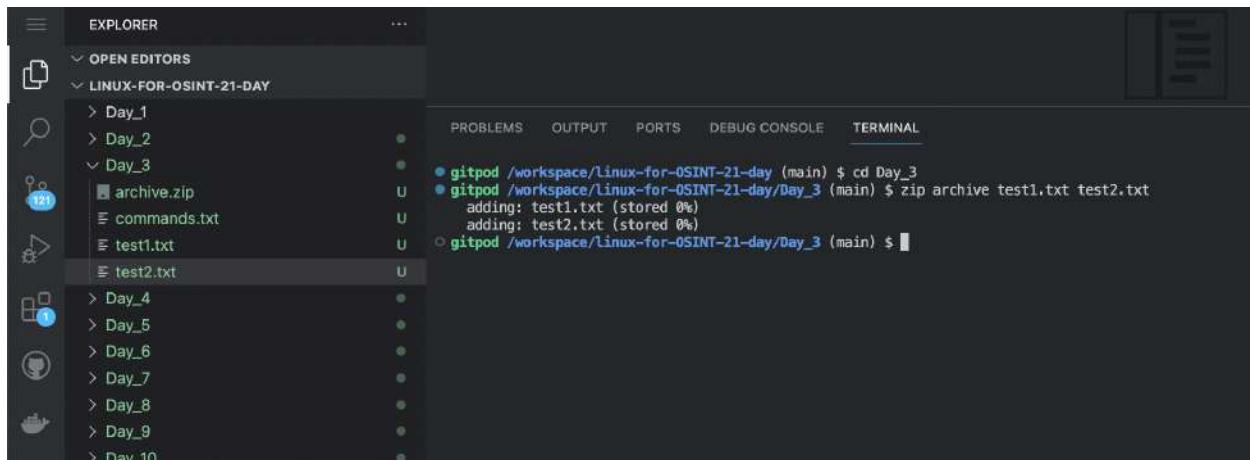

Now let's try to convert the file into a zip archive:


```
cd Day_3
zip archive test1.txt test2.txt
```

Instead of file names, we could specify directory names or put all txt files from the active directory into the archive using *.txt instead of listing filenames.

```
● gitpod /workspace/linux-for-OSINT-21-day/Day_3 (main) $ zip -sf archive.zip
Archive contains:
  test1.txt
  test2.txt
Total 2 entries (0 bytes)
○ gitpod /workspace/linux-for-OSINT-21-day/Day_3 (main) $
```

Now let's see what files are inside the archive using **-sf** flag:

zip -sf archive.zip

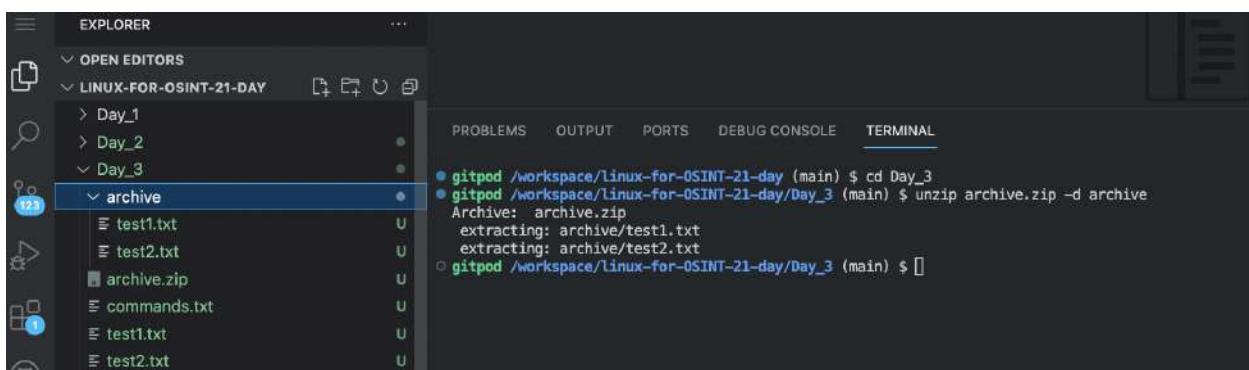

You can unzip the archive to a specific folder using the **unzip** command:

unzip archive.zip -d archive

You can use the **rar** and **unrar** utilities to work with WinRAR archives.

In the example above, we used apt package manager (<https://ubuntu.com/server/docs/package-management>), which is installed by default in Ubuntu. But there are other package managers that can be used both in Ubuntu and other distributions. Few examples:

PyPi (<https://pypi.org>) - Python Package Index.

pip3 install ddgr

Snap Store (<https://snapcraft.io/store>) - software store developed by Canonical.

snap install ddgr

Cast (<https://sourcemage.org>) - package manager for Source Mage Linux distribution.

cast ddgr

* (for each package manager, a sample command for installing the ddgr utility is listed, but you do not need to run them. We will install it on **Day 16** of this course)

In this course, we focus on working with the command line. Well for Linux there are a huge number of GUI applications. They are very easy to install through the app stores.

The app store for Linux

excel

Search

We've found 27 snaps

 onlyoffice-desktopeditors Ascensio System SIA	 Domotz Pro Agent Domotz	 digikam KDE	 Symphytum Oirio Joshi
 banana-accounting-plus Banana.ch SA	 Google Docs Tech Fiddle	 dosbox-jz Jacob Zimmermann	 super-u-plan AlexZhangrj
 Blueprint Compiler James Westman	 Interactive Data Editor Koushik Naskar	 Graphs Sjoerd Stendahl	 hollywood Dustin Kirkland
 Office365WebDesktop Rafael Angulo Ealo	 tm-desktop Excel	 latexmailmerge Jan Martin Reckel	 Enpass Christos Miniatis
 clrmamepro Marisa Giancarla	 Dave's Trails Marisa Giancarla	 Carrier Command (DOS) Marisa Giancarla	 aTimeRecording - Time Tracking Gerold Penz

Snap is a software packaging and deployment system developed by Canonical. Snapcraft (<http://snapcraft.io>) contain thousands of snaps (apps) for 41 Linux distributions.

The screenshot shows the Flathub website interface. On the left, there is a sidebar with filters for 'Categories', 'License', 'Verification', 'App Type', and 'Arch'. The main area is titled 'Search for 'excel'' and shows 52 results. Each result is a card with an icon, the app name, a brief description, and a 'Details' button. The results include 'Wiz Note', 'Pinpoint', 'Gods Deluxe', 'Lollypop', 'KVirc', 'jExifToolGUI', 'Ryujinx', 'Kaffeine', 'itopia Remote Desktop Client', and 'The Gnumeric Spreadsheet'.

Flathub (<http://flathub.org>) - another app store that contains more apps. But unlike Snap, which allows you to install command line utilities, Flathub only supports GUI applications.

If you use Gitpod, you won't be able to try them right now. Return to this chapter at **Day 21** after you select a VM to continue using Linux with a graphical interface.


Day 4. Batch file processing

With Bash scripts you can manipulate thousands of files with a few lines of code.

For example, you can perform the same action on all files with a certain extension located in a certain folder. For this we will use the **Find** utility (<https://man7.org/linux/man-pages/man1/find.1.html>). It is installed in Linux by default.

Please, type in command line:

```
cd Day_4
bash print_file_names.sh
```

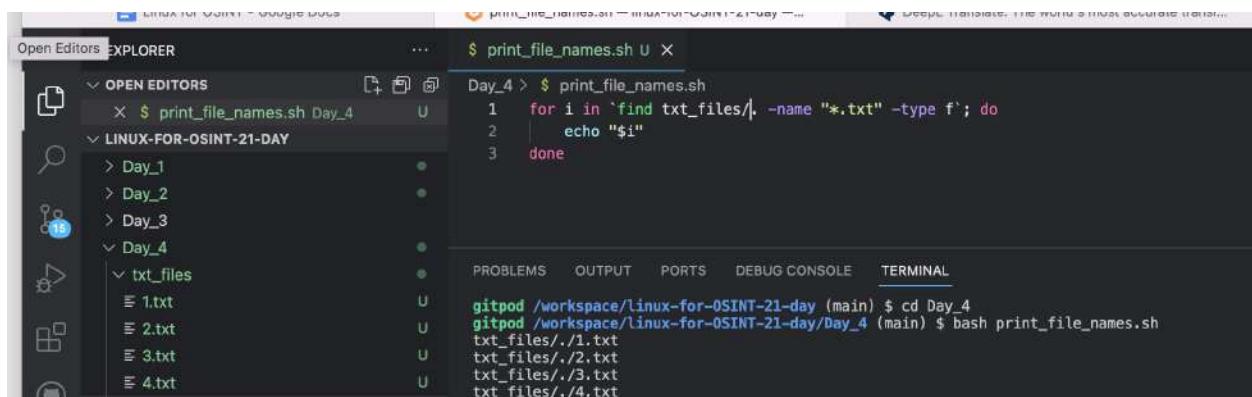

```
$ print_file_names.sh
Day_4 > $ print_file_names.sh
1 for i in `find txt_files/. -name "*.txt" -type f`; do
2 | echo "$i"
3 done
gitpod /workspace/linux-for-OSINT-21-day (main) $ cd Day_4
gitpod /workspace/linux-for-OSINT-21-day/Day_4 (main) $ bash print_file_names.sh
txt_files./1.txt
txt_files./2.txt
txt_files./3.txt
txt_files./4.txt
```

Source code of print_file_names.sh:

```
for i in `find txt_files/. -name "*.txt" -type f`; do
  echo "$i"
done
```

You can replace .txt with any other extension. You can also search for files whose names contain a certain word.

In truth, the script above doesn't make much sense on its own, since the file names are displayed simply by running the find command. Try this:

```
find -name "*.txt" -type f
```




The screenshot shows a terminal window with a dark background and light-colored text. The text is a list of file paths, each starting with a dot and followed by 'Day_1', 'Day_10', 'Day_11', 'Day_12', 'Day_13', 'Day_14', 'Day_15', 'Day_16', 'Day_17', 'Day_18', 'Day_19', 'Day_2', 'Day_3', 'Day_4', 'Day_5', 'Day_6', 'Day_7', 'Day_8', or 'Day_9' followed by '/test.txt'. The command 'find -name "*.txt" -type f' is at the top, and the prompt 'gitpod /workspace/linux-for-OSINT-21-day (main) \$' is at the bottom.

```
● gitpod /workspace/linux-for-OSINT-21-day (main) $ find -name "*.txt" -type f
./Day_1/commands.txt
./Day_10/test.txt
./Day_11/test.txt
./Day_12/test.txt
./Day_13/test.txt
./Day_14/example.txt
./Day_15/test.txt
./Day_16/test.txt
./Day_17/test.txt
./Day_18/test.txt
./Day_19/test.txt
./Day_2/test.txt
./Day_3/test.txt
./Day_4/test.txt
./Day_5/test.txt
./Day_6/test.txt
./Day_7/test.txt
./Day_8/test.txt
./Day_9/test.txt
○ gitpod /workspace/linux-for-OSINT-21-day (main) $ █
```

But by going through the file names one by one, we can perform a certain repetitive action on each file (process file with any Linux utility). Just replace “echo” command with something else.

As example, let's try to convert all txt files to csv format.

Save .txt files as .csv

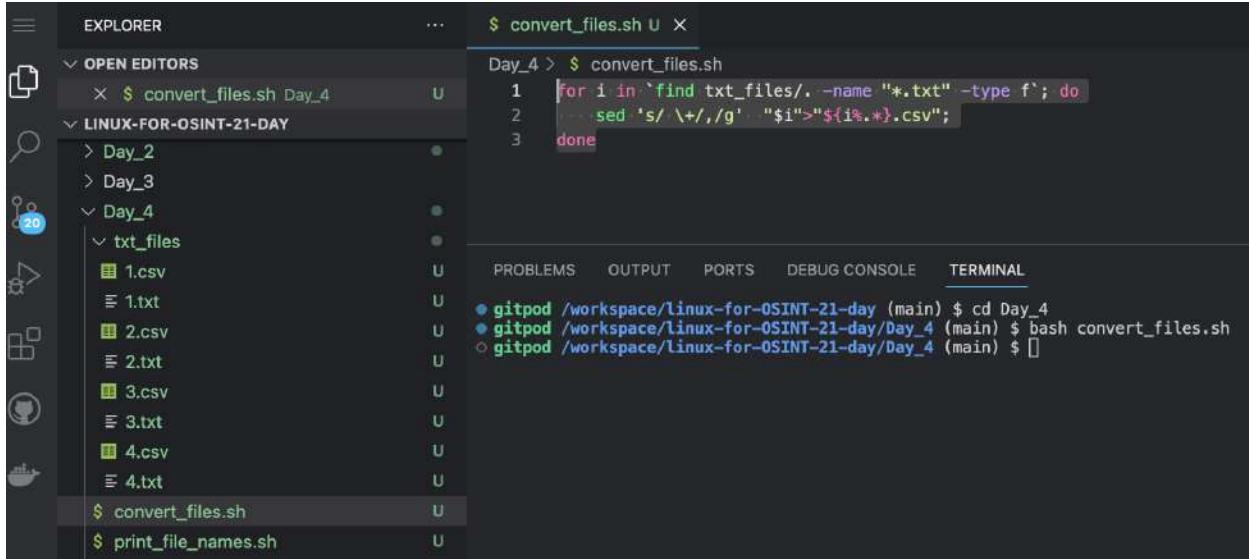

The screenshot shows a terminal window in a code editor. The terminal tab is active, showing the command line and its output. The command is:

```
$ convert_files.sh
```

The output shows the script running in a directory named 'Day_4' and executing a 'for' loop to convert text files to CSV format using 'sed'.

```
Day_4 > $ convert_files.sh
1 for i in `find txt_files/. -name "*.txt" -type f`; do
2     sed 's/ \+/,/g' "$i">>"${i%.}csv";
3 done
```

Below the terminal, the status bar shows:

PROBLEMS OUTPUT PORTS DEBUG CONSOLE TERMINAL

The terminal output shows the script running and completing:

```
● gitpod /workspace/linux-for-OSINT-21-day (main) $ cd Day_4
● gitpod /workspace/linux-for-OSINT-21-day/Day_4 (main) $ bash convert_files.sh
● gitpod /workspace/linux-for-OSINT-21-day/Day_4 (main) $
```

Enter in command line:

bash convert_files.sh

Source code of **convert_files.sh**:


```
for i in `find txt_files/. -name "*.txt" -type f`; do
    sed 's/ \+/,/g' "$i">>"${i%.}csv";
done
```

Note the sed (<https://www.gnu.org/software/sed/manual/sed.html>) command. We use to replace spaces with commas and return to it in **Day 7**.

Xargs

Xargs (<https://man7.org/linux/man-pages/man1/xargs.1.html>) is a utility that allows you to run different Linux commands with certain input parameters. This includes reading these parameters from lists stored in files.

Let's look at examples of how it works.

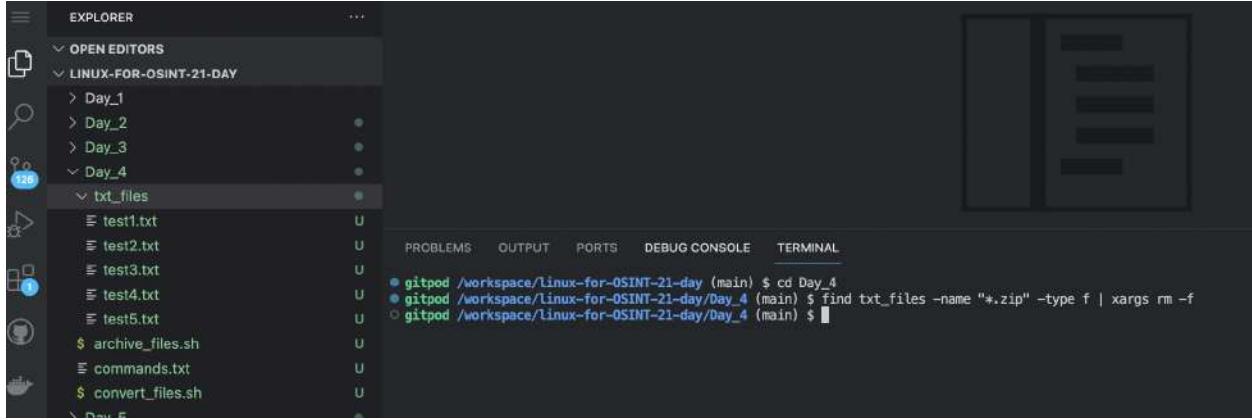


```
gitpod /workspace/linux-for-OSINT-21-day/main $ cd Day_4
gitpod /workspace/linux-for-OSINT-21-day/main $ find txt_files -name "*.zip" -type f | xargs rm -f
```

Let's delete all the archives from the txt_files folder:

```
find txt_files -name "*.zip" -type f | xargs rm -f
```

Now let's create archives using Xargs:

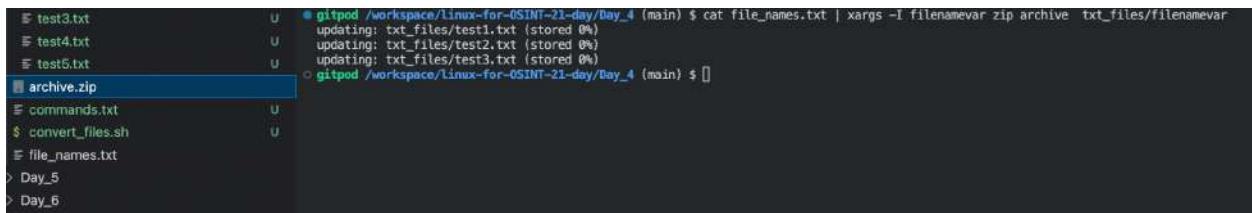

```
gitpod /workspace/linux-for-OSINT-21-day/main $ cat file_names.txt | xargs -I filenamevar zip archive txt_files/filenamevar
archive.zip
```

```
cat file_names.txt | xargs -I filenamevar zip archive txt_files/filenamevar
```

As you can see, in the right part of the command, we read the file line by line using the **Cat** command. And on the left side, we run Xargs with the **-I** flag to use each line as a **filenamevar** variable and use that variable as the filename in the parameters when we run the zip command.

The material on this day can be combined with almost all of the chapters in our course. But I recommend that you pay special attention to some of them:

Day 5 - file downloading.

Day 7 and Day 10 - text file editing.

Day 11 - working with video, audio and images.

Day 12 - working with PDF.


Day 13 - working with MS Office files.

Day 14 - working with JSON, CSV and XML files.

After reading the lesson in each of these days, I recommend running at least one command in combination with **Xargs**.

Day 5. Downloading files and working with APIs. Curl.

Today we're going to learn one of the most important skills for automating data collection in Linux - downloading files using the **Curl** utility. This comes in handy when processing API requests, scraping websites, downloading data from archives or other sources.

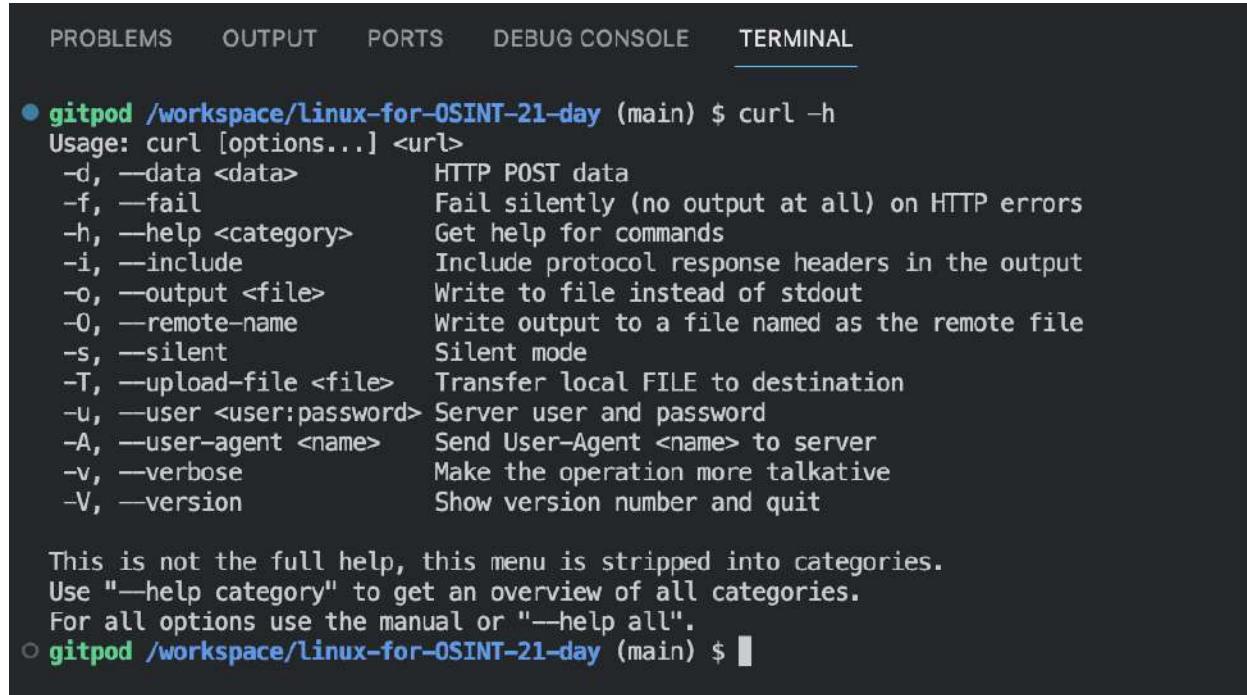

PROBLEMS OUTPUT PORTS DEBUG CONSOLE TERMINAL


- **gitpod /workspace/Linux-for-OSINT-21-day (main) \$ curl -h**
Usage: curl [options...] <url>
-d, --data <data> HTTP POST data
-f, --fail Fail silently (no output at all) on HTTP errors
-h, --help <category> Get help for commands
-i, --include Include protocol response headers in the output
-o, --output <file> Write to file instead of stdout
-O, --remote-name Write output to a file named as the remote file
-s, --silent Silent mode
-T, --upload-file <file> Transfer local FILE to destination
-u, --user <user:password> Server user and password
-A, --user-agent <name> Send User-Agent <name> to server
-v, --verbose Make the operation more talkative
-V, --version Show version number and quit

This is not the full help, this menu is stripped into categories.
Use "—help category" to get an overview of all categories.
For all options use the manual or "—help all".

- **gitpod /workspace/Linux-for-OSINT-21-day (main) \$ █**

Curl (<https://curl.se>) Is a tool to transfer data from or to a server, using one of the a lot of supported protocols (DICT, FILE, FTP, FTPS, GOPHER, HTTP, HTTPS, IMAP, IMAPS, LDAP, LDAPS, POP3, POP3S, RTMP, RTSP, SCP, SFTP, SMB, SMBS, SMTP, SMTPS, TELNET and TFTP). It does not require installation. It is available in Linux by default.

Let's try to download file. Change original name to file.pdf with **-o** flag:

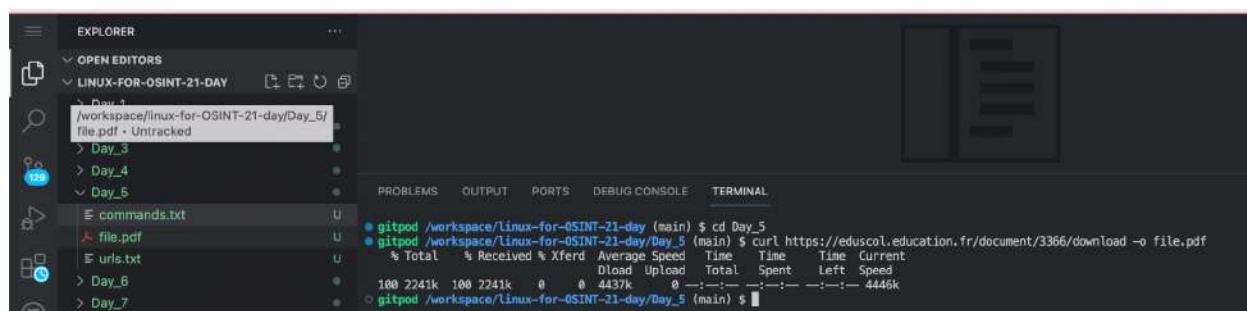

EXPLORER

- OPEN EDITORS
- LINUX-FOR-OSINT-21-DAY
- Day_4
- Day_3
- Day_4
- Day_5
- commands.txt
- file.pdf
- urls.txt
- Day_6
- Day_7

PROBLEMS OUTPUT PORTS DEBUG CONSOLE TERMINAL


- **gitpod /workspace/Linux-for-OSINT-21-day (main) \$ cd Day_5**
- **gitpod /workspace/Linux-for-OSINT-21-day/Day_5 (main) \$ curl https://eduscol.education.fr/document/3366/download -o file.pdf**
- **% Total % Received % Xferd Average Speed Time Time Current**
- **0 100 2241k 100 2241k 0 0 4437k 0 --:-- --:-- --:-- 4446k**
- **gitpod /workspace/Linux-for-OSINT-21-day/Day_5 (main) \$ █**

Enter in command line:

Cd Day_5

```
curl https://eduscol.education.fr/document/3366/download -o file.pdf
```

Now let's try downloading files from the list of links using the **Xargs** command (we talked about it yesterday).

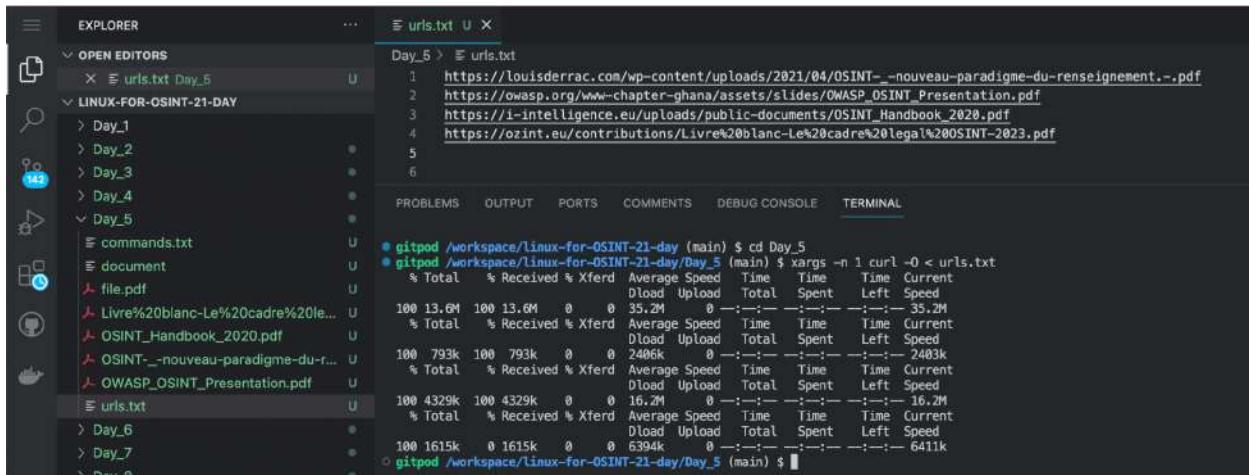

The screenshot shows a terminal window with the following content:

```
Day_5 > curl -O < urls.txt
1 https://louisderrac.com/wp-content/uploads/2021/04/OSINT_-_nouveau-paradigme-du-renseignement_.pdf
2 https://owasp.org/www-chapter-ghana/assets/slides/OWASP_OSINT_Presentation.pdf
3 https://i-intelligence.eu/uploads/public-documents/OSINT_Handbook_2020.pdf
4 https://ozint.eu/contributions/Livre%20blanc-Le%20cadre%20legal%20OSINT-2023.pdf
5
6
gitpod /workspace/linux-for-OSINT-21-day (main) $ xargs -n 1 curl -O < urls.txt
% Total % Received % Xferd Average Speed Time Time Current
Dload Upload Total Spent Left Speed
100 13.6M 100 13.6M 0 0 35.2M 0 -:- -:- -:- -:- 35.2M
% Total % Received % Xferd Average Speed Time Time Current
Dload Upload Total Spent Left Speed
100 793k 100 793k 0 0 2405k 0 -:- -:- -:- -:- 2403k
% Total % Received % Xferd Average Speed Time Time Current
Dload Upload Total Spent Left Speed
100 4329k 100 4329k 0 0 16.2M 0 -:- -:- -:- -:- 16.2M
% Total % Received % Xferd Average Speed Time Time Current
Dload Upload Total Spent Left Speed
100 1615k 0 1615k 0 0 6394k 0 -:- -:- -:- -:- 6411k
gitpod /workspace/linux-for-OSINT-21-day/Day_5 (main) $
```

```
xargs -n 1 curl -O < urls.txt
```

API requests

Using the **-H** flag, you can send requests with different http headers. This function is useful when automating the execution of requests to various APIs.

Simple example for Netlas API (<https://github.com/netlas-io/netlas-cookbook>):

```

curl -X 'GET' 'https://app.netlas.io/api/responses/?q=lidl.com&source_type=included&start=0&fields=' -H 'accept: application/json' >api_request_result.txt

```

```

curl -X 'GET' 'https://app.netlas.io/api/responses/?q=lidl.com&source_type=included&start=0&fields=' -H 'accept: application/json' >api_request_result.txt

```

```

{
  "items": [
    {
      "highlight": {
        "certificate": {
          "uri": "https://223.119.235.192:443"
        },
        "data": {
          "last_updated": "2023-10-19T13:29:53.501Z",
          "jarm": "2ad2ad0002ad2ad00042d42d000000d71691dd6844b6fa08f9c5c2b4b882cc",
          "isp": "China Mobile",
          "ip": "223.119.235.192"
        },
        "target": {
          "proto": "http"
        },
        "geo": {
          "path": "/",
          "protocol": "https",
          "proto": "tcp"
        },
        "whois": {
          "port": 443,
          "host": "223.119.235.192",
          "iteration": "8"
        }
      },
      "http": {}
    }
  ]
}

```

Using this query, we retrieved a JSON file with detailed domain information found in Netlas IP search engine by query "lidl.com". You can view it in a convenient format using some online JSON file viewer tools (<https://jsonviewer.stack.hu/>).

On **Day 14**, we'll talk a little more about data in JSON format and learn how to process it using the **jq** utility.

People and documents verification			
Name	Link	Description	Price
Approuve.com	https://approuve.co	Allows you to verify the identities of individuals, businesses, and connect to financial account data across Africa	Paid
Onfido.com	https://onfido.com	Onfido Document Verification lets your users scan a photo ID from any device, before checking it's genuine. Combined with Biometric Verification, it's a seamless way to anchor an account to the real identity of a customer. India	Paid
Superpass.io	https://surepass.io/passport-id-verification-api/	Passport, Photo ID and Driver License Verification in India	Paid

Business/Entity search			
Name	Link	Description	Price
Open corporates	https://api.opencorporates.com	Companies information	Paid, price upon request
Linkedin company search API	https://docs.microsoft.com/en-us/linkedin/marketing/integrations/community-management/organizations/company-search?context=linkedin%2Fcompliance%2Fcontext&tabs=http	Find companies using keywords, industry, location, and other criteria	FREE
Mattermark	https://rapidapi.com/raygorodskij/api/Mattermark/	Get companies and investor information	free 14-day trial, from \$49 per month

In addition to the Netlas API, which can be used to collect domain or IP address data, there are hundreds of other different APIs that are useful for OSINT.

They can help you collect information about emails, phone numbers, physical addresses, companies, cryptocurrency wallets, flights, and much more. You can find a list of them in the **APIs for OSINT** repository on Github (<https://github.com/cipher387/APIs-for-OSINT>).

Easily generate `curl` command lines to test your new shining API

Method: **GET** ▼

URL: <https://github.com/cipher387/python-for-OSINT-21-days/raw/main/Python%20for%20OSINT%202021%20day%20course%20for%20beginners%20-%20Part%201>

Body:

Header key: **Authorization** Header value: **REMOVE**

ADD CUSTOM HEADER

JSON Content-Type

Accept self-signed certs

Verbose

here you are!

```
curl -XGET 'https://github.com/cipher387/python-for-OSINT-21-days/raw/main/Python%20for%20OSINT%202021%20day%20course%20for%20beginners%20-%20Part%201'
```

For writing complex queries with header modification, you can use a special online service to generate commands for the **Curl** utility - Curl builder (<https://curlbuilder.com/>).

Curl can also be used to view information about web pages. Use **-I** flag to send HEAD request and retrieve only the headers of the response (without the body):

```
gitpod /workspace/linux-for-OSINT-21-day/Day_5 (main) $ curl -I https://sector035.nl
HTTP/2 200
date: Mon, 25 Dec 2023 22:06:23 GMT
content-type: text/html; charset=utf-8
pragma: no-cache
cache-control: max-age=604800
expires: Mon, 01 Jan 2024 22:06:23 GMT
set-cookie: grav-site-bac1ef=m3pv75g1l6n5h1vsvnq45gebl6; expires=Mon, 25-Dec-2023 22:36:23 GMT; Max-Age=1800; path=/; domain=sector035.nl; secure; HttpOnly; SameSite=Lax
last-modified: Tue, 11 Jul 2023 05:46:26 GMT
vary: User-Agent
cf-cache-status: DYNAMIC
report-to: {"endpoints": [{"url": "https://v3.s-BDexuA5PAIFD90B%2B73IWPi%2B6WPz0yUiGXjjTRHEhKu6v5y80cW9a59SFkzTQw%2B%2F10thTtjUmTCZCY3xn3GMzKwtaRvExrJ2FVCj1wENyUff01vAglteufJfA3D"}, {"group": "cf-nel", "max_age": 604800}]
nel: {"success_fraction": 0, "report_to": "cf-nel", "max_age": 604800}
server: cloudflare
cf-ray: 83b46413db9822ac-006
alt-svc: h3="443"; ma=86400
```

```
curl -I https://sector035.nl
```

This can be used, for example, to safely open short links:

```
● gitpod /workspace/linux-for-OSINT-21-day/Day_5 (main) $ curl -sIL https://rb.gy/899j50
HTTP/2 301
date: Mon, 25 Dec 2023 22:20:22 GMT
location: https://cybdetective.com/
cache-control: no-cache, no-store
expires: -1
engine: Rebrandly.redirect, version 2.1
strict-transport-security: max-age=15552000

HTTP/2 200
accept-ranges: bytes
content-type: text/html
date: Mon, 25 Dec 2023 22:20:22 GMT
etag: "5ff7fe41385da1:0"
last-modified: Sun, 22 Oct 2023 22:36:54 GMT
server: Microsoft-IIS/10.0
x-powered-by: ASP.NET
content-length: 9966

● gitpod /workspace/linux-for-OSINT-21-day/Day_5 (main) $ curl -sIL https://rb.gy/899j50 | grep ^location
location: https://cybdetective.com/
○ gitpod /workspace/linux-for-OSINT-21-day/Day_5 (main) $ █
```

```
curl -sIL https://rb.gy/899j50 | grep ^location
```

Note that here we are combining **Curl** with the **Grep** command, using the | symbol to cut out the string that starts with "location" from the result. Tomorrow we will talk more about this wonderful utility.

Day 6. Search in files. Grep

What can you do next with the downloaded files? Lots of different things. But the most important thing an OSINT specialist should be able to do is automatically search and extract different data.

Grep (<https://www.gnu.org/software/grep/>) is one of the oldest UNIX utilities, released in November 1973 (50 years in 2023!). It allows searching for matches to certain text patterns (regular expressions) in files.

The **Grep** utility does not require installation. It is available in Linux by default.

```
● gitpod /workspace/linux-for-OSINT-21-day (main) $ grep --help
Usage: grep [OPTION]... PATTERN [FILE]...
Search for PATTERN in each FILE.
Example: grep -i 'hello world' menu.h main.c
PATTERN can contain multiple patterns separated by newlines.

Pattern selection and interpretation:
-E, --extended-regexp      PATTERNs are extended regular expressions
-F, --fixed-strings        PATTERNs are strings
-G, --basic-regexp         PATTERNs are basic regular expressions
-P, --perl-regexp          PATTERNs are Perl regular expressions
-e, --regexp=PATTERNs     use PATTERNs for matching
-f, --file=FILE             take PATTERNs from FILE
-i, --ignore-case          ignore case distinctions in patterns and data
--no-ignore-case           do not ignore case distinctions (default)
-w, --word-regexp          match only whole words
-x, --line-regexp           match only whole lines
-z, --null-data             a data line ends in 0 byte, not newline

Miscellaneous:
-s, --no-messages           suppress error messages
-v, --invert-match          select non-matching lines
-V, --version                display version information and exit
--help                      display this help text and exit

Output control:
-m, --max-count=NUM         stop after NUM selected lines
-b, --byte-offset            print the byte offset with output lines
-n, --line-number             print line number with output lines
--line-buffered              flush output on every line
-H, --with-filename          print file name with output lines
-h, --no-filename             suppress the file name prefix on output
--label=LABEL                use LABEL as the standard input file name prefix
-o, --only-matching          show only nonempty parts of lines that match
-q, --quiet, --silent         suppress all normal output
--binary-files=TYPE           assume that binary files are TYPE;
```

Run the help command to appreciate just how many options this seemingly simple utility has.

Let's try to find lines in the text file that include "gmail". Use -F flag for search strings (it's optional, you can miss this flag):

```
≡ example.txt ✘ ×

Day_6 > ≡ example.txt
1 First string
2 Second string
3 johnsmith@gmail.com
4 103.21.244.25
5 34xp4vRoCGJym3xR7yCVPFHoCNxv4Twseo
6 example@gmail.com
7 bc1qazcm763858nkj2dj986etajv6wquslv8uxwczt
8 23.04.1991
9 173.245.49.202

PROBLEMS OUTPUT PORTS DEBUG CONSOLE TERMINAL

● gitpod /workspace/linux-for-OSINT-21-day (main) $ cd Day_6
● gitpod /workspace/linux-for-OSINT-21-day/Day_6 (main) $ grep gmail example.txt
johnsmith@gmail.com
example@gmail.com
● gitpod /workspace/linux-for-OSINT-21-day/Day_6 (main) $ grep '[0-9]' example.txt
103.21.244.25
34xp4vRoCGJym3xR7yCVPFHoCNxv4Twseo
bc1qazcm763858nkj2dj986etajv6wquslv8uxwczt
23.04.1991
173.245.49.202
○ gitpod /workspace/linux-for-OSINT-21-day/Day_6 (main) $
```


grep -F gmail Day_6/example.txt

By default, the **Grep** utility is case sensitive. To disable this option (search for both "gmail" and "GMAIL", "Gmail") add the **-i** flag.

grep -F -i gmail Day_6/example.txt

Now let's try to find the lines that contain at least one digit (use simple regular expression [0-9]):

grep '[0-9]' example.txt

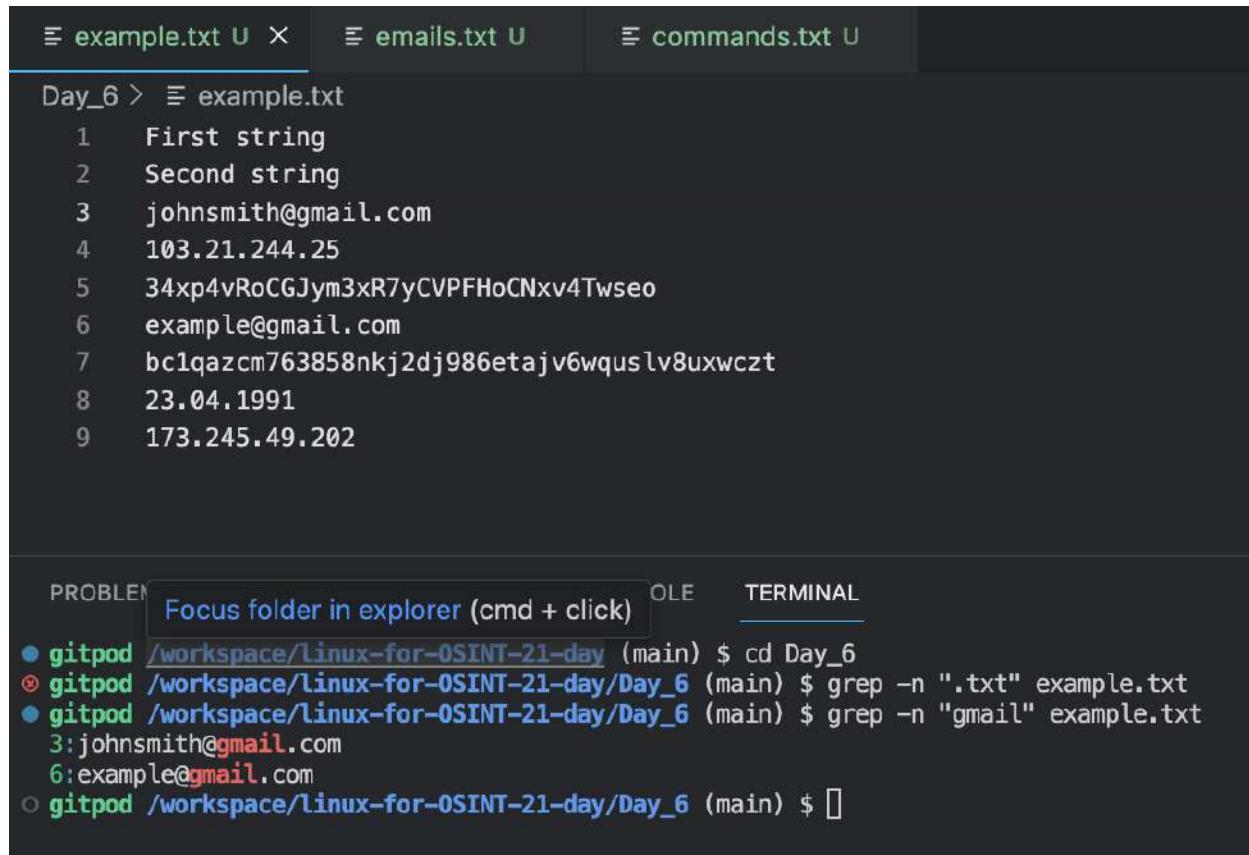


```
Day_6 > example.txt
1 First string
2 Second string
3 johnsmith@gmail.com
4 103.21.244.25
5 34xp4vRoCGJym3xR7yCVPFHoCNxv4Twseo
6 example@gmail.com
7 bc1qazcm763858nkj2dj986etajv6wquslv8uxwczt
8 23.04.1991
9 173.245.49.202

PROBLEMS Focus folder in explorer (cmd + click) OLE TERMINAL
● gitpod /workspace/linux-for-OSINT-21-day (main) $ cd Day_6
● gitpod /workspace/linux-for-OSINT-21-day/Day_6 (main) $ grep -n ".txt" example.txt
● gitpod /workspace/linux-for-OSINT-21-day/Day_6 (main) $ grep -n "gmail" example.txt
3:johnsmith@gmail.com
6:example@gmail.com
○ gitpod /workspace/linux-for-OSINT-21-day/Day_6 (main) $
```

If you want to add line number display to the results, use the `-n` flag:

```
grep -n "gmail" example.txt
```

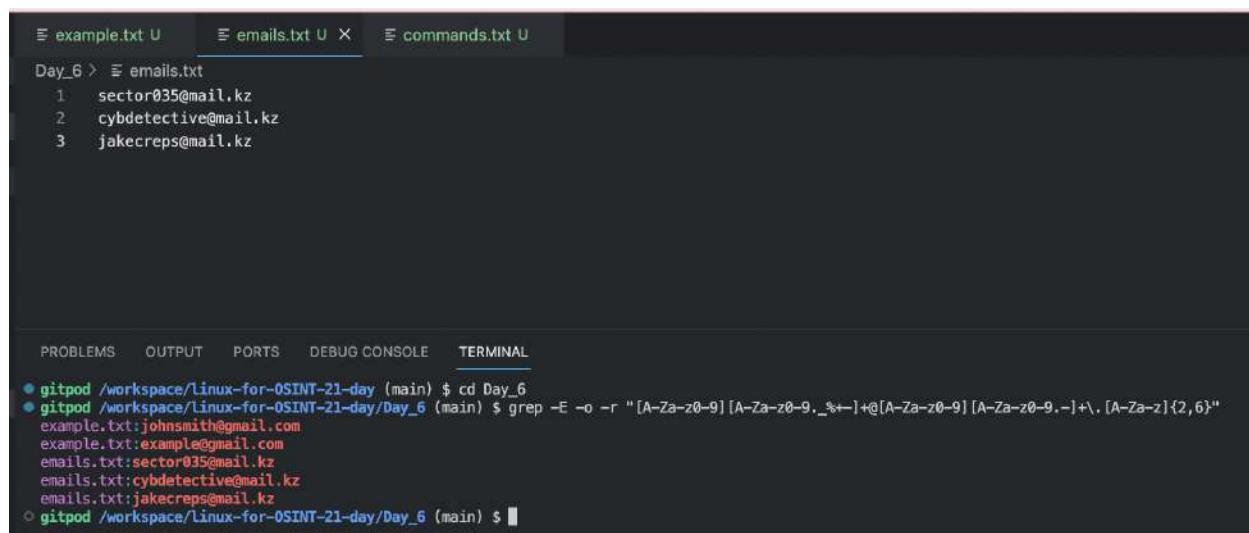

```
Day_6 > emails.txt
1 sector035@mail.kz
2 cybdetective@mail.kz
3 jakecreps@mail.kz

PROBLEMS OUTPUT PORTS DEBUG CONSOLE TERMINAL
● gitpod /workspace/linux-for-OSINT-21-day (main) $ cd Day_6
● gitpod /workspace/linux-for-OSINT-21-day/Day_6 (main) $ grep -E -o -r "[A-Za-z0-9][A-Za-z0-9._%+-]+@[A-Za-z0-9][A-Za-z0-9.-]+\.[A-Za-z]{2,6}" example.txt:johnsmith@gmail.com
example.txt:example@gmail.com
emails.txt:sector035@mail.kz
emails.txt:cybdetective@mail.kz
emails.txt:jakecreps@mail.kz
○ gitpod /workspace/linux-for-OSINT-21-day/Day_6 (main) $
```

Now the task is a little more difficult. Let's find the strings that contain emails:

```
grep -E -o -r
"[A-Za-z0-9][A-Za-z0-9._%+-]+@[A-Za-z0-9][A-Za-z0-9.-]+.[A-Za-z]{2,6}"
"
```

We used a few other useful flags in this command:

E - use extended regular expressions syntax.

o - show only parts of lines that match (NOT all lines).

r - search for all files in the current directory, as well as for all files in subdirectories.

The screenshot shows a dark-themed website titled "Useful Regex Patterns". The top right corner features a sidebar with the text "The DNS course for developers", "Learn DNS once and for all.", "Pre-sale Limited Offer!", and "ads via Carbon". Below the title, there are two buttons: "Post" and "Star". A link "Add new patterns via Github" is also present. The main content is organized into a grid of 12 boxes, each containing a regex pattern, a "Test string" input field, and a "Result" output field.

Date in format dd/mm/yyyy	Time in 24-hour format	Date and time in ISO-8601 format
<code>^(0?[1-9] 1[0-2])[0-9][01]([\v-])(0?[1-9])</code>	<code>^([01]?[0-9] 2[0-3]):[0-5][0-9]\$</code>	<code>^(?![+-]?\d{4,5}-?(?:\d{2} W\d{2})T)(?:(?!</code>
Test string	Test string	Test string
HTML tags	Username	Hex Color Value
<code>^<([a-z1-6]+)([^<]+)*(?:>(.*)<\\1> ^>)</code>	<code>^@[a-zA-Z0-9_-]{3,16}\$</code>	<code>^#?([a-fA-F0-9]{6} [a-fA-F0-9]{3})\$</code>
Test string	Test string	Test string
URL Slug	Email	SRC of image tag
<code>^-[a-z0-9-]+\$/</code>	<code>^.+@.+\$</code>	<code>^<\\s*img[^>]+src\\s*=\\s*([\"'])(.*)\\1[^>]*</code>
Test string	Test string	Test string
URL	IPv4 Address	IPv6 Address
<code>^((https? ftp file):\\//)?(\\da-zA-Z\\.-+)(\\.[a-z]</code>	<code>^(?:25[0-5] 2[0-4][0-9] 0[1-9]?[0-9])[0-9]</code>	<code>^((0-9a-fA-F){1,4}:(7,7)[0-9a-fA-F]{1,4}</code>
Test string	Test string	Test string

Patterns to search with **Grep** are called regular expressions. With their help you can search not only numbers and emails, but also URLs, IP addresses, crypto currency wallets, usernames, ZIP codes, code comments and much more.

We will not go into their syntax in this course. For most OSINT purposes, you will just need to copy a regular expressions from Stackoverflow or some online library:

RegexLib (<https://regexlib.com/>)

RegexHub (<https://projects.lukehaas.me/regexhub/>)

And, of course, you can always ask ChatGPT, Perplexity or Phind to compose a regular expression for you (we'll talk more about helper tools on [Day 20](#)).

If you are interested in this topic, my Medium blog has a very detailed and long article about it: **How regular expressions can be useful in OSINT. Theory and some practice using Google Sheets** (<https://medium.com/osint-ambition/this-article-consists-of-three-short-parts-31d31efabd5>).

You can also use regular expressions when working with other Linux utilities: **find**, **sed**, **awk**, **tr**, **vi** and others.

If you want to search for files strictly with a certain extension or for files whose name contains a certain string, replace part of the file name with asterisks:

```
grep -n "gmail" *.txt
```

PROBLEMS OUTPUT PORTS DEBUG CONSOLE TERMINAL

- gitpod /workspace/linux-for-OSINT-21-day (main) \$ ls -R | grep ".txt"
commands.txt
commands.txt
commands.txt
commands.txt
text_example.txt
commands.txt
result.txt
commands.txt
commands.txt
example.txt
commands.txt
commands.txt
osint_duckduckgo_search.txt
commands.txt
commands.txt
commands.txt
commands.txt
commands.txt
commands.txt
commands.txt
./Day_4/.txt_files:
test1.txt
test1.txt.zip
commands.txt
urls.txt
commands.txt
emails.txt
example.txt
commands.txt
commands.txt
text_example.txt
commands.txt
- gitpod /workspace/linux-for-OSINT-21-day (main) \$ |

The real power of **Grep** comes in combination with other commands. For example, you can use it to filter the output of the **Is** command:

```
ls -R | grep ".txt"
```

Note that we used the **ls** command with the **-R** flag to display the list of files in the subdirectories too.

```
≡ example.txt U X  ≡ emails.txt U  ≡ commands.txt U


Day_6 > ≡ example.txt
1 First string
2 Second string
3 johnsmith@gmail.com
4 103.21.244.25
5 34xp4vRoCGJym3xR7yCVPFHoCNxv4Twseo
6 example@gmail.com
7 bc1qazcm763858nkj2dj986etajv6wquslv8uxwczt
8 23.04.1991
9 173.245.49.202

PROBLEMS  OUTPUT  PORTS  DEBUG CONSOLE  TERMINAL

● gitpod /workspace/linux-for-OSINT-21-day (main) $ cd Day_6
● gitpod /workspace/linux-for-OSINT-21-day/Day_6 (main) $ grep -v "gmail" example.txt
First string
Second string
103.21.244.25
34xp4vRoCGJym3xR7yCVPFHoCNxv4Twseo
bc1qazcm763858nkj2dj986etajv6wquslv8uxwczt
23.04.1991
173.245.49.202
● gitpod /workspace/linux-for-OSINT-21-day/Day_6 (main) $
```

Also, grep allows you to search for strings that do NOT contain the word you are looking for or match a regular expression. Use the **-v** flag:

```
grep -v "gmail" example.txt
```

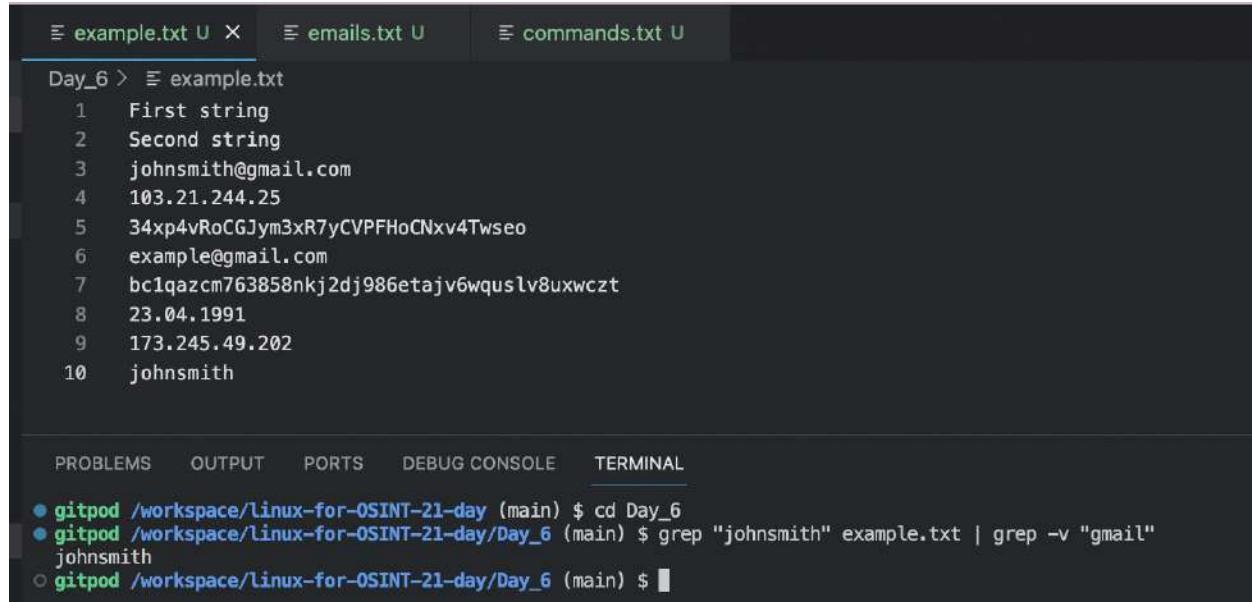

The screenshot shows a terminal window within a code editor interface. The terminal has three tabs at the top: 'example.txt', 'emails.txt', and 'commands.txt'. The 'example.txt' tab is active, displaying the following content:

```
Day_6 > 例 example.txt
1 First string
2 Second string
3 johnsmith@gmail.com
4 103.21.244.25
5 34xp4vRoCGJym3xR7yCVPFHoCNxv4Twseo
6 example@gmail.com
7 bc1qazcm763858nkj2dj986etajv6wquslv8uxwczt
8 23.04.1991
9 173.245.49.202
10 johnsmith
```

Below the terminal, a navigation bar includes 'PROBLEMS', 'OUTPUT', 'PORTS', 'DEBUG CONSOLE', and 'TERMINAL'. The 'TERMINAL' tab is selected. The terminal history shows the following commands:

- gitpod /workspace/linux-for-OSINT-21-day (main) \$ cd Day_6
- gitpod /workspace/linux-for-OSINT-21-day/Day_6 (main) \$ grep "johnsmith" example.txt | grep -v "gmail"
- johnsmith
- gitpod /workspace/linux-for-OSINT-21-day/Day_6 (main) \$

One last, very important note. You can run **Grep** multiple times at the one line. Let's try to find strings that contain "johnsmith" but do not contain "gmail":

grep "johnsmith" example.txt | grep -v "gmail"

Again, notice how we combine two commands on the same line using the **|**. This is a simple but very important skill that will allow you to get the most out of Linux.

Alternatives

Name	Description	Link.		
RZgrep	"Grep utility that searches through zip,jar,ear,tgz,bz2 in any form of nesting"	https://github.com/MoserMichael/RZgrep	MP4grep	CLI for transcribing and searching audio/video files https://github.com/o-oconnell/mp4grep
XLSgrep	"CLI tool to search text in XLSX, XLS and ODS files. It works similarly to Unix/GNU Linux grep"	https://github.com/zazuum/xlsgrep	minigrep	A minimalistic regex search and print out tool implementation as per Ch.12 of The Rust Programming Language https://github.com/paul-michell/minigrep
Hgrep	"Grep" for searching/replacement in html code	https://github.com/TUVIMEN/hgrep	Hackers Grep	Utility to search for strings in PE executables including imports, exports, and debug symbols https://github.com/codypierce/hackers-grep
BiNgrep	Grep for binaries files	https://github.com/m4b/bingrep	JVgrep	Grep for Japanese vimmer. You can find text from files that written in another Japanese encodings https://github.com/mattn/jvgrep
Cgrep	Grep for source codes in C/C++	https://github.com/awgn/cgrep	LiveGrep	Online grep search in Github repositories https://livegrep.com/
Ngrep	PCAP-based tool that allows you to specify an extended regular or hexadecimal expression to match against data payloads of packets. It understands many kinds of protocols, including IPv4/6, TCP, UDP, ICMPv4/6, ICMP and Raw	https://github.com/jpr5/ngrep	DNgrep	Graphical grep tool for Windows https://github.com/dnGrep/dnGrep
PHPgrep	Grep for PHP source code	https://github.com/quasiliye/phpgrep	Greplace.vim	Global search and replace for VI https://github.com/skwp/greplace.vim
UCG (Universal Code Grep)	Extremely fast grep-like tool specialized for searching large bodies of source code	https://github.com/gvansickle/ucg	SearchInProject_SublimeText	Use ag, ack, grep and git grep directly from Sublime Text 2 and 3 https://github.com/leonid-shevtssov/SearchInProject_SublimeText
			ACK3	grep-like Perl search tool optimized for source code https://github.com/beyondgrep/ACK3
			The Silver Searcher	Extreme grep-like C+Perl search tool for source code https://github.com/ggreer/the_silver_searcher
			Sift	GO fast and powerful alternative for grep https://github.com/svent/sift

The **Grep** utility is designed to search through text files. But it has many analogs that work with other formats: XLSX, ZIP, JAR, MP4, PDF etc. You can find links to them in the Awesome Grep (<https://github.com/cipher387/awesome-grep>) repository.


Day 7. Sed and Awk

Today is one of the longest lessons with the most examples. Some people will find it the most boring in the whole course. But believe me, from the point of view of learning to save time, it is the most useful day. It is even more useful than the day in which we will talk about AI assistants.

Sed (<https://www.gnu.org/software/sed/>) is a non-interactive command-line text editor (it would be more accurate to say stream editor). In other words, it allows you to make changes to a text file without opening it.

```
⑥ gitpod /workspace/linux-for-OSINT-21-day (main) $ sed -h
sed: invalid option -- 'h'
Usage: sed [OPTION]... {script-only-if-no-other-script} [input-file]...
      -n, --quiet, --silent
                  suppress automatic printing of pattern space
      --debug
                  annotate program execution
      -e script, --expression=script
                  add the script to the commands to be executed
      -f script-file, --file=script-file
                  add the contents of script-file to the commands to be executed
      --follow-symlinks
                  follow symlinks when processing in place
      -i[SUFFIX], --in-place[=SUFFIX]
                  edit files in place (makes backup if SUFFIX supplied)
      -l N, --line-length=N
                  specify the desired line-wrap length for the 'l' command
      --posix
                  disable all GNU extensions.
      -E, -r, --regexp-extended
                  use extended regular expressions in the script
                  (for portability use POSIX -E).
      -s, --separate
                  consider files as separate rather than as a single,
                  continuous long stream.
      --sandbox
                  operate in sandbox mode (disable e/r/w commands).
      -u, --unbuffered
                  load minimal amounts of data from the input files and flush
                  the output buffers more often
      -z, --null-data
                  separate lines by NUL characters
      --help
                  display this help and exit
      --version
                  output version information and exit
```

First, let's just try to replace one piece of text with another in the file:

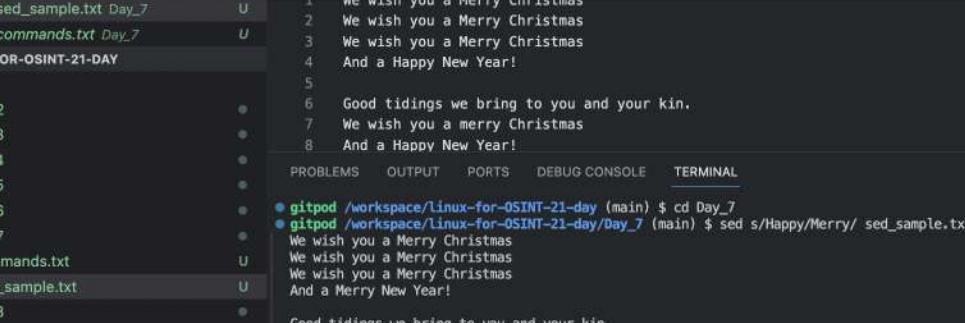

The screenshot shows a VS Code interface with multiple windows and terminals. The Explorer sidebar on the left lists files and folders, including 'sed_sample.txt', 'commands.txt', and 'Day_7' for 'Day_1' through 'Day_19'. The main editor area shows the content of 'sed_sample.txt' for each day, with the lyrics being modified by the 'sed' command. The terminal windows at the bottom show the command 'gitpod /workspace/linux-for-OSINT-21-day (main) \$ cd Day_7' followed by the execution of 'gitpod /workspace/linux-for-OSINT-21-day/Day_7 (main) \$ sed s/Happy/Merry/ sed_sample.txt' and the resulting output of the modified lyrics.

```
Day_7 > sed_sample.txt
1 We wish you a Merry Christmas
2 We wish you a Merry Christmas
3 We wish you a Merry Christmas
4 And a Happy New Year!
5
6 Good tidings we bring to you and your kin.
7 We wish you a merry Christmas
8 And a Happy New Year!

gitpod /workspace/linux-for-OSINT-21-day (main) $ cd Day_7
gitpod /workspace/linux-for-OSINT-21-day/Day_7 (main) $ sed s/Happy/Merry/ sed_sample.txt
We wish you a Merry Christmas
We wish you a Merry Christmas
We wish you a Merry Christmas
And a Merry New Year!

Good tidings we bring to you and your kin.
We wish you a merry Christmas
And a Merry New Year!

Oh, bring us some figgy pudding
Oh, bring us some figgy pudding
Oh, bring us some figgy pudding
And bring it right here!

Good tidings we bring to you and your kin.
We wish you a merry Christmas
And a Merry New Year!

We won't go until we get some
We won't go until we get some
We won't go until we get some
So bring it right here!
```

```
cd Day_7  
sed s/Happy/Merry/ sed_sample.txt
```

Now let's try to replace the text in the file using a regular expression (replace each digit to word "no"):




The screenshot shows a VS Code interface with the following details:

- EXPLORER** sidebar: Shows files in the current workspace, including `sed_sample.txt`, `digits.txt`, and `commands.txt` under the `Day_7` folder, and `Day_1` through `Day_7` under `LINUX-FOR-OSINT-21-DAY`.
- OPEN EDITORS** sidebar: Shows the same files as the Explorer.
- Terminal**: Displays a gitpod session in the workspace `/Day_7` with the command `sed s/[0-9]/no/g digits.txt` applied to the file `digits.txt`. The output shows the digits replaced by 'no'.
- Bottom Status Bar**: Shows the current gitpod session ID: `gitpod /workspace/linux-for-OSINT-21-day (main) $`

sed s/[0-9]/no/g digits.txt

The **-n** flag can be used to extract a single line or a range of lines from a file:

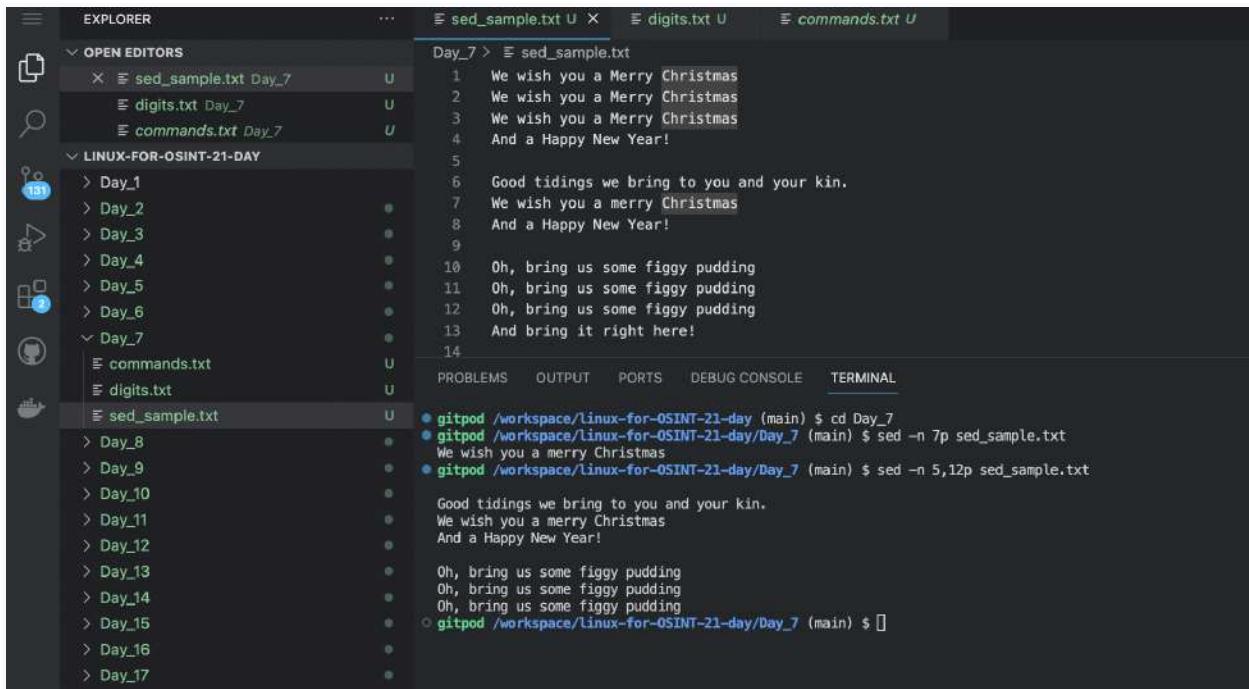

The screenshot shows a terminal window within a dark-themed IDE. The terminal is displaying the content of a file named `sed_sample.txt`. The file contains a mix of lyrics from "We Wish You a Merry Christmas" and "Oh, Bring Us Some Figgy Pudding". The terminal window has tabs for `PROBLEMS`, `OUTPUT`, `PORTS`, `DEBUG CONSOLE`, and `TERMINAL`. The `TERMINAL` tab is active. The terminal history shows the following commands:

```
gitpod /workspace/linux-for-OSINT-21-day (main) $ cd Day_7
gitpod /workspace/linux-for-OSINT-21-day/Day_7 (main) $ sed -n 7p sed_sample.txt
We wish you a merry Christmas
And a Happy New Year!
gitpod /workspace/linux-for-OSINT-21-day/Day_7 (main) $ sed -n 5,12p sed_sample.txt
Good tidings we bring to you and your kin.
We wish you a merry Christmas
And a Happy New Year!
Oh, bring us some figgy pudding
Oh, bring us some figgy pudding
Oh, bring us some figgy pudding
gitpod /workspace/linux-for-OSINT-21-day/Day_7 (main) $ []
```

`sed -n 7p sed_sample.txt`

`sed -n 5,12p sed_sample.txt`

For a file of a few dozen lines, this command seems pointless. Its true power comes out when you have, for example, a CSV file with tens of millions of lines that Excel refuses to open and you need to see what is on lines number 108100, 999588, 10009898 to make sure the data is in the right format.

It is also possible to combine this to function and replace a word or a regular expression in a given range of strings:

PROBLEMS OUTPUT PORTS DEBUG CONSOLE TERMINAL

- And a Happy New Year! `gitpod /workspace/linux-for-OSINT-21-day/Day_7` (main) \$ `sed '1,30 s/Happy/Merry/g' sed_sample.txt`
We wish you a Merry Christmas
We wish you a Merry Christmas
We wish you a Merry Christmas
And a Merry New Year!

Good tidings we bring to you and your kin.
We wish you a merry Christmas
And a Merry New Year!

Oh, bring us some figgy pudding
Oh, bring us some figgy pudding
Oh, bring us some figgy pudding
And bring it right here!

Good tidings we bring to you and your kin.
We wish you a merry Christmas
And a Merry New Year!

We won't go until we get some
We won't go until we get some
We won't go until we get some
So bring it right here!


Good tidings we bring to you and your kin.
We wish you a merry Christmas
And a Merry New Year!

We all like our figgy pudding

`sed '1,30 s/Happy/Merry/g' sed_sample.txt`

More examples can find in “**Useful sed**” Github repository (<https://github.com/adrianlarion/useful-sed>) .

Use this tool to generate a **sed** command which you can run on your Linux or Unix machine.

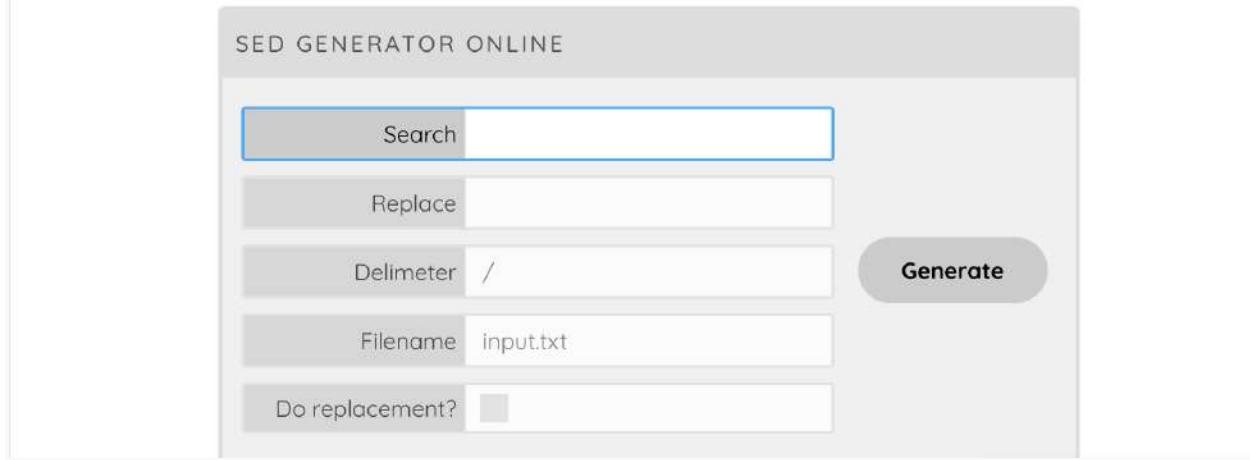


Do not try to memorize the syntactic rules for composing **Sed** commands. You can always find an example on StackOverflow, ask some AI code assistant for help, or use a special online service like **Sed command generator** (<https://www.jamiebalfour.scot/devkit/sed/>).

AWK

Awk (<https://www.gnu.org/software/gawk/manual/gawk.html>) is a scripting language for text processing. Interesting fact. Awk is not a technical acronym, but simply the initials of the three developers of this language: Alfred V. Aho, Peter J. Weinberger и Brian W. Kernighan.

Awk, like **Sed** does not require installation as it is included in Linux by default.


First, let's try to display the entire text of the file. It is easier to do this with **Cat**, but this example is necessary to better understand awk syntax:

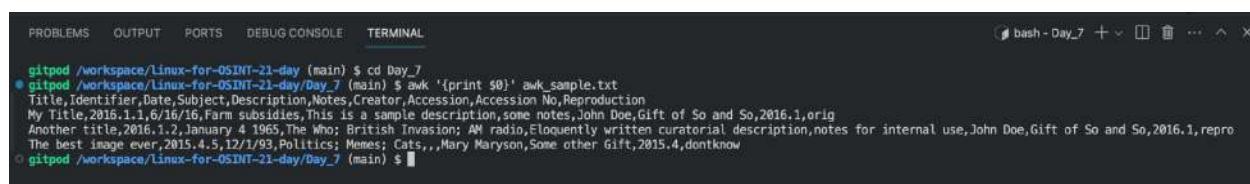

```
gitpod /workspace/Linux-for-OSINT-21-day (main) $ cd Day_7
gitpod /workspace/Linux-for-OSINT-21-day/Day_7 (main) $ awk '{print $0}' awk_sample.txt
Title,Identifier,Date,Subject,Description,Notes,Creator,Accession,Accession No,Reproduction
My Title,2016.1.1,6/16/16,Farm subsidies,This is a sample description,some notes,John Doe,Gift of So and So,2016.1,orig
Another title,2016.1.2,January 4 1965,The Who, British Invasion; AM radio,Eloquently written curatorial description,notes for internal use,John Doe,Gift of So and So,2016.1,repro
The best image ever,2015.4.5,12/1/93,Politics; Memes; Cats,,Mary Maryson,Some other Gift,2015.4,dontknow
gitpod /workspace/Linux-for-OSINT-21-day/Day_7 (main) $
```

```
awk '{print $0}' awk_sample.txt
```


Now let's do the same thing, but with line numbering:

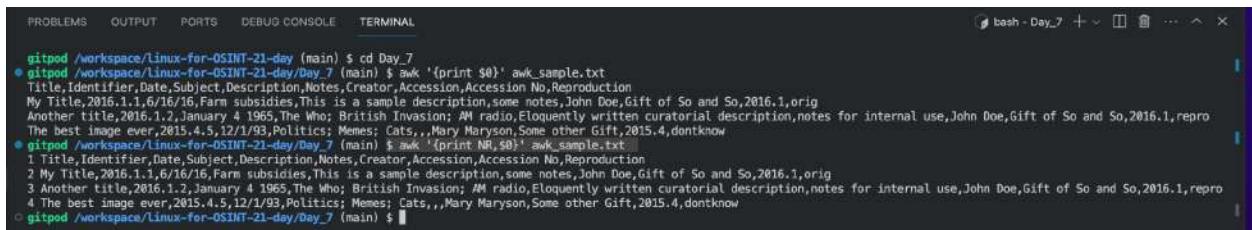

```
gitpod /workspace/Linux-for-OSINT-21-day (main) $ cd Day_7
● gitpod /workspace/Linux-for-OSINT-21-day/Day_7 (main) $ awk '{print NR,$0}' awk_sample.txt
1 Title,Identifier,Date,Subject,Description,Notes,Creator,Accession,Accession No,Reproduction
2 My Title,2016.1.1,6/16/16,Farm subsidies,This is a sample description,some notes,John Doe,Gift of So and So,2016.1,orig
3 Another title,2016.1.2,January 4 1965,The Who; British Invasion; AM radio,Eloquently written curatorial description,notes for internal use,John Doe,Gift of So and So,2016.1,repro
4 The best image ever,2015.4.5,12/1/93,Politics; Memes; Cats,,,Mary Maryston,Some other Gift,2015.4,dontknow
● gitpod /workspace/Linux-for-OSINT-21-day/Day_7 (main) $ awk '{print NR,$0}' awk_sample.txt
1 Title,Identifier,Date,Subject,Description,Notes,Creator,Accession,Accession No,Reproduction
2 My Title,2016.1.1,6/16/16,Farm subsidies,This is a sample description,some notes,John Doe,Gift of So and So,2016.1,orig
3 Another title,2016.1.2,January 4 1965,The Who; British Invasion; AM radio,Eloquently written curatorial description,notes for internal use,John Doe,Gift of So and So,2016.1,repro
4 The best image ever,2015.4.5,12/1/93,Politics; Memes; Cats,,,Mary Maryston,Some other Gift,2015.4,dontknow
○ gitpod /workspace/Linux-for-OSINT-21-day/Day_7 (main) $
```

```
awk '{print NR,$0}' awk_sample.txt
```

Let's display only the first and third columns of the document (using flag **-F** to indicate that the separator is a comma):

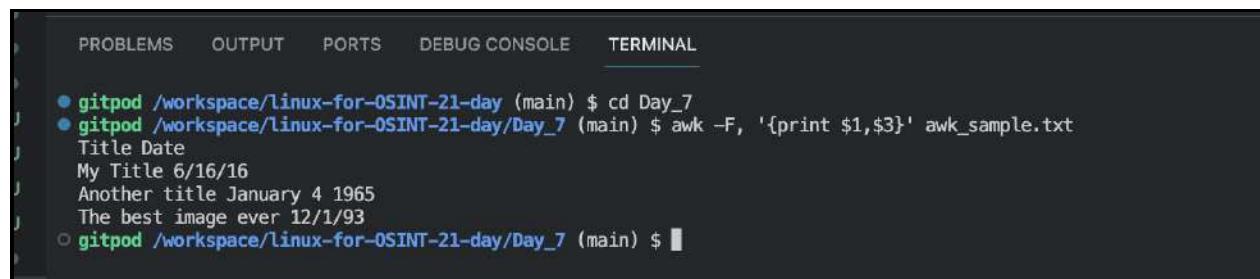

```
gitpod /workspace/Linux-for-OSINT-21-day (main) $ cd Day_7
● gitpod /workspace/Linux-for-OSINT-21-day/Day_7 (main) $ awk -F, '{print $1,$3}' awk_sample.txt
Title Date
My Title 6/16/16
Another title January 4 1965
The best image ever 12/1/93
● gitpod /workspace/Linux-for-OSINT-21-day/Day_7 (main) $
```

```
awk -F, '{print $1,$3}' awk_sample.txt
```

Now output only the strings that start with a certain character:

```
example.csv U awk_sample.txt U
Day_7 > awk_sample.txt
1 Title,Identifier,Date,Subject,Description,Notes,Creator,Accession,Accession No,Reproduction
2 My Title,2016.1.1,6/16/16,Farm subsidies,This is a sample description,some notes,John Doe,Gift of So and So,2016.1,orig
3 Another title,2016.1.2,January 4 1965,The Who; British Invasion; AM radio,Eloquently written curatorial description,notes for internal use,John Doe,Gift of So and So,2016.1,orig
4 The best image ever,2015.4.5,12/1/93,Politics; Memes; Cats,,,Mary Maryson,Some other Gift,2015.4,dontknow
5
```

PROBLEMS OUTPUT PORTS DEBUG CONSOLE TERMINAL

```
gitpod /workspace/linux-for-OSINT-21-day (main) $ cd Day_7
gitpod /workspace/linux-for-OSINT-21-day/Day_7 (main) $ awk '/^O/' awk_sample.txt
My Title,2016.1.1,6/16/16,Farm subsidies,This is a sample description,some notes,John Doe,Gift of So and So,2016.1,orig
gitpod /workspace/linux-for-OSINT-21-day/Day_7 (main) $
```

awk '/^O/' awk_sample.txt

Conversely, strings that end with a specific character:

```
example.csv U awk_sample.txt U
Day_7 > awk_sample.txt
1 Title,Identifier,Date,Subject,Description,Notes,Creator,Accession,Accession No,Reproduction
2 My Title,2016.1.1,6/16/16,Farm subsidies,This is a sample description,some notes,John Doe,Gift of So and So,2016.1,orig
3 Another title,2016.1.2,January 4 1965,The Who; British Invasion; AM radio,Eloquently written curatorial description,notes for internal use,John Doe,Gift of So and So,2016.1,orig
4 The best image ever,2015.4.5,12/1/93,Politics; Memes; Cats,,,Mary Maryson,Some other Gift,2015.4,dontknow
5
```

PROBLEMS OUTPUT PORTS DEBUG CONSOLE TERMINAL

```
gitpod /workspace/linux-for-OSINT-21-day (main) $ cd Day_7
gitpod /workspace/linux-for-OSINT-21-day/Day_7 (main) $ awk '/w$/' awk_sample.txt
The best image ever,2015.4.5,12/1/93,Politics; Memes; Cats,,,Mary Maryson,Some other Gift,2015.4,dontknow
gitpod /workspace/linux-for-OSINT-21-day/Day_7 (main) $
```


awk '/w\$/' awk_sample.txt

And now all the strings that do NOT end with a certain character:

```
PROBLEMS OUTPUT PORTS DEBUG CONSOLE TERMINAL
gitpod /workspace/linux-for-OSINT-21-day (main) $ cd Day_7
gitpod /workspace/linux-for-OSINT-21-day/Day_7 (main) $ awk '! /w$/' awk_sample.txt
The best image ever,2015.4.5,12/1/93,Politics; Memes; Cats,,,Mary Maryson,Some other Gift,2015.4,dontknow
gitpod /workspace/linux-for-OSINT-21-day/Day_7 (main) $ awk '! /w$/' awk_sample.txt
awk: cmd. line:1: ! /w$/' awk_sample.txt
awk: cmd. line:1: ^ syntax error
gitpod /workspace/linux-for-OSINT-21-day/Day_7 (main) $ awk '! /w$/' awk_sample.txt
Title,Identifier,Date,Subject,Description,Notes,Creator,Accession,Accession No,Reproduction
Another title,2016.1.2,January 4 1965,The Who; British Invasion; AM radio,Eloquently written curatorial description,notes for internal use,John Doe,Gift of So and So,2016.1,orig
gitpod /workspace/linux-for-OSINT-21-day/Day_7 (main) $
```

awk '! /w\$/' awk_sample.txt

More examples can find in **Simple AWK** Github repository (<https://github.com/adrianlarion/simple-awk>). As with **Sed**, you can ask the AI assistant for help writing commands or use special services.

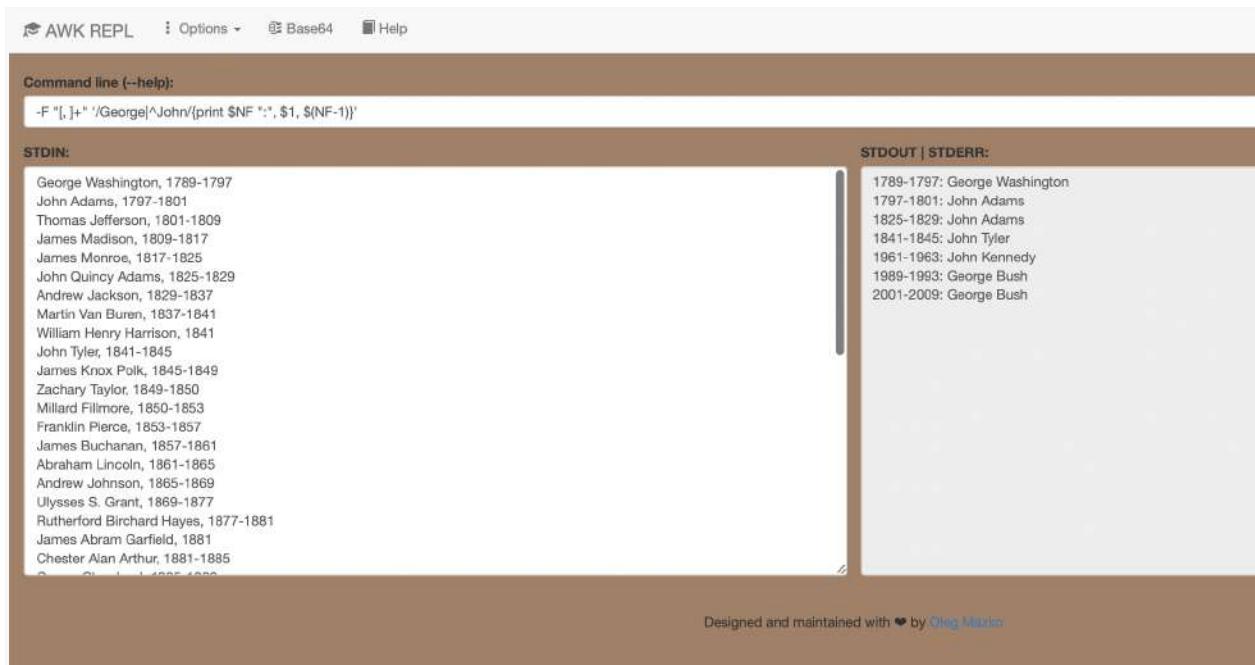

The screenshot shows the AWK REPL interface. At the top, there are tabs for 'AWK REPL', 'Options', 'Base64', and 'Help'. Below the tabs, the 'Command line (-help):' section contains the command: '-F "[,]+" '/George|^John/{print \$NF ":" , \$1, \$(NF-1)}'. The 'STDIN:' section contains a list of US Presidents with their names and years of service. The 'STDOUT | STDERR:' section shows the output of the command, which is a list of presidents with their names and years of service, separated by colons and commas. At the bottom, a footer notes: 'Designed and maintained with ❤ by [Oleg Maxin](#)'.

```
George Washington, 1789-1797
John Adams, 1797-1801
Thomas Jefferson, 1801-1809
James Madison, 1809-1817
James Monroe, 1817-1825
John Quincy Adams, 1825-1829
Andrew Jackson, 1829-1837
Martin Van Buren, 1837-1841
William Henry Harrison, 1841
John Tyler, 1841-1845
James Knox Polk, 1845-1849
Zachary Taylor, 1849-1850
Millard Fillmore, 1850-1853
Franklin Pierce, 1853-1857
James Buchanan, 1857-1861
Abraham Lincoln, 1861-1865
Andrew Johnson, 1865-1869
Ulysses S. Grant, 1869-1877
Rutherford Birkhard Hayes, 1877-1881
James Abram Garfield, 1881
Chester Alan Arthur, 1881-1885
Grover Cleveland, 1885-1889
```

```
1789-1797: George Washington
1797-1801: John Adams
1825-1829: John Adams
1841-1845: John Tyler
1861-1863: John Kennedy
1889-1993: George Bush
2001-2009: George Bush
```


AWK online (<https://awk.js.org>) is an online tool on which it is very convenient to test how various commands are executed on small text fragments.

When reading the additional documentation, you may notice that **Grep**, **Sed** and **Awk** may have common functions and it is not always clear which command is best to use. And more often than not, it doesn't matter.

Yes, 20-30 years ago when computers had modest capabilities it made sense to think deeply about this when working with large files. Today, however, in most situations it is not an important issue at all.

Day 8. Vim text editor

Interesting fact, if you type "emacs" into Google, the search engine will ask you, "Maybe you mean vi?" (vim is an improved version of the vi text editor, which was introduced first time in 1976). Many developers around the world really love Vim, have been using it for decades and are constantly discovering some amazing new features of this text editor.

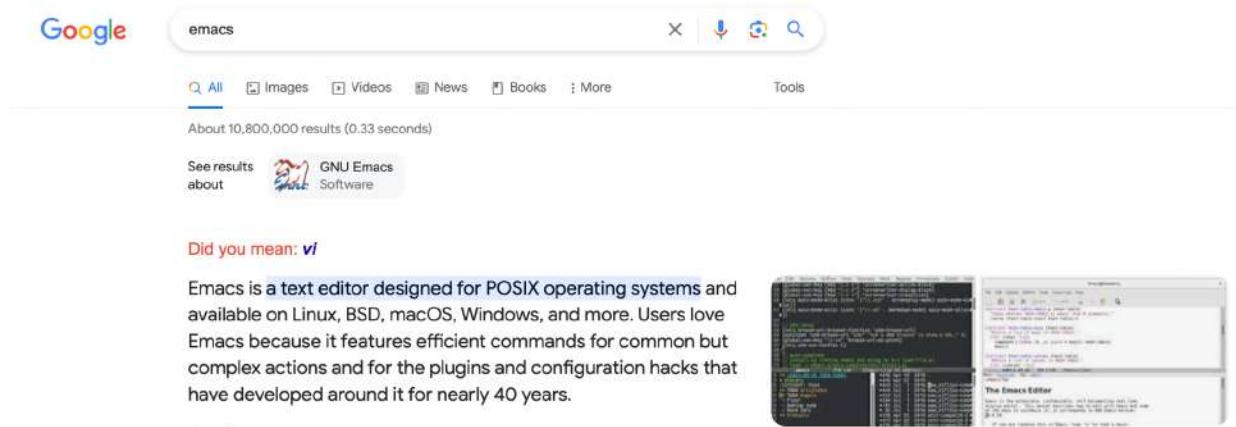

Vim (<https://www.vim.org>) - is a universal and highly configurable command line text editor. The first version of it appeared in 1991 and since then it has continued to be popular, despite many competitors in the form of other text editors and IDEs (Integrated Development Environment). Let's run it and see what it's good for.

```
● gitpod /workspace/Linux-for-OSINT-21-day/Day_14 (main) $ vim --version
VIM - Vi IMproved 8.2 (2019 Dec 12, compiled Oct 16 2023 18:15:38)
Included patches: 1-579, 1969, 580-1854, 1857, 1855-1857, 1331, 1858, 1858-1859, 1873, 1860-1969, 1992, 1970-1992, 2010, 1993-3995, 4563, 4646, 4
774, 4895, 4899, 4901, 4919, 213, 1840, 1846-1847
Modified by team+vim@tracker.debian.org
Compiled by team+vim@tracker.debian.org
Huge version without GUI. Features included (+) or not (-):
+acl          +file_in_path      +mouse_urxvt      -tag_any_white
+arabic       +find_in_path      +mouse_xterm      -tcl
+autocmd      +float           +multi_byte      +termguicolors
+autochdir    +folding          +multi_lang      +terminal
+autoservername -footer          -mzscheme        +terminfo
+balloon_eval +fork()          +netbeans_intg  +termresponse
+balloon_eval_term +gettext        +num64          +textobjects
+browse        +hangul_input    +packages        +textprop
+builtin_terms +iconv           +path_extra     +timers
+byte_offset   +insert_expand   -perl           +title
+channel      +ipv6            +persistent_undo -toolbar
+cindent       +job              +popupwin       +user_commands
-clientserver +jumplist        +postscript      +vartabs
-clipboard    +keymap          +printer        +vertsplit
+cmdline_compl +lambda          +profile        +vim9script
+cmdline_hist +langmap         +python         +viminfo
+cmdline_info +libcall          +python3        +virtualedit
+comments      +linebreak       +quickfix      +visual
+conceal       +lispindent       +reltime        +visualextra
+cryptv        +listcmds        +rightleft     +vreplace
+cscope        +localmap        -ruby          +wildignore
+cursorbind   +lua              +scrollbind   +wildmenu
+cursorshape  +menu            +signs         +windows

```

Layout: US ⌂ No open ports ⌂

Let's install:

```
sudo apt update
sudo apt install vim
```

```
PROBLEMS OUTPUT PORTS DEBUG CONSOLE TERMINAL
● gitpod /workspace/Linux-for-OSINT-21-day/Day_14 (main) $ sudo apt install vim
Reading package lists... Done
Building dependency tree... Done
Reading state information... Done
The following additional packages will be installed:
  vim-common vim-runtime
Suggested packages:
  ctags vim-doc vim-scripts
The following packages will be upgraded:
  vim vim-common vim-runtime
3 upgraded, 0 newly installed, 0 to remove and 80 not upgraded.
Need to get 8,650 kB of archives.
After this operation, 7,168 B of additional disk space will be used.
Do you want to continue? [Y/n] y
Get:1 http://archive.ubuntu.com/ubuntu jammy-updates/main amd64 vim amd64 2:8.2.3995-1ubuntu2.13 [1,734 kB]
Get:2 http://archive.ubuntu.com/ubuntu jammy-updates/main amd64 vim-runtime all 2:8.2.3995-1ubuntu2.13 [6,834 kB]
Get:3 http://archive.ubuntu.com/ubuntu jammy-updates/main amd64 vim-common all 2:8.2.3995-1ubuntu2.13 [81.5 kB]
Fetched 8,650 kB in 1s (7,913 kB/s)
debconf: delaying package configuration, since apt-utils is not installed
(Reading database ... 35595 files and directories currently installed.)
Preparing to unpack .../vim_2%3a8.2.3995-1ubuntu2.13_amd64.deb ...
Unpacking vim (2:8.2.3995-1ubuntu2.13) over (2:8.2.3995-1ubuntu2.12) ...
Preparing to unpack .../vim-runtime_2%3a8.2.3995-1ubuntu2.13_all.deb ...
Unpacking vim-runtime (2:8.2.3995-1ubuntu2.13) over (2:8.2.3995-1ubuntu2.12) ...
Preparing to unpack .../vim-common_2%3a8.2.3995-1ubuntu2.13_all.deb ...
Unpacking vim-common (2:8.2.3995-1ubuntu2.13) over (2:8.2.3995-1ubuntu2.12) ...
Setting up vim-common (2:8.2.3995-1ubuntu2.13) ...
Setting up vim-runtime (2:8.2.3995-1ubuntu2.13) ...
Setting up vim (2:8.2.3995-1ubuntu2.13) ...
Processing triggers for man-db (2.10.2-1) ...
```

And run:

```
PROBLEMS OUTPUT PORTS DEBUG CONSOLE TERMINAL
Quod equidem non reprehendo;
Lorem ipsum dolor sit amet, consectetur adipiscing elit. Quibus natura iure responderit non esse verum aliunde finem beate vivendi, a
se principia rei gerendae peti; Quae enim adhuc protulisti, popularia sunt, ego autem a te elegantiora desidero. Duo Reges: construc
tio interrete. Tum Lucius: Mihi vero ista valde probata sunt, quod item fratri puto. Bestiarum vero nullum iudicium puto. Nihil enim
iam habes, quod ad corpus referas; Deinde prima illa, quae in congressu solemus: Quid tu, inquit, huc? Et homini, qui ceteris animant
ibus plurimum praestat, praecipue a natura nihil datum esse dicemus?

Iam id ipsum absurdum, maximum malum neglegi. Quod ea non occurrentia fingunt, vincunt Aristonem; Atqui perspicuum est hominem e corp
ore animoque constare, cum primae sint animi partes, secundae corporis. Fieri, inquam, Triari, nullo pacto potest, ut non dicas, quid
non probes eius, a quo dissentias. Evidem e Cn. An dubium est, quin virtus ita maximam partem optineat in rebus humanis, ut reliqua
s obruat?

Quis istum dolorem timet?
Summus dolor plures dies manere non potest? Dicet pro me ipsa virtus nec dubitabit isti vestro beato M. Tubulum fuisse, qua illum, cu
ius is condemnatus est rogatione, P. Quod si ita sit, cur opera philosophiae sit danda nescio.


Ex eorum enim scriptis et institutis cum omnis doctrina liberalis, omnis historia.
Quod si ita est, sequitur id ipsum, quod te velle video, omnes semper beatos esse sapientes. Cum enim fertur quasi torrens oratio, qu
amvis multa cuiusque modi rapiat, nihil tamen teneas, nihil apprehendas, nusquam orationem rapidam coerceas. Ita redarguitur ipse a s
ese, convincunturque scripta eius probitate ipsius ac moribus. At quanta conantur! Mundum hunc omnem oppidum esse nostrum! Incendi ig
itur eos, qui audiunt, vides. Vide, ne magis, inquam, tuum fuerit, cum re idem tibi, quod mihi, videretur, non nova te rebus nomina i
rponere. Qui-vere falsone, quaerere mittimus-dicitur oculis se privasse; Si ista mala sunt, in quae potest incidere sapiens, sapiente
m esse non esse ad beatve vivendum satis. At vero si ad vitem sensus accesserit, ut appetitum quendam habeat et per se ipsa moveatur,
quid facturam putas?

Quem si tenueris, non modo meum Ciceronem, sed etiam me ipsum abducas licebit.
Stulti autem malorum memoria torquentur, sapientes bona praeterita grata recordatione renovata delectant.
Esse enim quam vellet iniquus iustus poterat inpure.
Quae autem natura suae primae institutionis obliterata est?
Verum tamen cum de rebus grandioribus dicas, ipsae res verba rapiunt;
Hoc est non modo cor non habere, sed ne palatum quidem.
@@@ "text_example.txt" [noeol] 21L, 3541B
1,2 Top
```

```
cd Day_8
vim text_example.txt
```

We will do nothing more with this text for now, but go straight to the most important question.

Exit Vim

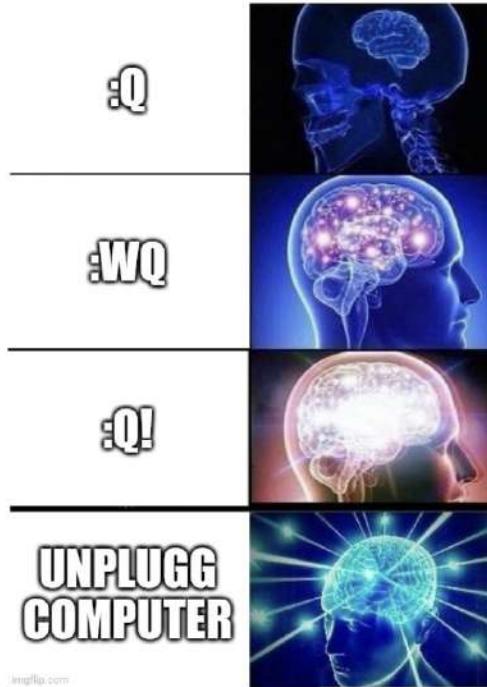

This is a very important question that has inspired hundreds of people to create memes (google [vim exit memes](#)). Save these instructions somewhere.

1. Press the **Esc** key to switch to command mode.
2. Type **:q!** and press Enter (or type **:wq!** and press Enter, if you want to save the changes)

In case you forget these instructions remember that you can always just click the right cross and close the terminal (in Gitpod too).

If suddenly, for some reason, the instructions above seem too simple for you, you can try a few dozen other ways to quit vim (<https://github.com/hakluke/how-to-exit-vim>).

Using Vim

Let's open the file again:

```
vim text_example.txt
```

And let's try to navigate through the text:

```
Quis istum dolorem timet?  
Quis istum dolorem timet?  
Quis istum dolorem timet?  
Quis istum dolorem timet?  
Summus dolor plures dies manere non potest? Dicet pro me ipsa virtus nec dubitabit isti vestro beato M. Tubulum f  
a sit, cur opera philosophiae sit danda nescio.  
  
eptis et institutis cum omnis doctrina liberalis, omnis historia.  
Quod si ita est, sequitur id ipsum, quod te velle video, omnes semper beatos esse sapientes. Cum enim fertur quas  
eneas, nihil apprehendas, nusquam orationem rapidam coerces. Ita redarguitur ipse a sese, convincunturque script  
omnem oppidum esse nostrum! Incendi igitur eos, qui audiunt, vides. Vide, ne magis, inquam, tuum fuerit, cum re  
Qui-vere falsone, quaerere mittimus-dicitur oculis se privasse; Si ista mala sunt, in quae potest incidere sapie  
vitem sensus accesserit, ut appetitum quendam habeat et per se ipsa moveatur, quid facturam putas?  
  
Quem si tenueris, non modo meum Ciceronem, sed etiam me ipsum abducas licebit.  
Stulti autem malorum memoria torquentur, sapientes bona praeterita grata recordatione renovata delectant.  
Esse enim quam vellet iniquus iustus poterat impune.  
Quae autem natura suae primae institutionis oblita est?  
Verum tamen cum de rebus grandioribus dicas, ipsae res verba rapiunt;  
/omnes
```

G - move to the last line.

gg - move to the first line

^ - move to the first character of current line

+ - move to the first character of next line

yyp - duplicate current line

dd - delete current line

g; - go back to the last modified location

x - delete character or selected

y - delete character or selected text

/ - find text

(If something suddenly doesn't work, press Esc to enter command entry mode).

And the bottom line is that there are over a thousand such quick commands. Yes, over a thousand commands for working with text files. Here's a list of 1,349, but it's probably not complete, since Vim is infinite (<https://pastebin.com/xBRYzAw0>).

If you pick at least a few dozen commands that best suit your goals, you can take your productivity to a whole new level (as well as improve memory and concentration tremendously). This is what hundreds of thousands of **Vim** fans around the world have already done (but I'm just about to do it myself, to be honest).

VimTricks

Vim Newsletter Archive Vim Books About ☾ 🔎

Category: Tips and Tricks

Inspect Character Under Cursor in Vim
★★★★★ 4.8 (88)
Use `ga` in Vim to inspect the character under the cursor in Vim. Extend this feature with the Characterize plugin.

Vim Calculator
★★★★★ 4.7 (154)
The Vim calculator is a built in feature requiring no plugins: Perform calculations without leaving Vim, even from your text.

Vim Command Line Window
★★★★★ 4.7 (74)
The Vim command line window is more than just a history of your commands. It's an editable buffer where you can compose commands.

Vim split to a specific size
★★★★★ 4.6 (79)
Open Vim splits to a specific height or width by prepending a number to the command.

Email *

Submit

SEARCH THE ARCHIVES

Enter your search query... 🔎

OUR BOOKS

Git Better with Vim

RECENT VIM TIPS

Learning tricks for **Vim** is a never-ending process. If you want, you can continue it on **Vim tricks newsletter** website (<https://vimtricks.com/>).

The screenshot shows the VimAwesome website interface. The top navigation bar has the title 'VimAwesome' and a subtitle 'AWESOME VIM PLUGINS from ACROSS THE UNIVERSE'. A search bar is at the top right with the text 'python'. Below the search bar is a tip: 'Tip: use / to search, J/K to navigate, N/P to flip pages'. To the right, it says '441 PLUGINS'. The main content area displays a list of Python plugins with their names, authors, and statistics. The plugins listed are:

- » UltiSnips by HOLGER RAPP (6602 stars, 6272 forks)
- jedi-vim by DAVE HALTER (5494 stars, 4851 forks)
- vim-flake8 by VINCENT DRIESSEN (4049 stars, 988 forks)
- taglist.vim by YEGAPPAN LAKSHMANAN (3302 stars, 618 forks)
- SimpleFold by TAYLOR HEDBERG (2995 stars, 551 forks)
- indent/python.vim by ERIC MC SWEEN (2828 stars, 77 forks)

If you want to use VIM to its full potential, then install additional plugins suitable for your daily tasks. You can find them at **VimAwesome** (<https://vimawesome.com>).

Alternatives

Vim is damn good, but I still advise you not to stop at **Vim** and try different good text editors for Linux, which allow you to speed up your work and automate different tasks:

Emacs (<https://www.gnu.org/software/emacs/>)
 Neovim (<https://neovim.io>)
 Atom (<https://github.com/atom/atom>)
 Notepad++ (<https://notepad-plus-plus.org>)
 Sublime Text (<https://www.sublimetext.com>)

Many of them have many more plugins and integrations as Vim and can be a complete replacement for the IDE in everyday work.


Day 9. Screen and Crone

Some commands can take a very long time to execute. Sometimes even for several days. For example, if you want to process hundreds of gigabytes of text data on a server with modest technical capacity.

Screen (<https://www.gnu.org/software/screen/>) allows you to perform multiple tasks simultaneously in the background. Roughly speaking, it allows you to make one terminal into several terminals working independently of each other.

Let's start with the installation:


```
sudo apt-get install screen
```

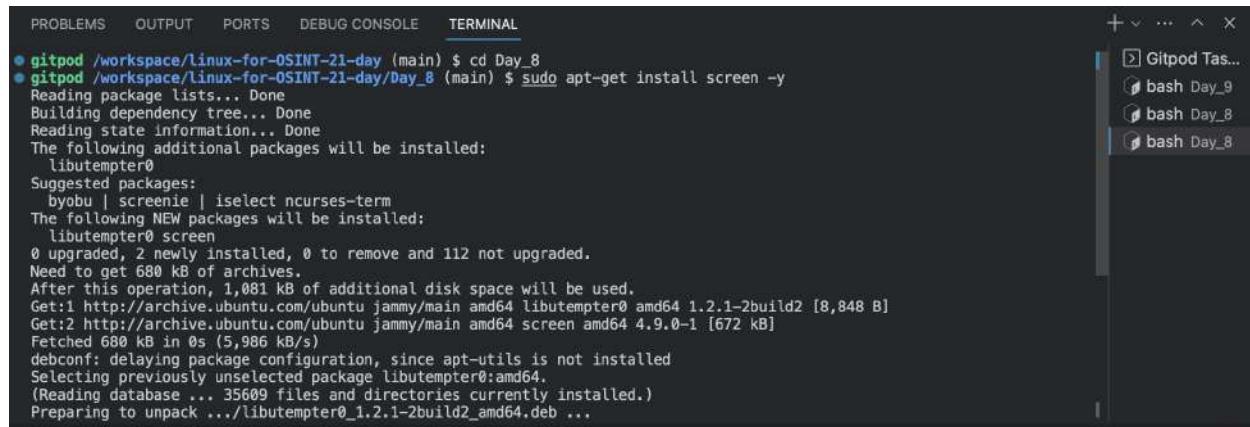

```
PROBLEMS OUTPUT PORTS DEBUG CONSOLE TERMINAL
● gitpod /workspace/linux-for-OSINT-21-day (main) $ cd Day_8
● gitpod /workspace/linux-for-OSINT-21-day/Day_8 (main) $ sudo apt-get install screen -y
Reading package lists... Done
Building dependency tree... Done
Reading state information... Done
The following additional packages will be installed:
  libutempter0
Suggested packages:
  byobu | screenie | iselect ncurses-term
The following NEW packages will be installed:
  libutempter0 screen
0 upgraded, 2 newly installed, 0 to remove and 112 not upgraded.
Need to get 680 kB of archives.
After this operation, 1,081 kB of additional disk space will be used.
Get:1 http://archive.ubuntu.com/ubuntu jammy/main amd64 libutempter0 amd64 1.2.1-2build2 [8,848 B]
Get:2 http://archive.ubuntu.com/ubuntu jammy/main amd64 screen amd64 4.9.0-1 [672 kB]
Fetched 680 kB in 0s (5,986 kB/s)
debconf: delaying package configuration, since apt-utils is not installed
Selecting previously unselected package libutempter0:amd64.
(Reading database ... 35609 files and directories currently installed.)
Preparing to unpack .../libutempter0_1.2.1-2build2_amd64.deb ...
```


Create new session with name “demo-screen”:

```
screen -S demo-screen
```

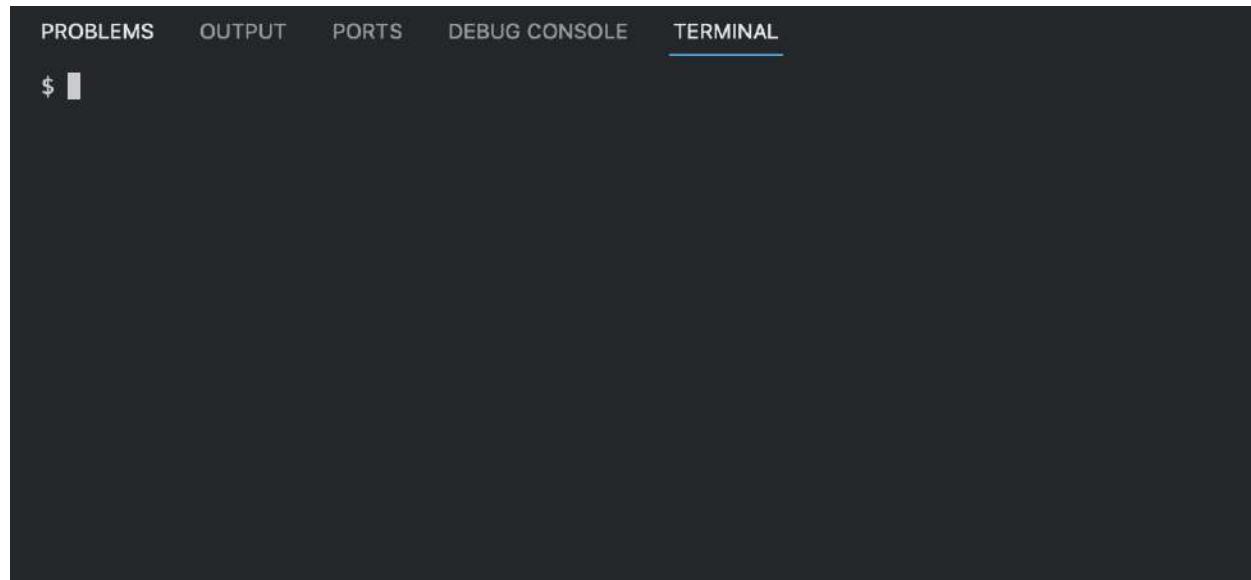

A screenshot of a terminal window. At the top, there are tabs labeled 'PROBLEMS', 'OUTPUT', 'PORTS', 'DEBUG CONSOLE', and 'TERMINAL', with 'TERMINAL' underlined. Below the tabs, the command line starts with '\$' followed by a blank space and a vertical bar.

Run some commands in it and press **Ctrl+A+D** to exit.

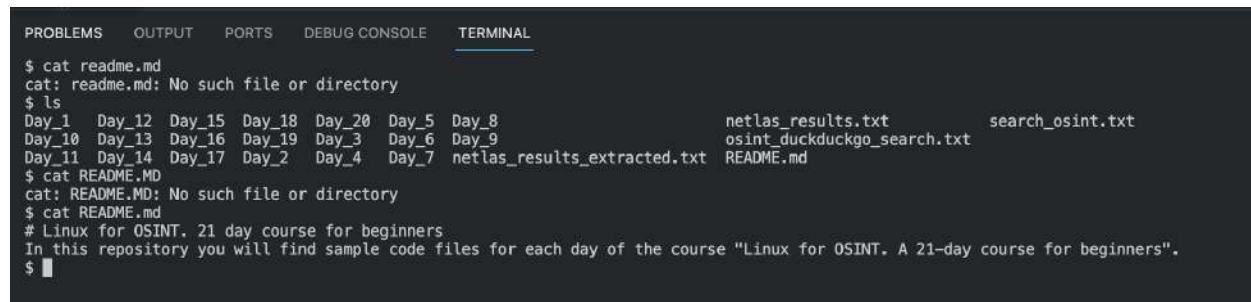

A screenshot of a terminal window showing a list of commands and files. The commands run are:

```
$ cat readme.md
cat: readme.md: No such file or directory
$ ls
Day_1  Day_12  Day_15  Day_18  Day_20  Day_5  Day_8          netlas_results.txt      search_osint.txt
Day_10  Day_13  Day_16  Day_19  Day_3   Day_6  Day_9          osint_duckduckgo_search.txt
Day_11  Day_14  Day_17  Day_2   Day_4   Day_7  netlas_results_extracted.txt README.md
$ cat README.MD
cat: README.MD: No such file or directory
$ cat README.md
# Linux for OSINT. 21 day course for beginners
In this repository you will find sample code files for each day of the course "Linux for OSINT. A 21-day course for beginners".
$
```

Now let's get the list of active sessions to see if there is a new session called "demo-screen":

screen -ls

```
PROBLEMS    OUTPUT    PORTS    DEBUG CONSOLE    TERMINAL
● gitpod /workspace/linux-for-OSINT-21-day (main) $ screen -ls
There is a screen on:
  9244.demo-screen          (12/16/2023 06:37:02 PM)          (Detached)
  1 Socket in /run/screen/S-gitpod.
○ gitpod /workspace/linux-for-OSINT-21-day (main) $ █
```

To return to a session named "demo-screen" simply type in the command line:

screen -r demo-screen

And press **Ctrl+A+D** to exit again.

And if you want to delete a session named "demo-screen", type:

```
○ gitpod /workspace/linux-for-OSINT-21-day/Day_9 (main) $ 
● gitpod /workspace/linux-for-OSINT-21-day/Day_9 (main) $ screen -XS demo-screen quit
○ gitpod /workspace/linux-for-OSINT-21-day/Day_9 (main) $ screen -ls
  No Sockets found in /run/screen/S-gitpod.

○ gitpod /workspace/linux-for-OSINT-21-day/Day_9 (main) $ █
```

screen -XS demo-screen quit

After that, check the list of sessions to make sure the deletion was successful.

screen -ls

Unfortunately, Gitpod is not very suitable for demonstrating the capabilities of **Screen**, because after closing the workspace tab and after the user is inactive for more than half an hour, all commands are stopped.

If you will be using the **Screen** on your own VM, make sure it is running until all the commands you need are executed in all sessions.

The ideal option for using the **Screen** is a VPS (Virtual Private Server) that runs 24/7 and you can just connect via SSH to it from time to time.

Crontab

Another important advantage of automation is the ability to schedule a certain sequence of actions for a certain time.

Crontab (<https://ss64.com/bash/crontab.html>) is a utility for editing the crontab file, which stores a schedule of commands to be executed by the **cron** daemon (an old UNIX term).

Here is an example from Wikipedia of what a crontab file might look like:

```
# /etc/crontab: system-wide crontab
# Unlike any other crontab you don't have to run the 'crontab'
# command to install the new version when you edit this file
# and files in /etc/cron.d. These files also have username fields,
# that none of the other crontabs do.

SHELL=/bin/sh
PATH=/usr/local/sbin:/usr/local/bin:/sbin:/bin:/usr/sbin:/usr/bin

# m h dom mon dow user  command
17 * * * * root    cd / && run-parts --report /etc/cron.hourly
25 6 * * * root    test -x /usr/sbin/anacron || ( cd / && run-parts --report /etc/cron.daily )
47 6 * * 7 root    test -x /usr/sbin/anacron || ( cd / && run-parts --report /etc/cron.weekly )
52 6 1 * * root    test -x /usr/sbin/anacron || ( cd / && run-parts --report /etc/cron.monthly )
#
```

Gitpod prohibits the use of Crontab utility at all. And we're not going to try any more commands today.

But lastly, I want to tell you about one very good service that will come in handy when you work with Crontab on a VM or VPS.

crontab guru

The quick and simple editor for cron schedule expressions by [Cronitor](#)

“At 22:00 on every day-of-week from Monday through Friday.”

next at 2023-05-17 22:00:00
then at 2023-05-18 22:00:00
then at 2023-05-19 22:00:00
then at 2023-05-22 22:00:00
then at 2023-05-23 22:00:00

random

0 22 * * 1-5

minute hour day month day
(month) (week)

*	any value
,	value list
,	separator
-	range of values
/	step values
@yearly	(non-standard)
@annually	(non-standard)
@monthly	(non-standard)
@weekly	(non-standard)
@daily	(non-standard)
@hourly	(non-standard)
@reboot	(non-standard)

Crontab Guru (<https://crontab.guru/>) - is an online service that allows you to quickly compose crone schedule expressions.

Day 10. Text analyzing and editing utilities

A significant part of this course is devoted to working with various text data formats. After all, the most important advantage of Linux is the significant reduction of routine work. Here are some more universal commands that are useful to know. All of them are available in Linux by default.

Cat

Cat (<https://pubs.opengroup.org/onlinepubs/9699919799/utilities/cat.html>) - utility that allows to view the contents of a text file. We have already used it in previous lessons and it may seem very simple, but it is not quite so. Two second examples.


It allows to view the contents of multiple files at once and save them all at once to a single file:



The screenshot shows a terminal window with four tabs at the top: file_names.txt, file2.txt, file3.txt (which is the active tab), and file1.txt. The terminal content shows the command 'cat file1.txt file2.txt >file3.txt' being run in the Day_10 directory. The output shows the contents of file1.txt followed by the contents of file2.txt. Below the terminal, a code editor interface is visible with tabs for PROBLEMS, OUTPUT, PORTS, COMMENTS, DEBUG CONSOLE, and TERMINAL, with TERMINAL being the active tab. The code editor shows a list of recent files: gitpod /workspace/linux-for-OSINT-21-day (main) \$ cd Day_10, gitpod /workspace/linux-for-OSINT-21-day/Day_10 (main) \$ cat file1.txt file2.txt >file3.txt, and gitpod /workspace/linux-for-OSINT-21-day/Day_10 (main) \$ []

```
cd Day_10
cat file1.txt file2.txt >file3.txt
```

You can even use it to collect the content of all files with a certain extension (or containing a certain word in the name) into one file:

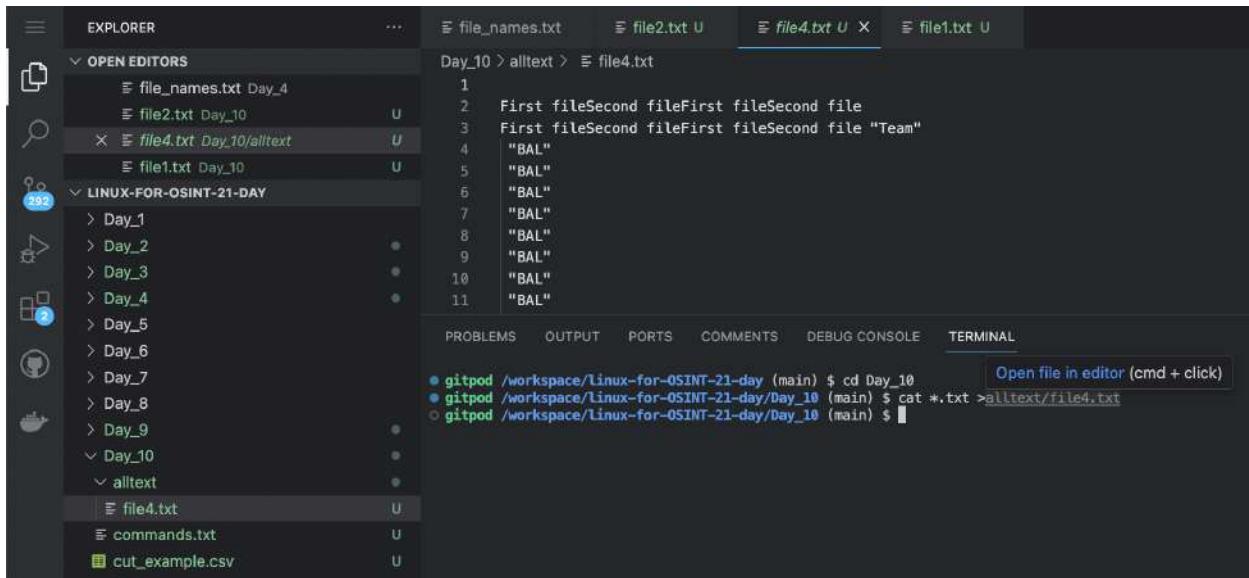

```
Day_10 > alltext > file4.txt
1
2 First fileSecond fileFirst fileSecond file
3 First fileSecond fileFirst fileSecond file "Team"
4 "BAL"
5 "BAL"
6 "BAL"
7 "BAL"
8 "BAL"
9 "BAL"
10 "BAL"
11 "BAL"


gitpod /workspace/Linux-for-OSINT-21-day (main) $ cd Day_10
gitpod /workspace/Linux-for-OSINT-21-day/Day_10 (main) $ cat *.txt >alltext/file4.txt
gitpod /workspace/Linux-for-OSINT-21-day/Day_10 (main) $
```

`cat *.txt >alltext/file4.txt`

Cut

Cut (<https://pubs.opengroup.org/onlinepubs/9699919799/utilities/cut.html>) is utility for cutting sections from each line of a file. Recall that we used the **Sed** utility to cut lines from the file, and the **Awk** utility to cut individual columns (**Day 7**).

Let's try to extract the first character from each line:

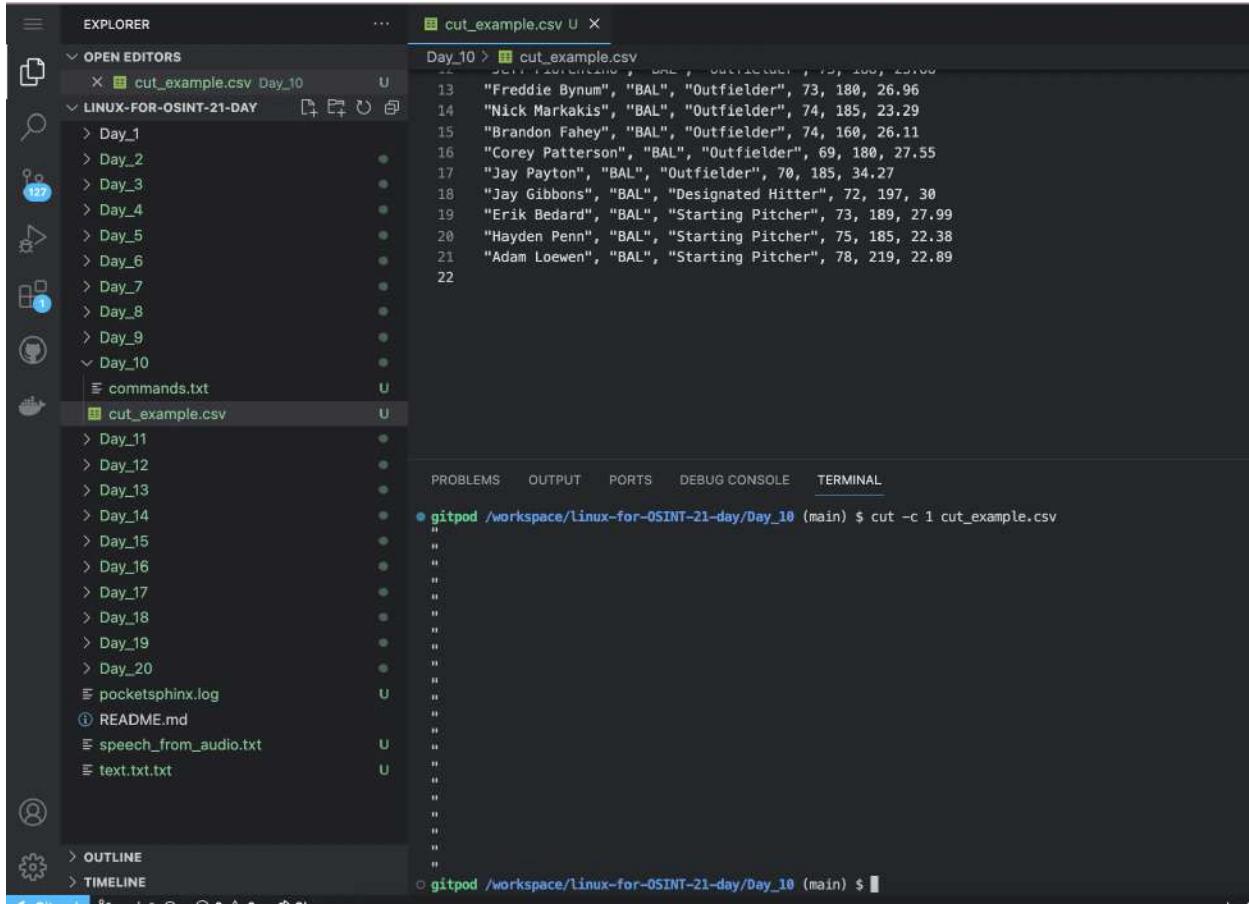

The screenshot shows a terminal window in a code editor (likely VS Code) displaying the output of the command `cut -c 1 cut_example.csv`. The terminal output is as follows:

```
gitpod /workspace/linux-for-OSINT-21-day/Day_10 (main) $ cut -c 1 cut_example.csv
"Jeff Pendergraft", "BAL", "Outfielder", 73, 188, 23.00
13 "Freddie Bynum", "BAL", "Outfielder", 73, 180, 26.96
14 "Nick Markakis", "BAL", "Outfielder", 74, 185, 23.29
15 "Brandon Fahey", "BAL", "Outfielder", 74, 160, 26.11
16 "Corey Patterson", "BAL", "Outfielder", 69, 180, 27.55
17 "Jay Payton", "BAL", "Outfielder", 70, 185, 34.27
18 "Jay Gibbons", "BAL", "Designated Hitter", 72, 187, 30
19 "Erik Bedard", "BAL", "Starting Pitcher", 73, 189, 27.99
20 "Hayden Penn", "BAL", "Starting Pitcher", 75, 185, 22.38
21 "Adam Loewen", "BAL", "Starting Pitcher", 78, 219, 22.89
22
```

`cut -c 1 cut_example.csv`

And here's a command that cuts the first through tenth characters from each line:

```
● gitpod /workspace/linux-for-OSINT-21-day/Day_10 (main) $ cut -c 5-10 cut_example.csv
e", "T
m Dona
l Bako
on Her
in Mil
is Gom
an Rob
uel Te
vin Mo
rey Hu
m Ster
f Fior
ddie B
k Mark
ndon F
ey Pat
Payto
Gibbo
k Beda
den Pe
m Loew
○ gitpod /workspace/linux-for-OSINT-21-day/Day_10 (main) $
```


cut -c 5-10 cut_example.csv

Cut can also be used to cut individual bytes or fields with delimiter designation (another method for extracting columns from CSV files).

Uniq

Uniq (<https://pubs.opengroup.org/onlinepubs/9699919799/utilities/uniq.html>) - utility that allows you to remove all duplicate lines from a file.

Let's try:

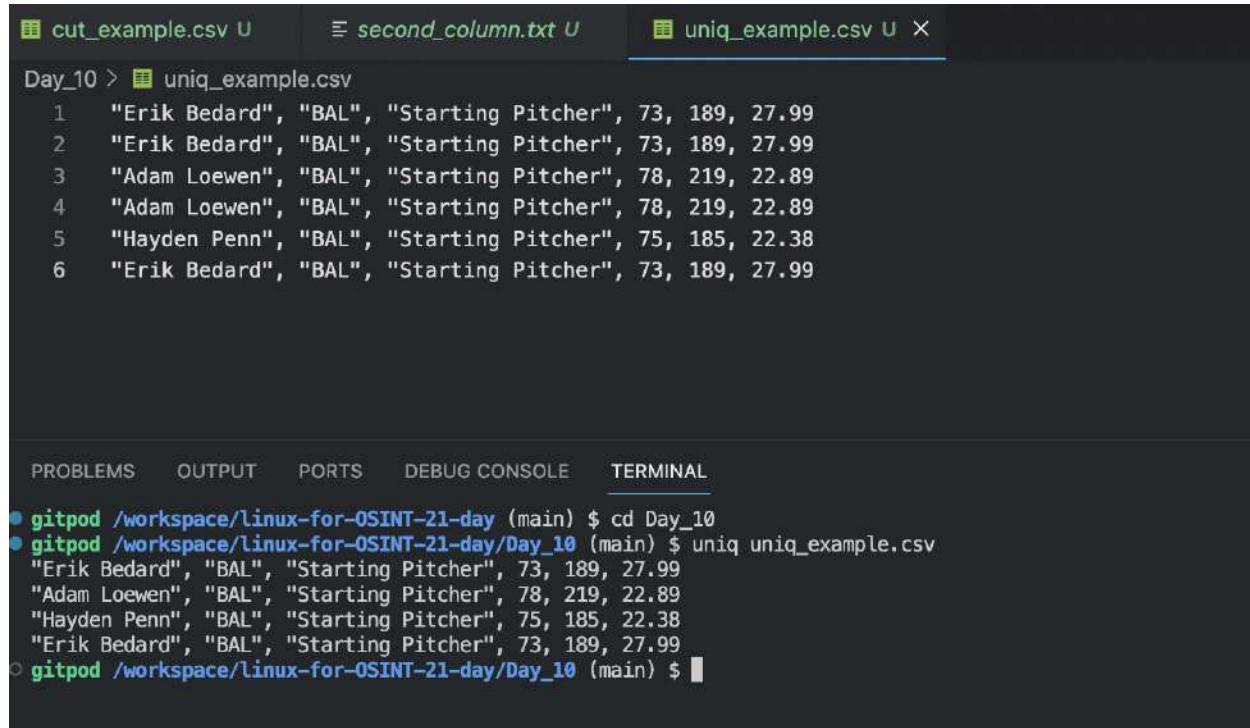

Day_10 > uniq_example.csv

```
1 "Erik Bedard", "BAL", "Starting Pitcher", 73, 189, 27.99
2 "Erik Bedard", "BAL", "Starting Pitcher", 73, 189, 27.99
3 "Adam Loewen", "BAL", "Starting Pitcher", 78, 219, 22.89
4 "Adam Loewen", "BAL", "Starting Pitcher", 78, 219, 22.89
5 "Hayden Penn", "BAL", "Starting Pitcher", 75, 185, 22.38
6 "Erik Bedard", "BAL", "Starting Pitcher", 73, 189, 27.99
```

PROBLEMS OUTPUT PORTS DEBUG CONSOLE TERMINAL

- gitpod /workspace/linux-for-OSINT-21-day (main) \$ cd Day_10
- gitpod /workspace/linux-for-OSINT-21-day/Day_10 (main) \$ uniq uniq_example.csv
- "Erik Bedard", "BAL", "Starting Pitcher", 73, 189, 27.99
- "Adam Loewen", "BAL", "Starting Pitcher", 78, 219, 22.89
- "Hayden Penn", "BAL", "Starting Pitcher", 75, 185, 22.38
- "Erik Bedard", "BAL", "Starting Pitcher", 73, 189, 27.99

uniq uniq_example.csv

Sort

Sort (<https://pubs.opengroup.org/onlinepubs/9699919799/utilities/sort.html>) - utility that sorts files in alphabetical and reverse alphabetical order, as well as descending and ascending order.

```

Day_10 > cut_example.csv
1 "Name", "Team", "Position", "Height(inches)", "Weight(lbs)", "Age"
2 "Adam Donachie", "BAL", "Catcher", 74, 180, 22.99
3 "Paul Bako", "BAL", "Catcher", 74, 215, 34.69
4 "Ramon Hernandez", "BAL", "Catcher", 72, 210, 30.78
5 "Kevin Millar", "BAL", "First Baseman", 72, 210, 35.43
6 "Chris Gomez", "BAL", "First Baseman", 73, 188, 35.71
7 "Brian Roberts", "BAL", "Second Baseman", 69, 176, 29.39
8 "Miguel Tejada", "BAL", "Shortstop", 69, 209, 30.77
9 "Melvin Mora", "BAL", "Third Baseman", 71, 200, 35.07
10 "Aubrey Huff", "BAL", "Third Baseman", 76, 231, 30.19
11 "Adam Stern", "BAL", "Outfielder", 71, 180, 27.05

PROBLEMS OUTPUT PORTS DEBUG CONSOLE TERMINAL
● gitpod /workspace/Linux-for-OSINT-21-day (main) $ cd Day_10
● gitpod /workspace/Linux-for-OSINT-21-day/Day_10 (main) $ sort -r cut_example.csv
"Ramon Hernandez", "BAL", "Catcher", 72, 210, 30.78
"Paul Bako", "BAL", "Catcher", 74, 215, 34.69
"Nick Markakis", "BAL", "Outfielder", 74, 185, 23.29
"Name", "Team", "Position", "Height(inches)", "Weight(lbs)", "Age"
"Miguel Tejada", "BAL", "Shortstop", 69, 209, 30.77
"Melvin Mora", "BAL", "Third Baseman", 71, 200, 35.07
"Kevin Millar", "BAL", "First Baseman", 72, 210, 35.43
"Jeff Fiorentino", "BAL", "Outfielder", 73, 188, 23.88
"Jay Payton", "BAL", "Outfielder", 70, 185, 34.27
"Jay Gibbons", "BAL", "Designated Hitter", 72, 197, 30
"Hayden Penn", "BAL", "Starting Pitcher", 75, 185, 22.38
"Freddie Bynum", "BAL", "Outfielder", 73, 180, 26.96
"Erik Bedard", "BAL", "Starting Pitcher", 73, 189, 27.99
"Corey Patterson", "BAL", "Outfielder", 69, 180, 27.55
"Chris Gomez", "BAL", "First Baseman", 73, 188, 35.71
"Brian Roberts", "BAL", "Second Baseman", 69, 176, 29.39
"Brandon Fahey", "BAL", "Outfielder", 74, 160, 26.11
"Aubrey Huff", "BAL", "Third Baseman", 76, 231, 30.19
"Adam Stern", "BAL", "Outfielder", 71, 180, 27.05
"Adam Loewen", "BAL", "Starting Pitcher", 78, 219, 22.89
"Adam Donachie", "BAL", "Catcher", 74, 180, 22.99
"Adam Stern", "BAL", "Outfielder", 71, 180, 27.05

● gitpod /workspace/Linux-for-OSINT-21-day/Day_10 (main) $ []

```

sort -r cut_example.csv

Here we used the **-r** flag to sort the rows in reverse alphabetical order.

Iconv

Iconv (<https://pubs.opengroup.org/onlinepubs/9699919799/utilities/iconv.html>) utility that convert some text in one encoding into another encoding.

We won't run this command (I don't have a suitable test file at hand right now), but it will be useful for you to know about its existence. If some text suddenly displays obscure characters instead of letters, try saving the file in a different encoding using this command.

iconv -f UTF-8 -t ASCII//TRANSLIT utf8.txt acii.txt


This is the last chapter in this book about automating text file manipulation in Linux. If you are interested in this topic, I recommend you to check out the repository **Text processing Recipes Linux** (<https://github.com/adrianlarion/text-processing-recipes-linux>).

Day 11. Video, audio and images

Sometimes in investigations, you have to deal with a large volume of media files that are very difficult to analyze manually. Today I will show you some very simple tools that will help you save time while watching videos, listening to audio and translating text from pictures.

FFMPEG


FFMPEG (<https://www.ffmpeg.org/>) is a toolkit for handling video, audio, and other multimedia files, capable of hundreds of different operations.

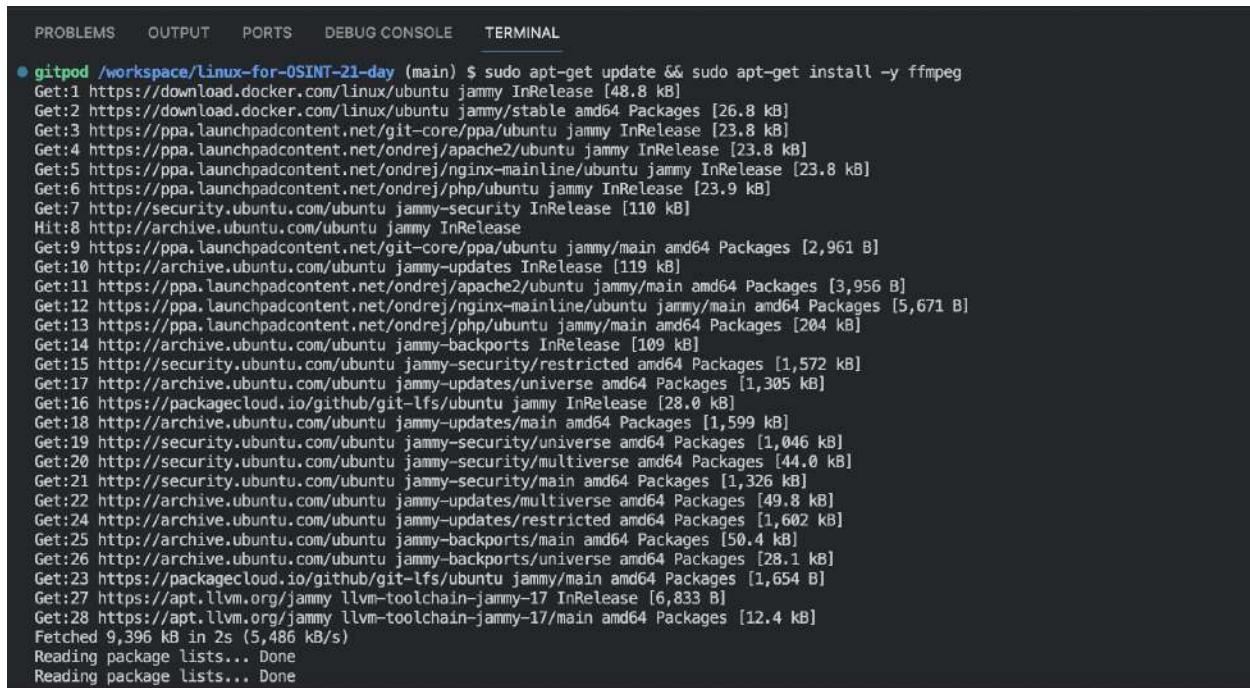

```
PROBLEMS OUTPUT PORTS DEBUG CONSOLE TERMINAL
● gitpod /workspace/Linux-for-OSINT-21-day (main) $ sudo apt-get update && sudo apt-get install -y ffmpeg
Get:1 https://download.docker.com/linux/ubuntu jammy InRelease [48.8 kB]
Get:2 https://download.docker.com/linux/ubuntu jammy/stable amd64 Packages [26.8 kB]
Get:3 https://ppa.launchpadcontent.net/git-core/ppa/ubuntu jammy InRelease [23.8 kB]
Get:4 https://ppa.launchpadcontent.net/ondrej/apache2/ubuntu jammy InRelease [23.8 kB]
Get:5 https://ppa.launchpadcontent.net/ondrej/nginx-mainline/ubuntu jammy InRelease [23.8 kB]
Get:6 https://ppa.launchpadcontent.net/ondrej/php/ubuntu jammy InRelease [23.9 kB]
Get:7 http://security.ubuntu.com/ubuntu jammy-security InRelease [110 kB]
Hit:8 http://archive.ubuntu.com/ubuntu jammy InRelease
Get:9 https://ppa.launchpadcontent.net/git-core/ppa/ubuntu jammy/main amd64 Packages [2,961 B]
Get:10 http://archive.ubuntu.com/ubuntu jammy-updates InRelease [119 kB]
Get:11 https://ppa.launchpadcontent.net/ondrej/apache2/ubuntu jammy/main amd64 Packages [3,956 B]
Get:12 https://ppa.launchpadcontent.net/ondrej/nginx-mainline/ubuntu jammy/main amd64 Packages [5,671 B]
Get:13 https://ppa.launchpadcontent.net/ondrej/php/ubuntu jammy/main amd64 Packages [204 kB]
Get:14 http://archive.ubuntu.com/ubuntu jammy-backports InRelease [109 kB]
Get:15 http://security.ubuntu.com/ubuntu jammy-security/restricted amd64 Packages [1,572 kB]
Get:17 http://archive.ubuntu.com/ubuntu jammy-updates/universe amd64 Packages [1,305 kB]
Get:16 https://packagecloud.io/github/git-lfs/ubuntu jammy InRelease [28.0 kB]
Get:18 http://archive.ubuntu.com/ubuntu jammy-updates/main amd64 Packages [1,599 kB]
Get:19 http://security.ubuntu.com/ubuntu jammy-security/universe amd64 Packages [1,046 kB]
Get:20 http://security.ubuntu.com/ubuntu jammy-security/multiverse amd64 Packages [44.0 kB]
Get:21 http://security.ubuntu.com/ubuntu jammy-security/main amd64 Packages [1,326 kB]
Get:22 http://archive.ubuntu.com/ubuntu jammy-updates/multiverse amd64 Packages [49.8 kB]
Get:24 http://archive.ubuntu.com/ubuntu jammy-updates/restricted amd64 Packages [1,602 kB]
Get:25 http://archive.ubuntu.com/ubuntu jammy-backports/main amd64 Packages [50.4 kB]
Get:26 http://archive.ubuntu.com/ubuntu jammy-backports/universe amd64 Packages [28.1 kB]
Get:23 https://packagecloud.io/github/git-lfs/ubuntu jammy/main amd64 Packages [1,654 B]
Get:27 https://apt.llvm.org/jammy llvm-toolchain-jammy-17 InRelease [6,833 B]
Get:28 https://apt.llvm.org/jammy llvm-toolchain-jammy-17/main amd64 Packages [12.4 kB]
Fetched 9,396 kB in 2s (5,486 kB/s)
Reading package lists... Done
Reading package lists... Done
```

Let's install:

```
sudo apt-get update
sudo apt-get install -y ffmpeg
```

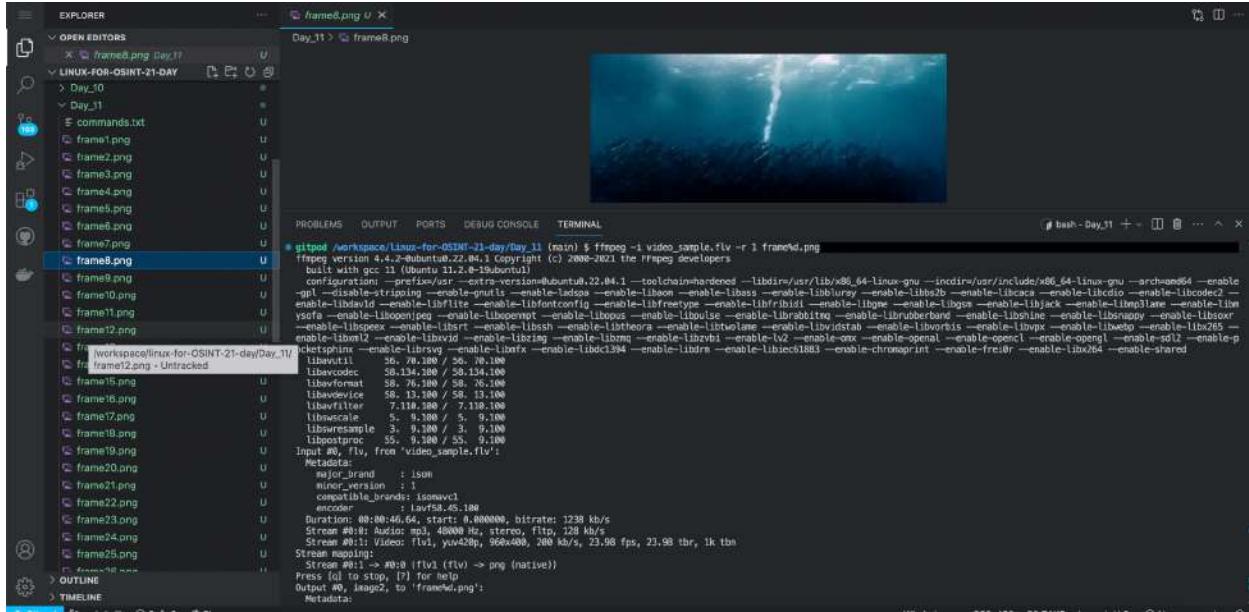

Now let's try to convert the video into a set of frames in png format:

cd Day_11

ffmpeg -i video_sample.flv -r 1 frame%d.png

Viewing a video frame by frame allows you to quickly understand what the video is about and highlight key episodes in it. A simple but very time-saving trick. Note that if you right-click on a file and folder in Gitpod, it can be downloaded from workspace.

Now let's try to extract the audio from the video with another simple command. You can listen to the result without leaving Gitpod:

```
ffmpeg -i video_sample.flv -q:a 0 -map a audio.mp3
```

As you can guess, audio needs to be extracted from video to turn it into text. This will help you quickly analyze it and find the key semantic parts.

Transcribe audio

PocketSphinx (<https://github.com/cmusphinx/pocketsphinx>) is a very simple speech recognizer.

```
gitpod /workspace/linux-for-OSINT-21-day/Day_11 (main) $ sudo apt install pocketsphinx pocketsphinx-en-us
Reading package lists... Done
Building dependency tree... Done
Reading state information... Done
pocketsphinx-en-us is already the newest version (0.8.0+real5prealpha1-14ubuntu1).
pocketsphinx-en-us set to manually installed.
The following NEW packages will be installed:
  pocketsphinx
0 upgraded, 1 newly installed, 0 to remove and 87 not upgraded.
Need to get 32.6 kB of archives.
After this operation, 140 kB of additional disk space will be used.
Do you want to continue? [Y/n] y
Get:1 http://archive.ubuntu.com/ubuntu jammy/universe amd64 pocketsphinx amd64 0.8.0+real5prealpha1-14ubuntu1 [32.6 kB]
Fetched 32.6 kB in 0s (111 kB/s)
debconf: delaying package configuration, since apt-utils is not installed
Selecting previously unselected package pocketsphinx.
(Reading database ... 36864 files and directories currently installed.)
Preparing to unpack .../pocketsphinx_0.8.0+real5prealpha1-14ubuntu1_amd64.deb ...
Unpacking pocketsphinx (0.8.0+real5prealpha1-14ubuntu1) ...
Setting up pocketsphinx (0.8.0+real5prealpha1-14ubuntu1) ...
Processing triggers for man-db (2.10.2-1) ...
gitpod /workspace/linux-for-OSINT-21-day/Day_11 (main) $
```

Let's install:

```
sudo apt install pocketsphinx pocketsphinx-en-us
```


If you want to work with audio recordings in other languages, install additional libraries. A complete list can be found [here](#).

PocketSphinx is an easy to use utility that produces quality results. But, unfortunately, it does not work with different audio file formats, but only with wav 16000 Hz.

```
gitpod /workspace/linux-for-OSINT-21-day/day_11 (main) $ ffmpeg -i test_speech.wav -ar 16000 -ac 1 test_speech_16000.wav
ffmpeg version 4.4.2-0ubuntu22.04.1 Copyright (c) 2000-2021 the FFmpeg developers
  configuration: --prefix=/usr --extra-version=0.22.04.1 --toolchain=hardened --libdir=/usr/lib/x86_64-linux-gnu --incdir=/usr/include/x86_64-linux-gnu --arch=amd64 --enable-gpl --disable-stripping --enable-gnulibc --enable-ladspa --enable-libaom --enable-libass --enable-libbluray --enable-libbs2b --enable-libcaca --enable-libcdio --enable-libcde2c --enable-libdav1d --enable-libdilite --enable-libfontconfig --enable-libfreetype --enable-libfribidi --enable-libgme --enable-libgsm --enable-libjjack --enable-libmp3lame --enable-libmfx --enable-libmysofa --enable-libopenjpeg --enable-libopenppm --enable-libopus --enable-libpulse --enable-librabbithq --enable-librubberband --enable-libshine --enable-libsnappy --enable-libsoxr --enable-libspeex --enable-libsrtp --enable-libssh --enable-libtheora --enable-libtwolame --enable-libvidstab --enable-libvorbis --enable-libvpx --enable-libwebp --enable-libx265 --enable-libxml2 --enable-libxvid --enable-libzimg --enable-libzvbi --enable-lv2 --enable-omx --enable-openal --enable-openccl --enable-opengl --enable-sdl2 --enable-pocketsphinx --enable-librsvg --enable-libxml --enable-libdc1394 --enable-libdrm --enable-libiec61883 --enable-chromaprint --enable-frei0r --enable-libx264 --enable-shared
  libavutil      56. 70.100 /  56. 70.100
  libavcodec     58.134.100 /  58.134.100
  libavformat    58. 76.100 /  58. 76.100
  libavdevice    58. 13.100 /  58. 13.100
  libavfilter     7.110.100 /  7.110.100
  libavresample   3.  9.100 /  3.  9.100
  libpostproc    55.  9.100 / 55.  9.100
Guessed Channel Layout for Input Stream #0.0 : mono
Input #0, wav, from 'test_speech.wav':
  Metadata:
    encoder         : Lavf59.27.100
  Duration: 00:00:14.21, bitrate: 384 kb/s
    Stream #0:0: Audio: pcm_s16le ([1][0][0][0] / 0x0001), 24000 Hz, mono, s16, 384 kb/s
Stream mapping:
  Stream #0:0 -> #0:0 (pcm_s16le (native) -> pcm_s16le (native))
Press [q] to stop, [?] for help
Output #0, wav, to 'test_speech_16000.wav':
  Metadata:
    ISFT           : Lavc58.76.100
  Stream #0:0: Audio: pcm_s16le ([1][0][0][0] / 0x0001), 16000 Hz, mono, s16, 256 kb/s
    Metadata:
      encoder       : Lavc58.134.100 pcm_s16le
size= 444KB time=00:00:14.20 bitrates: 256.1kbits/s speed=2.86e+03x
video:0kB audio:444kB subtitle:0kB other streams:0kB global headers:0kB muxing overhead: 0.017156%
```

Fortunately, most audio formats can be easily converted to it with `ffmpeg`. Example:

```
ffmpeg -i test_speech.wav -ar 16000 -ac 1 test_speech_16000.wav
```

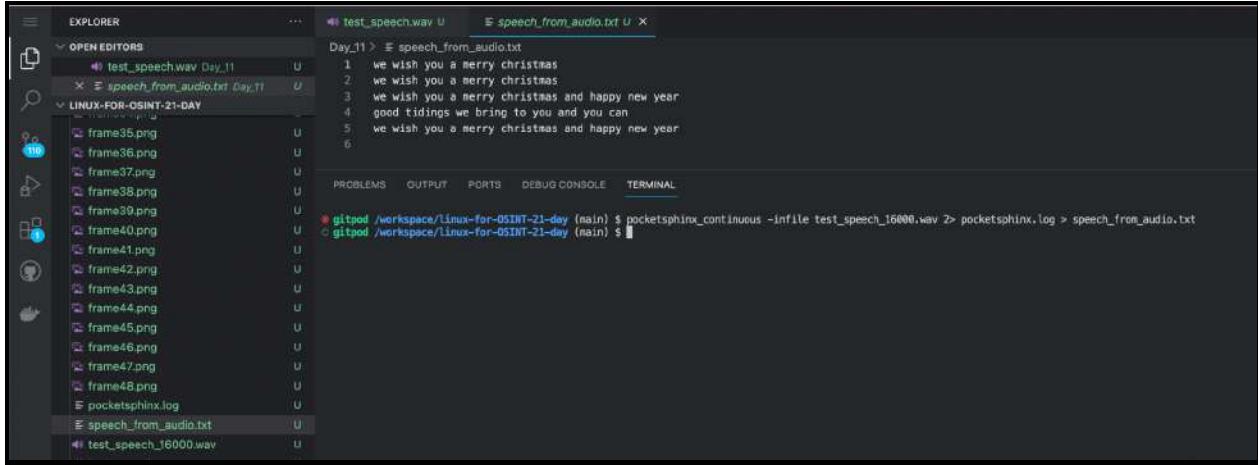

And now try convert speech audio to text:

```
pocketsphinx_continuous -infile test_speech_16000.wav 2> pocketsphinx.log > speech_from_audio.txt
```

If you need very high quality speech recognition for different rare languages, I suggest you take a look at Open AI Whisper API (<https://openai.com/research/whisper>). It is a paid tool, but it is really good.

Extract text from images

Tesseract OCR (<https://github.com/tesseract-ocr/tesseract>) is a simple Optical Text Recognition utility.

PROBLEMS OUTPUT PORTS DEBUG CONSOLE TERMINAL

```
● gitpod /workspace/linux-for-OSINT-21-day (main) $ sudo apt install tesseract-ocr
Reading package lists... Done
Building dependency tree... Done
Reading state information... Done
The following additional packages will be installed:
  libarchive13 libgif7 liblept5 libtesseract4 tesseract-ocr-eng tesseract-ocr-osd
Suggested packages:
  lrzip
The following NEW packages will be installed:
  libarchive13 libgif7 liblept5 libtesseract4 tesseract-ocr tesseract-ocr-eng tesseract-ocr-osd
0 upgraded, 7 newly installed, 0 to remove and 87 not upgraded.
Need to get 7,634 kB of archives.
After this operation, 22.7 MB of additional disk space will be used.
Do you want to continue? [Y/n] y
Get:1 http://archive.ubuntu.com/ubuntu jammy/main amd64 libarchive13 amd64 3.6.0-1ubuntu1 [368 kB]
Get:2 http://archive.ubuntu.com/ubuntu jammy/main amd64 libgif7 amd64 5.1.9-2build2 [33.8 kB]
Get:3 http://archive.ubuntu.com/ubuntu jammy/universe amd64 liblept5 amd64 1.82.0-3build1 [1,107 kB]
Get:4 http://archive.ubuntu.com/ubuntu jammy/universe amd64 libtesseract4 amd64 4.1.1-2.1build1 [1,308 kB]
Get:5 http://archive.ubuntu.com/ubuntu jammy/universe amd64 tesseract-ocr-eng all 1:4.00~git30-7274cfa-1.1 [1,591 kB]
Get:6 http://archive.ubuntu.com/ubuntu jammy/universe amd64 tesseract-ocr-osd all 1:4.00~git30-7274cfa-1.1 [2,990 kB]
Get:7 http://archive.ubuntu.com/ubuntu jammy/universe amd64 tesseract-ocr amd64 4.1.1-2.1build1 [236 kB]
Fetched 7,634 kB in 1s (7,075 kB/s)
debconf: delaying package configuration, since apt-utils is not installed
Selecting previously unselected package libarchive13:amd64.
(Reading database ... 36875 files and directories currently installed.)
Preparing to unpack .../0-libarchive13_3.6.0-1ubuntu1_amd64.deb ...
Unpacking libarchive13:amd64 (3.6.0-1ubuntu1) ...
Selecting previously unselected package libgif7:amd64.
Preparing to unpack .../1-libgif7_5.1.9-2build2_amd64.deb ...
Unpacking libgif7:amd64 (5.1.9-2build2) ...
Selecting previously unselected package liblept5:amd64.
Preparing to unpack .../2-liblept5_1.82.0-3build1_amd64.deb ...
Unpacking liblept5:amd64 (1.82.0-3build1) ...
Selecting previously unselected package libtesseract4:amd64.
Preparing to unpack .../3-libtesseract4_4.1.1-2.1build1_amd64.deb ...
Unpacking libtesseract4:amd64 (4.1.1-2.1build1) ...
Selecting previously unselected package tesseract-ocr-eng.
```

sudo apt install tesseract-ocr

Try to OCR text in image and save to text.txt:

```
test_speech.wav U text.txt.txt U text.png U X
Day_11 > text.png

We used a few other useful flags in this command:
E - use extended regular expressions syntax.
o - show only parts of lines that match (NOT all lines).
r - search for all files in the current directory, as well as for all files in subdirectories.

PROBLEMS OUTPUT PORTS DEBUG CONSOLE TERMINAL

● gitpod /workspace/linux-for-OSINT-21-day (main) $ cd Day_11
● gitpod /workspace/linux-for-OSINT-21-day/Day_11 (main) $ tesseract text.png text.txt
Tesseract Open Source OCR Engine v4.1.1 with Leptonica
● gitpod /workspace/linux-for-OSINT-21-day/Day_11 (main) $ cat text.txt.txt
We used a few other useful flags in this command:
E - use extended regular expressions syntax.
o - show only parts of lines that match (NOT all lines).
r - search for all files in the current directory, as well as for all files in subdirectories.
○ gitpod /workspace/linux-for-OSINT-21-day/Day_11 (main) $
```

tesseract text.png text.txt

Once we've turned video, audio, and pictures into text, we can translate it! Here is one of the many ways to automate this process.

Translate text

Translate Shell (<https://github.com/soimort/translate-shell>) is command line translator based on Google Translate, Bing Translator, Yandex.Translate and other translate services.

Let's install:

```

PROBLEMS    OUTPUT    PORTS    COMMENTS    DEBUG CONSOLE    TERMINAL
● gitpod /workspace/Linux-for-OSINT-21-day (main) $ sudo apt install translate-shell
Reading package lists... Done
Building dependency tree... Done
Reading state information... Done
The following additional packages will be installed:
  aspell aspell-en dictionaries-common gawk libaspell15 libfribidi-bin libtext-iconv-perl rlwrap
Suggested packages:
  aspell-doc spellutils wordlist gawk-doc mplayer | mpv | mpg123 | espeak
The following NEW packages will be installed:
  aspell aspell-en dictionaries-common gawk libaspell15 libfribidi-bin libtext-iconv-perl rlwrap translate-shell
0 upgraded, 9 newly installed, 0 to remove and 87 not upgraded.
Need to get 1,523 kB of archives.
After this operation, 6,130 kB of additional disk space will be used.
Do you want to continue? [Y/n] y
Get:1 http://archive.ubuntu.com/ubuntu jammy-updates/main amd64 gawk amd64 1:5.1.0~lubuntu0.1 [447 kB]
Get:2 http://archive.ubuntu.com/ubuntu jammy/main amd64 libtext-iconv-perl amd64 1.7-7build3 [14.3 kB]
Get:3 http://archive.ubuntu.com/ubuntu jammy/main amd64 libaspell15 amd64 0.60.8-4build1 [325 kB]
Get:4 http://archive.ubuntu.com/ubuntu jammy/main amd64 dictionaries-common all 1.28.1+ [185 kB]
Get:5 http://archive.ubuntu.com/ubuntu jammy/main amd64 aspell amd64 0.60.8-4build1 [87.7 kB]
Get:6 http://archive.ubuntu.com/ubuntu jammy/main amd64 aspell-en all 2018.04.16-0-1 [299 kB]
Get:7 http://archive.ubuntu.com/ubuntu jammy-updates/universe amd64 libfribidi-bin amd64 1:0.8-2ubuntu3.1 [9,494 kB]
Get:8 http://archive.ubuntu.com/ubuntu jammy/universe amd64 rlwrap amd64 0.43-1build3 [98.2 kB]
Get:9 http://archive.ubuntu.com/ubuntu jammy/multiverse amd64 translate-shell all 0.9.6.12-1 [56.9 kB]
Fetched 1,523 kB in 1s (1,760 kB/s)
debconf: delaying package configuration, since apt-utils is not installed
Selecting previously unselected package gawk.
(Reading database ... 36331 files and directories currently installed.)
Preparing to unpack .../0-gawk_1%3a5.1.0~lubuntu0.1_amd64.deb ...
Unpacking gawk (1:5.1.0~lubuntu0.1) ...
Selecting previously unselected package libtext-iconv-perl.
Preparing to unpack .../1-libtext-iconv-perl_1.7-7build3_amd64.deb ...
Unpacking libtext-iconv-perl (1.7-7build3) ...
Selecting previously unselected package libaspell15:amd64.
Preparing to unpack .../2-libaspell15_0.60.8-4build1_amd64.deb ...
Unpacking libaspell15:amd64 (0.60.8-4build1) ...

```

sudo apt install translate-shell

And translate text from file in French:


```
cat text.txt.txt | trans :fr
```

Codes for different languages can be found on this page:
<https://github.com/soimort/translate-shell/wiki/Languages>.

Today, we explored the easiest-to-use methods for automating media content analysis. But if you have to do it often, I recommend you to learn more about AI tools for image recognition that have appeared in the last six months to a year. Many of them have APIs that can be used to create command line tools.

Day 12. Analyze PDF

Sometimes investigations have to deal with hundreds of documents and only one of them may contain really important information. Therefore, it is worth trying to automate the analysis of text, images and metadata in PDF.

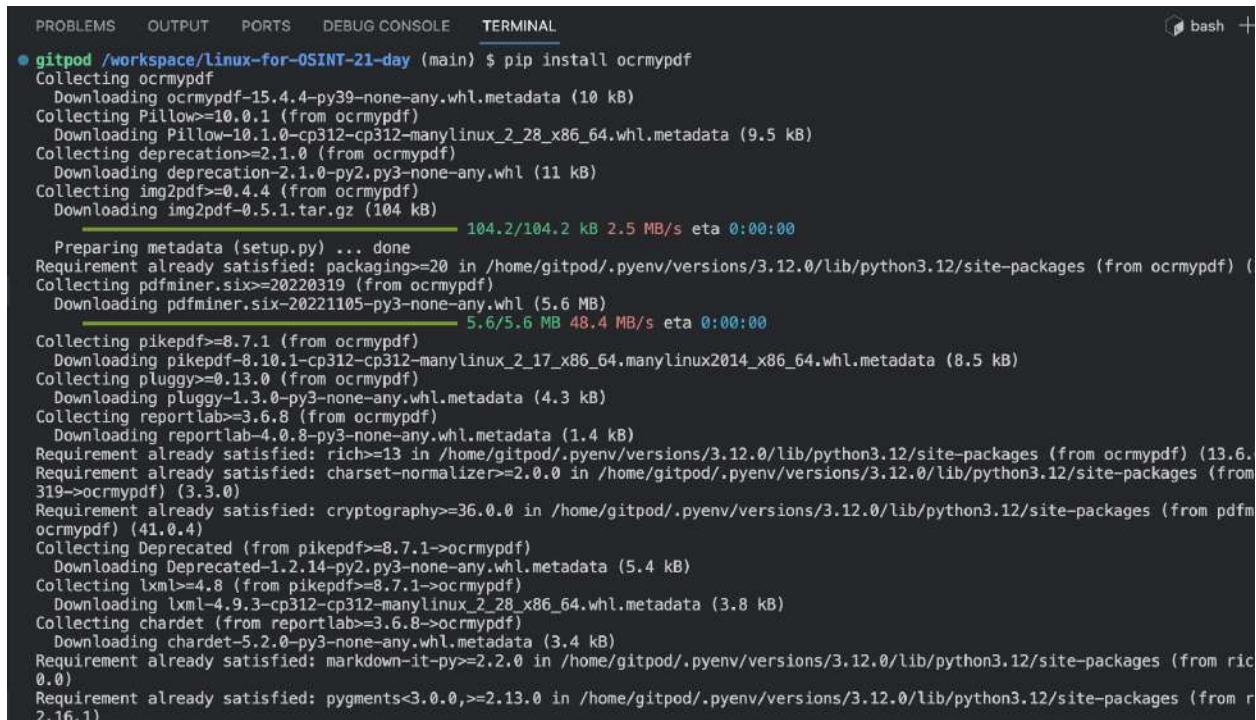

```
PROBLEMS OUTPUT PORTS DEBUG CONSOLE TERMINAL
● gitpod /workspace/linux-for-OSINT-21-day (main) $ pip install ocrmypdf
Collecting ocrmypdf
  Downloading ocrmypdf-15.4.4-py39-none-any.whl.metadata (10 kB)
Collecting Pillow>=10.0.1 (from ocrmypdf)
  Downloading Pillow-10.1.0-cp312-cp312-manylinux_2_28_x86_64.whl.metadata (9.5 kB)
Collecting deprecation>=2.1.0 (from ocrmypdf)
  Downloading deprecation-2.1.0-py2.py3-none-any.whl (11 kB)
Collecting img2pdf>=0.4.4 (from ocrmypdf)
  Downloading img2pdf-0.5.1.tar.gz (104 kB)
    104.2/104.2 kB 2.5 MB/s eta 0:00:00
  Preparing metadata (setup.py) ... done
Requirement already satisfied: packaging>=20 in /home/gitpod/.pyenv/versions/3.12.0/lib/python3.12/site-packages (from ocrmypdf) (20.4.2)
Collecting pdfminer.six>=20220319 (from ocrmypdf)
  Downloading pdfminer.six-20221105-py3-none-any.whl (5.6 MB)
    5.6/5.6 MB 48.4 MB/s eta 0:00:00
Collecting pikepdf>=8.7.1 (from ocrmypdf)
  Downloading pikepdf-8.10.1-cp312-cp312-manylinux_2_17_x86_64.manylinux2014_x86_64.whl.metadata (8.5 kB)
Collecting pluggy>=0.13.0 (from ocrmypdf)
  Downloading pluggy-1.3.0-py3-none-any.whl.metadata (4.3 kB)
Collecting reportlab>=3.6.8 (from ocrmypdf)
  Downloading reportlab-4.0.8-py3-none-any.whl.metadata (1.4 kB)
Requirement already satisfied: rich>=13 in /home/gitpod/.pyenv/versions/3.12.0/lib/python3.12/site-packages (from ocrmypdf) (13.6.1)
Requirement already satisfied: charset-normalizer>=2.0.0 in /home/gitpod/.pyenv/versions/3.12.0/lib/python3.12/site-packages (from ocrmypdf) (3.3.0)
Requirement already satisfied: cryptography>=36.0.0 in /home/gitpod/.pyenv/versions/3.12.0/lib/python3.12/site-packages (from pdfminer.six>=20220319)
Collecting Deprecated (from pikepdf>=8.7.1>=ocrmypdf)
  Downloading Deprecated-1.2.14-py2.py3-none-any.whl.metadata (5.4 kB)
Collecting lxml>=4.8 (from pikepdf>=8.7.1>=ocrmypdf)
  Downloading lxml-4.9.3-cp312-cp312-manylinux_2_28_x86_64.whl.metadata (3.8 kB)
Collecting chardet (from reportlab>=3.6.8>=ocrmypdf)
  Downloading chardet-5.2.0-py3-none-any.whl.metadata (3.4 kB)
Requirement already satisfied: markdown-it-py>=2.2.0 in /home/gitpod/.pyenv/versions/3.12.0/lib/python3.12/site-packages (from rich>=13.6.1)
Requirement already satisfied: pygments<3.0.0,>=2.13.0 in /home/gitpod/.pyenv/versions/3.12.0/lib/python3.12/site-packages (from reportlab>=3.6.8>=ocrmypdf) (2.16.1)
```

OCRmyPDF (<https://github.com/ocrmypdf/OCRmyPDF>) - tool that adds an optical character recognition (OCR) text to scanned PDF files. It makes the text searchable and processable.

Let's install:

```
pip install ocrmypdf
```

```
PROBLEMS    OUTPUT    PORTS    DEBUG CONSOLE    TERMINAL
gitpod /workspace/linux-for-OSINT-21-day/Day_12 (main) $ sudo apt update


    sudo apt install tesseract-ocr
Get:2 https://download.docker.com/linux/ubuntu jammy InRelease [48.8 kB]
Get:3 https://download.docker.com/linux/ubuntu jammy/stable amd64 Packages [26.8 kB]
Get:4 http://security.ubuntu.com/ubuntu jammy-security InRelease [110 kB]
Hit:5 http://archive.ubuntu.com/ubuntu jammy InRelease
Get:6 https://ppa.launchpadcontent.net/git-core/ppa/ubuntu jammy InRelease [23.8 kB]
Get:7 https://ppa.launchpadcontent.net/ondrej/apache2/ubuntu jammy InRelease [23.8 kB]
Get:8 https://ppa.launchpadcontent.net/ondrej/nginx-mainline/ubuntu jammy InRelease [23.8 kB]
Get:9 https://ppa.launchpadcontent.net/ondrej/php/ubuntu jammy InRelease [23.9 kB]
Get:10 http://archive.ubuntu.com/ubuntu jammy-updates InRelease [119 kB]
Get:11 https://ppa.launchpadcontent.net/git-core/ppa/ubuntu jammy/main amd64 Packages [2,961 B]
Get:12 https://ppa.launchpadcontent.net/ondrej/apache2/ubuntu jammy/main amd64 Packages [3,956 B]
Get:13 http://archive.ubuntu.com/ubuntu jammy-backports InRelease [109 kB]
Get:1 https://apt.llvm.org/jammy llvm-toolchain-jammy-17 InRelease [6,833 B]
Get:15 https://ppa.launchpadcontent.net/ondrej/nginx-mainline/ubuntu jammy/main amd64 Packages [5,671 B]
Get:16 https://ppa.launchpadcontent.net/ondrej/php/ubuntu jammy/main amd64 Packages [204 kB]
Get:17 http://security.ubuntu.com/ubuntu jammy-security/main amd64 Packages [1,326 kB]
Get:18 https://apt.llvm.org/jammy llvm-toolchain-jammy-17/main amd64 Packages [12.4 kB]
Get:19 http://archive.ubuntu.com/ubuntu jammy-updates/restricted amd64 Packages [1,602 kB]
Get:14 https://packagecloud.io/github/git-lfs/ubuntu jammy InRelease [28.0 kB]
Get:20 http://security.ubuntu.com/ubuntu jammy-security/universe amd64 Packages [1,046 kB]
Get:21 http://security.ubuntu.com/ubuntu jammy-security/restricted amd64 Packages [1,572 kB]
Get:22 http://archive.ubuntu.com/ubuntu jammy-updates/multiverse amd64 Packages [49.8 kB]
Get:23 http://archive.ubuntu.com/ubuntu jammy-updates/universe amd64 Packages [1,305 kB]
Get:24 http://security.ubuntu.com/ubuntu jammy-security/multiverse amd64 Packages [44.0 kB]
Get:25 http://archive.ubuntu.com/ubuntu jammy-updates/main amd64 Packages [1,599 kB]
Get:27 http://archive.ubuntu.com/ubuntu jammy-backports/universe amd64 Packages [28.1 kB]
Get:28 http://archive.ubuntu.com/ubuntu jammy-backports/main amd64 Packages [50.4 kB]
Get:26 https://packagecloud.io/github/git-lfs/ubuntu jammy/main amd64 Packages [1,654 B]
Fetched 9,396 kB in 2s (4,285 kB/s)
Reading package lists... Done
Building dependency tree... Done
Reading state information... Done
```

Install Tesseract OCR (<https://github.com/tesseract-ocr/tesseract>), the text recognition utility that OCRMyPDF is based on.

```
sudo apt update
sudo apt install tesseract-ocr
```

Install Ghostscript (<https://www.ghostscript.com>) is an interpreter for the PostScript® language and PDF files:

```
sudo apt install ghostscript
```

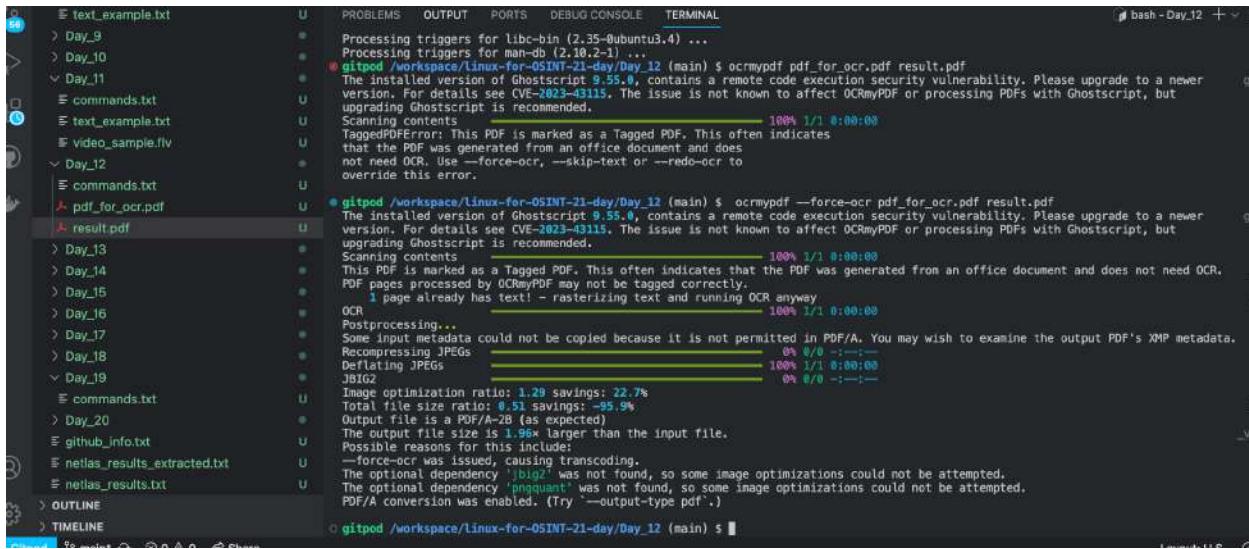

```
PROBLEMS OUTPUT PORTS DEBUG CONSOLE TERMINAL
Processing triggers for libc-bin (2.35-0ubuntu3,4) ...
Processing triggers for man-db (2.18.2-1) ...
gitpod /workspace/linux-for-OSINT-21-day/Day_12 (main) $ ocrmypdf pdf_for_ocr.pdf result.pdf
The installed version of Ghostscript 9.55.0, contains a remote code execution security vulnerability. Please upgrade to a newer version. For details see CVE-2023-43115. The issue is not known to affect OCRMyPDF or processing PDFs with Ghostscript, but upgrading Ghostscript is recommended.
Scanning contents 100% 1/1 0:00:00
TaggedPDFError: This PDF is marked as a Tagged PDF. This often indicates that the PDF was generated from an office document and does not need OCR. Use --force-ocr, --skip-text or --redo-ocr to override this error.
gitpod /workspace/linux-for-OSINT-21-day/Day_12 (main) $ ocrmypdf --force-ocr pdf_for_ocr.pdf result.pdf
The installed version of Ghostscript 9.55.0, contains a remote code execution security vulnerability. Please upgrade to a newer version. For details see CVE-2023-43115. The issue is not known to affect OCRMyPDF or processing PDFs with Ghostscript, but upgrading Ghostscript is recommended.
Scanning contents 100% 1/1 0:00:00
This PDF is marked as a Tagged PDF. This often indicates that the PDF was generated from an office document and does not need OCR.
PDF pages processed by OCRMyPDF may not be tagged correctly.
1 page already has text! - rasterizing text and running OCR anyway
OCR
Postprocessing...
Some input metadata could not be copied because it is not permitted in PDF/A. You may wish to examine the output PDF's XMP metadata.
Recompressing JPEGs 0% 0/0 --:--:-
Deflating JPEGs 100% 1/1 0:00:00
JBIG2 0% 0/0 --:--:-
Image optimization ratio: 1.29 savings: 22.7%
Total file size ratio: 0.51 savings: -95.9%
Output file is a PDF-A-2B (as expected)
The output file size is 1.96x larger than the input file.
Possible reasons for this include:
--force-ocr was issued, causing transcoding.
The optional dependency 'bzip2' was not found, so some image optimizations could not be attempted.
The optional dependency 'pizquant' was not found, so some image optimizations could not be attempted.
PDF/A conversion was enabled. (Try --output-type pdf.)
gitpod /workspace/linux-for-OSINT-21-day/Day_12 (main) $
```


Let's run:

```
cd Day_12
ocrmypdf pdf_for_ocr.pdf result.pdf
```

As it happens, I picked up a not-so-great PDF that already has a text layer. So the **--force-ocr** flag is used to create another layer.

```
ocrmypdf --force-ocr pdf_for_ocr.pdf result.pdf
```

The command may take some time to execute, depending on the number of pages in the document.

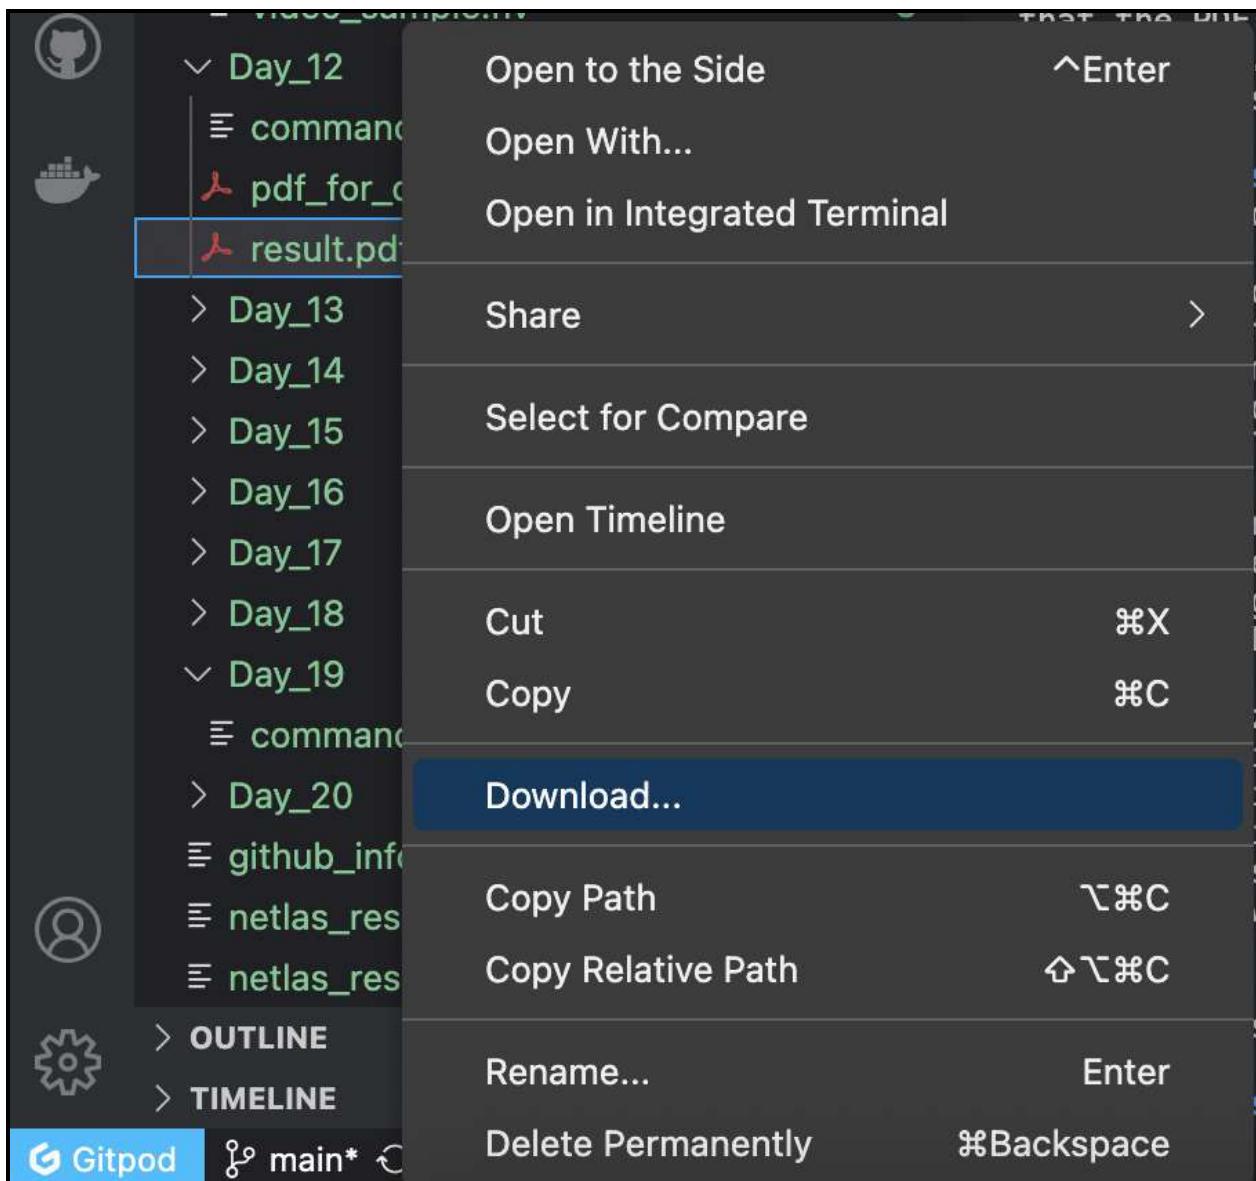

If you use Gitpod, you need to download the PDF document to your computer to view it. Right-click on it and select **Download**.

Instructions for Adding Your Logo & Address to AAO-HNSF Patient Handouts

CO-BRANDING AAO-HNSF PATIENT HANDOUTS IS AS EASY AS 1-2-3!

1 Download & Save Patient Handout

- Download the patient handout

You will need Adobe Acrobat Reader.
You can install it for free here:
get.adobe.com/reader

- Save it to your computer

Remember where you save it; you will need to access it in the following steps.



2 Upload Your Logo & Address

Your image **must** be saved as a .pdf file!

For additional information on how to save your logo/address as a .pdf file, please see the instructions below.

You will not be able to upload your personal information to the patient handout if the file is not saved in the .pdf format.

- Open the saved patient handout document

- Click in the white space at the bottom of the page.

- Within the **Select Icon** window, **Browse** to the .pdf file you would like to **Insert** and then click, **OK**.

The logo and/or address file will resize appropriately for the box.

- Type your web address in the blue rectangle below the white image field.


3 You're Ready to Print!

- Save your file.

Make sure to save your file before you close the document to ensure your logo and/or address will be there the next time you open up the document.

- You are now ready to print!

Example of a co-branded Patient Handout:

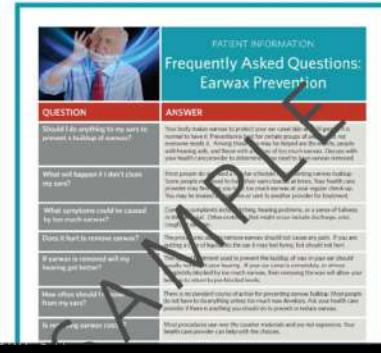

When viewing a file, the text should be available for selection, copying and pasting.

Now let's try to extract the text from the PDF file and save it to a separate file. We will use **Pdfotext** command, part of poppler-utils (<https://poppler.js.org/docs/v2/utils/>).

Extract text from PDF

```

PROBLEMS   OUTPUT   PORTS   DEBUG CONSOLE   TERMINAL
Get:27 http://archive.ubuntu.com/ubuntu jammy-backports/universe amd64 Packages [28.1 kB]
Get:25 https://packagecloud.io/github/git-lfs/ubuntu jammy/main amd64 Packages [1,654 B]
Get:19 https://apt.llvm.org/jammy llvm-toolchain-jammy-17 InRelease [6,833 B]
Get:28 https://apt.llvm.org/jammy llvm-toolchain-jammy-17/main amd64 Packages [12.4 kB]
Fetched 9,396 kB in 3s (3,677 kB/s)
Reading package lists... Done
Building dependency tree... Done
Reading state information... Done
85 packages can be upgraded. Run 'apt list --upgradable' to see them.
● gitpod /workspace/linux-for-OSINT-21-day (main) $ sudo apt-get install poppler-utils --fix-missing
Reading package lists... Done
Building dependency tree... Done
Reading state information... Done
The following additional packages will be installed:
  libpoppler118
The following NEW packages will be installed:
  libpoppler118 poppler-utils
0 upgraded, 2 newly installed, 0 to remove and 85 not upgraded.
Need to get 1,258 kB of archives.
After this operation, 4,307 kB of additional disk space will be used.
Do you want to continue? [Y/n] y
Get:1 http://archive.ubuntu.com/ubuntu jammy-updates/main amd64 libpoppler118 amd64 22.02.0-2ubuntu0.3 [1,072 kB]
Get:2 http://archive.ubuntu.com/ubuntu jammy-updates/main amd64 poppler-utils amd64 22.02.0-2ubuntu0.3 [186 kB]
Fetched 1,258 kB in 1s (1,533 kB/s)
debconf: delaying package configuration, since apt-utils is not installed
Selecting previously unselected package libpoppler118:amd64.
(Reading database ... 36155 files and directories currently installed.)
Preparing to unpack .../libpoppler118_22.02.0-2ubuntu0.3_amd64.deb ...
Unpacking libpoppler118:amd64 (22.02.0-2ubuntu0.3) ...
Selecting previously unselected package poppler-utils.
Preparing to unpack .../poppler-utils_22.02.0-2ubuntu0.3_amd64.deb ...
Unpacking poppler-utils (22.02.0-2ubuntu0.3) ...
Setting up libpoppler118:amd64 (22.02.0-2ubuntu0.3) ...
Setting up poppler-utils (22.02.0-2ubuntu0.3) ...
Processing triggers for man-db (2.10.2-1) ...
Processing triggers for libc-bin (2.35-0ubuntu3.4) ...

```

First, Let's install popper-utils:

```

sudo apt clean
sudo apt autoclean
sudo apt update
sudo apt-get install poppler-utils --fix-missing

```

```

Day_12 > result.txt
6
9  lice Cele hs
10
11 Wy.
12
13 @ Download the patient handout
14
15 Upload Your Logo & Address
16

PROBLEMS OUTPUT PORTS DEBUG CONSOLE TERMINAL

pdftotext version 22.02.0
Copyright 2005-2022 The Poppler Developers - http://poppler.freedesktop.org
Copyright 1996-2011 Glyph & Cog, LLC
Usage: pdftotext [options] <PDF-file> [<text-file>]
-f <int> : first page to convert
-l <int> : last page to convert
-r <fp> : resolution, in DPI (default is 72)
-x <int> : x-coordinate of the crop area top left corner
-y <int> : y-coordinate of the crop area top left corner
-w <int> : width of crop area in pixels (default is 0)
-h <int> : height of crop area in pixels (default is 0)
-layout : maintain original physical layout
-fixed <fp> : assume fixed-pitch (or tabular) text
-raw : keep strings in content stream order
-nodig : discard diagonal text
-htmle : generate a simple HTML file, including the meta information
-enc <string> : output text encoding name
-listenc : list available encodings
-eol <string> : output end-of-line convention (unix, dos, or mac)
-nogbrk : don't insert page breaks between pages
-bbox : output bounding box for each word and page size to HTML. Sets -htmle
-bbox-layout : like -bbox but with extra layout bounding box data. Sets -htmle
-cropbox : use the crop box rather than media box
-colspace <fp> : how much spacing we allow after a word before considering adjacent text to be a new column, as a fraction
a 0.3 (default)
-owp <string> : owner password (for encrypted files)
-upw <string> : user password (for encrypted files)
-q : don't print any messages or errors
-v : print copyright and version info
-h : print usage information
--help : print usage information
--help : print usage information
--7 : print usage information

gitpod /workspace/Linux-for-OSINT-21-DAY (main) $ pdftotext Day_12/result.pdf Day_12/result.txt
gitpod /workspace/Linux-for-OSINT-21-DAY (main) $ 


```

pdftotext result.pdf result.txt

You can now return to **Day 6** and **Day 7** to use the commands described there to work with text extracted from PDF files. For some people, it may be more convenient to skip text extraction and search directly in the PDF using PDFGrep (<https://pdfgrep.org/>) utility.

Extract images from PDF

Also **PopperUtils** include **Pdfimages**, which allows you to extract images from PDF documents. Unfortunately, it works far from perfect, but let's give it a try:

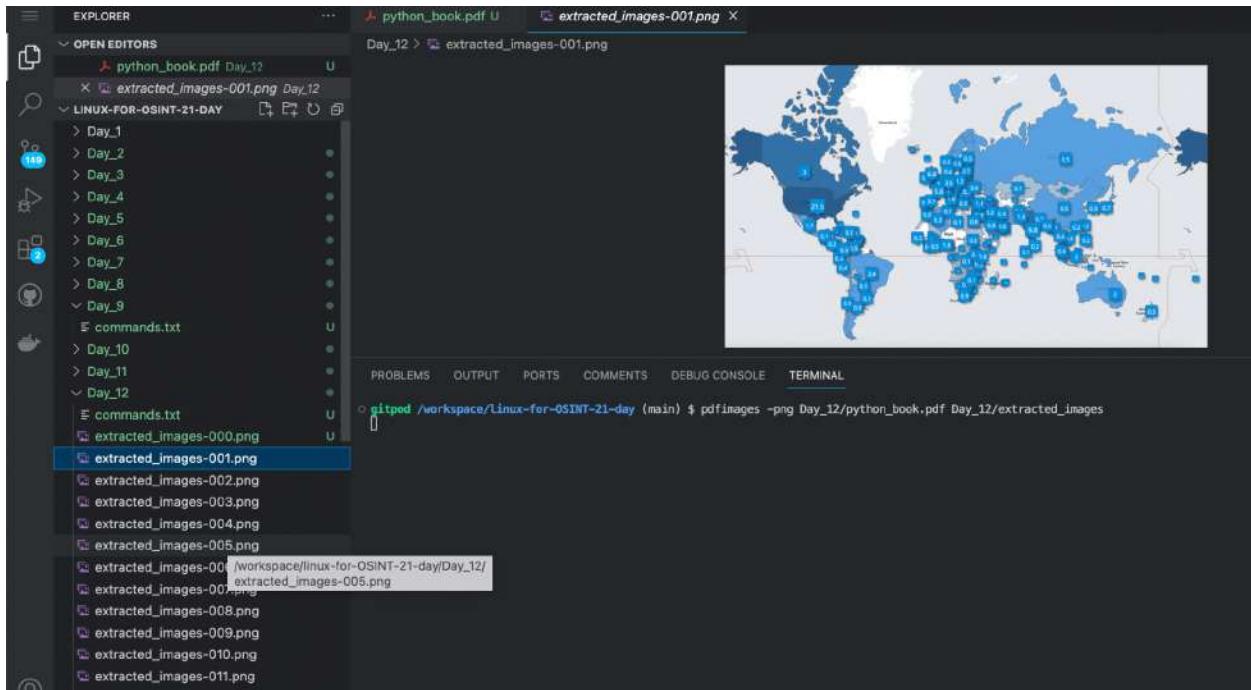

```
pdfimages -png python_book.pdf extracted_images
```

Metadata analyze

PROBLEMS OUTPUT PORTS DEBUG CONSOLE TERMINAL

```
● gitpod /workspace/linux-for-OSINT-21-day (main) $ sudo apt-get update
  sudo apt-get install -y libimage-exiftool-perl
  Hit:1 https://download.docker.com/linux/ubuntu jammy InRelease
  Hit:2 https://ppa.launchpadcontent.net/git-core/ppa/ubuntu jammy InRelease
  Hit:3 https://ppa.launchpadcontent.net/ondrej/apache2/ubuntu jammy InRelease
  Hit:4 https://ppa.launchpadcontent.net/ondrej/nginx-mainline/ubuntu jammy InRelease
  Hit:5 https://ppa.launchpadcontent.net/ondrej/php/ubuntu jammy InRelease
  Hit:6 http://security.ubuntu.com/ubuntu jammy-security InRelease
  Hit:7 http://archive.ubuntu.com/ubuntu jammy InRelease
  Hit:8 http://archive.ubuntu.com/ubuntu jammy-updates InRelease
  Hit:10 http://archive.ubuntu.com/ubuntu jammy-backports InRelease
  Hit:9 https://apt.llvm.org/jammy llvm-toolchain-jammy-17 InRelease
  Hit:11 https://packagecloud.io/github/git-lfs/ubuntu jammy InRelease
  Reading package lists... Done
  Reading package lists... Done
  Building dependency tree... Done
  Reading state information... Done
  The following additional packages will be installed:
    libarchive-zip-perl libmime-charset-perl libsombok3 libunicode-linebreak-perl
  Suggested packages:
    libposix-strptime-perl libencode-hanextra-perl libpod2-base-perl
  The following NEW packages will be installed:
    libarchive-zip-perl libimage-exiftool-perl libmime-charset-perl libsombok3 libunicode-linebreak-perl
  0 upgraded, 5 newly installed, 0 to remove and 85 not upgraded.
  Need to get 3,964 kB of archives.
  After this operation, 23.5 MB of additional disk space will be used.
  Get:1 http://archive.ubuntu.com/ubuntu jammy/main amd64 libarchive-zip-perl all 1.68-1 [90.2 kB]
```

ExifTool (<https://exiftool.org/>) is a Perl library for reading, editing and deleting metadata. According to the list on the official website, it supports 209 file formats!

Let's install:

`sudo apt-get update`

`sudo apt-get install -y libimage-exiftool-perl`

```
PROBLEMS OUTPUT PORTS DEBUG CONSOLE TERMINAL

● gitpod /workspace/linux-for-OSINT-21-day (main) $ exiftool Day_12/result.pdf
ExifTool Version Number      : 12.40
File Name                   : result.pdf
Directory                   : Day_12
File Size                   : 1112 KiB
File Modification Date/Time : 2023:12:17 13:10:51+00:00
File Access Date/Time       : 2023:12:17 17:31:59+00:00
File Inode Change Date/Time: 2023:12:17 17:31:59+00:00
File Permissions            : -rw-r--r--
File Type                   : PDF
File Type Extension         : pdf
MIME Type                   : application/pdf
PDF Version                 : 1.7
Linearized                  : Yes
Author                      :
Create Date                 : 2016:12:22 11:43:55-05:00
Modify Date                 : 2023:12:17 13:10:49+00:00
Language                     : en
XMP Toolkit                 : XMP toolkit 2.9.1-13, framework 1.6
Producer                     : pikepdf 8.10.1
Creator Tool                : ocrmypdf 15.4.4 / Tesseract OCR-PDF 4.1.1
Document ID                 : uuid:3f4126da-d4fa-11f9-0000-4575653f8ad2
Format                       : application/pdf
Part                         : 2
Conformance                 : B
Creator                      :
Metadata Date               : 2023:12:17 13:10:49.574827+00:00
Page Count                   : 1
○ gitpod /workspace/linux-for-OSINT-21-day (main) $
```

And run :

exiftool result.pdf

If you only need certain metadata fields, you can filter them using other Linux utilities such as Grep:

```
PROBLEMS OUTPUT PORTS COMMENTS DEBUG CONSOLE TERMINAL

● gitpod /workspace/linux-for-OSINT-21-day (main) $ exiftool Day_12/result.pdf | grep ^Producer
Producer                  : pikepdf 8.10.1
○ gitpod /workspace/linux-for-OSINT-21-day (main) $
```

exiftool result.pdf | grep ^Producer

You can also try many other tools to automate work with files (PDF and others formats) metadata:

Metadetective (<https://github.com/franckferman/MetaDetective>)

ExifLooter (<https://github.com/aydinnyunus/exifLooter>)

MetaFinder (<https://github.com/Josue87/MetaFinder>)

PyMeta (<https://github.com/m8sec/pymeta>)

Hachoir (<https://github.com/vstinner/hachoir>)

Day 13. MS Office files

LibreOffice (<https://www.libreoffice.org>) is an open source analog of Microsoft Office. Yes, it is far from perfect and lacks some features, but still it allows you to work very successfully with text documents, spreadsheets, presentations and databases.

And all this can be done not only with the GUI, but also with the command line.

```
PROBLEMS    OUTPUT    PORTS    DEBUG CONSOLE    TERMINAL

gitpod /workspace/linux-for-OSINT-21-day (main) $ sudo apt install libreoffice
Reading package lists... Done
Building dependency tree... Done
Reading state information... Done
The following additional packages will be installed:
  apparmor at-spi2-core ca-certificates-java dbus-user-session dconf-gsettings-backend dconf-service default-jre default-jre-headless
  dictionaries-common firebird3.0-common firebird3.0-common-doc firebird3.0-server-core firebird3.0-utils fonts-crosextra-caladea fonts-crosextra-carlito
  fonts-dejavu fonts-dejavu-extra fonts-liberation fonts-liberation2 fonts-linuxlibertine fonts-noto-core fonts-noto-extra fonts-noto-mono fonts-noto-ui-core
  fonts-opensymbol fonts-sil-gentium fonts-sil-gentium-basic gsettings-desktop-schemas gstreamer1.0-glib gstreamer1.0-gtk3 gstreamer1.0-plugins-base
  gtk-update-icon-cache humanity-icon-theme hunspell-en-us java-common libabw20210324 libabw-0.1-1 libatk-bridge2.0-0 libatk-wrapper-java
  libatk-wrapper-java-jni libatk1.0-0 libatk1.0-data libatspi2.0-0 libauthen-sasl-perl libavahi-client3 libavahi-common-data libavahi-common3
  libboost-filesystem1.74.0 libboost-iostreams1.74.0 libboost-locale1.74.0 libboost-thread1.74.0 libbssh-jav libcdparanoia0 libcdr-0.1-1 libclone-perl
  libclucene-contribs1.5 libclucene-core1.5 libclawd2 libcurl2 libcurl3 libdata-dump-perl libdconf1 libde-book-0.1-1 libegl-mesa0 libegl1 libel-api-jav
  libencode-locale-perl libeo0 libepoxy0 libepoxygen-0.1-1 libetonyek-0.1-1 libexttextcat-2.0-0 libexttextcat-data libfbclient2 libfile-basedir-perl
  libfile-desktopentry-perl libfile-listing-perl libfile-mimeinfo-perl libfont-atm-perl libfontfont1 libfreehand-0.1-1 libgpgrmeli libgpgrmep6 libgraphene-1.0-0
  libgstreamer-glib1.0-0 libgstreamer-plugins-base1.0-0 libgtk-3-0 libgtk-3-common libgtk3d-3-0 libguidev-1.0-0 libharfbuzz-icu0 libhsqlbl1.8.0-jav
  libhttp-form-perl libhttp-parser-perl libhttp-tagset-perl libhtml-tree-perl libhttp-cookies-perl libhttp-daemon-perl libhttp-date-perl
  libhttp-message-perl libhttp-negotiate-perl libhunspell1.7-0 libhyphen0 libib-util libio-html-perl libio-socket-ssl-perl libio-stringy-perl
  libipc-system-simple-perl libjasp-api-jav liblangtag-common liblangtag1 libibreoffice-java liblvm1 liblpw-mediatypes-perl liblwp-protocol-https-perl
  libmailtools-perl libmhash2 libmssql-0.1-1 libmaw-0.3-3 libmythes-1.2-0 libnet-dbus-perl libnet-smtp-perl libnet-ssleay-perl libnspr4
  libns3 libodfgen-0.1-1 liborc-0.4-0 liborcus-0.17-0 liborcus-parser-0.17-0 libpagemaker-0.0-0 libpaper-utils libpaper1 libpcsc-lite1 libphobos2-ldc-shared98
  libpoppler18 libraptor2-0 librasqal1 librdf0 libreoffice-base-core libreoffice-base-drivers libreoffice-calc libreoffice-common
  libreoffice-core libreoffice-draw libreoffice-gnome libreoffice-gtk3 libreoffice-impress libreoffice-java-common libreoffice-math libreoffice-nlpserver
  libreoffice-report-builder libreoffice-report-builder-bin libreoffice-script-provider-bsi libreoffice-script-provider-js libreoffice-script-provider-python
  libreoffice-sdbc-firebird libreoffice-sdbc-hsldb libreoffice-sdbc-mysql libreoffice-sdbc-postgresql libreoffice-style-colibre libreoffice-style-elementary
  libreoffice-style-yaru libreoffice-wiki-publisher libreoffice-writer libreveng-0.0-0 libservlet-api-jav libservlet3.1-jav libsuiteparseconfig3
  libtext-iconv-perl libtie-ixhash-perl libtimage-perl libtommath1 libtry-tiny-perl libuno-cppu3 libuno-cppuhelpergcc3-3 libuno-purpenhelpergcc3-3
  libuno-sal3 libuno-salhelpergcc3-3 libuno-xml2 libuno-xml3 libuno-xml4 libuno-xml5 libuno-xml6 libuno-xml7 libuno-xml8 libuno-xml9 libuno-xml10
  libwebsocket-api-jav libwpd-0.10-0 libwpg-0.3-3 libwps-0.4-4 libwww-perl libwww-robotrules-perl libxml1-protocol-perl libxml2 libxmlsec1 libxmlsec1-ns libxml2 libxml3 libxml4 libxml5 libxml6 libxml7 libxml8 libxml9 libxml10 libxml11 libxml12 libxml13 libxml14 libxml15 libxml16 libxml17 libxml18 libxml19 libxml20 libxml21 libxml22 libxml23 libxml24 libxml25 libxml26 libxml27 libxml28 libxml29 libxml210 libxml211 libxml212 libxml213 libxml214 libxml215 libxml216 libxml217 libxml218 libxml219 libxml220 libxml221 libxml222 libxml223 libxml224 libxml225 libxml226 libxml227 libxml228 libxml229 libxml230 libxml231 libxml232 libxml233 libxml234 libxml235 libxml236 libxml237 libxml238 libxml239 libxml240 libxml241 libxml242 libxml243 libxml244 libxml245 libxml246 libxml247 libxml248 libxml249 libxml250 libxml251 libxml252 libxml253 libxml254 libxml255 libxml256 libxml257 libxml258 libxml259 libxml260 libxml261 libxml262 libxml263 libxml264 libxml265 libxml266 libxml267 libxml268 libxml269 libxml270 libxml271 libxml272 libxml273 libxml274 libxml275 libxml276 libxml277 libxml278 libxml279 libxml280 libxml281 libxml282 libxml283 libxml284 libxml285 libxml286 libxml287 libxml288 libxml289 libxml290 libxml291 libxml292 libxml293 libxml294 libxml295 libxml296 libxml297 libxml298 libxml299 libxml2100 libxml2101 libxml2102 libxml2103 libxml2104 libxml2105 libxml2106 libxml2107 libxml2108 libxml2109 libxml21010 libxml21011 libxml21012 libxml21013 libxml21014 libxml21015 libxml21016 libxml21017 libxml21018 libxml21019 libxml21020 libxml21021 libxml21022 libxml21023 libxml21024 libxml21025 libxml21026 libxml21027 libxml21028 libxml21029 libxml21030 libxml21031 libxml21032 libxml21033 libxml21034 libxml21035 libxml21036 libxml21037 libxml21038 libxml21039 libxml21040 libxml21041 libxml21042 libxml21043 libxml21044 libxml21045 libxml21046 libxml21047 libxml21048 libxml21049 libxml21050 libxml21051 libxml21052 libxml21053 libxml21054 libxml21055 libxml21056 libxml21057 libxml21058 libxml21059 libxml21060 libxml21061 libxml21062 libxml21063 libxml21064 libxml21065 libxml21066 libxml21067 libxml21068 libxml21069 libxml21070 libxml21071 libxml21072 libxml21073 libxml21074 libxml21075 libxml21076 libxml21077 libxml21078 libxml21079 libxml21080 libxml21081 libxml21082 libxml21083 libxml21084 libxml21085 libxml21086 libxml21087 libxml21088 libxml21089 libxml21090 libxml21091 libxml21092 libxml21093 libxml21094 libxml21095 libxml21096 libxml21097 libxml21098 libxml21099 libxml210100 libxml210101 libxml210102 libxml210103 libxml210104 libxml210105 libxml210106 libxml210107 libxml210108 libxml210109 libxml210110 libxml210111 libxml210112 libxml210113 libxml210114 libxml210115 libxml210116 libxml210117 libxml210118 libxml210119 libxml210120 libxml210121 libxml210122 libxml210123 libxml210124 libxml210125 libxml210126 libxml210127 libxml210128 libxml210129 libxml210130 libxml210131 libxml210132 libxml210133 libxml210134 libxml210135 libxml210136 libxml210137 libxml210138 libxml210139 libxml210140 libxml210141 libxml210142 libxml210143 libxml210144 libxml210145 libxml210146 libxml210147 libxml210148 libxml210149 libxml210150 libxml210151 libxml210152 libxml210153 libxml210154 libxml210155 libxml210156 libxml210157 libxml210158 libxml210159 libxml210160 libxml210161 libxml210162 libxml210163 libxml210164 libxml210165 libxml210166 libxml210167 libxml210168 libxml210169 libxml210170 libxml210171 libxml210172 libxml210173 libxml210174 libxml210175 libxml210176 libxml210177 libxml210178 libxml210179 libxml210180 libxml210181 libxml210182 libxml210183 libxml210184 libxml210185 libxml210186 libxml210187 libxml210188 libxml210189 libxml210190 libxml210191 libxml210192 libxml210193 libxml210194 libxml210195 libxml210196 libxml210197 libxml210198 libxml210199 libxml2101100 libxml2101101 libxml2101102 libxml2101103 libxml2101104 libxml2101105 libxml2101106 libxml2101107 libxml2101108 libxml2101109 libxml2101110 libxml2101111 libxml2101112 libxml2101113 libxml2101114 libxml2101115 libxml2101116 libxml2101117 libxml2101118 libxml2101119 libxml21011100 libxml21011101 libxml21011102 libxml21011103 libxml21011104 libxml21011105 libxml21011106 libxml21011107 libxml21011108 libxml21011109 libxml21011110 libxml21011111 libxml21011112 libxml21011113 libxml21011114 libxml21011115 libxml21011116 libxml21011117 libxml21011118 libxml21011119 libxml210111100 libxml210111101 libxml210111102 libxml210111103 libxml210111104 libxml210111105 libxml210111106 libxml210111107 libxml210111108 libxml210111109 libxml210111110 libxml210111111 libxml210111112 libxml210111113 libxml210111114 libxml210111115 libxml210111116 libxml210111117 libxml210111118 libxml210111119 libxml2101111100 libxml2101111101 libxml2101111102 libxml2101111103 libxml2101111104 libxml2101111105 libxml2101111106 libxml2101111107 libxml2101111108 libxml2101111109 libxml2101111110 libxml2101111111 libxml2101111112 libxml2101111113 libxml2101111114 libxml2101111115 libxml2101111116 libxml2101111117 libxml2101111118 libxml2101111119 libxml21011111100 libxml21011111101 libxml21011111102 libxml21011111103 libxml21011111104 libxml21011111105 libxml21011111106 libxml21011111107 libxml21011111108 libxml21011111109 libxml21011111110 libxml21011111111 libxml21011111112 libxml21011111113 libxml21011111114 libxml21011111115 libxml21011111116 libxml21011111117 libxml21011111118 libxml21011111119 libxml210111111100 libxml210111111101 libxml210111111102 libxml210111111103 libxml210111111104 libxml210111111105 libxml210111111106 libxml210111111107 libxml210111111108 libxml210111111109 libxml210111111110 libxml210111111111 libxml210111111112 libxml210111111113 libxml210111111114 libxml210111111115 libxml210111111116 libxml210111111117 libxml210111111118 libxml210111111119 libxml2101111111100 libxml2101111111101 libxml2101111111102 libxml2101111111103 libxml2101111111104 libxml2101111111105 libxml2101111111106 libxml2101111111107 libxml2101111111108 libxml2101111111109 libxml2101111111110 libxml2101111111111 libxml2101111111112 libxml2101111111113 libxml2101111111114 libxml2101111111115 libxml2101111111116 libxml2101111111117 libxml2101111111118 libxml2101111111119 libxml21011111111100 libxml21011111111101 libxml21011111111102 libxml21011111111103 libxml21011111111104 libxml21011111111105 libxml21011111111106 libxml21011111111107 libxml21011111111108 libxml21011111111109 libxml21011111111110 libxml21011111111111 libxml21011111111112 libxml21011111111113 libxml21011111111114 libxml21011111111115 libxml21011111111116 libxml21011111111117 libxml21011111111118 libxml21011111111119 libxml210111111111100 libxml210111111111101 libxml210111111111102 libxml210111111111103 libxml210111111111104 libxml210111111111105 libxml210111111111106 libxml210111111111107 libxml210111111111108 libxml210111111111109 libxml210111111111110 libxml210111111111111 libxml210111111111112 libxml210111111111113 libxml210111111111114 libxml210111111111115 libxml210111111111116 libxml210111111111117 libxml210111111111118 libxml210111111111119 libxml2101111111111100 libxml2101111111111101 libxml2101111111111102 libxml2101111111111103 libxml2101111111111104 libxml2101111111111105 libxml2101111111111106 libxml2101111111111107 libxml2101111111111108 libxml2101111111111109 libxml2101111111111110 libxml2101111111111111 libxml2101111111111112 libxml2101111111111113 libxml2101111111111114 libxml2101111111111115 libxml2101111111111116 libxml2101111111111117 libxml2101111111111118 libxml2101111111111119 libxml21011111111111100 libxml21011111111111101 libxml21011111111111102 libxml21011111111111103 libxml21011111111111104 libxml21011111111111105 libxml21011111111111106 libxml21011111111111107 libxml21011111111111108 libxml21011111111111109 libxml21011111111111110 libxml21011111111111111 libxml21011111111111112 libxml21011111111111113 libxml21011111111111114 libxml21011111111111115 libxml21011111111111116 libxml21011111111111117 libxml21011111111111118 libxml21011111111111119 libxml210111111111111100 libxml210111111111111101 libxml210111111111111102 libxml210111111111111103 libxml210111111111111104 libxml210111111111111105 libxml210111111111111106 libxml210111111111111107 libxml210111111111111108 libxml210111111111111109 libxml210111111111111110 libxml210111111111111111 libxml210111111111111112 libxml210111111111111113 libxml210111111111111114 libxml210111111111111115 libxml210111111111111116 libxml210111111111111117 libxml210111111111111118 libxml210111111111111119 libxml2101111111111111100 libxml2101111111111111101 libxml2101111111111111102 libxml2101111111111111103 libxml2101111111111111104 libxml2101111111111111105 libxml2101111111111111106 libxml2101111111111111107 libxml2101111111111111108 libxml2101111111111111109 libxml2101111111111111110 libxml2101111111111111111 libxml2101111111111111112 libxml2101111111111111113 libxml2101111111111111114 libxml2101111111111111115 libxml2101111111111111116 libxml2101111111111111117 libxml2101111111111111118 libxml2101111111111111119 libxml21011111111111111100 libxml21011111111111111101 libxml21011111111111111102 libxml21011111111111111103 libxml21011111111111111104 libxml21011111111111111105 libxml21011111111111111106 libxml21011111111111111107 libxml21011111111111111108 libxml21011111111111111109 libxml21011111111111111110 libxml21011111111111111111 libxml21011111111111111112 libxml21011111111111111113 libxml21011111111111111114 libxml21011111111111111115 libxml21011111111111111116 libxml21011111111111111117 libxml21011111111111111118 libxml21011111111111111119 libxml210111111111111111100 libxml210111111111111111101 libxml210111111111111111102 libxml210111111111111111103 libxml210111111111111111104 libxml210111111111111111105 libxml210111111111111111106 libxml210111111111111111107 libxml210111111111111111108 libxml210111111111111111109 libxml210111111111111111110 libxml2101111111111111111111 libxml2101111111111111111112 libxml2101111111111111111113 libxml2101111111111111111114 libxml2101111111111111111115 libxml2101111111111111111116 libxml2101111111111111111117 libxml2101111111111111111118 libxml2101111111111111111119 libxml21011111111111111111100 libxml21011111111111111111101 libxml21011111111111111111102 libxml21011111111111111111103 libxml21011111111111111111104 libxml21011111111111111111105 libxml21011111111111111111106 libxml21011111111111111111107 libxml21011111111111111111108 libxml21011111111111111111109 libxml21011111111111111111110 libxml210111111111111111111111 libxml210111111111111111111112 libxml210111111111111111111113 libxml210111111111111111111114 libxml210111111111111111111115 libxml210111111111111111111116 libxml210111111111111111111117 libxml210111111111111111111118 libxml210111111111111111111119 libxml2101111111111111111111100 libxml2101111111111111111111101 libxml2101111111111111111111102 libxml2101111111111111111111103 libxml2101111111111111111111104 libxml2101111111111111111111105 libxml2101111111111111111111106 libxml2101111111111111111111107 libxml2101111111111111111111108 libxml2101111111111111111111109 libxml2101111111111111111111110 libxml21011111111111111111111111 libxml21011111111111111111111112 libxml21011111111111111111111113 libxml21011111111111111111111114 libxml21011111111111111111111115 libxml21011111111111111111111116 libxml21011111111111111111111117 libxml21011111111111111111111118 libxml21011111111111111111111119 libxml210111111111111111111111100 libxml210111111111111111111111101 libxml210111111111111111111111102 libxml210111111111111111111111103 libxml210111111111111111111111104 libxml210111111111111111111111105 libxml210111111111111111111111106 libxml210111111111111111111111107 libxml210111111111111111111111108 libxml210111111111111111111111109 libxml210111111111111111111111110 libxml2101111111111111111111111111 libxml2101111111111111111111111112 libxml2101111111111111111111111113 libxml2101111111111111111111111114 libxml2101111111111111111111111115 libxml2101111111111111111111111116 libxml2101111111111111111111111117 libxml2101111111111111111111111118 libxml2101111111111111111111111119 libxml21011111111111111111111111100 libxml21011111111111111111111111101 libxml21011111111111111111111111102 libxml21011111111111111111111111103 libxml21011111111111111111111111104 libxml21011111111111111111111111105 libxml21011111111111111111111111106 libxml21011111111111111111111111107 libxml21011111111111111111111111108 libxml21011111111111111111111111109 libxml21011111111111111111111111110 libxml210111111111111111111111111111 libxml210111111111111111111111111112 libxml210111111111111111111111111113 libxml210111111111111111111111111114 libxml210111111111111111111111111115 libxml210111111111111111111111111116 libxml210111111111111111111111111117 libxml210111111111111111111111111118 libxml210111111111111111111111111119 libxml2101111111111111111111111111100 libxml2101111111111111111111111111101 libxml2101111111111111111111111111102 libxml2101111111111111111111111111103 libxml2101111111111111111111111111104 libxml2101111111111111111111111111105 libxml2101111111111111111111111111106 libxml2101111111111111111111111111107 libxml2101111111111111111111111111108 libxml2101111111111111111111111111109 libxml2101111111111111111111111111110 libxml21011111111111111111111111111111 libxml21011111111111111111111111111112 libxml21011111111111111111111111111113 libxml21011111111111111111111111111114 libxml21011111111111111111111111111115 libxml21011111111111111111111111111116 libxml21011111111111111111111111111117 libxml21011111111111111111111111111118 libxml21011111111111111111111111111119 libxml210111111111111111111111111111100 libxml210111111111111111111111111111101 libxml21011111111
```

PROBLEMS OUTPUT PORTS DEBUG CONSOLE TERMINAL

```
● gitpod /workspace/linux-for-OSINT-21-day (main) $ libreoffice -h
LibreOffice 7.3.7.2 30(Build:2)

Usage: soffice [argument...]
    argument - switches, switch parameters and document URIs (filenames).

Using without special arguments:
Opens the start center, if it is used without any arguments.
{file}           Tries to open the file (files) in the components
                suitable for them.
{file} {macro:///Library.Module.MacroName}
    Opens the file and runs specified macros from
    the file.

Getting help and information:
--help | -h | -?    Shows this help and quits.
--helpwriter        Opens built-in or online Help on Writer.
--helpcalc          Opens built-in or online Help on Calc.
--helpdraw          Opens built-in or online Help on Draw.
--helpimpress       Opens built-in or online Help on Impress.
--helpbase          Opens built-in or online Help on Base.
--helpbasic         Opens built-in or online Help on Basic scripting
                    language.
--helpmath          Opens built-in or online Help on Math.
--version           Shows the version and quits.
--nstemporarydirectory
                    (MacOS X sandbox only) Returns path of the temporary
                    directory for the current user and exits. Overrides
                    all other arguments.

General arguments:
--quickstart[=no]   Activates[Deactivates] the Quickstarter service.
--nolockcheck       Disables check for remote instances using one
                    installation.
--infilter={filter} Force an input filter type if possible. For example:
                    --infilter="Calc Office Open XML"
                    --infilter="Text (encoded):UTF8,LF,,,"

```

Run the help command to verify that the installation is correct. You will appreciate the huge number of functions this utility has.

libreoffice -h

example.docx U example.txt U

Day_13 > example.txt


```
1 Sample Document
2 This document was created using accessibility techniques for headings, lists, image alternate text, tables, and columns. It should be completely accessible.
3 Headings
4 There are eight section headings in this document. At the beginning, "Sample Document" is a level 1 heading. The main section headings, such as "Heading
5 Lists
6 The following outline of the sections of this document is an ordered (numbered) list with six items. The fifth item, "Tables," contains a nested unorder
7 1. Headings
8 2. Lists
```

PROBLEMS OUTPUT PORTS DEBUG CONSOLE TERMINAL

```
● gitpod /workspace/linux-for-OSINT-21-day (main) $ cd Day_13
● gitpod /workspace/linux-for-OSINT-21-day/Day_13 (main) $ libreoffice --headless --convert-to txt example.docx
convert:/workspace/linux-for-OSINT-21-day/Day_13/example.docx ->/workspace/linux-for-OSINT-21-day/Day_13/example.txt using filter : Text
Overwriting: /workspace/linux-for-OSINT-21-day/Day_13/example.txt
● gitpod /workspace/linux-for-OSINT-21-day/Day_13 (main) $
```

Now let's convert the docx file to a txt file:

libreoffice --headless --convert-to txt example.docx

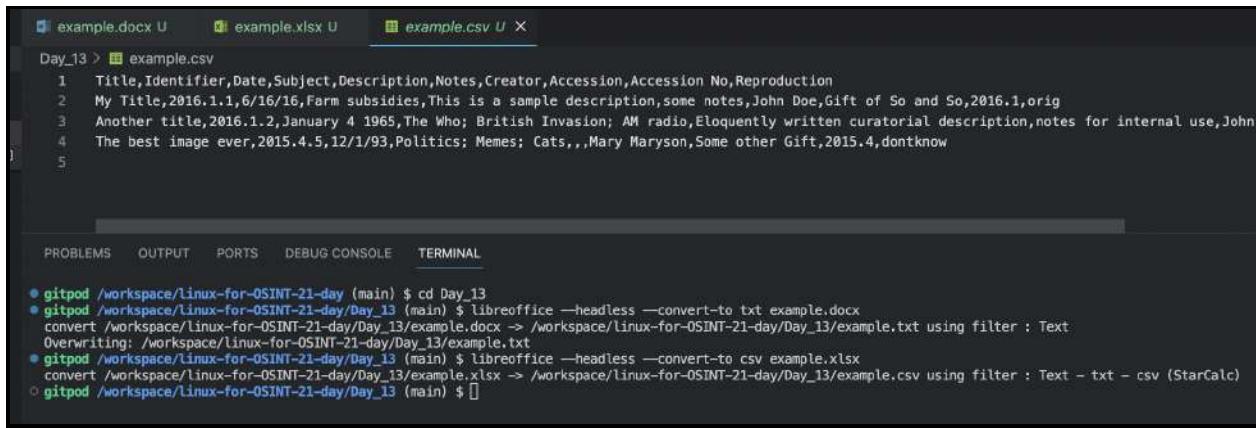

The terminal window shows the following command and its output:

```
gitpod /workspace/linux-for-OSINT-21-day (main) $ cd Day_13
gitpod /workspace/linux-for-OSINT-21-day/Day_13 (main) $ libreoffice --headless --convert-to txt example.docx
convert /workspace/linux-for-OSINT-21-day/Day_13/example.docx -> /workspace/linux-for-OSINT-21-day/Day_13/example.txt using filter : Text
Overwriting: /workspace/linux-for-OSINT-21-day/Day_13/example.txt
gitpod /workspace/linux-for-OSINT-21-day/Day_13 (main) $ libreoffice --headless --convert-to csv example.xlsx
convert /workspace/linux-for-OSINT-21-day/Day_13/example.xlsx -> /workspace/linux-for-OSINT-21-day/Day_13/example.csv using filter : Text - txt - csv (StarCalc)
gitpod /workspace/linux-for-OSINT-21-day/Day_13 (main) $
```

The terminal also lists three open files: example.docx, example.xlsx, and example.csv.

libreoffice --headless --convert-to csv example.xlsx

Libre Office includes applications for working with a wide variety of file formats. For example:

- swf, gif
- bmp, jpeg, png, tiff
- svg
- zml, html
- epub, fb2
- wks, wps, wdb
- vsd

And working with all these formats can most likely be automated using the command line. In addition, just as Microsoft allows you to automate documents using VBA or JavaScript, LibreOffice allows you to create automations in LibreOffice Basic (as well as Python).

You can read more about it here:

LibreOffice	Basic	Programming	Guide
https://wiki.documentfoundation.org/Documentation/BASIC_Guide			
LibreOffice	Python	Design	Guide
https://wiki.documentfoundation.org/Macros/Python_Design_Guide/en			

If your job involves creating more reporting documentation, it makes sense for you to read the links above in more detail. With the help of document templates and macros, you can simplify many tasks considerably. But there are other tools besides LibreOffice for this, such as Pandoc.

Creating .docx files

Pandoc (<https://pandoc.org/MANUAL.html>) is a universal utility for analyzing, converting and generating text documents (web pages, ebooks and more).


`-f FORMAT, -r FORMAT, --from=FORMAT, --read=FORMAT`

Specify input format. *FORMAT* can be:

- [bibtex](#) (BibTeX bibliography)
- [bblatex](#) (BibLaTeX bibliography)
- [bits](#) (BITS XML, alias for `jats`)
- [commonmark](#) (CommonMark Markdown)
- [commonmark_x](#) (CommonMark Markdown with extensions)
- [creole](#) (Creole 1.0)
- [csljson](#) (CSL JSON bibliography)
- [csv](#) (CSV table)
- [tsv](#) (TSV table)
- [docbook](#) (DocBook)
- [docx](#) (Word docx)
- [dokuwiki](#) (DokuWiki markup)
- [endnotexml](#) (EndNote XML bibliography)
- [epub](#) (EPUB)
- [fb2](#) (FictionBook2 e-book)
- [gfm](#) (GitHub-Flavored Markdown), or the deprecated and less accurate `markdown_github`; use `markdown_github` only if you need extensions not supported in [gfm](#).
- [haddock](#) (Haddock markup)
- [html](#) (HTML)
- [ipython](#) (Jupyter notebook)
- [jats](#) (JATS XML)
- [jira](#) (Jira/Confluence wiki markup)
- [json](#) (JSON version of native AST)
- [latex](#) (LaTeX)
- [markdown](#) (Pandoc's Markdown)
- [markdown_mmd](#) (MultiMarkdown)
- [markdown_phpxtra](#) (PHP Markdown Extra)
- [markdown_strict](#) (original unextended Markdown)
- [mediawiki](#) (MediaWiki markup)
- [man](#) (roff man)
- [muse](#) (Muse)
- [native](#) (native Haskell)
- [odt](#) (ODT)
- [opml](#) (OPML)
- [org](#) (Emacs Org mode)
- [ris](#) (RIS bibliography)
- [rtf](#) (Rich Text Format)
- [rst](#) (reStructuredText)
- [t2t](#) (txt2tags)
- [textile](#) (Textile)
- [tikiwiki](#) (TikiWiki markup)
- [twiki](#) (TWiki markup)
- [typst](#) (typst)
- [vimwiki](#) (Vimwiki)
- the path of a custom Lua reader, see [Custom readers and writers](#) below

It can work with over 40 different file formats!


Let's install:

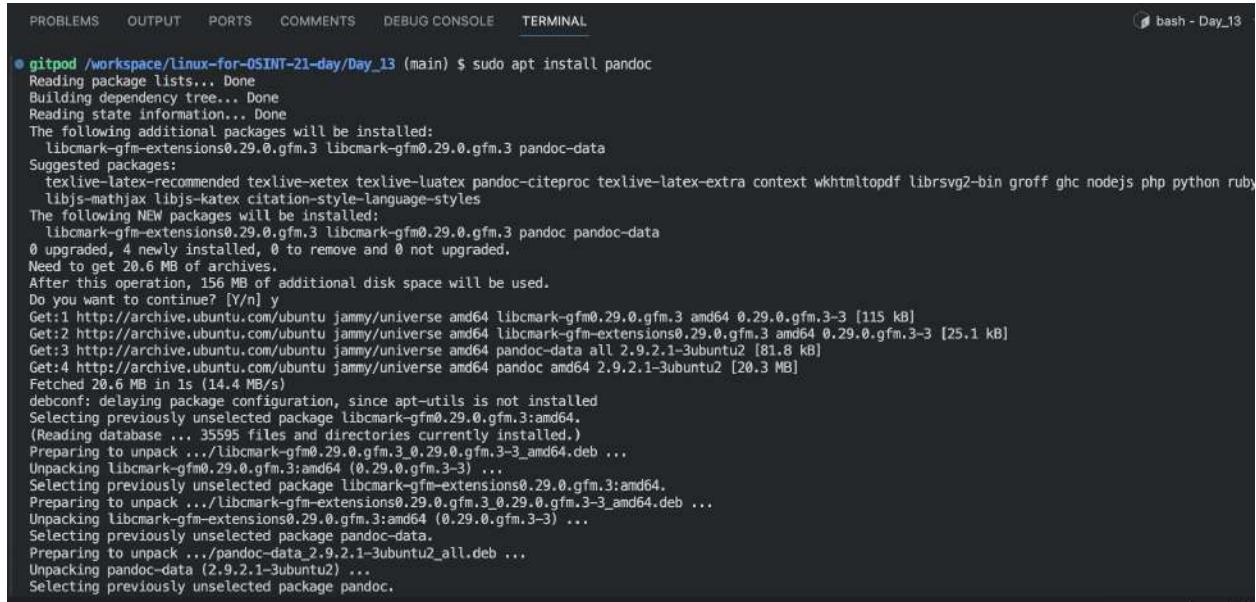

```
gitpod /workspace/linux-for-OSINT-21-day/Day_13 (main) $ sudo apt install pandoc
Reading package lists... Done
Building dependency tree... Done
Reading state information... Done
The following additional packages will be installed:
  libcmark-gfm-extensions0.29.0.gfm.3 libcmark-gfm0.29.0.gfm.3 pandoc-data
Suggested packages:
  texlive-latex-recommended texlive-xetex texlive-luatex pandoc-citeproc texlive-latex-extra context wktexmltopdf librsvg2-bin groff ghc nodejs php python ruby libjs-mathjax libjs-katex citation-style-language-styles
The following NEW packages will be installed:
  libcmark-gfm-extensions0.29.0.gfm.3 libcmark-gfm0.29.0.gfm.3 pandoc pandoc-data
0 upgraded, 4 newly installed, 0 to remove and 0 not upgraded.
Need to get 20.6 MB of archives.
After this operation, 156 MB of additional disk space will be used.
Do you want to continue? [Y/n] y
Get:1 http://archive.ubuntu.com/ubuntu jammy/universe amd64 libcmark-gfm0.29.0.gfm.3 amd64 0.29.0.gfm.3-3 [115 kB]
Get:2 http://archive.ubuntu.com/ubuntu jammy/universe amd64 libcmark-gfm-extensions0.29.0.gfm.3 amd64 0.29.0.gfm.3-3 [25.1 kB]
Get:3 http://archive.ubuntu.com/ubuntu jammy/universe amd64 pandoc-data all 2.9.2.1-3ubuntu2 [81.8 kB]
Get:4 http://archive.ubuntu.com/ubuntu jammy/universe amd64 pandoc amd64 2.9.2.1-3ubuntu2 [20.3 MB]
Fetched 20.6 MB in 14.4 MB/s
debconf: delaying package configuration, since apt-utils is not installed
Selecting previously unselected package libcmark-gfm0.29.0.gfm.3:amd64.
(Reading database ... 35595 files and directories currently installed.)
Preparing to unpack .../libcmark-gfm0.29.0.gfm.3_0.29.0.gfm.3-3_amd64.deb ...
Unpacking libcmark-gfm0.29.0.gfm.3:amd64 (0.29.0.gfm.3-3) ...
Selecting previously unselected package libcmark-gfm-extensions0.29.0.gfm.3:amd64.
Preparing to unpack .../libcmark-gfm-extensions0.29.0.gfm.3_0.29.0.gfm.3-3_amd64.deb ...
Unpacking libcmark-gfm-extensions0.29.0.gfm.3:amd64 (0.29.0.gfm.3-3) ...
Selecting previously unselected package pandoc-data.
Preparing to unpack .../pandoc-data_2.9.2.1-3ubuntu2_all.deb ...
Unpacking pandoc-data (2.9.2.1-3ubuntu2) ...
Selecting previously unselected package pandoc.
```


sudo apt install pandoc

Now let's write some text into a docx file:

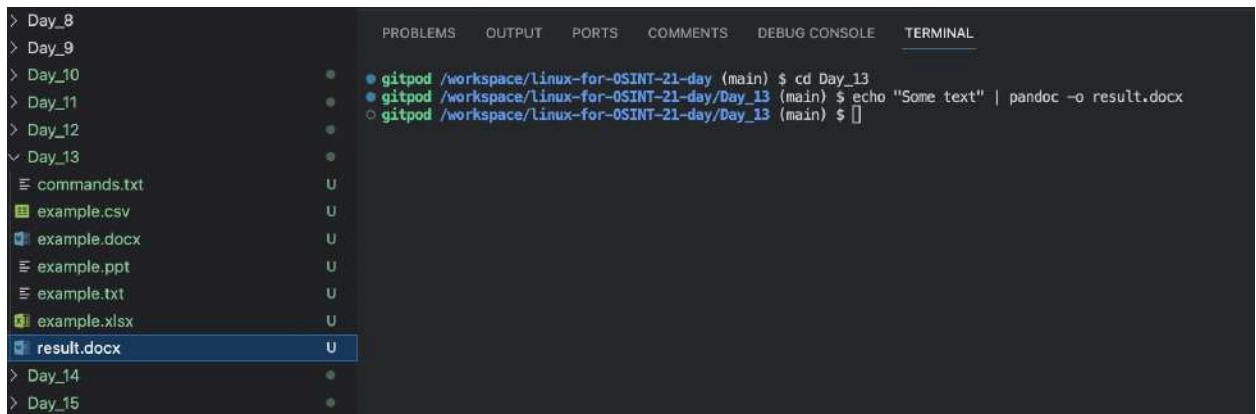


```
gitpod /workspace/linux-for-OSINT-21-day/Day_13 (main) $ cd Day_13
gitpod /workspace/linux-for-OSINT-21-day/Day_13 (main) $ echo "Some text" | pandoc -o result.docx
gitpod /workspace/linux-for-OSINT-21-day/Day_13 (main) $ 
```

echo "Some text" | pandoc -o result.docx

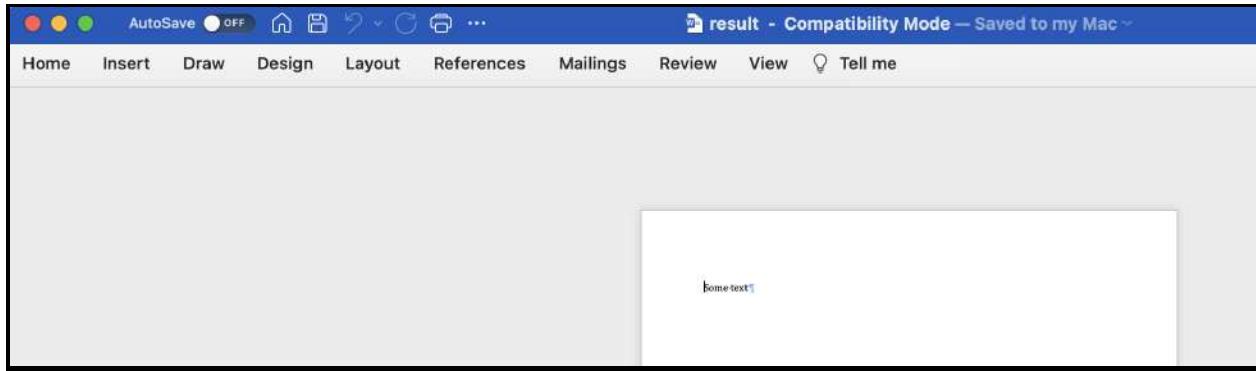

Similarly, you can save the result of any command to docx.

Another interesting thing is that Pandoc can directly download files from the internet:

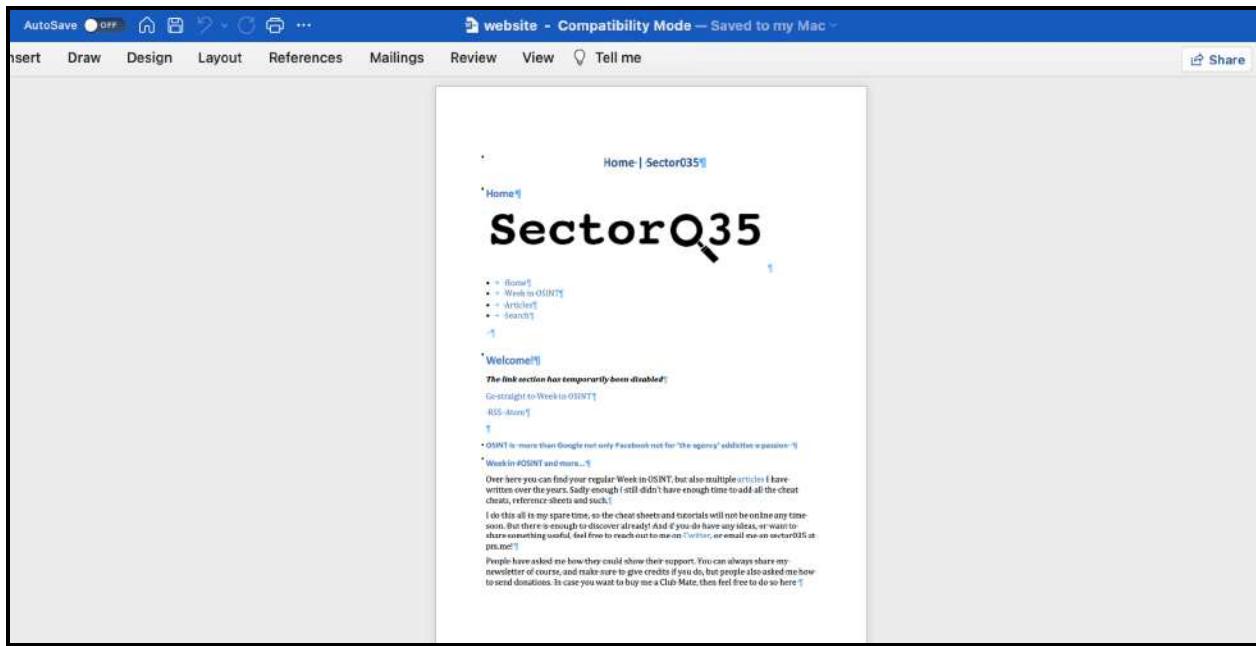


```
pandoc -f html -t docx https://sector035.nl -o website.docx
```

The above shows the simplest examples, but Pandoc also allows you to edit document formatting and structure, read metadata, add tables to documents, and more. Like LibreOffice, it is an incredibly versatile tool.

Day 14. JSON, XML, CSV

Today we'll talk about the three popular file formats, which are used in various REST-APIs (you can read more about how to make http requests in Day 5) and as formats for exporting/importing data in various tools.

JSON

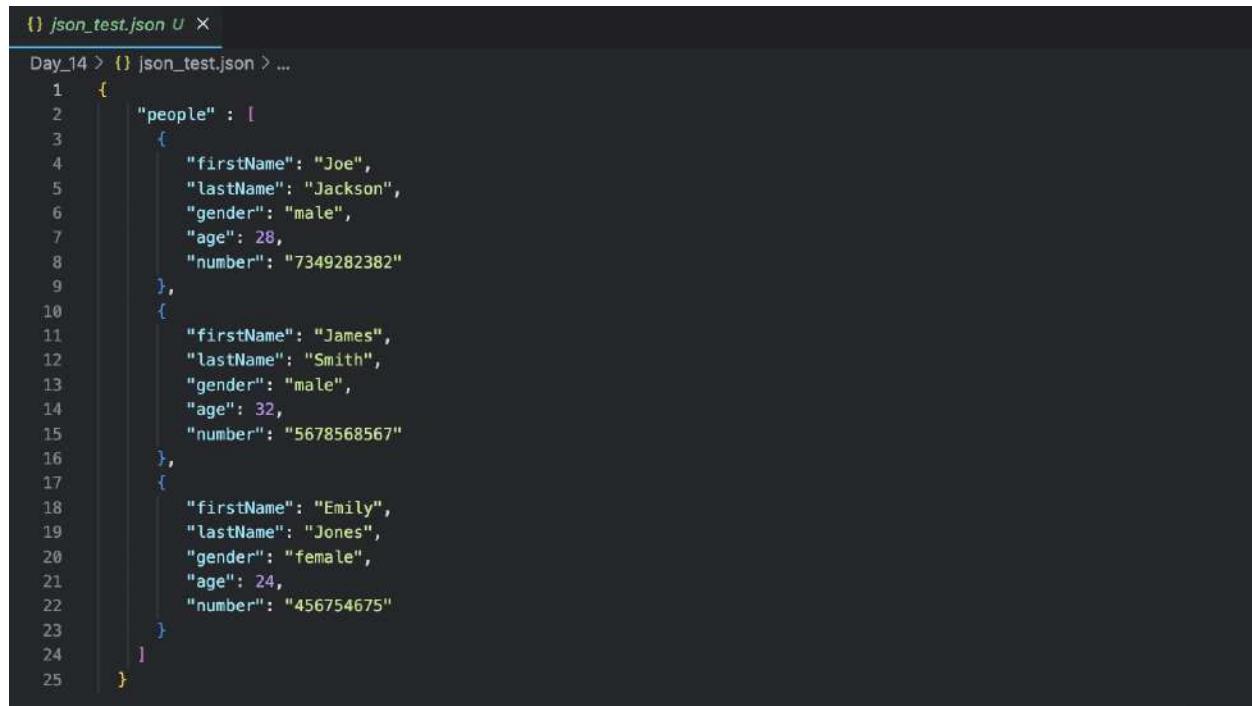

The screenshot shows a terminal window with the following content:

```
1} json_test.json X
Day_14 > 1} json_test.json > ...
1  {
2    "people" : [
3      {
4        "firstName": "Joe",
5        "lastName": "Jackson",
6        "gender": "male",
7        "age": 28,
8        "number": "7349282382"
9      },
10     {
11       "firstName": "James",
12       "lastName": "Smith",
13       "gender": "male",
14       "age": 32,
15       "number": "5678568567"
16     },
17     {
18       "firstName": "Emily",
19       "lastName": "Jones",
20       "gender": "female",
21       "age": 24,
22       "number": "456754675"
23     }
24   ]
25 }
```

JSON is format for representing structured data based on JavaScript object syntax. That is, data in it are described in the form of objects (example on the picture - **people**), each of which has a set of certain properties (example on the picture - **firstName**, **lastName**, **gender**) and each property can have a certain value (example on the picture - "Joe", "Jackson", "male").

JQ (<https://jqlang.github.io/jq/>) is one of most popular command line JSON processor. It is installed by default in most Linux distributions.

PROBLEMS OUTPUT PORTS DEBUG CONSOLE TERMINAL

```
● gitpod /workspace/linux-for-OSINT-21-day/Day_13 (main) $ jq -h
jq - commandline JSON processor [version 1.6]

Usage: jq [options] <jq filter> [file...]
jq [options] --args <jq filter> [strings...]
jq [options] --jsonargs <jq filter> [JSON_TEXTS...]

jq is a tool for processing JSON inputs, applying the given filter to
its JSON text inputs and producing the filter's results as JSON on
standard output.

The simplest filter is ., which copies jq's input to its output
unmodified (except for formatting, but note that IEEE754 is used
for number representation internally, with all that that implies).

For more advanced filters see the jq(1) manpage ("man jq")
and/or https://stedolan.github.io/jq

Example:

$ echo '{"foo": 0}' | jq .
{
  "foo": 0
}

Some of the options include:
-c          compact instead of pretty-printed output;
-n          use 'null' as the single input value;
-e          set the exit status code based on the output;
-s          read (slurp) all inputs into an array; apply filter to it;
-r          output raw strings, not JSON texts;
-R          read raw strings, not JSON texts;
-C          colorize JSON;
-M          monochrome (don't colorize JSON);
-S          sort keys of objects on output;
--tab       use tabs for indentation;
--arg a v  set variable $a to value <v>;
```

Let's try to extract the `firstName` value of the first `people` object (key):

EXPLORER ... { json_test.json U X

OPEN EDITORS Day_13 > { json_test.json } ...

LINUX-FOR-OSINT-21-DAY

- Day_1
- Day_2
- Day_3
- Day_4
- Day_5
- Day_6
- Day_7
- Day_8
- Day_9
- Day_10
- Day_11
- Day_12
- Day_13
- Day_14

```
1  {
2   "people" : [
3     {
4       "firstName": "Joe",
5       "lastName": "Jackson",
6       "gender": "male",
7       "age": 28,
8       "number": "7349282382"
9     },
10    {
11      "firstName": "James"
12    }
13  ]
```


PROBLEMS OUTPUT PORTS DEBUG CONSOLE TERMINAL

```
● gitpod /workspace/linux-for-OSINT-21-day (main) $ cd Day_13
● gitpod /workspace/linux-for-OSINT-21-day/Day_13 (main) $ jq '.people[0].firstName' json_test.json
"Joe"
● gitpod /workspace/linux-for-OSINT-21-day/Day_13 (main) $
```

```
cd Day_14
```

```
jq '.people[0].firstName' json_test.json
```

Now let's display the values of the firstName for all "people" keys:

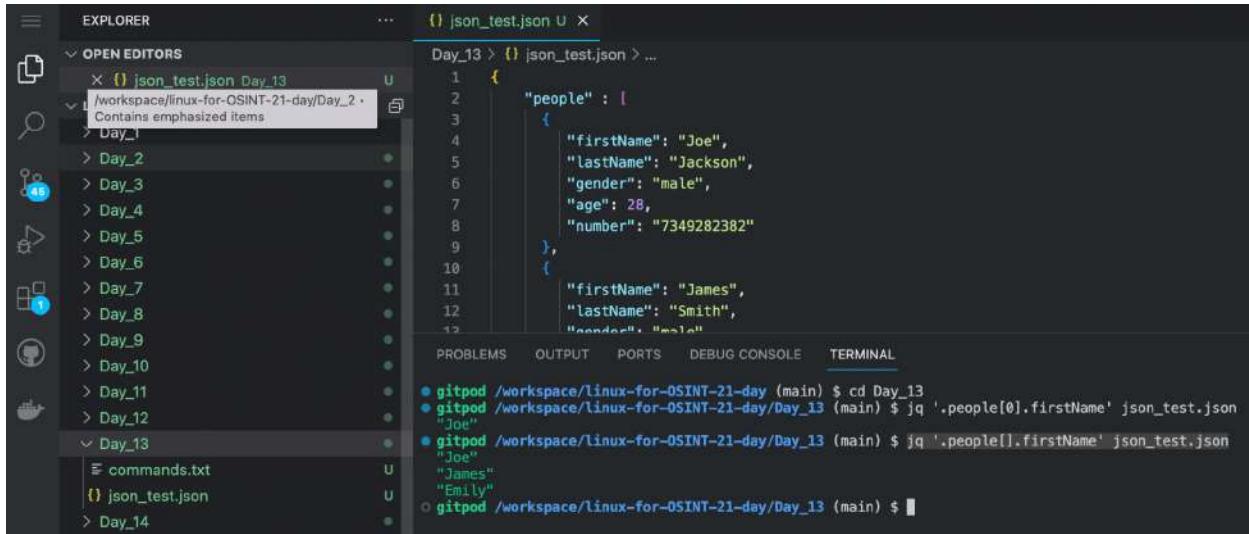


```
gitpod /workspace/linux-for-OSINT-21-day (main) $ cd Day_13
gitpod /workspace/linux-for-OSINT-21-day/Day_13 (main) $ jq '.people[0].firstName' json_test.json
"Joe"
gitpod /workspace/linux-for-OSINT-21-day/Day_13 (main) $ jq '.people[].firstName' json_test.json
"Joe"
"James"
"Emily"
```

```
jq '.people[].firstName' json_test.json
```

Similarly, you can access any values of any properties for all keys.

JSONPath Online Evaluator - jsonpath.com

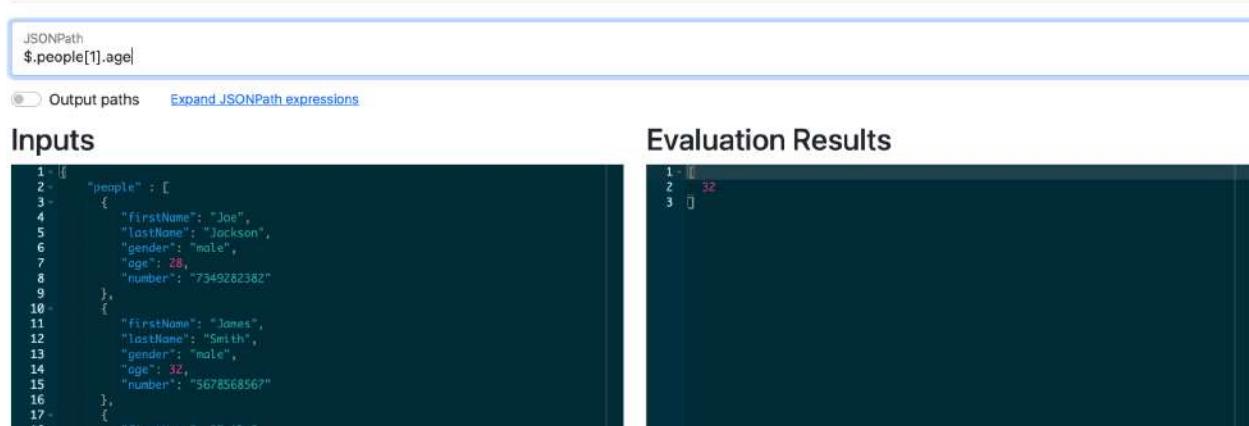

JSONPath

```
$.people[1].age
```

Output paths [Expand JSONPath expressions](#)

Inputs


```
1: [{}]
2:   "people" : [
3:     {
4:       "firstName": "Joe",
5:       "lastName": "Jackson",
6:       "gender": "male",
7:       "age": 28,
8:       "number": "7349282382"
9:     },
10:    {
11:      "firstName": "James",
12:      "lastName": "Smith",
13:      "gender": "male",
14:      "age": 32,
15:      "number": "5678568567"
16:    },
17:    {
18:      "firstName": "Emily",
19:      "lastName": "Jones",
20:      "gender": "female",
21:      "age": 22,
22:      "number": "1234567890"
23:    }
24:  ]
```

Evaluation Results

```
1: []
2: 32
3: []
```

We used a JSON file with a very simple structure as an example, but in the course of your investigation you may well have to deal with files whose structure will include dozens of different levels. Special online services such as **JSONPath Online Evaluator** (<https://jsonpath.com>).

XML

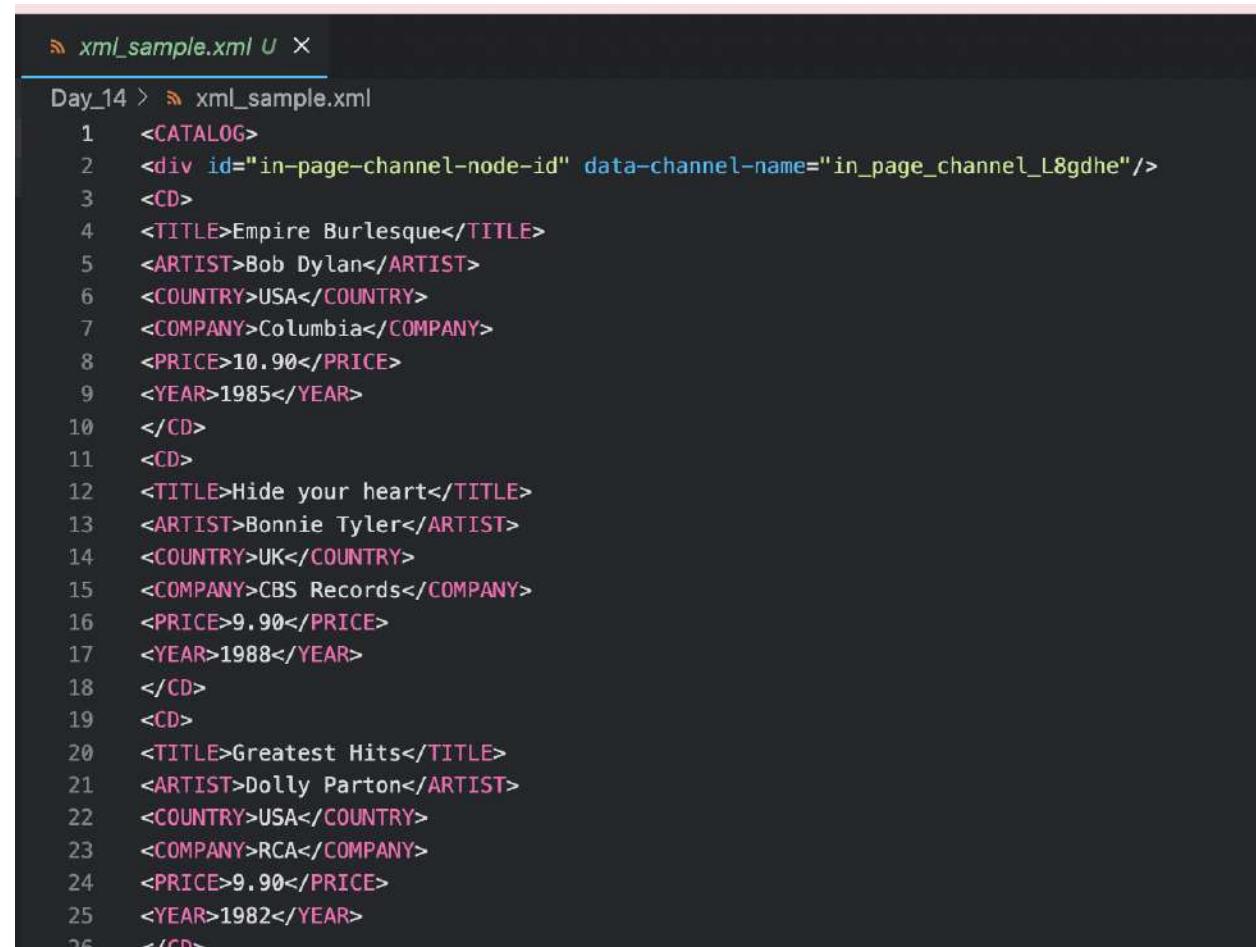

```
xml_sample.xml  U  X
Day_14 > xml_sample.xml
1  <CATALOG>
2  <div id="in-page-channel-node-id" data-channel-name="in_page_channel_L8gdhe"/>
3  <CD>
4  <TITLE>Empire Burlesque</TITLE>
5  <ARTIST>Bob Dylan</ARTIST>
6  <COUNTRY>USA</COUNTRY>
7  <COMPANY>Columbia</COMPANY>
8  <PRICE>10.90</PRICE>
9  <YEAR>1985</YEAR>
10 </CD>
11 <CD>
12 <TITLE>Hide your heart</TITLE>
13 <ARTIST>Bonnie Tyler</ARTIST>
14 <COUNTRY>UK</COUNTRY>
15 <COMPANY>CBS Records</COMPANY>
16 <PRICE>9.90</PRICE>
17 <YEAR>1988</YEAR>
18 </CD>
19 <CD>
20 <TITLE>Greatest Hits</TITLE>
21 <ARTIST>Dolly Parton</ARTIST>
22 <COUNTRY>USA</COUNTRY>
23 <COMPANY>RCA</COMPANY>
24 <PRICE>9.90</PRICE>
25 <YEAR>1982</YEAR>
26 </CD>
```

XML (eXtensible Markup Language) is a markup language similar to HTML, but without predefined tags to use (the user can define their own tags).

XMLStarlet (<https://xmlstar.sourceforge.net/doc/UG/xmlstarlet-ug.html>) is a simple cross-platform utility for extracting data from XML files.


Let's install:

```
PROBLEMS    OUTPUT    PORTS    DEBUG CONSOLE    TERMINAL

● gitpod /workspace/linux-for-OSINT-21-day (main) $ sudo apt-get install xmlstarlet
Reading package lists... Done
Building dependency tree... Done
Reading state information... Done
The following NEW packages will be installed:
  xmlstarlet
0 upgraded, 1 newly installed, 0 to remove and 0 not upgraded.
Need to get 265 kB of archives.
After this operation, 631 kB of additional disk space will be used.
Get:1 http://archive.ubuntu.com/ubuntu jammy/universe amd64 xmlstarlet amd64 1.6.1-2.1 [265 kB]
Fetched 265 kB in 0s (3,216 kB/s)
debconf: delaying package configuration, since apt-utils is not installed
Selecting previously unselected package xmlstarlet.
(Reading database ... 35595 files and directories currently installed.)
Preparing to unpack .../xmlstarlet_1.6.1-2.1_amd64.deb ...
Unpacking xmlstarlet (1.6.1-2.1) ...
Setting up xmlstarlet (1.6.1-2.1) ...
Processing triggers for man-db (2.10.2-1) ...
○ gitpod /workspace/linux-for-OSINT-21-day (main) $ █
```

sudo apt-get install xmlstarlet

Now let's display the contents of all <title> tags:

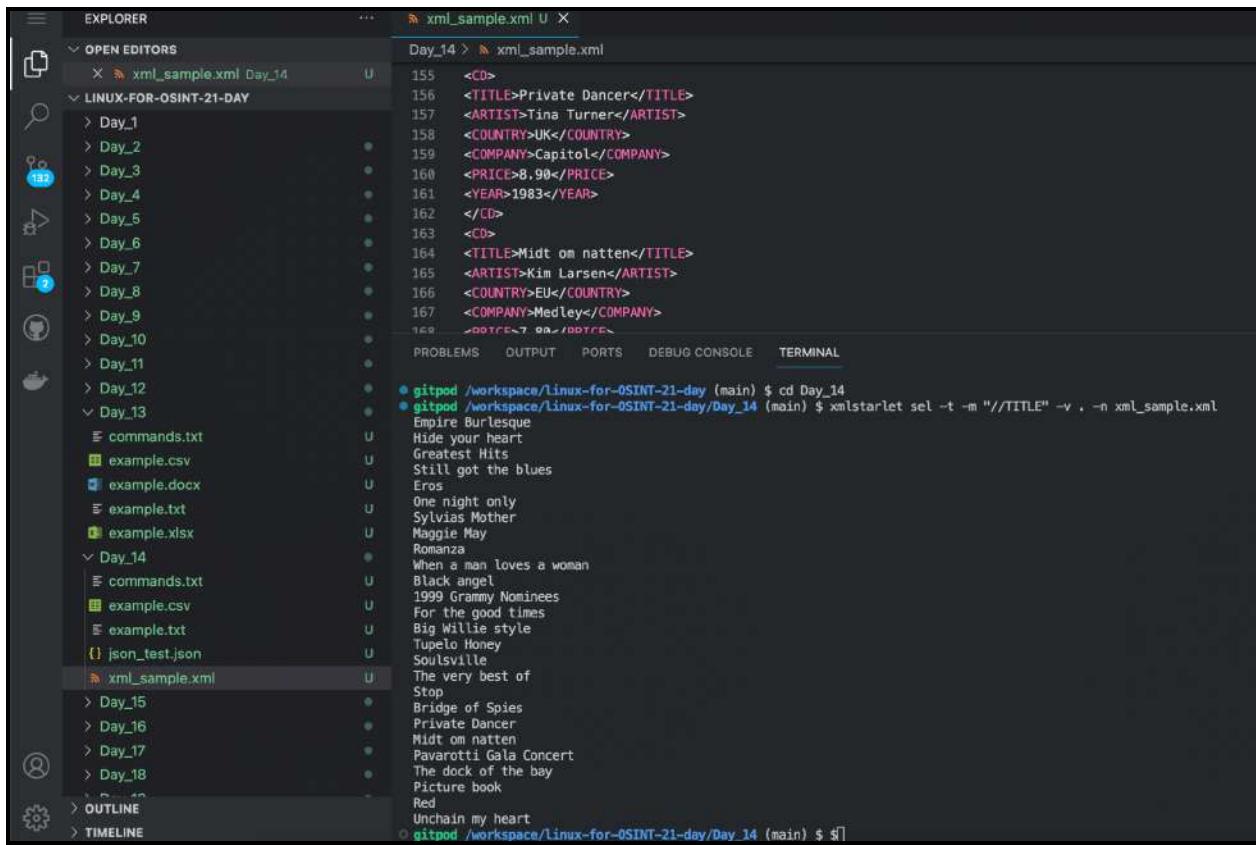

The screenshot shows a terminal window with the following content:

```
xml_sample.xml 155 156 157 158 159 160 161 162 163 164 165 166 167 168
Day_14 > xml_sample.xml
155  <CD>
156  <TITLE>Private Dancer</TITLE>
157  <ARTIST>Tina Turner</ARTIST>
158  <COUNTRY>UK</COUNTRY>
159  <COMPANY>Capitol</COMPANY>
160  <PRICE>8.99</PRICE>
161  <YEAR>1983</YEAR>
162  </CD>
163  <CD>
164  <TITLE>Midt om natten</TITLE>
165  <ARTIST>Kim Larsen</ARTIST>
166  <COUNTRY>EU</COUNTRY>
167  <COMPANY>Medley</COMPANY>
168  <TITLE>7 9a</TITLE>
gitpod /workspace/linux-for-OSINT-21-day (main) $ cd Day_14
gitpod /workspace/linux-for-OSINT-21-day/Day_14 (main) $ xmlstarlet sel -t -m "//TITLE" -v . -n xml_sample.xml
Empire Burlesque
Hide your heart
Greatest Hits
Still got the blues
Eros
One night only
Sylvias Mother
Maggie May
Romanza
When a man loves a woman
Black angel
1999 Grammy Nominees
For the good times
Big Willie style
Tupelo Honey
Soulsville
The very best of
Stop
Bridge of Spies
Private Dancer
Midt om natten
Pavarotti Gala Concert
The dock of the bay
Picture book
Red
Unchain my heart
gitpod /workspace/linux-for-OSINT-21-day/Day_14 (main) $ $]
```

xmlstarlet sel -t -m "//TITLE" -v . -n xml_sample.xml

The screenshot shows an XML editor interface. On the left, there is a search bar with the text "/COUNTRY|". On the right, a message says "Elements found: 26". Below the search bar, the XML code is displayed. On the far right, a list of 19 items is shown, each consisting of a number and a country name. The first few items are: 1. USA, 2. UK, 3. USA, 4. UK, 5. EU, 6. UK, 7. UK, 8. UK, 9. EU, 10. USA, 11. EU, 12. USA, 13. UK, 14. USA, 15. UK, 16. Norway, 17. UK, 18. UK, 19. UK.

```

<COUNTRY>
<div id="in-page-channel-node-id" data-channel-name="in_page_channel_L8gdhe"/>
<CD>
<TITLE>Empire Burlesque
</TITLE>
<ARTIST>Bob Dylan
</ARTIST>
<COUNTRY>USA
</COUNTRY>
<COMPANY>Columbia
</COMPANY>
<PRICE>10.90
</PRICE>
<YEAR>1985
</YEAR>
</CD>
<CD>
<TITLE>Hide your heart
</TITLE>

```

In order to find the path to specific data in an XML document you can use special online services such as Xpather (<http://xpather.com>).

CSV

If you happened to miss **Day 6** and **Day 7**, I suggest you get back to it. Knowledge of **Grep**, **Sed** and **Awk** is enough to work efficiently with CSV files. Some users prefer to replace grep with CSVGrep (<https://csvkit.readthedocs.io/en/1.0.2/scripts/csvgrep.html>). It's a little more convenient for searching specific columns.

Let's install CSVKit (<https://csvkit.readthedocs.io/en/1.0.2/index.html>):

The screenshot shows a terminal window with several tabs at the top: PROBLEMS, OUTPUT, PORTS, DEBUG CONSOLE, and TERMINAL. The TERMINAL tab is active and shows the command: `gitpod /workspace/linux-for-OSINT-21-day (main) $ sudo apt-get -y install csvkit`. The output of the command is displayed below, showing the installation of CSVKit and its dependencies. The terminal window is a dark-themed interface.

```

gitpod /workspace/linux-for-OSINT-21-day (main) $ sudo apt-get -y install csvkit
Reading package lists... Done
Building dependency tree... Done
Reading state information... Done
The following additional packages will be installed:
  libimagequant0 libraqm0 mailcap mime-support python-babel-locatedata python3-agate python3-agatedb python3-agateexcel python3-agatesql python3-attr
  python3-babel python3-bs4 python3-chardet python3-csvkit python3-dbfread python3-et-xmlfile python3-greenlet python3-html5lib python3-icu python3-iniconfig
  python3-isodate python3-jical python3-leather python3-lxml python3-olefile python3-openpynxl python3-packaging python3-parsedatetime python3-pil python3-pluggy
  python3-py python3-pygments python3-pytest python3-pytimeparse python3-slugify python3-soupsieve python3-sqlalchemy python3-sqlalchemy-ext python3-toml
  python3-tz python3-unidecode python3-webencodings python3-xlrd
Suggested packages:
  csvkit-doc python-agate-doc python-agatedb-doc python-agateexcel-doc python-agatesql-doc python-attr-doc python-dbfread-doc python-greenlet-dev
  python-greenlet-doc python3-genshi python-leather-doc python-lxml-doc python-pil-doc python-pygments-doc ttf-bitstream-vera python-sqlalchemy-doc python3-fdb
  python3-pymssql python3-mysqldb python3-psycopg2 python3-asyncpg python3-aiosqlite
The following NEW packages will be installed:
  csvkit libimagequant0 libraqm0 mailcap mime-support python-babel-locatedata python3-agate python3-agatedb python3-agateexcel python3-agatesql python3-attr
  python3-babel python3-bs4 python3-chardet python3-csvkit python3-dbfread python3-et-xmlfile python3-greenlet python3-html5lib python3-icu python3-iniconfig
  python3-isodate python3-jical python3-leather python3-lxml python3-olefile python3-openpynxl python3-packaging python3-parsedatetime python3-pil python3-pluggy
  python3-py python3-pygments python3-pytest python3-pytimeparse python3-slugify python3-soupsieve python3-sqlalchemy python3-sqlalchemy-ext python3-toml
  python3-tz python3-unidecode python3-webencodings python3-xlrd
0 upgraded, 44 newly installed, 0 to remove and 0 not upgraded.
Need to get 10.5 MB of archives.
After this operation, 55.4 MB of additional disk space will be used.
Get:1 http://archive.ubuntu.com/ubuntu jammy/main amd64 python-babel-locatedata all 2.8.0+dfsg.1-7 [4,982 kB]
Get:2 http://archive.ubuntu.com/ubuntu jammy-updates/main amd64 python3-tz all 2022.1-ubuntu0.22.04.1 [30.7 kB]
Get:3 http://archive.ubuntu.com/ubuntu jammy/main amd64 python3-babel all 2.8.0+dfsg.1-7 [85.1 kB]
Get:4 http://archive.ubuntu.com/ubuntu jammy/universe amd64 python3-isodate all 0.6.1-1 [24.7 kB]
Get:5 http://archive.ubuntu.com/ubuntu jammy/universe amd64 python3-leather all 0.3.4-1 [19.9 kB]
Get:6 http://archive.ubuntu.com/ubuntu jammy/universe amd64 python3-parsedatetime all 2.6-2 [32.9 kB]

```

```
sudo apt-get -y install csvkit
```

Now let's try to display all rows that contain a certain word in column 2:

```
csvgrep -d ',' -c 2 -m 'Murky' example.csv
```

CSVKit also includes many other useful utilities.

in2csv (<https://csvkit.readthedocs.io/en/latest/scripts/in2csv.html>) - convert any files to CSV.

```

1  firstName,lastName,gender,age,number
2  Joe,Jackson,male,28,7349282382
3  James,Smith,male,32,5678568567
4  Emily,Jones,female,24,456754675
5

```

in2csv -k people json_test.json > test_json_to_csv.csv

Csvcut (<https://csvkit.readthedocs.io/en/latest/scripts/csvcut.html>) is a tool for filter and truncate CSV files.

```

1  domain,port
2  "codingtutor.dev,www.pferdepension-wolfsgrube.de,www.elite-generalbau.de,addavear.com,daus.online,dominik-peter
3  "codingtutor.dev,www.pferdepension-wolfsgrube.de,www.elite-generalbau.de,addavear.com,daus.online,dominik-peter
4  "akp-communications.com,www.alaindelgado.fr,medizinisches-versorgungszentrum.care,stefanhorak.de,wolfs-cave.de,
5  "akp-communications.com,www.alaindelgado.fr,medizinisches-versorgungszentrum.care,stefanhorak.de,wolfs-cave.de,
6  "pactech.mx,product-compliance.net,anima-club.com,holzbau-fischer.com,chip-metropole.de,xn--historische-percke-
7  "ebonyrouse.livesex-secrets.com,arinellla.whackcams.com,nicoleheard.livesex-secrets.com,annajensen.livesex-secr
8  "www.northernberkshireropes.com,northernberkshireropes.com,mailleman.com,thebearlovers.com,mail.dumud.net,dumud
9  "www.northernberkshireropes.com,northernberkshireropes.com,mailleman.com,thebearlovers.com,mail.dumud.net,dumud
10 "www.northernberkshireropes.com,northernberkshireropes.com,mailleman.com,thebearlovers.com,mail.dumud.net,dumud
11 "www.northernberkshireropes.com,northernberkshireropes.com,mailleman.com,thebearlovers.com,mail.dumud.net,dumud
12 "www.northernberkshireropes.com,northernberkshireropes.com,mailleman.com,thebearlovers.com,mail.dumud.net,dumud
13 "www.northernberkshireropes.com,northernberkshireropes.com,mailleman.com,thebearlovers.com,mail.dumud.net,dumud
14 "www.northernberkshireropes.com,northernberkshireropes.com,mailleman.com,thebearlovers.com,mail.dumud.net,dumud
15 "www.northernberkshireropes.com,northernberkshireropes.com,mailleman.com,thebearlovers.com,mail.dumud.net,dumud
16 "www.northernberkshireropes.com,northernberkshireropes.com,mailleman.com,thebearlovers.com,mail.dumud.net,dumud
17 "mateuspaduaweb.com.br,www.mateuspaduaweb.com.br",80

```

```
csvcut -c domain,port example.csv > cut_csv.csv
```

It is also worth paying attention to:

Csvjoin (<https://csvkit.readthedocs.io/en/latest/scripts/csvjoin.html>)

Csvsort (<https://csvkit.readthedocs.io/en/latest/scripts/csvsort.html>)

Csvstat (<https://csvkit.readthedocs.io/en/latest/scripts/csvstat.html>).

When working with data in XML or JSON format, I recommend that you consider converting it to CSV. In many cases, this format is more convenient to understand and work in the command line (as mentioned above, you can easily do it with **in2csv**).


Day 15. Scraping

Scraping is the process of automatically extracting different data from web pages. If you are good at using **curl**, **grep**, **sed** and **awk** mentioned in the previous days, you can already successfully scrape web pages on Linux. But it's worth exploring a few more tools to be more effective.

Katana

First of all, let's learn how to make a list of URLs of all pages of the site (or rather, all pages that are linked from other pages of the site, starting with the main page).

This is very easy if you have the wonderful Katana (<https://github.com/projectdiscovery/katana>) tool from Project Discovery (<https://github.com/projectdiscovery>).

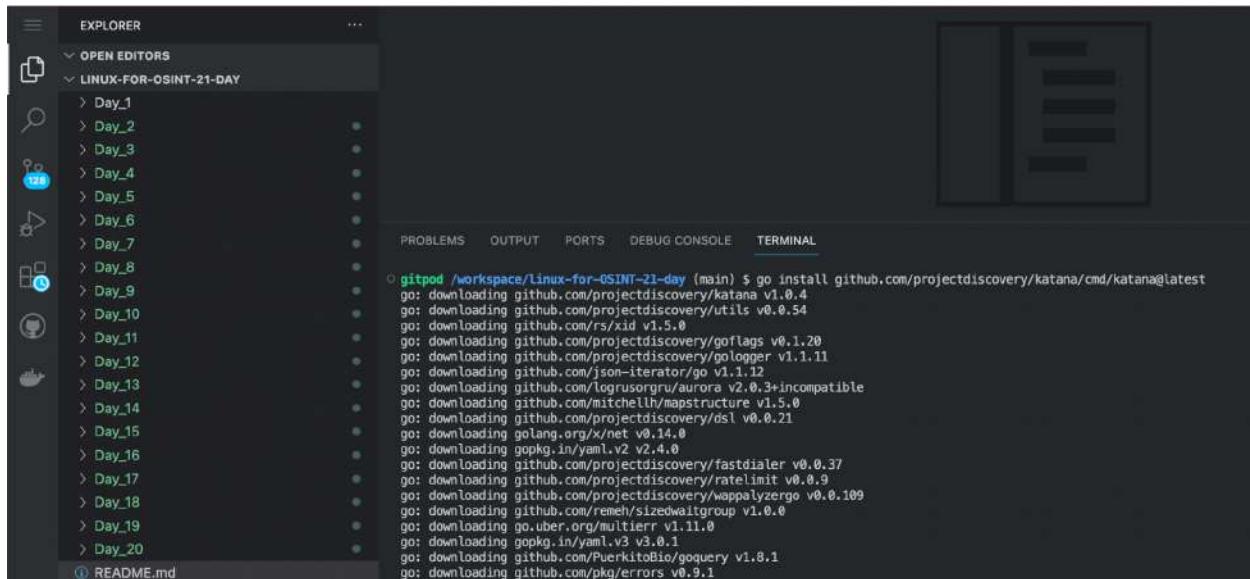

The screenshot shows a code editor interface with the Explorer sidebar open, displaying a folder structure for 'LINUX-FOR-OSINT-21-DAY' containing files named 'Day_1' through 'Day_20' and 'README.md'. The terminal tab is active, showing the command 'gitpod /workspace/linux-for-osint-21-day (main) \$ go install github.com/projectdiscovery/katana/cmd/katana@latest' and its execution log. The log details the download of various Go packages from GitHub, including 'github.com/projectdiscovery/katana v1.0.4', 'github.com/projectdiscovery/utils v0.0.54', and 'github.com/projectdiscovery/goftags v0.1.20'.

Let's install:

```
go install github.com/projectdiscovery/katana/cmd/katana@latest
```

```

projectdiscovery.io

[INF] Current katana version v1.0.4 (latest)
[INF] Started standard crawling for => https://sector035.nl
https://sector035.nl
https://sector035.nl/user/plugins/shortcode-ui/js/ui-atext.js
https://sector035.nl/user/themes/quark/js/jquery.treemenu.js
https://sector035.nl/user/plugins/shortcode-ui/css/ui-atext.css
https://sector035.nl/user/themes/quark/css/custom.css
https://sector035.nl/user/themes/quark-open-publishing/js/site.js
https://sector035.nl/user/themes/quark-open-publishing/js/my.js
https://sector035.nl/user/themes/quark/css/line-awesome.min.css
https://sector035.nl/user/plugins/login/css/login.css
https://sector035.nl/user/plugins/highlight/css/default.css
https://sector035.nl/user/plugins/youtube/css/youtube.css
https://sector035.nl/user/themes/quark/css-compiled/spectre.min.css
https://sector035.nl/user/themes/quark/css-compiled/theme_min.css
https://sector035.nl/user/plugins/tntsearch/assets/tntsearch.css
https://sector035.nl/user/plugins/markdown-notices/assets/notices.css
https://sector035.nl/user/plugins/external_links/assets/css/external_links.css
https://sector035.nl/user/plugins/image-captions/css/image-captions.css
https://sector035.nl/user/themes/quark-open-publishing/css/theme.css
https://sector035.nl/user/plugins/form/assets/form-styles.css
https://sector035.nl/user/plugins/highlight/js/highlight.pack.js
https://sector035.nl/system/assets/jquery/jquery-3.x.min.js
https://sector035.nl/user/themes/quark-open-publishing/js/...
https://sector035.nl/search
https://sector035.nl/articles.rss
https://sector035.nl/articles.atom

```

And run:

katana -u sector035.nl

```

results.txt U X
Day_15 > results.txt
1 https://sector035.nl
2 https://www.osint-jobs.com/
3 https://sector035.nl/user/themes/quark-open-publishing/js/my.js
4 https://sector035.nl/user/themes/quark/css/custom.css
5 https://sector035.nl/user/themes/quark/js/jquery.treemenu.js
6 https://sector035.nl/user/themes/quark-open-publishing/js/site.js
7 https://sector035.nl/user/plugins/shortcode-ui/js/ui-atext.js
8 https://sector035.nl/user/plugins/highlight/css/default.css

PROBLEMS OUTPUT PORTS DEBUG CONSOLE TERMINAL
gitpod /workspace/Linux-for-OSINT-21-day (main) $ cd Day_15
gitpod /workspace/linux-for-OSINT-21-day/Day_15 (main) $ katana -list domains.txt>results.txt

```


If you want to collect links from a whole list of domains, use the `-list` flag. And let's save the result this time, to a text file, so that we can use it when we run the next command:

```
cd Day_15
katana -list domains.txt>results.txt
```

NUCLEI

Nuclei (<https://github.com/projectdiscovery/nuclei>) is another great tool from Project Discovery. It is primarily designed to scan sites for vulnerabilities, but it also does an excellent job of collecting various investigative data from web pages.

Let's install:

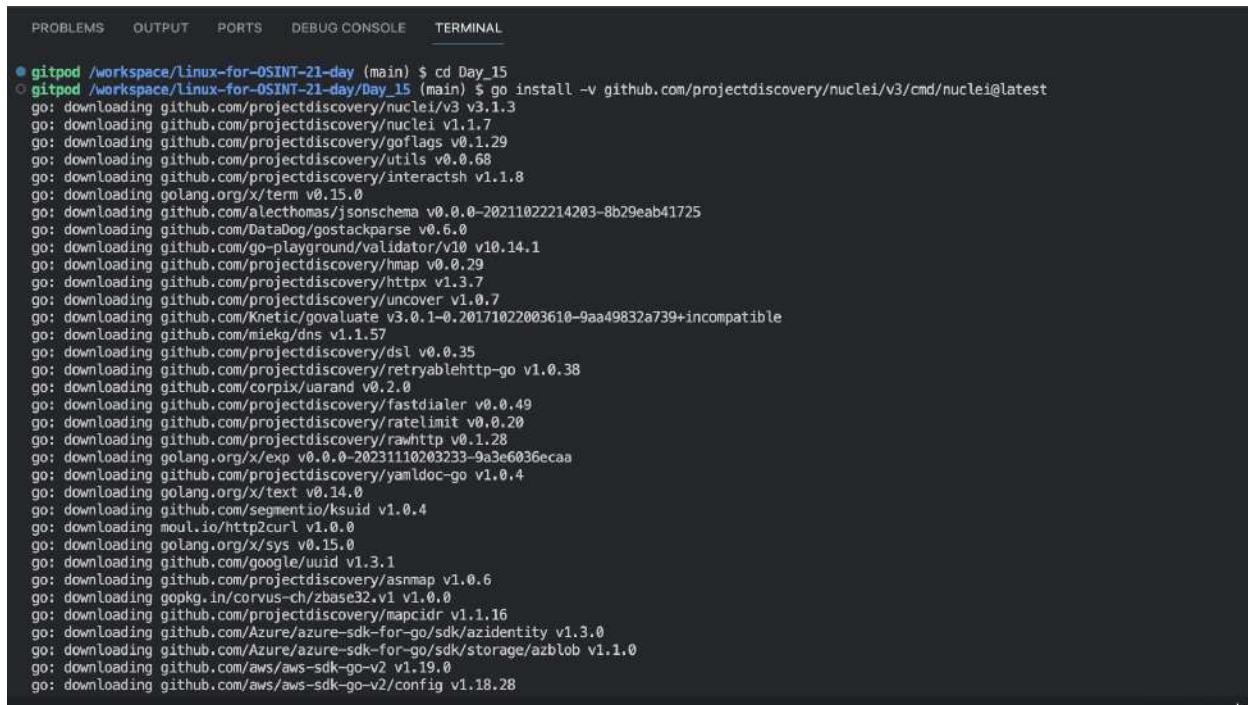

The screenshot shows a terminal window with the following content:

```
PROBLEMS OUTPUT PORTS DEBUG CONSOLE TERMINAL

● gitpod /workspace/linux-for-OSINT-21-day (main) $ cd Day_15
● gitpod /workspace/linux-for-OSINT-21-day/Day_15 (main) $ go install -v github.com/projectdiscovery/nuclei/v3/cmd/nuclei@latest
go: downloading github.com/projectdiscovery/nuclei/v3 v3.1.3
go: downloading github.com/projectdiscovery/nuclei/v1.1.7
go: downloading github.com/projectdiscovery/goflags v0.1.29
go: downloading github.com/projectdiscovery/utils v0.0.68
go: downloading github.com/projectdiscovery/interactsh v1.1.8
go: downloading golang.org/x/term v0.15.0
go: downloading github.com/alethomas/jsonschema v0.0.0-20211022214203-8b29eab41725
go: downloading github.com/DataDog/gostackparse v0.6.0
go: downloading github.com/go-playground/validator/v10 v10.14.1
go: downloading github.com/projectdiscovery/hmap v0.0.29
go: downloading github.com/projectdiscovery/httpx v1.3.7
go: downloading github.com/projectdiscovery/uncover v1.0.7
go: downloading github.com/Knetic/govulnmate v3.0.1-0.20171022003610-9aa49832a739+incompatible
go: downloading github.com/miekg/dns v1.1.57
go: downloading github.com/projectdiscovery/dsl v0.0.35
go: downloading github.com/projectdiscovery/retryablehttp-go v1.0.38
go: downloading github.com/corpix/uarand v0.2.0
go: downloading github.com/projectdiscovery/fastdialer v0.0.49
go: downloading github.com/projectdiscovery/ratelimit v0.0.20
go: downloading github.com/projectdiscovery/rawhttp v0.1.28
go: downloading golang.org/x/exp v0.0.0-20231110203233-9a3e6036ecaa
go: downloading github.com/projectdiscovery/yaml/doc-go v1.0.4
go: downloading golang.org/x/text v0.14.0
go: downloading github.com/segmentio/ksuid v1.0.4
go: downloading moul.io/httppcurl v1.0.0
go: downloading golang.org/x/sys v0.15.0
go: downloading github.com/google/uuid v1.3.1
go: downloading github.com/projectdiscovery/asnmap v1.0.6
go: downloading gopkg.in/corvus-ch/zbase32.v1 v1.0.0
go: downloading github.com/projectdiscovery/mapcidr v1.1.16
go: downloading github.com/Azure/azure-sdk-for-go/sdk/azidentity v1.3.0
go: downloading github.com/Azure/azure-sdk-for-go/sdk/storage/azblob v1.1.0
go: downloading github.com/aws/aws-sdk-go-v2 v1.19.0
go: downloading github.com/aws/aws-sdk-go-v2/config v1.18.28
```


```
go install -v github.com/projectdiscovery/nuclei/v3/cmd/nuclei@latest
```

Clone repo “Juicy info Nuclei templates” (we'll talk more about the git command on day 19):

```
● gitpod /workspace/linux-for-OSINT-21-day/Day_15 (main) $ git clone https://github.com/cipher387/juicyinfo-nuclei-templates
Cloning into 'juicyinfo-nuclei-templates'...
remote: Enumerating objects: 173, done.
remote: Counting objects: 100% (73/73), done.
remote: Compressing objects: 100% (71/71), done.
remote: Total 173 (delta 41), reused 0 (delta 0), pack-reused 100
Receiving objects: 100% (173/173), 14.55 MiB | 20.96 MiB/s, done.
Resolving deltas: 100% (85/85), done.
○ gitpod /workspace/linux-for-OSINT-21-day/Day_15 (main) $
```

git clone https://github.com/cipher387/juicyinfo-nuclei-templates


Now, let's scan through all the links we've collected using Katana and extract links that contain the word Github in them from the pages (we'll use the `github.yaml` template to do this):

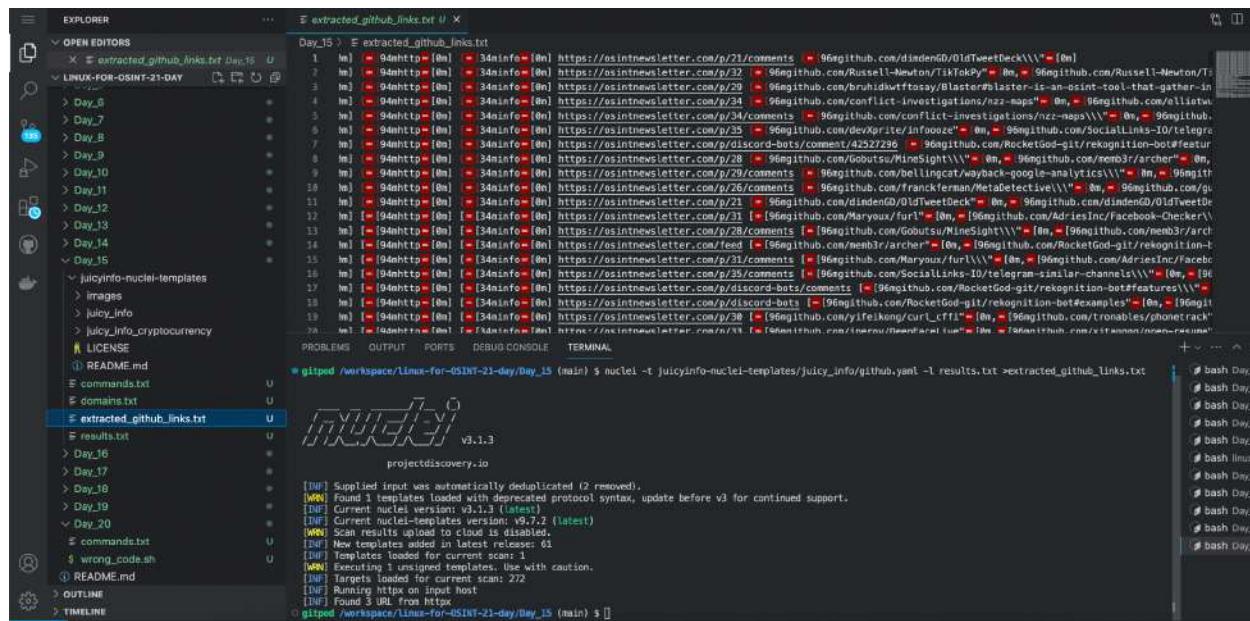

nuclei -t juicyinfo-nuclei-templates/juicy_info/github.yaml -l results.txt >extracted_github_links.txt

Similarly, you can collect links to other social networks, phone numbers, IP addresses, emails, cryptocurrency wallet addresses, etc. (template names are intuitive).

Nuclei also allows you to extract information from html tags. Let's collect the titles (`<title>` tag) of the same pages:

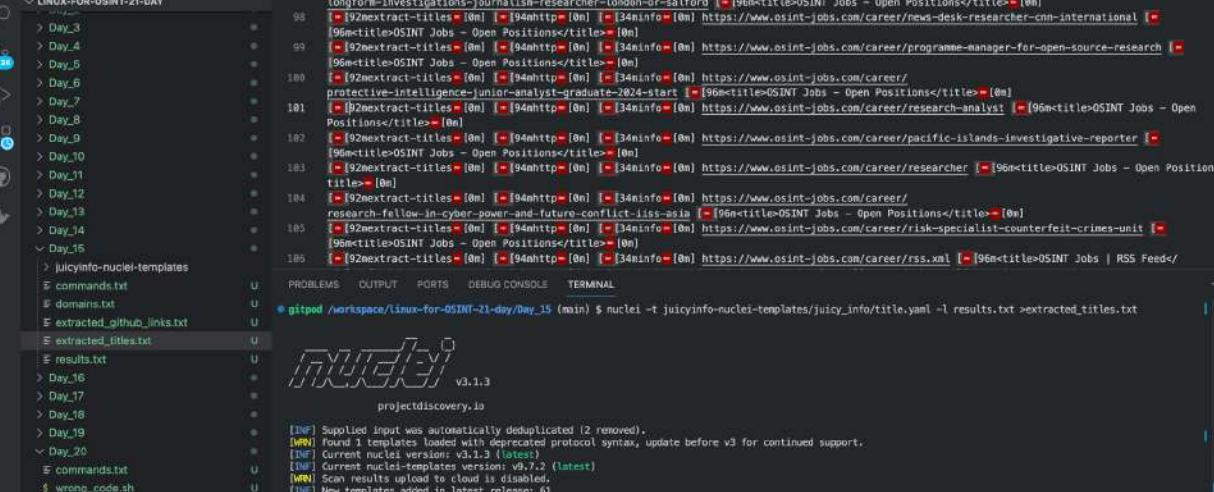

```
EXPLORER          extracted_titles.txt ✘
OPEN EDITORS      Day_16
LINUX-FOR-OSINT-21-DAY
  Day_3
  Day_4
  Day_5
  Day_6
  Day_7
  Day_8
  Day_9
  Day_10
  Day_11
  Day_12
  Day_13
  Day_14
  Day_15
  juicyinfo-nuclei-templates
    commands.txt
    domains.txt
    extracted_github_links.txt
    extracted_titles.txt
    results.txt
    Day_16
    Day_17
    Day_18
    Day_19
    Day_20
    commands.txt
    wrong_code.sh
    README.md
  OUTLINE
  TIMELINE
Day_16  extracted_titles.txt
97 [!] 92extract-title-[0m] [+] 94http-[0m] [+] 34info-[0m] https://www.osint-jobs.com/career/longform-investigations-journalism-researcher-london-or-salford [96m<title>OSINT Jobs - Open Positions</title>-[0m]
98 [!] 92extract-title-[0m] [+] 94http-[0m] [+] 34info-[0m] https://www.osint-jobs.com/career/news-desk-researcher-cnn-international [96m<title>OSINT Jobs - Open Positions</title>-[0m]
99 [!] 92extract-title-[0m] [+] 94http-[0m] [+] 34info-[0m] https://www.osint-jobs.com/career/programme-manager-for-open-source-research [96m<title>OSINT Jobs - Open Positions</title>-[0m]
100 [!] 92extract-title-[0m] [+] 94http-[0m] [+] 34info-[0m] https://www.osint-jobs.com/career/protective-intelligence-junior-analyst-graduate-2024-start [96m<title>OSINT Jobs - Open Positions</title>-[0m]
101 [!] 92extract-title-[0m] [+] 94http-[0m] [+] 34info-[0m] https://www.osint-jobs.com/career/research-analyst [96m<title>OSINT Jobs - Open Positions</title>-[0m]
102 [!] 92extract-title-[0m] [+] 94http-[0m] [+] 34info-[0m] https://www.osint-jobs.com/career/pacific-islands-investigative-reporter [96m<title>OSINT Jobs - Open Positions</title>-[0m]
103 [!] 92extract-title-[0m] [+] 94http-[0m] [+] 34info-[0m] https://www.osint-jobs.com/career/researcher [96m<title>OSINT Jobs - Open Positions</title>-[0m]
104 [!] 92extract-title-[0m] [+] 94http-[0m] [+] 34info-[0m] https://www.osint-jobs.com/career/research-fellow-in-cyber-power-and-future-conflict-lisis-asia [96m<title>OSINT Jobs - Open Positions</title>-[0m]
105 [!] 92extract-title-[0m] [+] 94http-[0m] [+] 34info-[0m] https://www.osint-jobs.com/career/risk-specialist-counterfeit-crimes-unit [96m<title>OSINT Jobs - Open Positions</title>-[0m]
106 [!] 92extract-title-[0m] [+] 94http-[0m] [+] 34info-[0m] https://www.osint-jobs.com/career/rss.xml [96m<title>OSINT Jobs | RSS Feed</title>-[0m]
PROBLEMS          OUTPUT          PORTS          DEBUG CONSOLE          TERMINAL
gitpod /workspace/linux-for-OSINT-21-day/Day_15 (main) $ nuclei -t juicyinfo-nuclei-templates/juicy_info/title.yaml -l results.txt >extracted_titles.txt

[INFO] Supplied input was automatically deduplicated (2 removed).
[INFO] Found 3 templates loaded with deprecated protocol syntax, update before v3 for continued support.
[INFO] Current nuclei version: v3.1.3 (latest)
[INFO] Current nuclei-templates version: v9.7.2 (latest)
[INFO] Scan results upload to cloud is disabled.
[INFO] New templates added in latest release: 61
[INFO] Templates loaded for current scan: 1
[INFO] Executing 1 unsigned templates. Use with caution.
[INFO] Targets loaded for current scan: 272
[INFO] Targets with http:// prefix: 272
[INFO] Found 3 IATs from http://
[INFO] Found 3 IATs from https://
projectdiscovery.io v3.1.3
projectdiscovery.io
[INFO] Supplied input was automatically deduplicated (2 removed).
[INFO] Found 3 templates loaded with deprecated protocol syntax, update before v3 for continued support.
[INFO] Current nuclei version: v3.1.3 (latest)
[INFO] Current nuclei-templates version: v9.7.2 (latest)
[INFO] Scan results upload to cloud is disabled.
[INFO] New templates added in latest release: 61
[INFO] Templates loaded for current scan: 1
[INFO] Executing 1 unsigned templates. Use with caution.
[INFO] Targets loaded for current scan: 272
[INFO] Targets with http:// prefix: 272
[INFO] Found 3 IATs from http://
[INFO] Found 3 IATs from https://
nuclei /workspace/linux-for-OSINT-21-day/Day_15 (main) $
```

```
nuclei -t juicyinfo-nuclei-templates/juicy_info/title.yaml -l results.txt  
>extracted_titles.txt
```

What if you want to scrape some other tag instead of the <title> tag?

```
! title.yaml X
Day_15 > juicyinfo-nuclei-templates > juicy_info > ! title.yaml > id
  1   id: extract-titles
  2
  3   info:
  4     name: Titles extractor
  5     author: cipher387
  6     severity: info
  7     description: Extract titles from web page body
  8     tags: osint,juicy-info,scraping
  9
 10   requests:
 11     - method: GET
 12       path:
 13         - "{{BaseUrl}}"
 14
 15   matchers:
 16     - type: regex
 17       part: body
 18       regex:
 19         - '<title>.*</title>*'
 20   extractors:
 21     - type: regex
 22       part: body
 23       regex:
 24         - '<title>.*</title>*'
 25
```

Open the **title.yaml** file and simply replace the title with some other title. If you wish, save the template under a different name and run Nuclei in the above way.

And, of course, you can use whatever regular expressions you can think of for your tasks in the templates.

You could do the same thing with the curl and grep command combinations we talked about on **Days 5 and 6**, but Nuclei is much faster and easier to set up.

HTML2TEXT

Html2text (<https://alir3z4.github.io/html2text/>) is a very simple Python script that cleans up the text of web pages from html tags and makes it easy to read and automated information retrieval.

PROBLEMS OUTPUT PORTS DEBUG CONSOLE TERMINAL

```
④ gitpod /workspace/linux-for-OSINT-21-day (main) $ apt-get install html2text
E: Could not open lock file /var/lib/dpkg/lock-frontend - open (13: Permission denied)
E: Unable to acquire the dpkg frontend lock (/var/lib/dpkg/lock-frontend), are you root?
● gitpod /workspace/linux-for-OSINT-21-day (main) $ sudo apt-get install html2text
Reading package lists... Done
Building dependency tree... Done
Reading state information... Done
The following NEW packages will be installed:
  html2text
0 upgraded, 1 newly installed, 0 to remove and 0 not upgraded.
Need to get 84.2 kB of archives.
After this operation, 279 kB of additional disk space will be used.
Get:1 http://archive.ubuntu.com/ubuntu jammy/universe amd64 html2text amd64 1.3.2a-28 [84.2 kB]
Fetched 84.2 kB in 0s (1,037 kB/s)
debconf: delaying package configuration, since apt-utils is not installed
Selecting previously unselected package html2text.
(Reading database ... 35768 files and directories currently installed.)
Preparing to unpack .../html2text_1.3.2a-28_amd64.deb ...
Unpacking html2text (1.3.2a-28) ...
Setting up html2text (1.3.2a-28) ...
Processing triggers for man-db (2.10.2-1) ...
○ gitpod /workspace/linux-for-OSINT-21-day (main) $ █
```

Let's install:

sudo apt-get install html2text

Let's try to extract the text from the html file contained in the **Day 15** folder:

```
PROBLEMS    OUTPUT    PORTS    DEBUG CONSOLE    TERMINAL
● gitpod /workspace/linux-for-OSINT-21-day/Day_15 (main) $ html2text example.html

[ ./example_files/logo3.png ]_Filesamples
Categories
Video Audio Document Image Font Ebook Code

[q] [q]

***** Sample DOCX Files Download *****
DOCX Microsoft Word Open XML Format Document File
A popular word processing file format created as a replacement for DOC files in
Microsoft Word 2007 and above by Microsoft. It uses the Open XML mark-up
language.

Below you will find a selection of sample .docx document files for you to
download. On the right there are some details about the file such as its size
so you can best decide which one will fit your needs.
sample4.docx
DOCX / 13.51 MB

Download
sample3.docx
DOCX / 33.57 KB
```

html2text example.html

Other tools

Scraping is a huge topic with many different nuances that requires a book of its own. Today we just learned how to extract information from html code.

But sometimes collecting data from websites requires automating the opening of the browser and simulating different user actions (because the necessary data is loaded only after executing JavaScript code). In this case, you need to use tools that run browsers (for example, Firefox or Chromium) in the command line.

It should also be said that Linux and Bash are not always the right tools for scraping. For many OSINT-related tasks, any of the many scraping browser plugins that support exporting data in CSV format (pay special attention to AI scraping), which, as you know, is very convenient to work with in Linux, may be sufficient. Few examples:

Webscraper.io (<https://webscraper.io>)

DataMiner (<https://dataminer.io>)

Instant Data Scraper
(<https://chromewebstore.google.com/detail/instant-data-scraper/ofaokhiedipichpaobibbnahnkdoijah>)


and many many others.

Day 16. Web search automation tools

Searching for information on Google or another search engine can take up most of an OSINT professional's time. Therefore, even if you forget about all the other chapters in this book and automate only this process, this would already be enough to reduce lost work time through automation.

There are many tools for automating your work with different search engines, but they are all pretty similar to each other. Today, I will show you examples of two types of tools - one that automates a traditional search engine (searches web pages) and one that automates an IP search engine (searches through all the devices connected to the internet).

DuckDuckGo search automation

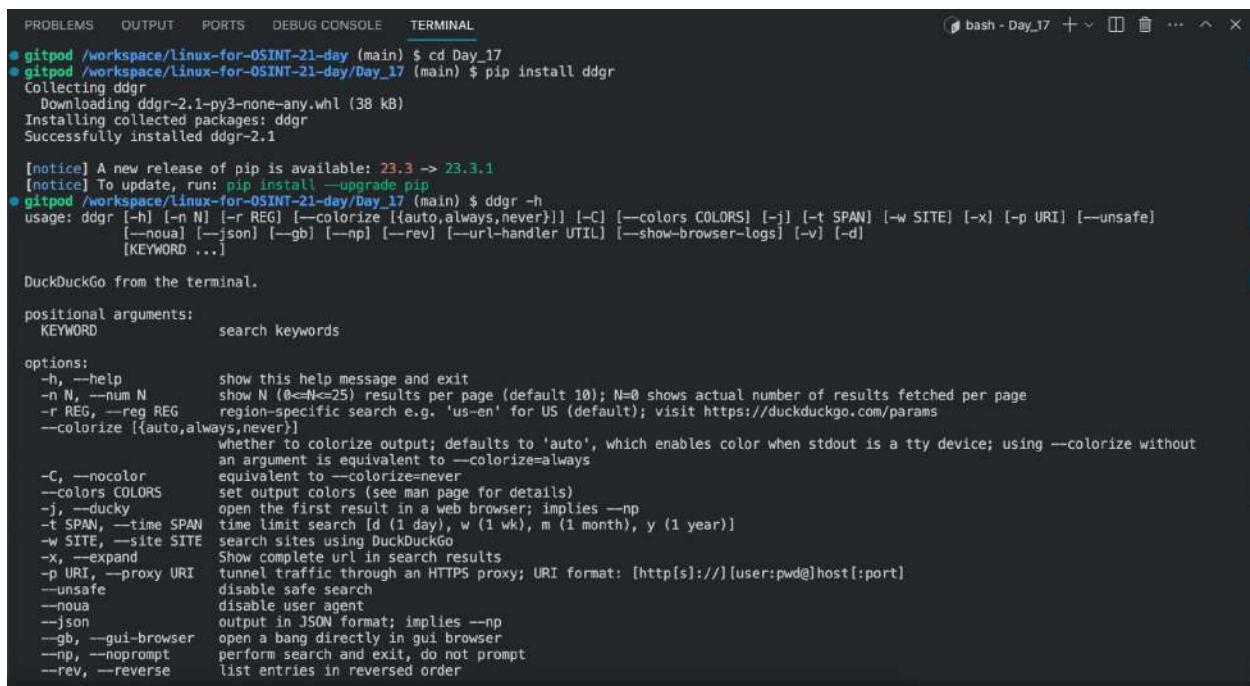

```
PROBLEMS OUTPUT PORTS DEBUG CONSOLE TERMINAL
● gitpod /workspace/linux-for-OSINT-21-day (main) $ cd Day_17
● gitpod /workspace/linux-for-OSINT-21-day/Day_17 (main) $ pip install ddgr
Collecting ddgr
  Downloading ddgr-2.1-py3-none-any.whl (38 kB)
Installing collected packages: ddgr
Successfully installed ddgr-2.1

[notice] A new release of pip is available: 23.3 -> 23.3.1
[notice] To update, run: pip install --upgrade pip
● gitpod /workspace/linux-for-OSINT-21-day/Day_17 (main) $ ddgr -h
usage: ddgr [-h] [-n N] [-r REG] [--colorize {auto,always,never}] [-C] [--colors COLORS] [-j] [-t SPAN] [-w SITE] [-x] [-p URI] [--unsafe]
             [--noua] [--json] [--gb] [--np] [--rev] [--url-handler UTILITY] [--show-browser-logs] [-v] [-d]
             [KEYWORD ...]

DuckDuckGo: from the terminal.


positional arguments:
  KEYWORD           search keywords

options:
  -h, --help        show this help message and exit
  -n N, --num N    show N (0<=N<=25) results per page (default 10); N=0 shows actual number of results fetched per page
  -r REG, --reg REG region-specific search e.g. 'us-en' for US (default); visit https://duckduckgo.com/params
  --colorize {auto,always,never}
                    whether to colorize output; defaults to 'auto', which enables color when stdout is a tty device; using --colorize without
                    an argument is equivalent to --colorize=always
  -C, --nocolor    equivalent to --colorize=never
  --colors COLORS   set output colors (see man page for details)
  -j, --ducky      open the first result in a web browser; implies --np
  -t SPAN, --time SPAN time limit search [d (1 day), w (1 wk), m (1 month), y (1 year)]
  -w SITE, --site SITE search sites using DuckDuckGo
  -x, --expand     Show complete url in search results
  -p URI, --proxy URI tunnel traffic through an HTTPS proxy; URI format: [http[s]://][user:pwd@]host[:port]
  --unsafe         disable safe search
  --noua          disable user agent
  --json          output in JSON format; implies --np
  --gb, --gui-browser open a bang directly in gui browser
  --np, --noprompt perform search and exit, do not prompt
  --rev, --reverse list entries in reversed order
```

DuckDuckGo search (<https://github.com/jarun/ddgr>) is a command-line utility written in Python that allows you to automate DuckDuckGo searches.

Lets' install from PyPi package manager:

```
pip install ddgr
```

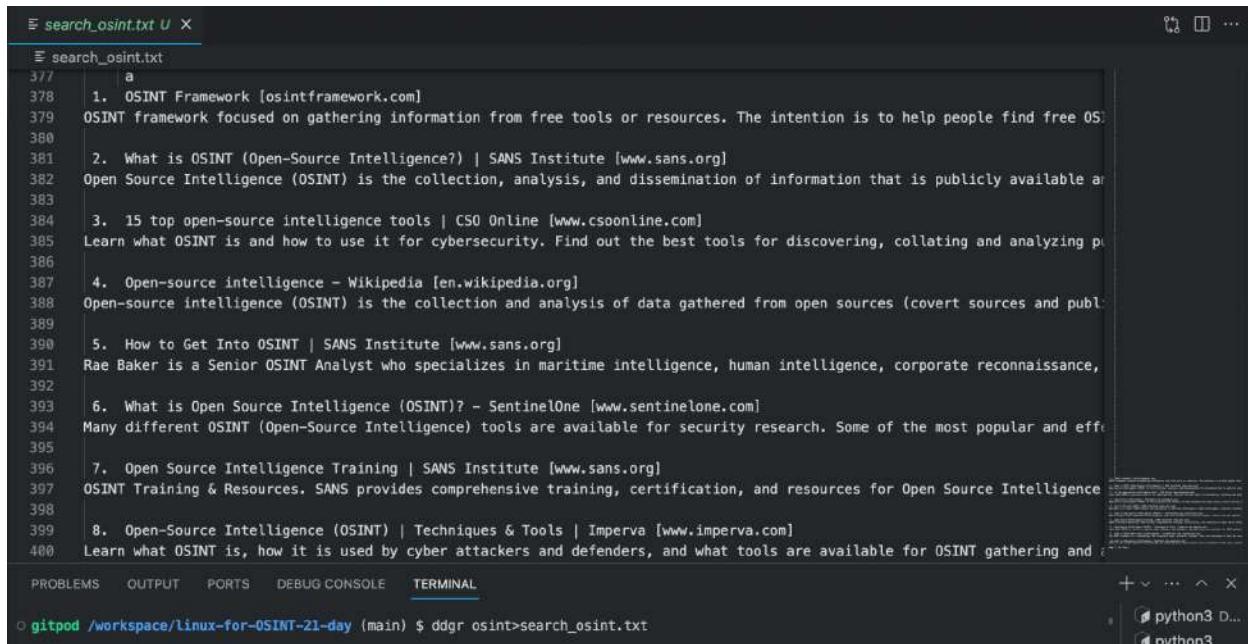

```
search_osint.txt u x
search_osint.txt
377 a
378 1. OSINT Framework [osintframework.com]
379 OSINT framework focused on gathering information from free tools or resources. The intention is to help people find free OS:
380
381 2. What is OSINT (Open-Source Intelligence?) | SANS Institute [www.sans.org]
382 Open Source Intelligence (OSINT) is the collection, analysis, and dissemination of information that is publicly available a
383
384 3. 15 top open-source intelligence tools | CSO Online [www.csoonline.com]
385 Learn what OSINT is and how to use it for cybersecurity. Find out the best tools for discovering, collating and analyzing p
386
387 4. Open-source intelligence - Wikipedia [en.wikipedia.org]
388 Open-source intelligence (OSINT) is the collection and analysis of data gathered from open sources (covert sources and publ
389
390 5. How to Get Into OSINT | SANS Institute [www.sans.org]
391 Rae Baker is a Senior OSINT Analyst who specializes in maritime intelligence, human intelligence, corporate reconnaissance,
392
393 6. What is Open Source Intelligence (OSINT)? - SentinelOne [www.sentinelone.com]
394 Many different OSINT (Open-Source Intelligence) tools are available for security research. Some of the most popular and effe
395
396 7. Open Source Intelligence Training | SANS Institute [www.sans.org]
397 OSINT Training & Resources. SANS provides comprehensive training, certification, and resources for Open Source Intelligence
398
399 8. Open-Source Intelligence (OSINT) | Techniques & Tools | Imperva [www.imperva.com]
400 Learn what OSINT is, how it is used by cyber attackers and defenders, and what tools are available for OSINT gathering and i
PROBLEMS OUTPUT PORTS DEBUG CONSOLE TERMINAL + ~ ⌂ ⌂ ⌂ ⌂ ⌂
gitpod /workspace/linux-for-OSINT-21-day (main) $ ddgr osint>search_osint.txt
python3 D...
python3
```

Now let's try searching for the word "osint" in DuckDuckGo and write the results to a text file:

```
cd Day_16
ddgr osint>search_osint.txt
```

If you want to extract only references from the results file (for example, for automatic scraping), you can use a combination of **Cat** and **Grep** commands:

```

390 5. How to Get Into OSINT | SANS Institute [www.sans.org]
391 Learn how to find OSINT resources and communities, practice techniques, and find a job in OSINT. This blog post shares various metho
392
393 6. What is Open Source Intelligence (OSINT)? - SentinelOne [www.sentinelone.com]
394 OSINT stands for open source intelligence, which refers to legally gathered information about an individual or organization from fre
395
396 7. Open Source Intelligence Training | SANS Institute [www.sans.org]
397 Learn how to collect and analyze publicly available information from various sources to support investigations, security, and decisio
398
399 8. Open-Source Intelligence (OSINT) | Techniques & Tools | Imperva [www.imperva.com]
400 Learn what OSINT is, how it works, and how it can be used by security teams, attackers, and public opinion seekers. Explore the hist
401
402 9. OSINT: What is open source intelligence and how is it used? [portswigger.net]
403 OSINT is intelligence drawn from publicly available material, such as the internet, mass media, and social media. It can be used for
404
405 10. What is Open-Source Intelligence | OpenText [www.opentext.com]
406 OSINT is the insight gained from processing and analyzing public data sources such as TV, radio, social media, and websites. Learn h
407
408 ddgr (? for help):
```

PROBLEMS OUTPUT PORTS COMMENTS DEBUG CONSOLE TERMINAL

- gitpod /workspace/linux-for-OSINT-21-day/Day_16 (main) \$ cat search_osint.txt | grep -o '\[.*\]'
- [osintframework.com]
[www.sans.org]
[www.csconline.com]
[en.wikipedia.org]
[www.sans.org]
[www.sentinelone.com]
[www.sans.org]
[www.imperva.com]
[portswigger.net]
[www.opentext.com]
- gitpod /workspace/linux-for-OSINT-21-day/Day_16 (main) \$

cat search_osint.txt | grep -o '\[.*\]'

Yes, is not very good that this tool does not collect full URLs but only site names. But the reader will be motivated to try other tools for collecting search results, which I'll talk about below.

Also a good option is to export the JSON results immediately by running the **Ddgr** command with the **--json** flag.

Remember that you can use not only words and phrases in your queries, but also advanced search operators. For example:

filetype:xlsx
site:facebook.com
intitle:osint
inurl:osint

If you need to gather search results for a larger list of queries, use proxy servers to avoid having your IP address blocked with **--proxy** flag. These can be found in numerous lists of free proxy servers. For example, <https://github.com/TheSpeedX/PROXY-List>.

To collect the maximum amount of data, I recommend that you collect results not only from DuckDuckGo, but also from other search engines using the tools like:

PyDork (<https://github.com/blacknon/pydork>) - search in Google, Bing, DuckDuckGo, **Baidu** and Yahoo Japan.

Fast Google Dorks Scan (<https://github.com/IvanGlinkin/Fast-Google-Dorks-Scan>)

0xDork (<https://github.com/rly0nheart/0xdork>) - search in Google.

and many others.

Tools for automating the collection of search results for different search engines are plentiful. You can find a list of them in the Dorks collection list repository (<https://github.com/cipher387/Dorks-collections-list>).

In addition, these tools are quite simple and you can easily make your own using APIs, a list of which can be found at “Search engines API” section of API for OSINT repository (<https://github.com/cipher387/API-s-for-OSINT>).

IP search engines

It is worth talking separately about automating the collection of IP search engines (Shodan, Censys, Fofa, Netlas) search results. This is a bit more complex process, as search results contain much more information than Google or DuckDuckGo search results.

IP search engines differ from “normal” search engines in that they do not index web pages to which they can find links, but all IP addresses connected to the Internet. That is, not only websites, but all other servers and devices.

As usual, I'll use Netlas for an example.

```
PROBLEMS OUTPUT PORTS DEBUG CONSOLE TERMINAL
bash - Day_17 + - ×

Requirement already satisfied: charset-normalizer<4,>=2 in /home/gitpod/.pyenv/versions/3.12.0/lib/python3.12/site-packages (from requests>=2.12.5->netlas) (3.3.0)
Requirement already satisfied: idna<4,>=2.5 in /home/gitpod/.pyenv/versions/3.12.0/lib/python3.12/site-packages (from requests>=2.12.5->netlas) (3.4)
Requirement already satisfied: urllib3<3,>=1.21.1 in /home/gitpod/.pyenv/versions/3.12.0/lib/python3.12/site-packages (from requests>=2.12.5->netlas) (2.0.6)
Requirement already satisfied: certifi>=2017.4.17 in /home/gitpod/.pyenv/versions/3.12.0/lib/python3.12/site-packages (from requests>=2.12.5->netlas) (2023.7.22)
Downloading netlas-0.4.1-py3-none-any.whl (10 kB)
  Downloading click-8.1.7-py3-none-any.whl (97 kB)    97.9/97.9 kB 38.6 MB/s eta 0:00:00
  Downloading tqdm-4.66.1-py3-none-any.whl (78 kB)    78.3/78.3 kB 19.8 MB/s eta 0:00:00
Building wheels for collected packages: orjson
  Building wheel for orjson (pyproject.toml) ... done
  Created wheel for orjson: filename=orjson-3.9.0-cp312-cp312-linux_x86_64.whl size=735362 sha256=719370238c1c9c98bcd396ddb2932eb023367375ba37d2f4914368bcf0f63766
  Stored in directory: /workspace/.pyenv_mirror/pip_cache/wheels/c4/04/5b/abeb46db205bc1993d473ea3c43bcadae072cd002d798200db
Successfully built orjson
Installing collected packages: appdirs, tqdm, orjson, click, netlas
Successfully installed appdirs-1.4.4 click-8.1.7 netlas-0.4.1 orjson-3.9.0 tqdm-4.66.1

[notice] A new release of pip is available: 23.3 -> 23.3.1
[notice] To update, run: pip install --upgrade pip
● gitpod /workspace/linux-for-OSINT-21-day/Day_17 (main) $ netlas -h

Usage: netlas [OPTIONS] COMMAND [ARGS]...

Options:
  -h, --help  Show this message and exit.

Commands:
  count      Calculate count of query results.
  download   Download data.
  host       Host (ip or domain) information.
  indices    Get available data indices.
  profile    Get user profile data.
  savekey    Save API key to the local system.
  search (query) Search query.
  stat       Get statistics for query.
```

First, let's install the Netlas Python package (<https://readthedocs.org/projects/netlas-python/>):

pip install netlas
netlas -h

```
PROBLEMS OUTPUT PORTS DEBUG CONSOLE TERMINAL
● gitpod /workspace/linux-for-OSINT-21-day (main) $ netlas -h


Usage: netlas [OPTIONS] COMMAND [ARGS]...

Options:
  -h, --help  Show this message and exit.

Commands:
  count      Calculate count of query results.
  download   Download data.
  host       Host (ip or domain) information.
  indices    Get available data indices.
  profile    Get user profile data.
  savekey    Save API key to the local system.
  search (query) Search query.
  stat       Get statistics for query.
○ gitpod /workspace/linux-for-OSINT-21-day (main) $
```

Before sending first request, register on Netlas and copy the API key from your personal account (50 request/day FREE):

```
netlas savekey YOUR_API_KEY
```

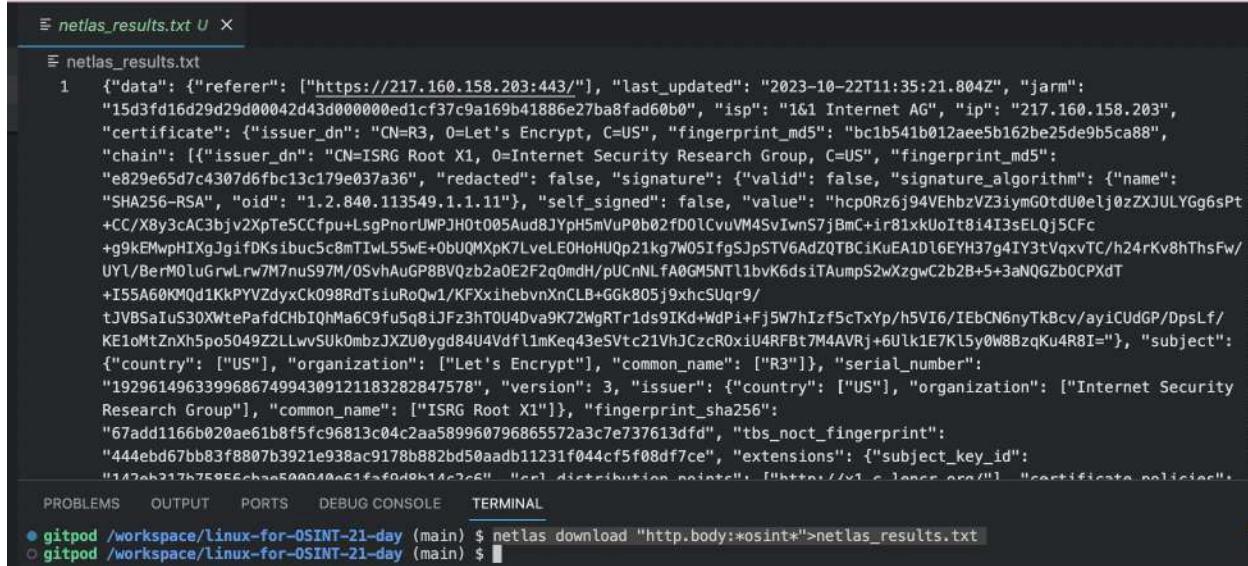

```
netlas_results.txt U ×
netlas_results.txt
1  {"data": {"referer": ["https://217.160.158.203:443/"], "last_updated": "2023-10-22T11:35:21.804Z", "jarm": "15d3fd16d29d29d00042d43d000000ed1cf37c9a169b41886e27ba8fad60b0", "isp": "1&1 Internet AG", "ip": "217.160.158.203", "certificate": {"issuer_dn": "CN=R3, O=Let's Encrypt, C=US", "fingerprint_md5": "bc1b541b012aee5b162be25de9b5ca88", "chain": [{"issuer_dn": "CN=ISRG Root X1, O=Internet Security Research Group, C=US", "fingerprint_md5": "e829e65d7c4307d6fb13c179e037a36", "redacted": false, "signature": {"valid": false, "signature_algorithm": {"name": "SHA256-RSA", "oid": "1.2.840.113549.1.1.11"}, "self_signed": false, "value": "hcp0Rz6j94VHbzVZ3iyM0Gtdu0elj0zZXJULYg6sPt+CC/X8y3cAC3bjv2XpTe5CCfpv+LsgPnorUWPJH0t005Aud8JYpH5mVu0b0b02fD01Cv0VM45vIwnS7jBmC+iR81xKu0It814I3sELQj5CFc+g9kEMwpHIXgJgjifDKsibuc5c8mTiwL55wE+0bUQMxP7LveLE0HoH0UQp21kg7W05Ifg5JpSTV6AdZQTBCiKuEA1D16EYH37g4IY3tVqxvTC/h24rKv8hThsFw/UYl/BerM0luGrwLrw7M7nuS97M/0SvhAuGP8BVQzb2a0E2F2q0mdH/pUcnNLfA0GM5NT1lbvK6dsiT Aump52wXzgwC2b2B+5+3aNQGZb0CPXdt+I55A60KM0d1KkPYVZdyxCk098RdTsiuRoQw1/KFxu1hebvnXnCLB+GGK805j9xhcSUqr9/tJVBsaIuS30XwtePaFdCHbIQhMa6C9fu5q8iJFz3hTOu4Dva9K72WgRTr1ds9IKd+WdPi+Fj5W7hIzf5cTxYp/h5VI6/IEbCN6nyTkBcv/ayiCUdGP/DpsLf/KE1oMtZnXh5po5049Z2LwvSUk0mbzXZU0ygd84U4Vdf1mKeg43e5Vtc21VhJczcRoXiU4RFBt7M4AVRj+6Ulk1E7K15y0W8BzqKu4R8I=", "subject": {"country": ["US"], "organization": ["Let's Encrypt"], "common_name": ["R3"]}, "serial_number": "19296149633996867499430912118328247578", "version": 3, "issuer": {"country": ["US"], "organization": ["Internet Security Research Group"]}, "common_name": ["ISRG Root X1"], "fingerprint_sha256": "67add1166b020ae61b8f5fc96813c04c2aa589960796865572a3c7e737613dfd", "tbs_noct_fingerprint": "444ebd67bb83f8807b3921e938ac9178b882bd50aadb11231f044cf5f08df7ce", "extensions": {"subject_key_id": "142a6217b759566baa500040e61f5a0d0b11c2c6", "cert_distribution_point": [{"url": "https://v1.letsencrypt.org/"}], "certificate_policies": [{"id": "1.3.6.1.4.1.31195.4.1.1", "uri": "https://v1.letsencrypt.org/certs/1.3.6.1.4.1.31195.4.1.1"}]}}, "PROBLEMS", "OUTPUT", "PORTS", "DEBUG CONSOLE", "TERMINAL"]
● gitpod /workspace/linux-for-OSINT-21-day (main) $ netlas download "http.body:*osint*">>netlas_results.txt
● gitpod /workspace/linux-for-OSINT-21-day (main) $
```

Let's try to find servers that have the word "osint" in the body tag of their http response html code:


```
netlas download "http.body:*osint*">>netlas_results.txt
```

Note that in the query, we use the filter for advanced search "http.body" to search only the text of web pages. But Netlas has dozens of other advanced search operators. For example:

```
http.title:  
http.meta:  
uri:  
domain:  
port:  
geo.city:  
ip:  
geo.country:
```

You can extract the any data from the results file using the JQ utility, which is described in detail in **Day 14**:

```
jq .data.http.title netlas_results.txt >netlas_results_extracted.txt
```

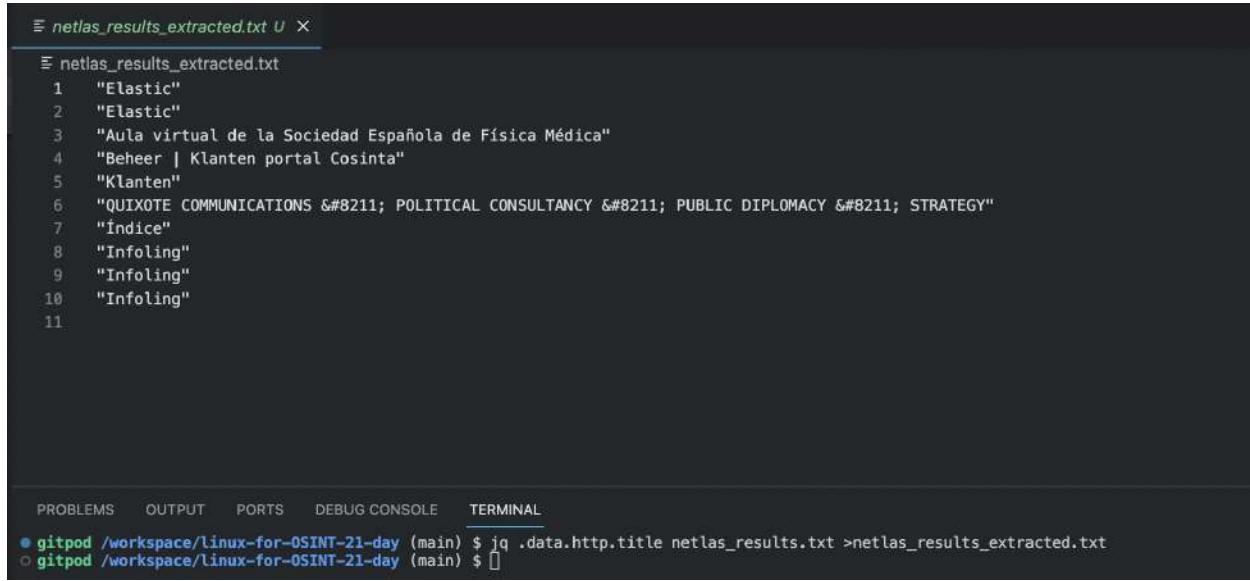

```
jq .data.http.title netlas_results.txt >netlas_results_extracted.txt
```

```
netlas_results_extracted.txt
```

```
1 "Elastic"
2 "Elastic"
3 "Aula virtual de la Sociedad Española de Física Médica"
4 "Beheer | Klanten portal Cosinta"
5 "Klanten"
6 "QUIXOTE COMMUNICATIONS &#8211; POLITICAL CONSULTANCY &#8211; PUBLIC DIPLOMACY &#8211; STRATEGY"
7 "Índice"
8 "Infoling"
9 "Infoling"
10 "Infoling"
11
```

```
PROBLEMS OUTPUT PORTS DEBUG CONSOLE TERMINAL
```

```
gitpod /workspace/linux-for-OSINT-21-day (main) $ jq .data.http.title netlas_results.txt >netlas_results_extracted.txt
gitpod /workspace/linux-for-OSINT-21-day (main) $
```


To learn more about how to automate dozens of different OSINT and pentest tasks with Netlas Python library, check out Netlas CookBook (<https://github.com/netlas-io/netlas-cookbook>).

Day 17. File sharing sites, torrents, FTP

Today we'll return to the topic we started talking about in **Day 5**. It's downloading content (for later automatic analysis). This time we will talk about slightly more complex things, but in a more superficial way: FTP servers, torrents, file sharing and social media.

Today we're not going to run examples of commands, we're just going to talk about different tools that are worth knowing about.

FTP

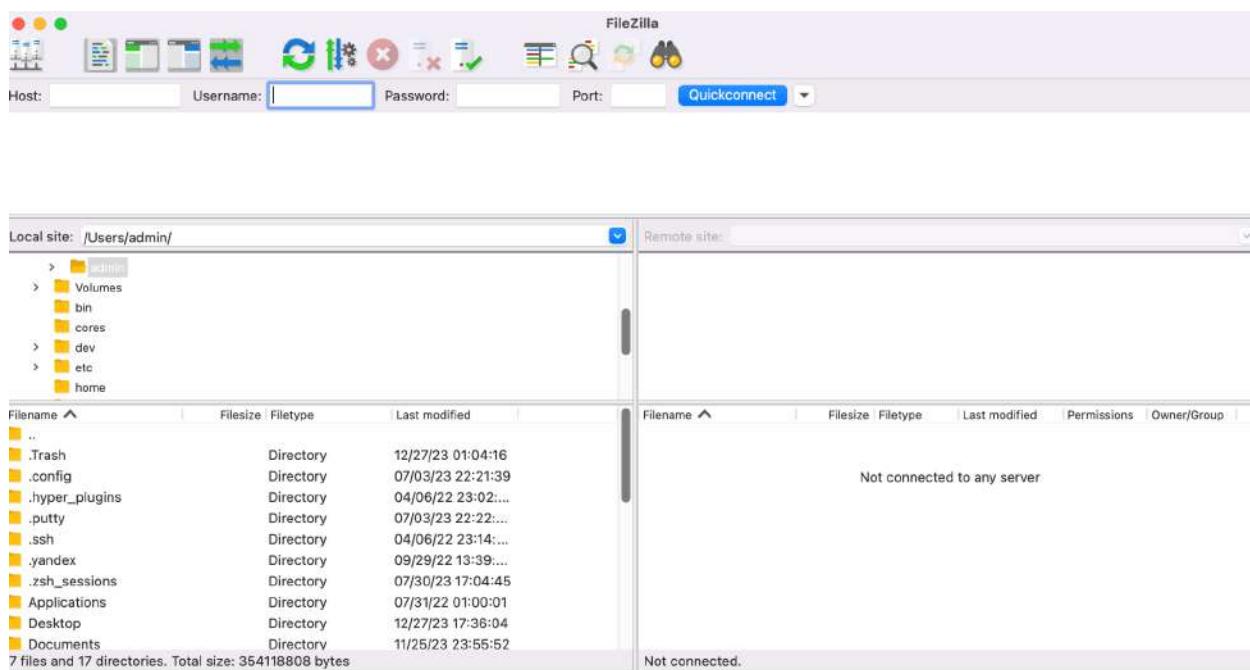

On the fifth day, we already talked about the **curl** utility, which supports uploading files through different protocols, including the FTP protocol.

But still, the **FTP** utility (https://www.gnu.org/software/inetutils/manual/html_node/ftp-invocation.html) is a bit more convenient for this task.

If you just need to transfer files, you will probably be more comfortable using a GUI FTP client such as FileZilla (https://wiki.filezilla-project.org/Main_Page) rather than the command line.

But FileZilla (like many other FTP clients) allows you to automate various actions using the command line ([https://wiki.filezilla-project.org/Command-line_arguments_\(Client\)](https://wiki.filezilla-project.org/Command-line_arguments_(Client))).

Torrents

It is illegal to use leaked data files, but many OSINT professionals use them anyway to gather more information. Often the leaked data is stored as huge files on torrents.

For example, I had to deal with one major social network leak that weighed hundreds of gigabytes. Unpacking the archives and extracting the necessary data from it using the JQ utility took more than two days! But thanks to the screen (**Day 9**) I only had to spend about an hour writing commands and check screen sessions a few times to see if everything's going well.

Seedbox is a high-bandwidth remote server used to upload and download digital files from a peer-to-peer (P2P) network ([tech slang](#)).

Here are some examples of popular services for monthly seedbox rentals:

RapidSeedbox (<https://www.rapidseedbox.com>)

CloudBoxes (<https://cloudboxes.io>)

DediSeedBox (<https://dediseedbox.com/>)

Seedboxes is a very handy thing, but you can run command line torrent clients on your VPS as well if you want:

Aria (<https://aria2.github.io>)

Transmission-cli (<https://cli-ck.io/transmission-cli-user-guide/>)

WebTorrent-cli (<https://github.com/webtorrent/webtorrent-cli>)

Stig (<https://github.com/rndusr/stig>)

File sharing services

When using files that are uploaded to various file sharing sites in investigations, you should also keep in mind that their downloading can be automated. Here are some examples of command line utilities for different services that will help you do this:

Google Drive (<https://github.com/glotlabs/gdrive>)

DropBox (<https://github.com/dropbox/dbxcli>)

Mega.nz (<https://github.com/meganz/MEGAcmd>)

OneDrive (<https://github.com/skilion/onedrive>)

But be very careful when using them and never use accounts where you have important information stored for authorization. **After all, these are unofficial utilities and accounts can be blocked for using them.**

Social media

When you work with a lot of content that is published on some popular social network, check to see if someone else has made a utility to automate its uploading. For example:

YouTube-dl (<https://youtube-dl.org>)

SlideShare (<https://github.com/mohan3d/slideshare-go>)

Spotify (<https://github.com/spotDL/spotify-downloader>)

You Get (<https://github.com/soimort/you-get>)

And I'll say it again. We are talking about unofficial clients, the use of which can lead to blocked accounts. Be very careful.

Day 18. Domain investigation

Perhaps when you first saw this book, you thought of it as being mostly about automating the network information gathering. But this book has the goal of teaching OSINT technicians minimal Linux skills.

Therefore, I will cover only the most basic techniques.

Whois

Whois is a simple utility that displays basic information about a domain: whether it is registered or not, date of registration, end date of the paid holding period, contact details of the owner, etc.

```
PROBLEMS    OUTPUT    PORTS    DEBUG CONSOLE    TERMINAL
● gitpod /workspace/linux-for-OSINT-21-day (main) $ sudo apt-get install whois
Reading package lists... Done
Building dependency tree... Done
Reading state information... Done
The following NEW packages will be installed:
  whois
0 upgraded, 1 newly installed, 0 to remove and 0 not upgraded.
Need to get 53.4 kB of archives.
After this operation, 279 kB of additional disk space will be used.
Get:1 http://archive.ubuntu.com/ubuntu jammy/main amd64 whois amd64 5.5.13 [53.4 kB]
Fetched 53.4 kB in 0s (149 kB/s)
debconf: delaying package configuration, since apt-utils is not installed
Selecting previously unselected package whois.
(Reading database ... 35595 files and directories currently installed.)
Preparing to unpack .../whois_5.5.13_amd64.deb ...
Unpacking whois (5.5.13) ...
Setting up whois (5.5.13) ...
Processing triggers for man-db (2.10.2-1) ...
○ gitpod /workspace/linux-for-OSINT-21-day (main) $ █
```


Let's install:

```
sudo apt-get install whois
```

```
PROBLEMS OUTPUT PORTS DEBUG CONSOLE TERMINAL
● gitpod /workspace/linux-for-OSINT-21-day (main) $ whois github.com
Domain Name: GITHUB.COM
Registry Domain ID: 1264983250_DOMAIN_COM-VRSN
Registrar WHOIS Server: whois.markmonitor.com
Registrar URL: http://www.markmonitor.com
Updated Date: 2022-09-07T09:10:44Z
Creation Date: 2007-10-09T18:20:50Z
Registry Expiry Date: 2024-10-09T18:20:50Z
Registrar: MarkMonitor Inc.
Registrar IANA ID: 292
Registrar Abuse Contact Email: abusecomplaints@markmonitor.com
Registrar Abuse Contact Phone: +1.2086851750
Domain Status: clientDeleteProhibited https://icann.org/epp#clientDeleteProhibited
Domain Status: clientTransferProhibited https://icann.org/epp#clientTransferProhibited
Domain Status: clientUpdateProhibited https://icann.org/epp#clientUpdateProhibited
Name Server: DNS1.P08.NSONE.NET
Name Server: DNS2.P08.NSONE.NET
Name Server: DNS3.P08.NSONE.NET
Name Server: DNS4.P08.NSONE.NET
Name Server: NS-1283.AWSDNS-32.ORG
Name Server: NS-1707.AWSDNS-21.CO.UK
Name Server: NS-421.AWSDNS-52.COM
Name Server: NS-520.AWSDNS-01.NET
DNSSEC: unsigned
URL of the ICANN Whois Inaccuracy Complaint Form: https://www.icann.org/wicf/
>>> Last update of whois database: 2023-12-16T19:51:05Z <<<
For more information on Whois status codes, please visit https://icann.org/epp
NOTICE: The expiration date displayed in this record is the date the
registrar's sponsorship of the domain name registration in the registry is
currently set to expire. This date does not necessarily reflect the expiration
date of the domain name registrant's agreement with the sponsoring
registrar. Users may consult the sponsoring registrar's Whois database to
view the registrar's reported date of expiration for this registration.
TERMS OF USE: You are not authorized to access or query our Whois
```

And let's gather information about the GitHub.com domain:

whois github.com

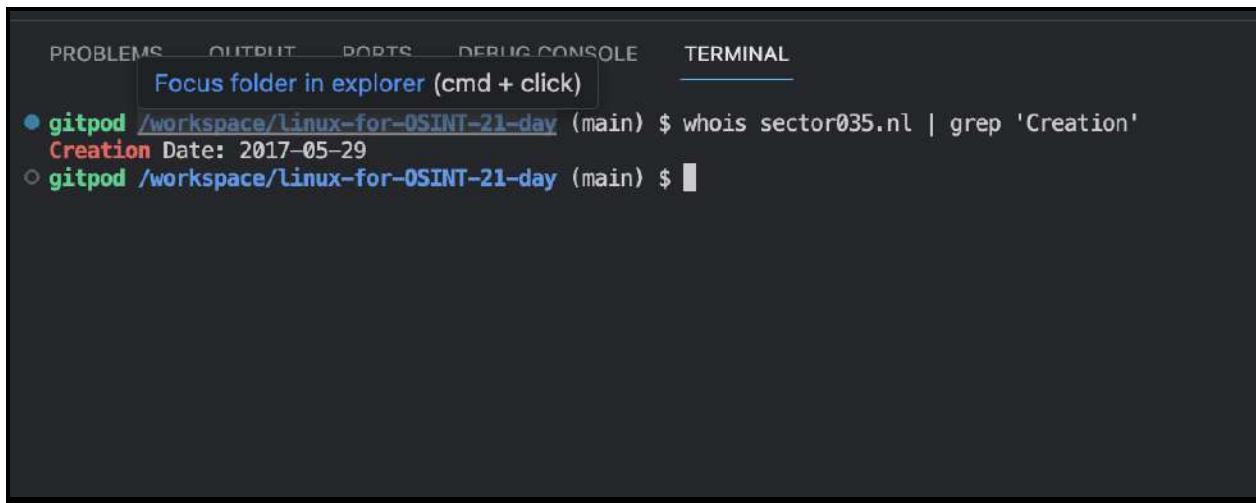

```
PROBLEMS OUTPUT PORTS DEBUG CONSOLE TERMINAL
Focus folder in explorer (cmd + click)

● gitpod /workspace/linux-for-OSINT-21-day (main) $ whois sector035.nl | grep 'Creation'
Creation Date: 2017-05-29
○ gitpod /workspace/linux-for-OSINT-21-day (main) $ █
```

If you only need certain information from whois, you can extract the necessary strings with grep (remember **Day 6**):

whois sector035.nl | grep 'Creation'

DNS

Dnsutils Debian package (<https://packages.debian.org/en/buster/dnsutils>) includes three commands:

dig - query the DNS (Domain Name System) info;
nslookup - the older way to do it;
nsupdate - perform dynamic updates (See RFC2136).

For the purposes of this course, we will consider only the first.

```
PROBLEMS OUTPUT PORTS DEBUG CONSOLE TERMINAL
● gitpod /workspace/linux-for-OSINT-21-day (main) $ sudo apt-get install dnsutils
Reading package lists... Done
Building dependency tree... Done
Reading state information... Done
The following additional packages will be installed:
  bind9-dnsutils bind9-host bind9-libs liblmbdb0 libuv1
The following NEW packages will be installed:
  bind9-dnsutils bind9-host bind9-libs dnsutils liblmbdb0 libuv1
0 upgraded, 6 newly installed, 0 to remove and 0 not upgraded.
Need to get 1,594 kB of archives.
After this operation, 9,892 kB of additional disk space will be used.
Do you want to continue? [Y/n] y
Get:1 http://archive.ubuntu.com/ubuntu jammy/main amd64 liblmbdb0 amd64 0.9.24-1build2 [47.6 kB]
Get:2 http://archive.ubuntu.com/ubuntu jammy/main amd64 libuv1 amd64 1.43.0-1 [93.1 kB]
Get:3 http://archive.ubuntu.com/ubuntu jammy-updates/main amd64 bind9-libs amd64 1:9.18.12-0ubuntu0.22.04.3 [1,240 kB]
Get:4 http://archive.ubuntu.com/ubuntu jammy-updates/main amd64 bind9-host amd64 1:9.18.12-0ubuntu0.22.04.3 [52.3 kB]
Get:5 http://archive.ubuntu.com/ubuntu jammy-updates/main amd64 bind9-dnsutils amd64 1:9.18.12-0ubuntu0.22.04.3 [157 kB]
Get:6 http://archive.ubuntu.com/ubuntu jammy-updates/universe amd64 dnsutils all 1:9.18.12-0ubuntu0.22.04.3 [3,924 B]
Fetched 1,594 kB in 0s (13.2 MB/s)
debconf: delaying package configuration, since apt-utils is not installed
Selecting previously unselected package liblmbdb0:amd64.
(Reading database ... 35604 files and directories currently installed.)
Preparing to unpack .../0-liblmbdb0_0.9.24-1build2_amd64.deb ...
Unpacking liblmbdb0:amd64 (0.9.24-1build2) ...
Selecting previously unselected package libuv1:amd64.
Preparing to unpack .../1-libuv1_1.43.0-1_amd64.deb ...
Unpacking libuv1:amd64 (1.43.0-1) ...
Selecting previously unselected package bind9-libs:amd64.
Preparing to unpack .../2-bind9-libs_1%3a9.18.12-0ubuntu0.22.04.3_amd64.deb ...
Unpacking bind9-libs:amd64 (1:9.18.12-0ubuntu0.22.04.3) ...
Selecting previously unselected package bind9-host.
Preparing to unpack .../3-bind9-host_1%3a9.18.12-0ubuntu0.22.04.3_amd64.deb ...
Unpacking bind9-host (1:9.18.12-0ubuntu0.22.04.3) ...
Selecting previously unselected package bind9-dnsutils.
```

Let's install dnsutils:

sudo apt-get install dnsutils

```
PROBLEMS OUTPUT PORTS DEBUG CONSOLE TERMINAL
● gitpod /workspace/linux-for-OSINT-21-day (main) $ dig google.com
; <>> DiG 9.18.12-0ubuntu0.22.04.3-Ubuntu <>> google.com
;; global options: +cmd
;; Got answer:
;; ->>HEADER<<- opcode: QUERY, status: NOERROR, id: 39629
;; flags: qr rd ra; QUERY: 1, ANSWER: 1, AUTHORITY: 0, ADDITIONAL: 1
;;
;; OPT PSEUDOSECTION:
;; EDNS: version: 0, flags:; udp: 1232
;; QUESTION SECTION:
:google.com.           IN      A
;;
;; ANSWER SECTION:
google.com.        122     IN      A      142.250.201.174
;;
;; Query time: 3 msec
;; SERVER: 1.1.1.1#53(1.1.1.1) (UDP)
;; WHEN: Sat Dec 16 19:55:35 UTC 2023
;; MSG SIZE  rcvd: 55
○ gitpod /workspace/linux-for-OSINT-21-day (main) $ 4
```


And get information from Domain Name System about google.com:

```
dig google.com
```

Netlas


As you already know from past lessons, Netlas is a search engine that indexes not only websites, but all IP addresses connected to the Internet. And there is a lot of different information about each address or domain stored there, which can be retrieved with the **host** command.

Let's try to do it:

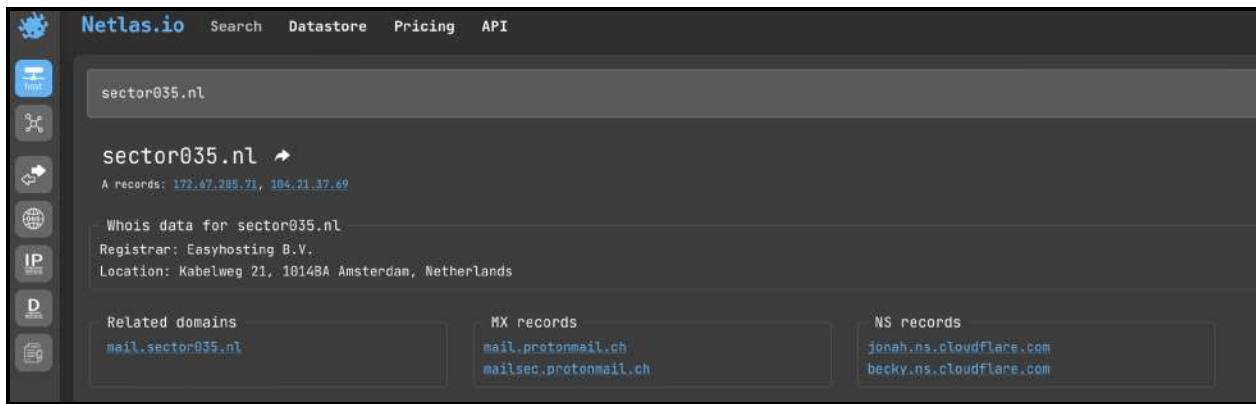A screenshot of the Netlas.io web interface. The top navigation bar includes 'Netlas.io', 'Search', 'Datastore', 'Pricing', and 'API'. The main search bar contains the query 'sector035.nl'. Below the search bar, the domain 'sector035.nl' is highlighted with a blue arrow icon. To the left of the domain are several icons: a globe, a file, a gear, a left arrow, a right arrow, a magnifying glass, and an IP address. To the right of the domain, it says 'A records: 172.67.205.71, 104.21.37.69'. Below this, 'Whois data for sector035.nl' is shown, indicating the Registrar is 'Easyhosting B.V.' and the Location is 'Kabelweg 21, 1014BA Amsterdam, Netherlands'. Below the Whois data, there are sections for 'Related domains' (listing 'mail.sector035.nl'), 'MX records' (listing 'mail.protonmail.ch' and 'mailsec.protonmail.ch'), and 'NS records' (listing 'jonah.ns.cloudflare.com' and 'becky.ns.cloudflare.com').

If you haven't already done so on **Day 16**, install the Netlas package from PyPi:

```
pip install netlas
```

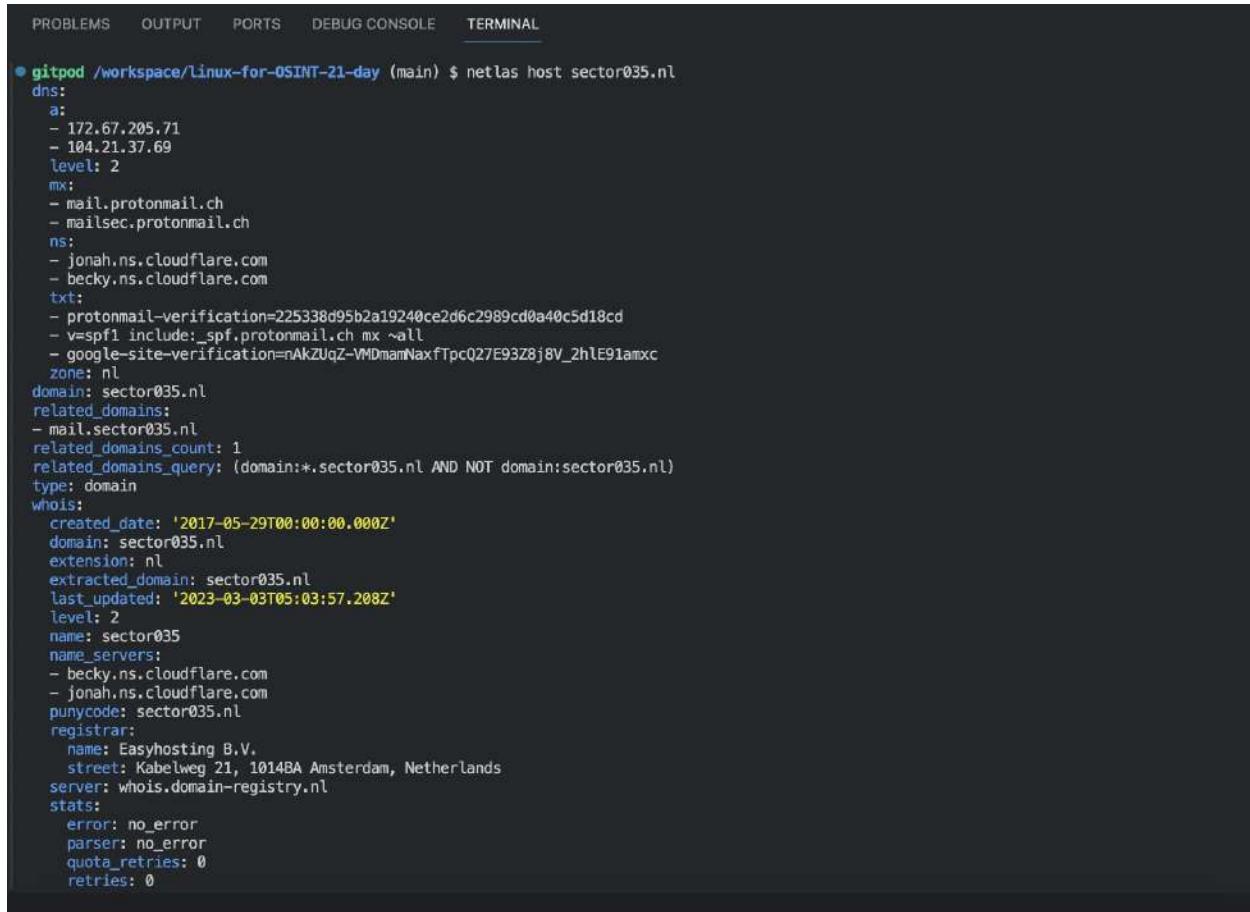

```
PROBLEMS OUTPUT PORTS DEBUG CONSOLE TERMINAL

● gitpod /workspace/Linux-for-OSINT-21-day (main) $ netlas host sector035.nl
dns:
  a:
    - 172.67.205.71
    - 104.21.37.69
  level: 2
  mx:
    - mail.protonmail.ch
    - mailsec.protonmail.ch
  ns:
    - jonah.ns.cloudflare.com
    - becky.ns.cloudflare.com
  txt:
    - protonmail-verification=225338d95b2a19240ce2d6c2989cd0a40c5d18cd
    - v=spf1 include:_spf.protonmail.ch mx ~all
    - google-site-verification=nAkZUqZ-VMdmanNaxfTpcQ27E93Z8j8V_2hLE91amxc
  zone: nl
  domain: sector035.nl
  related_domains:
    - mail.sector035.nl
  related_domains_count: 1
  related_domains_query: (domain:*.sector035.nl AND NOT domain:sector035.nl)
  type: domain
  whois:
    created_date: '2017-05-29T00:00:00.000Z'
    domain: sector035.nl
    extension: nl
    extracted_domain: sector035.nl
    last_updated: '2023-03-03T05:03:57.208Z'
    level: 2
    name: sector035
    name_servers:
      - becky.ns.cloudflare.com
      - jonah.ns.cloudflare.com
    punycode: sector035.nl
    registrar:
      name: Easyhosting B.V.
      street: Kabelweg 21, 1014BA Amsterdam, Netherlands
    server: whois.domain-registry.nl
    stats:
      error: no_error
      parser: no_error
      quota_retries: 0
      retries: 0
```

And run:

netlas host sector035.nl

As you can see, it displays both whois information, dns information, addresses of various servers that are associated with the domain that can be used for further investigation and many other info.

As I warned in the preface to this book, it is not written for pentesters and bug hunters at all, but for OSINT specialists. If you plan to do a job that requires a more in-depth knowledge of computer networks, you should explore many other sources of information.

A good place to start is with the manual for Nmap (<https://nmap.org>), one of the most famous utility for network exploration and security auditing.

All the commands described above can be combined with Xargs (remember **Day 4**) and used to work with domain/IP address lists.

20 domain investigation Python packages

Just type in command line: `pip install + package name`

<code>python-whois</code>	<code>virustotal-python</code>
<code>dnstwist</code>	<code>pysnyk</code>
<code>builtwith</code>	<code>pydork</code>
<code>waybackpy</code>	<code>EmailHarvester</code>
<code>netlas</code>	<code>sitemap-generator</code>
<code>pyseoanalyzer</code>	<code>censys</code>
<code>shodan</code>	<code>wapiti3</code>
<code>dns-crawler</code>	<code>dirhunt</code>
<code>oxdork</code>	<code>cloudscraper</code>
<code>urlscanio</code>	<code>metadata_parser</code>



Image from [Twitter](#).

In the picture is a small list with Python packages to gather information about the websites. To install each of them, type `pip install (package name)` at the command line, and then use the help command to understand what a particular package is for.

This is the largest homework in this book and you can spend several weeks completing it. We will try some more commands tomorrow, and next lessons will be without command examples, just reading and thinking.

Day 19. Git and Github


Git (<https://git-scm.com>) is a software version control system created by Linus Torvalds. According to StackOverflow's 2022 survey, more than 93% of developers use it as their primary version control system (<https://survey.stackoverflow.co/2022/#section-version-control-version-control-systems>).

The situation with Git and Linux is that exceptionally rare case where one person managed to invent two such game-changing software in one lifetime (Linux in 1991, Git in 2005).

Even if you don't intend to do any development work, you can still benefit from basic Git skills for OSINT. This comes in handy for running different tools, as well as for analyzing Github repositories that store large amounts of text data (e.g., phishing domain lists or smart contract files).

Gitpod already has Git installed, but in other cases you may need to install it:

```
sudo apt-get update  
sudo apt-get install git
```

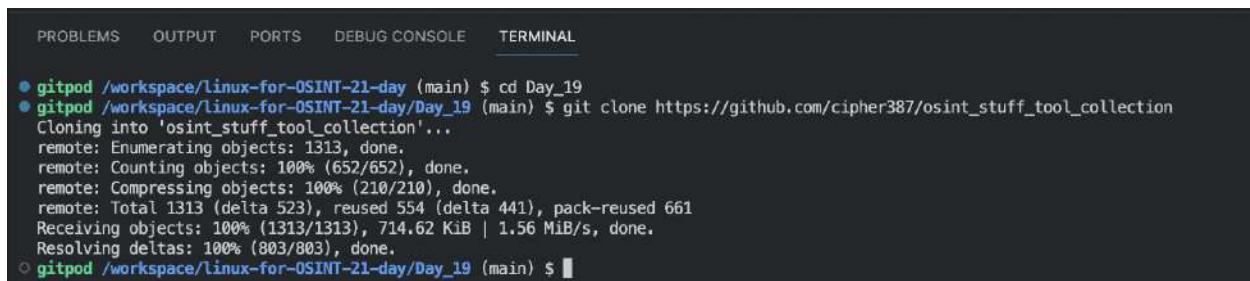

```
PROBLEMS OUTPUT PORTS DEBUG CONSOLE TERMINAL

● gitpod /workspace/linux-for-OSINT-21-day (main) $ cd Day_19
● gitpod /workspace/linux-for-OSINT-21-day/Day_19 (main) $ git clone https://github.com/cipher387/osint_stuff_tool_collection
Cloning into 'osint_stuff_tool_collection'...
remote: Enumerating objects: 1313, done.
remote: Counting objects: 100% (652/652), done.
remote: Compressing objects: 100% (210/210), done.
remote: Total 1313 (delta 523), reused 554 (delta 441), pack-reused 661
Receiving objects: 100% (1313/1313), 714.62 KiB | 1.56 MiB/s, done.
Resolving deltas: 100% (803/803), done.
● gitpod /workspace/linux-for-OSINT-21-day/Day_19 (main) $
```

Let's go to <https://github.com/new> and create new empty Github repository.

Create a new repository

A repository contains all project files, including the revision history. Already have a project repository elsewhere? [Import a repository](#).

Required fields are marked with an asterisk (*).

Owner * Repository name *

/ linux_for_osint_20_day is available.

Great repository names are short and memorable. Need inspiration? How about `cuddly-tribble`?

Description (optional)

Public Anyone on the internet can see this repository. You choose who can commit.

Private You choose who can see and commit to this repository.

Initialize this repository with:

Add a README file This is where you can write a long description for your project. [Learn more about READMEs](#).

Add .gitignore

Choose which files not to track from a list of templates. [Learn more about ignoring files](#).

Choose a license

License:

A license tells others what they can and can't do with your code. [Learn more about licenses](#).

This will set `main` as the default branch. Change the default name in your settings.

① You are creating a private repository in your personal account.

Create repository

Look at the image above, fill in the repository name and description fields, make the repository private, create a README.MD file and click on **Create repository**.

Now go back to Gitpod and type in the command line:

PROBLEMS OUTPUT PORTS DEBUG CONSOLE TERMINAL

```
● gitpod /workspace/linux-for-OSINT-21-day (main) $ cd Day_19
● gitpod /workspace/linux-for-OSINT-21-day/Day_19 (main) $ git clone https://github.com/cipher387/linux_for_osint_20_day
Cloning into 'linux_for_osint_20_day'...
remote: Enumerating objects: 3, done.
remote: Counting objects: 100% (3/3), done.
remote: Compressing objects: 100% (2/2), done.
remote: Total 3 (delta 0), reused 0 (delta 0), pack-reused 0
Receiving objects: 100% (3/3), done.
○ gitpod /workspace/linux-for-OSINT-21-day/Day_19 (main) $
```


git clone https://github.com/cipher387/linux_for_osint_20_day

Replace cipher387 with your Github login and if your repository name is different, replace that too.

You can only copy private repositories from your own account, or from the accounts of people who have given you access to one or more private repositories.

Public repositories can be cloned from any account.

Now let's make sure that the repository has been cloned correctly:

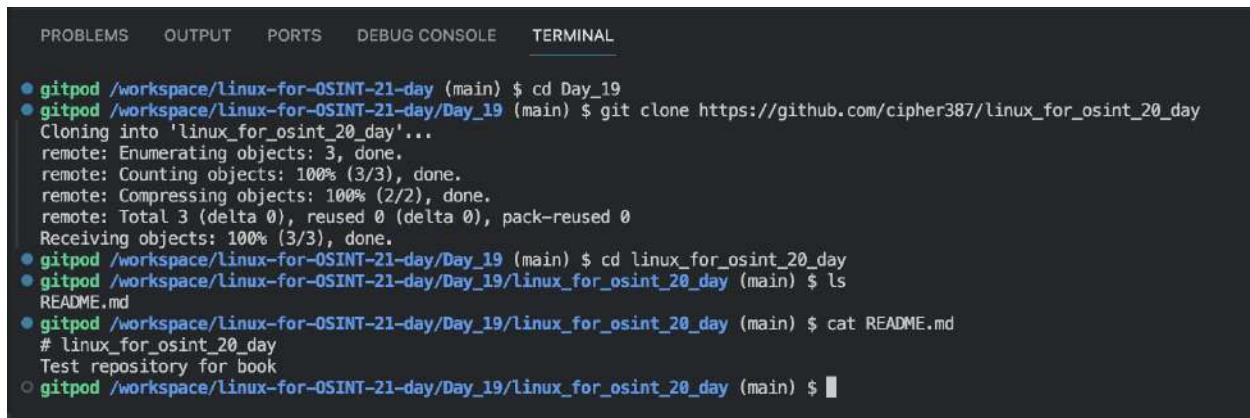


```
PROBLEMS OUTPUT PORTS DEBUG CONSOLE TERMINAL

● gitpod /workspace/linux-for-OSINT-21-day (main) $ cd Day_19
● gitpod /workspace/linux-for-OSINT-21-day/Day_19 (main) $ git clone https://github.com/cipher387/linux_for_osint_20_day
Cloning into 'linux_for_osint_20_day'...
remote: Enumerating objects: 3, done.
remote: Counting objects: 100% (3/3), done.
remote: Compressing objects: 100% (2/2), done.
remote: Total 3 (delta 0), reused 0 (delta 0), pack-reused 0
Receiving objects: 100% (3/3), done.
● gitpod /workspace/linux-for-OSINT-21-day/Day_19 (main) $ cd linux_for_osint_20_day
● gitpod /workspace/linux-for-OSINT-21-day/Day_19/linux_for_osint_20_day (main) $ ls
README.md
● gitpod /workspace/linux-for-OSINT-21-day/Day_19/linux_for_osint_20_day (main) $ cat README.md
# linux_for_osint_20_day
Test repository for book
○ gitpod /workspace/linux-for-OSINT-21-day/Day_19/linux_for_osint_20_day (main) $
```

```
cd linux_for_osint_20_day
ls
cat README.md
```

Let's create a new file in the repository folder:

```
ls >test.txt
cat test.txt
```

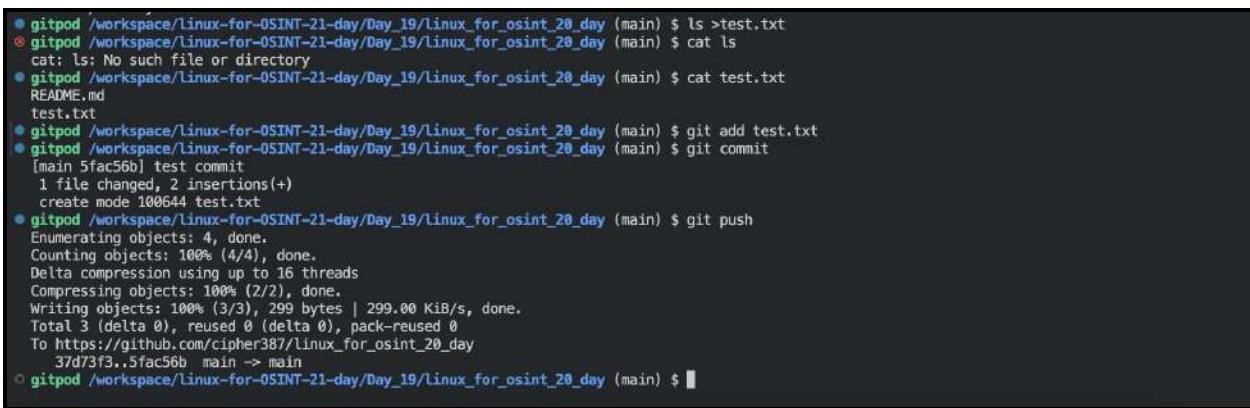

```
● gitpod /workspace/linux-for-OSINT-21-day/Day_19/Linux_for_osint_20_day (main) $ ls >test.txt
● gitpod /workspace/linux-for-OSINT-21-day/Day_19/Linux_for_osint_20_day (main) $ cat ls
cat: ls: No such file or directory
● gitpod /workspace/linux-for-OSINT-21-day/Day_19/Linux_for_osint_20_day (main) $ cat test.txt
README.md
test.txt
● gitpod /workspace/linux-for-OSINT-21-day/Day_19/Linux_for_osint_20_day (main) $ git add test.txt
● gitpod /workspace/linux-for-OSINT-21-day/Day_19/Linux_for_osint_20_day (main) $ git commit
[main 5fac56b] test commit
 1 file changed, 2 insertions(+)
 create mode 100644 test.txt
● gitpod /workspace/linux-for-OSINT-21-day/Day_19/Linux_for_osint_20_day (main) $ git push
Enumerating objects: 4, done.
Counting objects: 100% (4/4), done.
Delta compression using up to 16 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (3/3), 299 bytes | 299.00 KiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0
To https://github.com/cipher387/Linux_for_osint_20_day
 37d73f3..5fac56b main -> main
○ gitpod /workspace/linux-for-OSINT-21-day/Day_19/Linux_for_osint_20_day (main) $
```


And add it to a new commit:

```
git add test.txt  
git commit
```

Write some comment on the commit, close the text editor and type.

```
git push
```

Now open Github and verify the changes you have made:

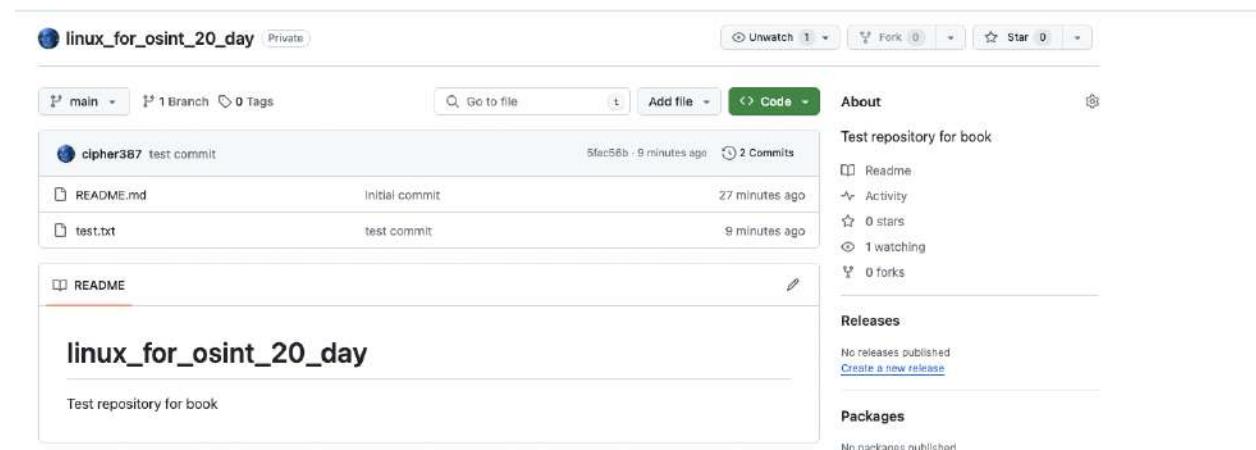

linux_for_osint_20_day (Private)

Unwatch 1 Fork 0 Star 0

main 1 Branch 0 Tags

Go to file Add file Code

cipher387 test commit 5fac56b · 9 minutes ago 2 Commits

README.md Initial commit 27 minutes ago

test.txt test commit 9 minutes ago

README

linux_for_osint_20_day

Test repository for book

About

Test repository for book

Readme Activity 0 stars 1 watching 0 forks

Releases

No releases published Create a new release

Packages

No packages published Publish your first package

If you are in doubt about whether you have made the latest changes, check the status of the repository with this command:


```
PROBLEMS OUTPUT PORTS COMMENTS DEBUG CONSOLE TERMINAL
```

```
gitpod /workspace/linux-for-OSINT-21-day (main) $ cd Day_19
gitpod /workspace/linux-for-OSINT-21-day/Day_19 (main) $ cd linux_for_osint_20_day
gitpod /workspace/linux-for-OSINT-21-day/Day_19/linux_for_osint_20_day (main) $ git status
On branch main
Your branch is up to date with 'origin/main'.

nothing to commit, working tree clean
gitpod /workspace/linux-for-OSINT-21-day/Day_19/linux_for_osint_20_day (main) $
```

git status

There are about a dozen different git commands. But the most important thing you should realize from this tutorial is that working with Github repositories using the command line is easy and convenient.

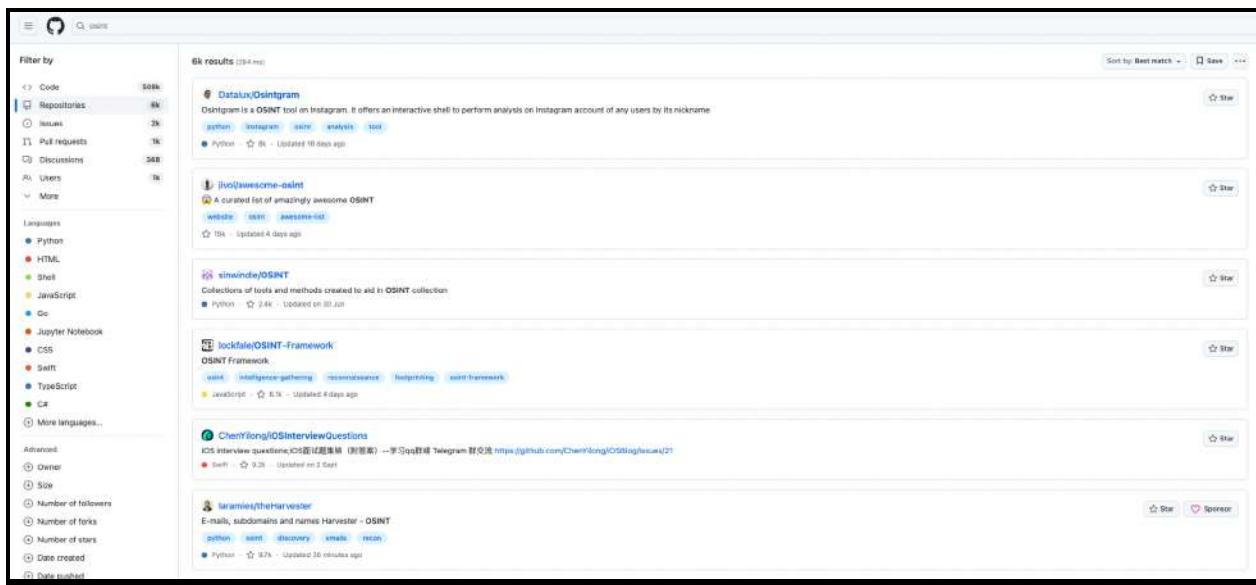

Github is not only a service for organizing collaboration on software development. It is also a huge platform for free distribution of open source software and technical knowledge.

You can also find an active OSINT-enthusiast community there, including thousands of users and repositories.


You've probably already created a Github profile to authorize Gitpod. Feel free to use it to interact with the global OSINT community:

- give stars to repositories you like. Pay special attention to good and little-known projects that have very few stars.
- If you encounter any errors while running any tools, feel free to write about them in Issues.
- If you have something useful, even if it's just a list of tools or a cheat sheet with useful commands, feel free to put it in the public repository.
- and, of course, don't forget to subscribe to my profile (<https://github.com/cipher387>).

Day 20. Tools to make Linux easier to use

In this book, I have already written about tools that can help you write commands in Linux. For example, in the chapters on **Sed** and **Awk**, JSON and XML. Today we will talk about more universal tools.

The most important thing you should know about the Linux command line is that you need to know almost nothing about it to successfully solve your problems using it.

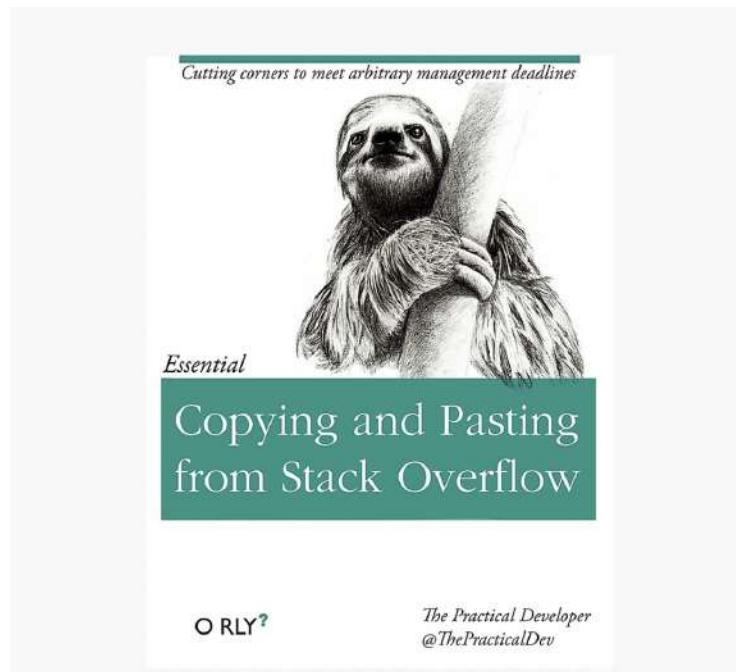

If you have read at least 1-2 of the past lessons (days) and understand where to put files and where to enter commands, you can do a lot with the help of Google and StackOverflow. Really a lot.

AI tools

Using AI assistants to write code has become very popular in the last year and a half. Many popular chatbots can generate both individual commands and full-fledged bash scripts:

The screenshot shows the You.com AI interface. At the top, there are navigation links: Chat (underlined), All, YouWrite, and Imagine. On the right, there are links for Plans, Community, Extension, Sign in, and a settings gear icon. A blue box contains the user's query: "please write curl command for downloading google.com main page and save it as txt in html_pages folder". Below this, a text box displays the response: "To download the main page of google.com using the curl command and save it as a text file in the \"html_pages\" folder, you can use the following command: curl -o html_pages/google.html https://www.google.com". A note below the command says: "This command will create a file named \"google.html\" in the \"html_pages\" folder (assuming it already exists) and save the HTML content of the main page of google.com into that file." At the bottom, there is a text input field with the placeholder "Ask a follow-up... (⌘ + K)" and a "..." button.

ChatGPT (<https://chat.openai.com>)
Perplexity.ai (<https://www.perplexity.ai>)
Google Bard (<https://bard.google.com>)
You.com (<https://you.com/>)

They are exceptional at saving time on simple tasks, but when dealing with more complex issues, they can make mistakes and lead down the wrong path. Be careful.

showing all, navigate: ← explain crontab(1) → explain shell syntax

```
for user in $(cut -f1 -d: /etc/passwd); do crontab(1) -u $user -l
2>/dev/null; done
```

for name [[in [word ...]] ;] do list ; done
 The list of words following `in` is expanded, generating a list of items. The variable `name` is set to each element of this list in turn, and `list` is executed each time. If the `in word` is omitted, the `for` command executes `list` once for each positional parameter that is set (see **PARAMETERS** below). The return status is the exit status of the last command that executes. If the expansion of the items following `in` results in an empty list, no commands are executed, and the return status is `0`.

maintain crontab files for individual users (Vixie Cron)

Before a command is executed, its input and output may be redirected using a special notation interpreted by the shell. Redirection may also be used to open and close files for the current shell execution environment. The following redirection operators may precede or appear anywhere within a simple command or may follow a command. Redirections are processed in the order they appear, from left to right.

Redirecting Output

Redirection of output causes the file whose name results from the expansion of `word` to be opened for writing on file descriptor `n`, or the standard output (file descriptor 1) if `n` is not specified. If the file does not exist it is created; if it does exist it is truncated to zero size

And don't forget that you can not only ask AI assistants to write code or a command from scratch, but explain what some command or script found on Stackoverflow does. You can also use the Explain Shell (<https://explainshell.com/>) for this purpose.

write curl command for download google com main page

ANSWER | PHIND V8 MODEL

To download the main page of Google.com using the `curl` command, you can use the following command:

```
curl https://www.google.com > google_main_page.html
```

Here's a step-by-step explanation of the command:

1. `curl` is the command-line tool used for transferring data with URLs. It supports various protocols including HTTP, HTTPS, FTP, FTPS, SCP, SFTP, and more.³
2. `https://www.google.com` is the URL of the webpage you want to download. This is the main page of Google.com⁴.
3. `>` is a redirection operator in Unix-like operating systems. It is used to redirect the output of a command to a file. In this case, it redirects the output of the `curl` command (which is the HTML content of the webpage) to a file named `google_main_page.html`².
4. `google_main_page.html` is the name of the file where the HTML content of the webpage will be saved. If this file does not exist, it will be created. If it does exist, it will be overwritten.².

After running this command, you will have a file named `google_main_page.html` in your current directory. This file contains the HTML content of the Google.com main page. You can open this file in a web browser to view the webpage, or you can open it in a text editor to view the HTML source code².

[Rewrite](#) [Up](#) [Down](#) [Share](#) [Flag](#)

SUGGESTIONS

Can I download a specific section of the Google.com main page using `curl`?

Ask a followup question

SOURCES

[1 ↗ stackoverflow.com > questions > 48133080 > how-to-d...](#)

How to download a Google Drive url via curl or wget
13 Answers Sorted by: 118 How about this method? When the file is such large size, Google returns a code for downloading the file. You.

[2 ↗ www.networkworld.com > article > 957280 > using-curl... Using curl and wget commands to download pages from web sites](#)

Probably the most obvious thing to do with the curl command is to download a page from a web site for review on the command.

[3 ↗ linuxize.com > post > curl-command-examples Curl Command in Linux with Examples | Linuxize](#)

The syntax for the curl command is as follows: curl [options] [URL...] In its simplest form, when invoked without any option, curl displays the specified.

[4 ↗ www.digitalocean.com > community > tutorials > workfl... How to Download Files with cURL | DigitalOcean](#)

Step 1 – Fetching remote files Out of the box, without any command-line arguments, the curl command will fetch a file and display its contents.

1 2 3 4 5

Separately, I would like to pay your attention to the AI assistant Phind (<https://www.phind.com/>), which not only write commands, but also provides explanations with sources on various reference sites like StackOverflow.

Code checkers

StackOverflow users, AI assistants and everyone who writes code sometimes make mistakes. Special tools will help you to understand where exactly the error is.

ShellCheck
finds bugs in your shell scripts.

You can `cabal`, `apt`, `dnf`, `pkg` OR `brew` install it locally right now.

Paste a script to try it out:

Your Editor (Ace)

```
Load random example
1 #!/bin/bash
2 ## Example: ShellCheck can detect some higher level semantic problems
3
4 while getopts "nf:" param
5 do
6   case "$param" in
7     f) file="$OPTARG" ;;
8     v) set -x ;;
9     esac
10 done
11
12 case "$file" in
13   *.gz) gzip -d "$file" ;;
14   *.*) tar -xvf "$file" ;;

```

ShellCheck Output

```
$ shellcheckmyscript
Line 6:
  case "$param" in
  ^-- SC2213 (warning): getopts specified -n, but it's not handled by this 'case'.
  ^-- SC2220 (warning): Invalid flags are not handled. Add a *) case.

Line 8:
  v) set -x ;;
  ^-- SC2214 (warning): This case is not specified by getopts.

Line 13:
  *.gz) gzip -d "$file" ;;
  ^-- SC2221 (warning): This pattern always overrides a later one on line 15.
```

ShellCheck (<https://www.shellcheck.net/#>) - simple online tool that help to find bugs in shell scripts. You can also run it locally using the command line.

PROBLEMS OUTPUT PORTS DEBUG CONSOLE TERMINAL

-W NUM —wiki-link-count=NUM The number of wiki links to show, when applicable
 -x —external-sources Allow 'source' outside of FILES
 —help Show this usage summary and exit

gitpod /workspace/linux-for-OSINT-21-day (main) \$ shellcheck Day_20/wrong_code.sh

In Day_20/wrong_code.sh line 6:
 case "\$param" in
 ^-- SC2213 (warning): getopts specified -n, but it's not handled by this 'case'.
 ^-- SC2220 (warning): Invalid flags are not handled. Add a *) case.

In Day_20/wrong_code.sh line 8:
 v) set -x ;;
 ^-- SC2214 (warning): This case is not specified by getopts.

In Day_20/wrong_code.sh line 13:
 *.gz) gzip -d "\$file" ;;
 ^-- SC2221 (warning): This pattern always overrides a later one on line 15.

In Day_20/wrong_code.sh line 15:
 *.tar.gz) tar xzf "\$file" ;;
 ^-- SC2222 (warning): This pattern never matches because of a previous pattern on line 13.

In Day_20/wrong_code.sh line 19:
 if [["\$(\$uname)" == "Linux"]]
 ^-- SC2193 (warning): The arguments to this comparison can never be equal. Make sure your syntax is correct.

For more information:
<https://www.shellcheck.net/wiki/SC2193> -- The arguments to this comparison ...
<https://www.shellcheck.net/wiki/SC2213> -- getopts specified -n, but it's no...
<https://www.shellcheck.net/wiki/SC2214> -- This case is not specified by get...

Install:

```
sudo apt-get install shellcheck
```

And run the test:

```
shellcheck Day_20/wrong_code.sh
```

The most important reason for the loss of efficiency in Linux (especially among beginners) is syntax errors when entering commands. TheFuck (<https://github.com/nvbn/thefuck>) is a utility that corrects errors in the command you entered before. Let's install it and see how it works.



A screenshot of a terminal window titled 'python 76x18'. The user has typed 'git: 'brnch' is not a git command. See 'git --help''. The terminal then displays a list of suggestions from TheFuck, starting with 'branch' and including several other command names and aliases, such as 'thefuck', 'git', 'diezcamia-java', 'master', 'mcarton-git-aliases', 'mkreder-master', 'scorphus-issue-221-tf-alias', 'tjhorner-sudo-rule-fix', 'underscorejho-master', and 'python'. It also shows that 'python' is not a command and suggests 'python3' and 'python-minimal'.


```
git: 'brnch' is not a git command. See 'git --help'.

Did you mean this?
  branch
→ thefuck git:(master) ✘ fuck
git branch [enter/ctrl+c]
  diezcamia-java
* master
  mcarton-git-aliases
  mkreder-master
  scorphus-issue-221-tf-alias
  tjhorner-sudo-rule-fix
  underscorejho-master
→ thefuck git:(master) ✘ python
No command 'python' found, did you mean:
  Command 'python' from package 'python3' (main)
  Command 'python' from package 'python-minimal' (main)
```

Unfortunately, at the moment this tool failed to install on Gitpod (due to certain issues with Python customizations) and I'm showing you a picture from the official documentation.

Bash history

Linux has a command that allows you to see a history of what you've typed in the terminal.

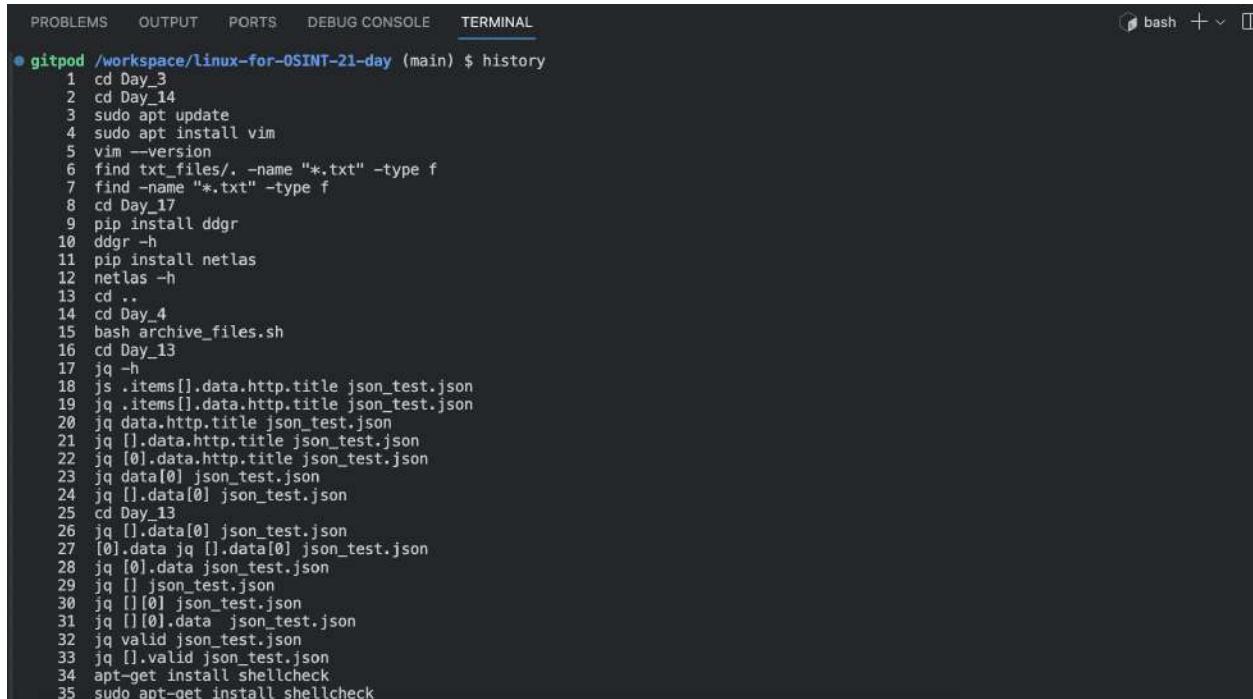

```
gitpod /workspace/linux-for-OSINT-21-day (main) $ history
1 cd Day_3
2 cd Day_14
3 sudo apt update
4 sudo apt install vim
5 vim --version
6 find txt_files/. -name "*.txt" -type f
7 find -name "*.txt" -type f
8 cd Day_17
9 pip install ddgr
10 ddgr -h
11 pip install netlas
12 netlas -h
13 cd ..
14 cd Day_4
15 bash archive_files.sh
16 cd Day_13
17 jq -h
18 jq .items[].data.http.title json_test.json
19 jq .items[].data.http.title json_test.json
20 jq data.http.title json_test.json
21 jq [].data.http.title json_test.json
22 jq [0].data.http.title json_test.json
23 jq data[0] json_test.json
24 jq [0].data[0] json_test.json
25 cd Day_13
26 jq [0].data[0] json_test.json
27 [0].data jq [0].data[0] json_test.json
28 jq [0].data json_test.json
29 jq [0] json_test.json
30 jq [0][0] json_test.json
31 jq [0][0].data json_test.json
32 jq valid json_test.json
33 jq [0].valid json_test.json
34 apt-get install shellcheck
35 sudo apt-get install shellcheck
```

Just type at the command line:

history

Don't forget that you can save the results of running the command to a file and do text searches with Grep.

That's it for today, but there are many more different tools to make working with the Linux command line and writing bash scripts easier. But, unfortunately, the format of this book does not allow to cover all of them. In fact, such a conclusion can be written for all the previous chapters.

Day 21. Which Linux distribution is better to use?

The short answer is the one that you are most comfortable working with and the one that you put the most effort into setting up. Try different distributions. But I would still recommend that you start with the ones **that are actively developing at the moment and have a large community** of users around them.

Here are some examples of distributions that were created for cybersecurity researchers:

Tsurugi Linux Acquire (https://tsurugi-linux.org/tsurugi_acquire.php) - lightweight distribution (the installation file is just over 1 GB, there is a 32-bit version, very good for running from a USB device) with many pre-installed tools for OSINT.

Kali Linux (<https://www.kali.org/get-kali/>) - the world's most popular distribution for pentest and ethical hacking.

CSI Linux (<https://csilinux.com>) - complete “cyber forensic” platform based on Ubuntu.

BlackArch (<https://blackarch.org>) - lightweight (Slim ISO 5.5 Gb) expansion to Arch Linux for penetration testers.

Here are a couple more long lists of Linux distributions for cybersecurity professionals:

Distro Forensics Github repository (<https://github.com/CScorza/DistroForensics>)

Linux for OSINT Twitter list (https://twitter.com/cyb_detective/status/1441686068173033473)

But if you work in cybersecurity, that doesn't mean you really need to use distributions that are designed for cybersecurity professionals. It's not necessary at all.

And there is absolutely no way to say that one distribution is better than another. After all, the answer to that question is different for each person and changes over time.

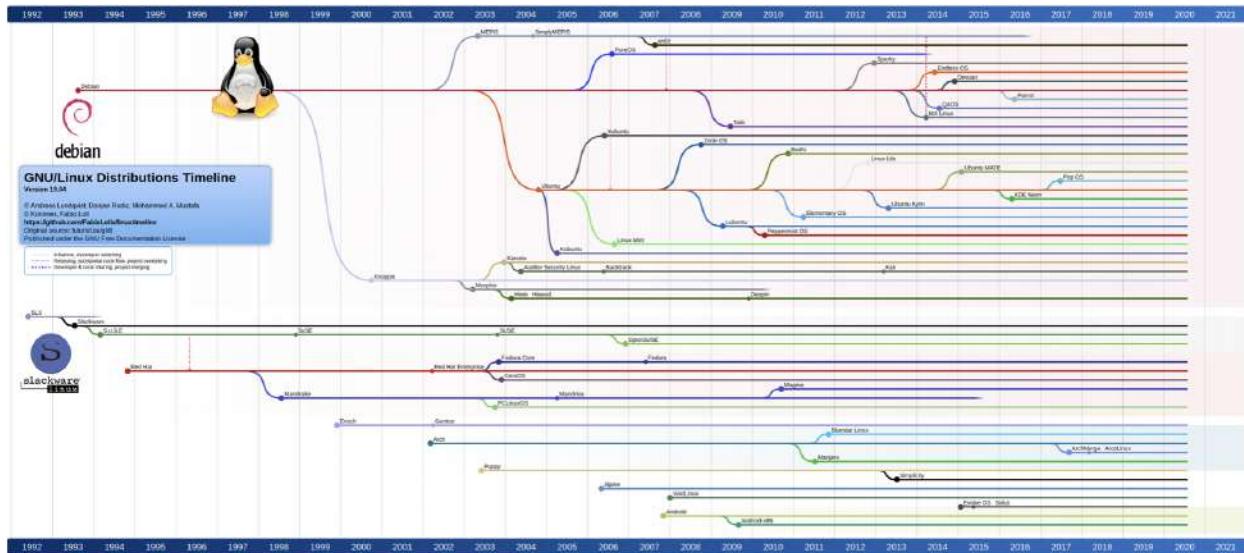


Image from [Reddit](#).

There are hundreds of different Linux distributions and their variations (see picture above). Choose the one that:

- suits your computer's system requirements and runs quickly
- is convenient and understandable for you personally (you can only find out which one by practice)

Your work performance depends on how much effort you put into customizing the distribution for your personal tasks. The toolkit is different for each researcher anyway and you'll still have to install a lot of the tools yourself.


And most importantly, remember that the Linux philosophy is about no rules, maximum flexibility and maximum attention for the user's individuality and goals.

Latest VM Images

Fedora 39 VirtualBox Image VMware Image	Ubuntu 23.10 VirtualBox Image VMware Image	Kali Linux 2023.4 VirtualBox Image VMware Image
Debian 12.0.0 VirtualBox Image VMware Image	Lubuntu 23.04 VirtualBox Image VMware Image	Ubuntu 23.04 VirtualBox Image VMware Image
Manjaro 22.0 VirtualBox Image VMware Image	Linux Mint 21 VirtualBox Image VMware Image	Rocky Linux 9.0 VirtualBox Image VMware Image

You can use Linux as a virtual machine. Download images of different distributions in [LinuxVMImages website](https://www.linuxvmimages.com/) (<https://www.linuxvmimages.com/>).

But think about other forms of usage such as VPS (virtual private server). The cost of renting them starts at a few dollars a month (few [examples](#) from \$3.99 to \$15) or bootable USB drive (example of instruction for Ubuntu and Windows <https://ubuntu.com/tutorials/create-a-usb-stick-on-windows#1-overview>).

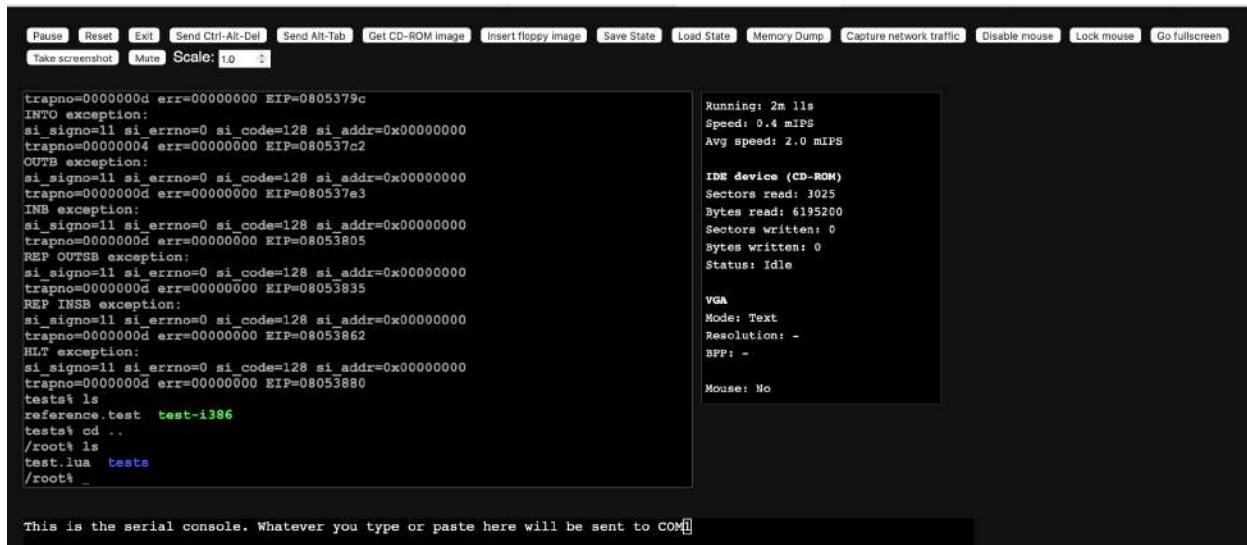

Maybe after reading this book, Gitpod or even just browser-based versions of Linux will be enough for you:

<https://copy.sh/v86/?profile=linux26>

<https://www.masswerk.at/jsuix/index.html>

<https://bellard.org/jslinux/vm.html?cpu=riscv64&url=fedora33-riscv.cfg&mem=>

You might be comfortable using Linux on an Android smartphone using terminal emulators such as Termux (<https://termux.dev/en/>).

You will never know what's best for you until you try to solve your personal everyday problems.

Does it make sense to use Linux as your primary operating system

To be honest, I've only worked on a MacBook for 9 years now. And I do much of my work in macOS.

I use Linux several times a week to automate various tasks. But there are so many people who use it all the time and there are several reasons why this is a good practice.



Libre Cloud Services.

OpenDesktop.org is a libre platform providing free cloud storage, online office editing, contacts & calendar tools, personal chat and messaging, as well as project development and product publishing to anyone who values freedom and openness.

Get a free account to enjoy true freedom with all the services below:




Firstly, it is an opportunity to significantly reduce the influence of global corporations on your life. If this idea inspires you, you can also opt out of Microsoft and Google online services like calendar, maps, cloud file storages, as well as streaming services and social networks. You can find decentralised open source analogues for all this on OpenDesktop (<https://www.opendesktop.org>).

(But keep in mind that you won't get rid of the influence of corporations on your life until the end, as the leading technology companies spend a lot of money to support Linux foundation and Open Source community).

Applications	Graphics	Email
<ul style="list-style-type: none"> • Applications • Audio • Chat Clients • Data Backup and Recovery • Desktop Customization • Development • E-Book Utilities • Education • Email Utilities • File Manager • Games • Graphics • Internet • Office • Productivity • Proxy • Security • Sharing Files • Terminal • Text Editors • Utilities • Video • VPN • Wiki Software • Others <ul style="list-style-type: none"> • Command Line Utilities • Custom Linux Kernels • Desktop Environments • Display Managers • Console • Graphic <ul style="list-style-type: none"> • Window Managers • Compositors • Stacking Window Managers • Tiling Window Managers • Dynamic Window Managers 	<p>Graphic Creation</p> <ul style="list-style-type: none"> • Aseprite - Animated sprite editor & pixel art tool. • Blender - A free and open source complete 3D creation pipeline for artists and small teams. • Cinepaint - Open source deep paint software. • Drawing - This free basic raster image editor is similar to Microsoft Paint, but aiming at the GNOME desktop. • Gifcurny - Your open source video to GIF maker built with Haskell. • Gravit - Gravit Designer is a full featured free vector design app right at your fingertip. • Heron Animation - A free stop animation making program. • Inkscape - A powerful, free design tool for you , whether you are an illustrator, designer, web designer or just someone who needs to create some vector imagery. • Ipe - Ipe is a LaTeX powered drawing editor for creating figures and presentations in PDF format. • Karbon - An open source vector drawing program. • Knott - A Program designed solely to help design and create Celtic Knots. • KolourPaint - KolourPaint is a simple painting program to quickly create raster images. • Krita - Open Source Software for Concept Artists, Digital Painters, and Illustrators. 	<ul style="list-style-type: none"> • aerc - aerc is an efficient, extensible email client that runs in the terminal. It features special support for git email workflows, reviewing patches, and processing HTML emails in a terminal-based browser. • Claws - Claws is an email client and news reader, featuring a sophisticated interface, easy configuration, intuitive operation, abundant features and plugins, robustness and stability. • ElectronMail - ElectronMail is an Electron-based unofficial desktop client for ProtonMail and Tutanota end-to-end encrypted email providers. • Evolution - Evolution is a personal information management application that provides integrated mail, calendaring and address book functionality. • Geary - Geary is an email application built for GNOME 3. It allows you to read and send email with a simple, modern interface. • Hiri - Hiri is a business-focused desktop e-mail client for sending and receiving e-mails, managing calendars, contacts, and tasks. • KMail - KMail is the email component of Kontact, the integrated personal information manager from KDE. • Mailnag - Mailnag is a daemon program that checks POP3 and IMAP servers for new mail. • Mailspring - A beautiful, fast and maintained fork of Nylas Mail (dead) by one of the original authors. • Sylpheed - Lightweight and user-friendly e-mail client. • Thunderbird - Thunderbird is a free email application that's easy to set up and customize and it's loaded with great features. • Trojita - A super fast desktop email client for Linux.

Secondly, it's a huge selection of FREE, yet LEGAL software for a wide variety of purposes. Check out the **Awesome Linux Software** (<https://github.com/luong-komorebi/Awesome-Linux-Software/>) list, which has thousands of links.

By the way, many of these apps also have versions for Windows and macOS.

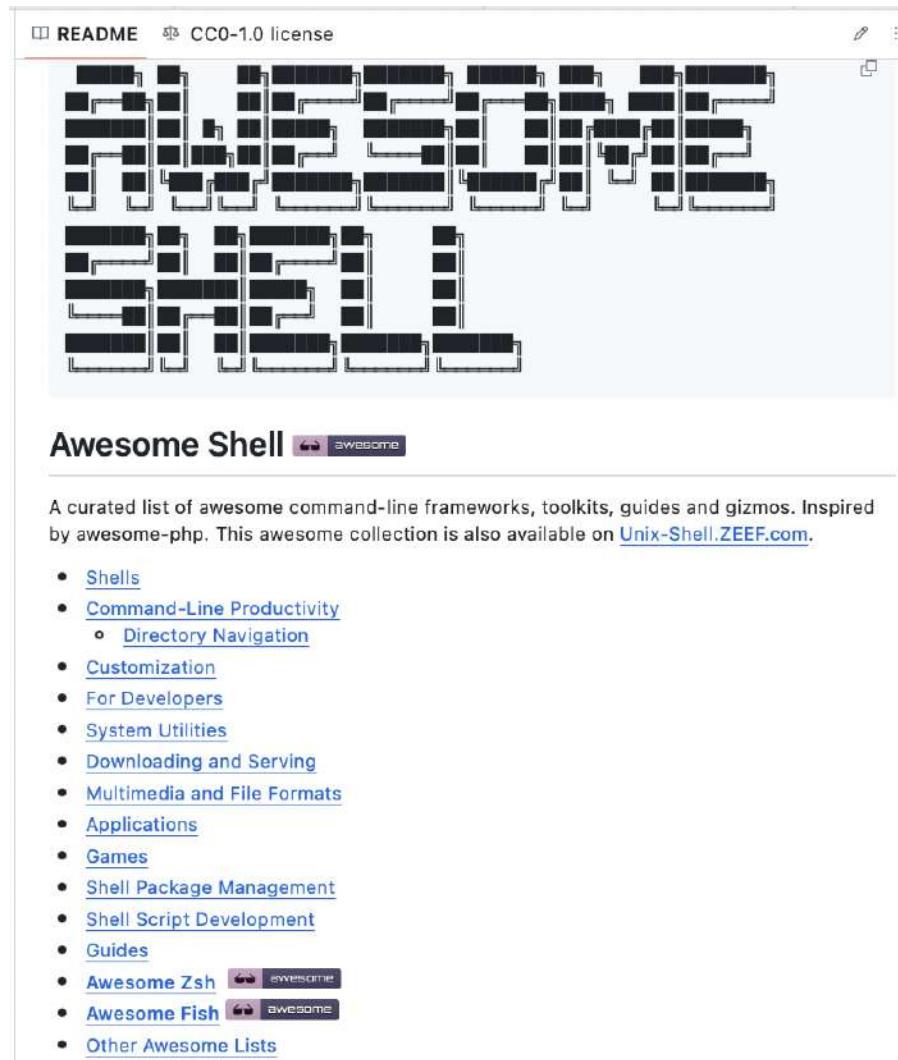

The screenshot shows the GitHub repository page for 'Awesome Shell'. The page features a large, pixel-art logo composed of terminal windows displaying the word 'AWESOME'. The repository statistics on the right indicate 29.4k stars, 778 watching, and 2.4k forks. It also shows that no releases or packages have been published. The 'Contributors' section lists 266 contributors, with 252 more shown below. The main content area lists categories such as Shells, Command-Line Productivity, Customization, For Developers, System Utilities, Downloading and Serving, Multimedia and File Formats, Applications, Games, Shell Package Management, Shell Script Development, and Guides. Under 'Guides', there are links for 'Awesome Zsh' and 'Awesome Fish', each with its own small pixel-art logo.

You can see what a huge number of command line utilities exist if you open the repository **Awesome Shell** (<https://github.com/alebcay/awesome-shell>). It includes almost 400 links (and these are only the most useful and well-known utilities).

Third, if you do need some applications that only exist on Windows, you can still run them on Linux using launchers such as:

Wine (<http://winehq.org>)

CrossOver (<http://codeweavers.com/crossover>)

Unfortunately, they are not always convenient and often produce errors. For example, I recently failed to run a programme for viewing dental images on Wine. But in many cases, they do work.

Fourth, Linux allows you maximum flexibility in customizing your desktop GUI (incomparable to Windows and Mac). You can start by trying one of the popular Linux Desktop Environments:

Gnome 3 (<https://www.gnome.org/gnome-3/>)

KDE (<https://www.kde.org/>)

Cinnamon (<http://developer.linuxmint.com/projects.html>)

Mate (<http://mate-desktop.com/>)

Xfce (<http://www.xfce.org>)

What to do next?

Practice as much as possible. Keep doing OSINT investigations and try to automate tasks with Linux utilities. Don't be afraid to make mistakes and don't hesitate to use Stackoverflow and AI tools described in **Day 20**.

Don't forget to subscribe to me on Twitter, Mastodon, Telegram, BlueSky, Substack, Medium to get regular news about new OSINT tools, and not to miss new books. All links can be found at cybdetective.com.

Once you've had at least a little bit of practice and you want to learn something new again, you can also read "Python for OSINT. A 21-day course for beginners" (<https://github.com/cipher387/python-for-OSINT-21-days>). It's also distributed freely (donate what you want and if you want).

Also remember that the global open source community is growing due to the small efforts of each of the tens of millions of enthusiasts around the world.

Don't forget to write about open source tools in your social networks, support developers with good reviews and donations, and if you like programming, don't hesitate to contribute to various projects on Github. Even if you don't know much yet, you can help with testing or writing documentation.

Application. Is it possible to do the same thing on Windows?

Yes, it is possible and plenty of people do it. But as mentioned above, it's easier to run Linux on VM or VPS than to think about how to do the same thing on Windows.

The most justifiable reason to run Linux utilities on Windows - it is to combine some complex automations created with PowerShell or VBA with automations based on Linux utilities. In that case, here are some instructions on how to do it:

How to install bash in Windows from HackerNoon

(<https://hackernoon.com/how-to-install-bash-on-windows-10-lqb73yj3>)

How to run Linux software on Windows from GeeksForGeeks

(<https://www.geeksforgeeks.org/how-to-run-linux-software-on-windows/>)