

## Day - 6

### (Class- Movie)

Question:

The class Movie is stated below. An instance of class Movie represents a film. This class has the following three properties:

- title, which is a String representing the title of the movie
- studio, which is a String representing the studio that made the movie
- rating, which is a String representing the rating of the movie (i.e. PG13, R, etc)

a) Write a constructor for the class Movie, which takes a String representing the title of the movie, a String representing the studio, and a String representing the rating as its arguments, and sets the respective class properties to these values.

b) The constructor for the class Movie will set the class property rating to "PG" as default when no rating is provided.

c) Write a method getPG, which takes an array of base type Movie as its argument, and returns a new array of only those movies in the input array with a rating of "PG". You may assume the input array is full of Movie instances. The returned array need not be full.

d) Write a piece of code that creates an instance of the class Movie with the title "Casino Royale", the studio "Eon Productions", and the rating "PG13"

Answer:

```
class Movie {
  constructor(title, studio, rating="PG")
  {
    this.title=title;
    this.studio=studio;
    this.rating=rating;
  }

  static getPg(movie)
  {
    let moviePg=[]
    movie.forEach(element=> {
      if(element.rating == "PG")
        moviePg.push(element)
    });
    return moviePg
  }
}
```

```

    }
}
let newMovie1=newMovie("Casino Royale","Eon Productions","PG-13");
let newMovie2=newMovie("Beast","SunPictures","PG");
let newMovie3=newMovie("Doctor","AGS Entertainment",);
let arr=[newMovie1,newMovie2,newMovie3];
let PGMovies=Movie.getPg(arr);
console.log(PGMovies);

```

Output:

[Movie, Movie]

```


0: Movie {title: 'Beast', studio: 'Sun Pictures', rating: 'PG'}
1: Movie {title: 'Doctor', studio: 'AGS Entertainment', rating: 'PG'}
length: 2
[[Prototype]]: Array(0)

```

## Circle - Class

2. Question:

Convert the UML diagram to Typescript class. - use number for double

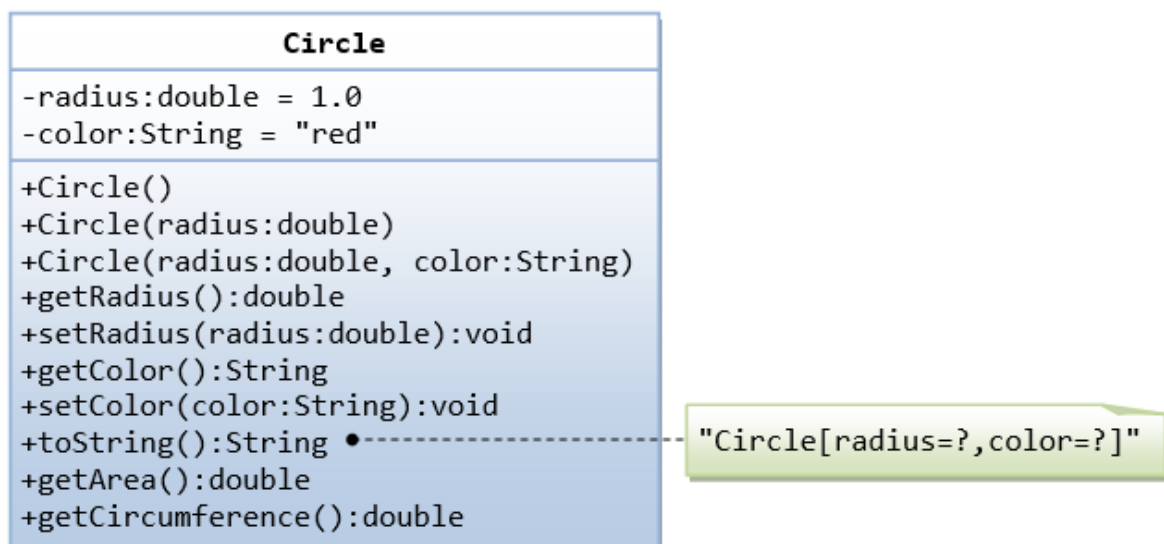

```

classCircle{
    constructor(radius,color)
    {
        this._radius=radius;
        this._color=color;
    }

    getradius(){
        returnthis._radius
    }
    setradius(value){
        this._radius =value
    }

    getcolor(){
        returnthis._color
    }
    setcolor(value){
        this._color=value
    }

    getArea(){
        returnMath.PI*Math.pow(this._radius,2)
    }

    getCircum(){
        return2*Math.PI*this._radius
    }
}
letcircle1= newCircle(1,"Yellow")
console.log(circle1.getArea())
console.log(circle1.getCircum())

```

Output:

3.141592653589793

6.283185307179586

3. Write a “person” class to hold all the details.

```
class Person{
  constructor (firstName,lastName,age){
    this._firstName=firstName;
    this._lastName=lastName;
    this._age=age;
  }

  getDetails(){
    return [this._firstName,this._lastName,this._age]
  }
}

let myData= new Person("Ninja","Narseh",26)
console.log(myData.getDetails())
```

Output:

['Ninja', 'Naresh', 26]

4. Write a class to calculate uber price.

```
class Uber{
  constructor(totalKm,waitingTime=0)
  {
    this.totalKm=totalKm;
    this.waitingTime=waitingTime
  }
  calculateFare(){
    if(this.totalKm<=2)
    {
      return (30 + ' Rs')
    }

    this.totalKm =this.totalKm-2
    return (30+(this.totalKm*4)+(this.waitingTime*2)+' Rs')
  }
}
```

```
}  
  
letRide1 =newUber(2)  
console.log(Ride1.calculateFare())  
  
letRide2 = newUber(82,5)  
console.log(Ride2.calculateFare())
```

Output:

30 Rs

360 Rs

## Day- 7

1. Solving problems using array functions on rest countries data.
  - a. Get all the countries from Asia continent /region using Filter function
  - b. Get all the countries with a population of less than 2 lakhs using Filter function
  - c. Print the following details name, capital, flag using forEach function
  - d. Print the total population of countries using reduce function
  - e. Print the country which uses US Dollars as currency.

a. Get all the countries from Asia continent /region using Filter function

```
var request=newXMLHttpRequest();
    request.open('GET','https://raw.githubusercontent.com/rvsp/restcountries-json-data/master/res-countries.json','true');
    request.send();
    request.onload=function (){
        var countryData=JSON.parse(this.response);
        const asia=countryData.filter((element)=>{
            if(element.region==='Asia'){
                return element.name;
            }
        })
        console.log(asia);}
```

b. Get all the countries with a population of less than 2 lakhs using Filter function

```
var request=newXMLHttpRequest();
    request.open('GET','https://raw.githubusercontent.com/rvsp/restcountries-json-data/master/res-countries.json','true');
    request.send();
    request.onload=function (){
        var countryData=JSON.parse(this.response);
        const popu=countryData.filter((element)=>{
            return element.population<200000;
        })
        console.log(popu);}
```

c. Print the following details name, capital, flag using forEach function.

```

var request = new XMLHttpRequest();
request.open('GET', 'https://raw.githubusercontent.com/rvsp/restcountries-json-data/master/res-countries.json', true);
request.send();
request.onload = function () {
    var countryData = JSON.parse(this.response);
    countryData.forEach((element) => {
        console.log(element.name, element.capital, element.flag);
    });
}

```

d. Print the total population of countries using reduce function.

```

var request = new XMLHttpRequest();
request.open('GET', 'https://raw.githubusercontent.com/rvsp/restcountries-json-data/master/res-countries.json', true);
request.send();
request.onload = function () {
    var countryData = JSON.parse(this.response);
    const population = countryData.reduce((acc, element) => {
        return acc + element.population;
    }, 0);
    console.log(population);
}

```

e. Print the country which uses US Dollars as currency.

```

var request = new XMLHttpRequest();
request.open('Get', 'https://raw.githubusercontent.com/rvsp/restcountries-json-data/master/res-countries.json', true);
request.send();
request.onload = function () {
    var data = JSON.parse(this.response);
    var cur = [];
    for (i = 0; i < data.length; i++) {
        if (data[i].currencies[0].code === "USD") {
            console.log("name:", data[i].name, "==>", data[i].currencies[0].code);
        }
    }
}

```