The same n-ary fact, entering the same encoder two ways

hyper (proposed): preserve

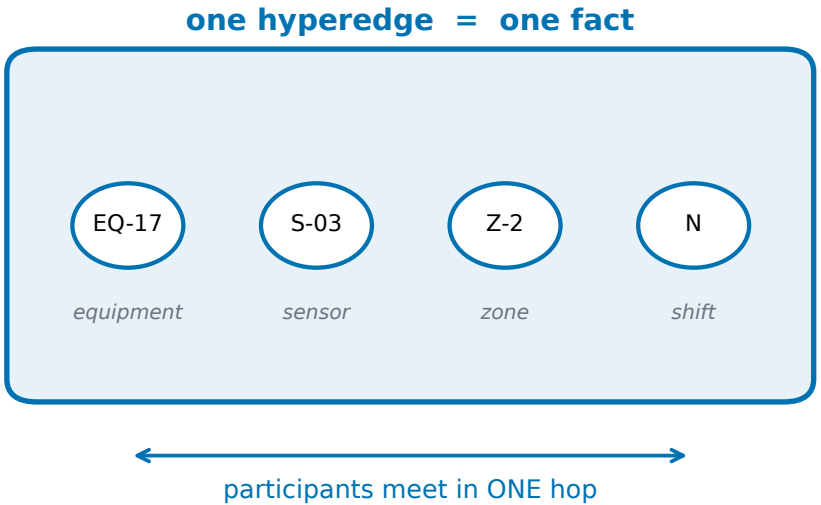

reified_binary (control): resolve

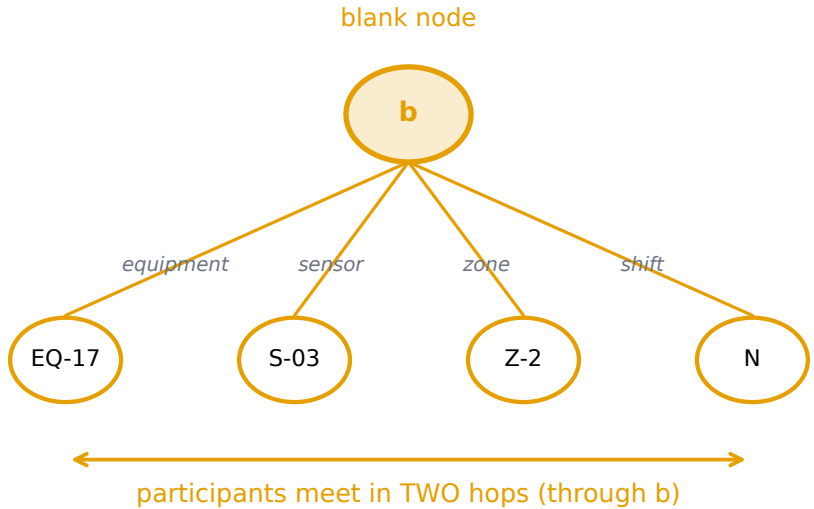

Same facts, same encoder module, same parameter count, same per-seed initial weights, same budget, same text tower. Only the input graph differs.
Both are non-reductive (star-type) encodings: the role survives in both, as an incidence role on the left and as an edge type on the right.