

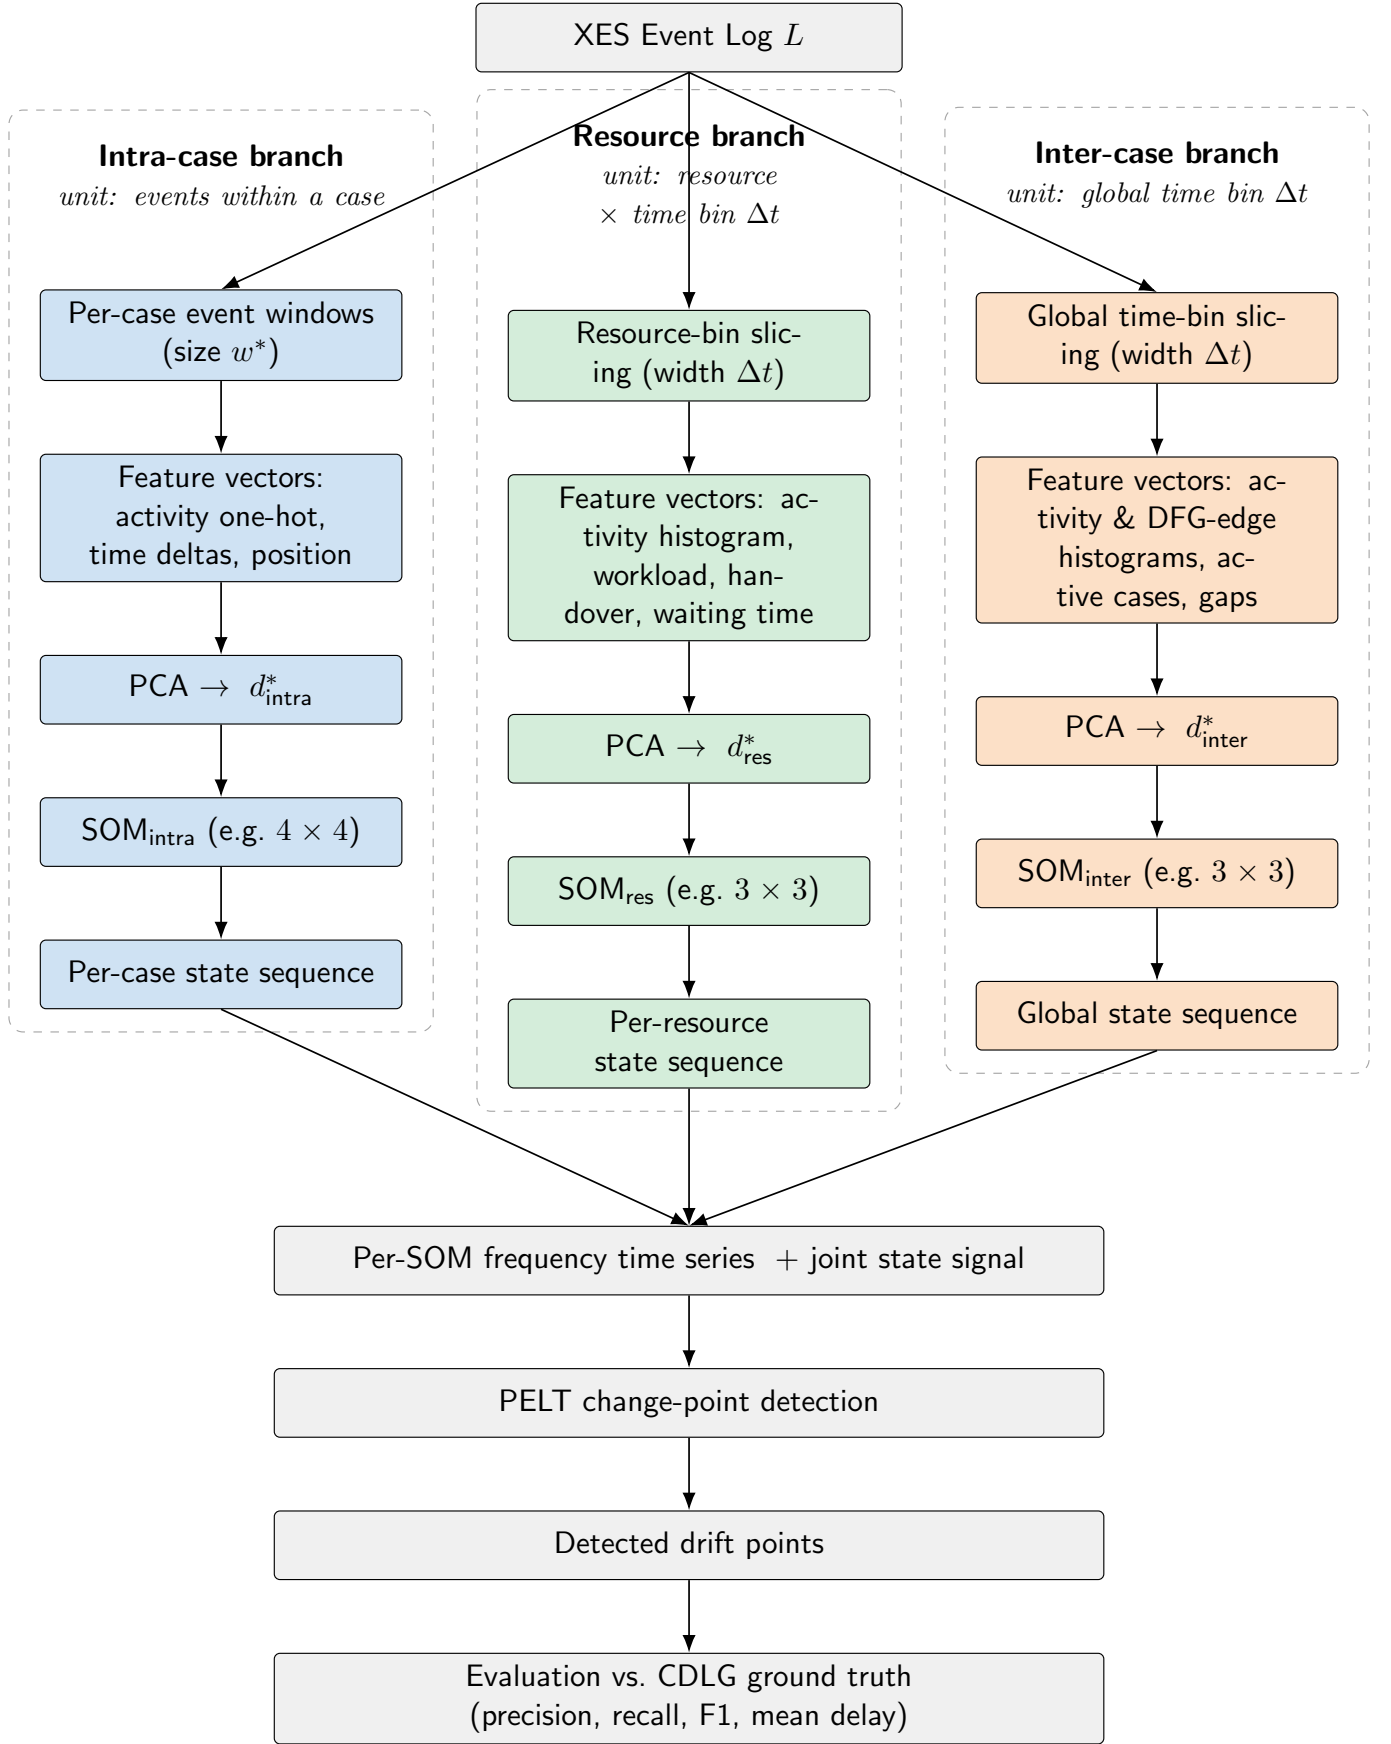


Figure 1: Three-branch pipeline for state-based concept drift detection in traditional event logs. Each branch independently encodes one perspective (intra-case, resource, inter-case), compresses with PCA, and discovers states via a Self-Organizing Map. State frequencies form time series whose change points (PELT) yield drift candidates.