

[Lab scenario](#)

[Objectives](#)

[Estimated
timing: 40
minutes](#)

[Architecture
diagram](#)

[Instructions](#)

Lab 04 - Implement Virtual Networking

Student lab manual

Lab scenario

You need to explore Azure virtual networking capabilities. To start, you plan to create a virtual network in Azure that will host a couple of Azure virtual machines. Since you intend to implement network-based segmentation, you will deploy them into different subnets of the virtual network. You also want to make sure that their private and public IP addresses will not change over time. To comply with Contoso security requirements, you need to protect public endpoints of Azure virtual machines accessible from Internet. Finally, you need to implement DNS name resolution for Azure virtual machines both within the virtual network and from Internet.

Note: An [interactive lab simulation](#) is available that allows you to click through this lab at your own pace. You may find slight differences between the interactive simulation and the hosted lab, but the core concepts and ideas being demonstrated are the same.


Objectives

In this lab, you will:

- Task 1: Create and configure a virtual network
- Task 2: Deploy virtual machines into the virtual network
- Task 3: Configure private and public IP addresses of Azure VMs
- Task 4: Configure network security groups
- Task 5: Configure Azure DNS for internal name resolution
- Task 6: Configure Azure DNS for external name resolution

Estimated timing: 40 minutes

Architecture diagram

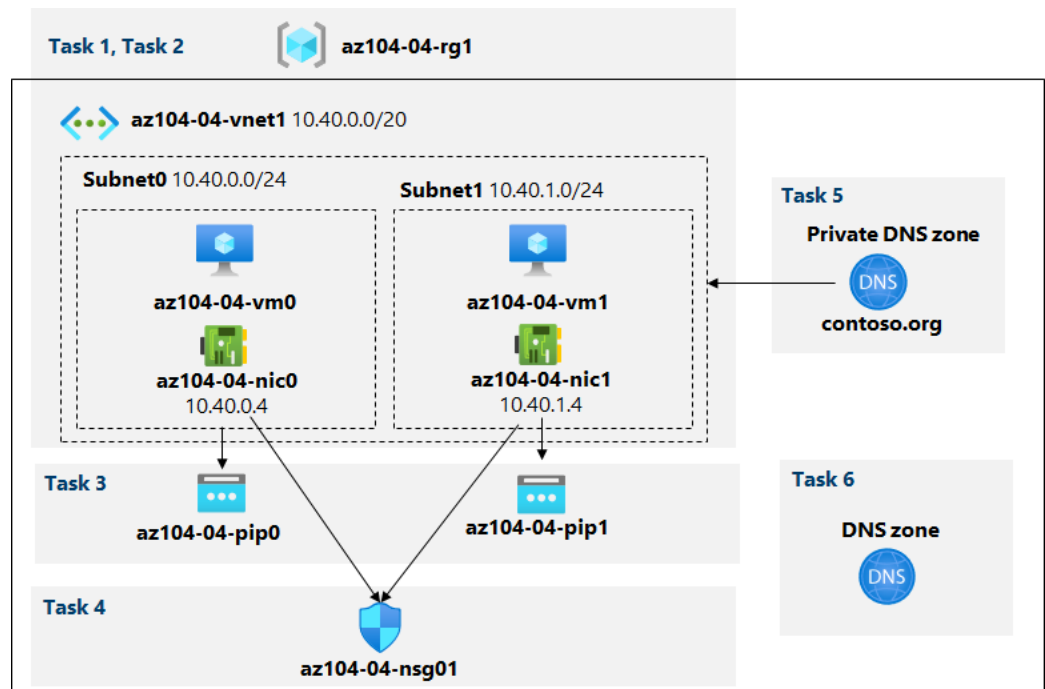

Instructions

Exercise 1

Task 1: Create and configure a virtual network

In this task, you will create a virtual network with multiple subnets by using the Azure portal

1. Sign in to the [Azure portal](#).
2. In the Azure portal, search for and select **Virtual networks**, and, on the **Virtual networks** blade, click + **Create**.
3. Create a virtual network with the following settings (leave others with their default values):

Setting	Value
Subscription	the name of the Azure subscription you will be using in this lab
Resource Group	the name of a new resource group az104-04-rg1
Name	az104-04-vnet1
Region	the name of any Azure region available in the subscription you will use in this lab

4. Click **Next : IP Addresses** and enter the following values

Setting	Value
IPv4 address space	10.40.0.0/20

5. Click + **Add subnet** enter the following values then click **Add**

Setting	Value
Subnet name	subnet0
Subnet address range	10.40.0.0/24

6. Accept the defaults and click **Review and Create**. Let validation occur, and hit **Create** again to submit your deployment.

 **Note:** Wait for the virtual network to be provisioned. This should take less than a minute.

7. Click on **Go to resource**
8. On the **az104-04-vnet1** virtual network blade, click **Subnets** and then click + **Subnet**.
9. Create a subnet with the following settings (leave others with their default values):


Setting	Value
Name	subnet1
Address range (CIDR block)	10.40.1.0/24
Network security group	None
Route table	None

10. Click **Save**


Task 2: Deploy virtual machines into the virtual network

In this task, you will deploy Azure virtual machines into different subnets of the virtual network by using an ARM template

1. In the Azure portal, open the **Azure Cloud Shell** by clicking on the icon in the top right of the Azure Portal.
2. If prompted to select either **Bash** or **PowerShell**, select **PowerShell**.

 **Note:** If this is the first time you are starting **Cloud Shell** and you are presented with the **You have no storage mounted** message, select the subscription you are using in this lab, and click **Create storage**.

3. In the toolbar of the Cloud Shell pane, click the **Upload/Download files** icon, in the drop-down menu, click **Upload** and upload the files **\Allfiles\Labs\04\az104-04-vms-loop-template.json** and **\Allfiles\Labs\04\az104-04-vms-loop-parameters.json** into the Cloud Shell home directory.

 **Note:** You might need to upload each file separately.


4. Edit the Parameters file, and change the password. If you need help editing the file in the Shell please ask your instructor for assistance. As a best practice, secrets, like passwords, should be more securely stored in the Key Vault.
5. From the Cloud Shell pane, run the following to deploy two virtual machines by using the template and parameter files:


Code

 Copy

```
$rgName = 'az104-04-rg1'

New-AzResourceGroupDeployment `
  -ResourceGroupName $rgName `
  -TemplateFile $HOME/az104-04-vms-loop-template.json `
  -TemplateParameterFile $HOME/az104-04-vms-loop-parameters.json
```

 **Note:** This method of deploying ARM templates uses Azure PowerShell. You can perform the same task by running the equivalent Azure CLI command **az deployment create** (for more information, refer to [Deploy resources with Resource Manager templates and Azure CLI](#)).

 **Note:** Wait for the deployment to complete before proceeding to the next task. This should take about 2 minutes.

Note: If you got an error stating the VM size is not available please ask your instructor for assistance and try these steps:

- Click on the `{}` button in your CloudShell, select the **az104-04-vms-loop-parameters.json** from the left hand side bar and take a note of the `vmSize` parameter value.
- Check the location in which the 'az104-04-rg1' resource group is deployed. You can run `az group show -n az104-04-rg1 --query location` in your CloudShell to get it.
- Run

```
az vm list-skus --location <Replace with your location> -o table --query "[? contains(name, 'Standard_D2s')].name"
```

 in your CloudShell. If there are no listed SKUs (i.e. there are no results), then you cannot deploy any D2S virtual machines in that region. You will need to find a region that will allow you to deploy D2S virtual machines. Once you have chosen a suitable location, delete the AZ104-04-rg1 resource group and restart the lab.
- Replace the value of `vmSize` parameter with one of the values returned by the command you just run.
- Now redeploy your templates by running the `New-AzResourceGroupDeployment` command again. You can press the up button a few times which would bring the last executed command.

6. Close the Cloud Shell pane.

Task 3: Configure private and public IP addresses of Azure VMs

In this task, you will configure static assignment of public and private IP addresses assigned to network interfaces of Azure virtual machines.

Note: Private and public IP addresses are actually assigned to the network interfaces, which, in turn are attached to Azure virtual machines, however, it is fairly common to refer to IP addresses assigned to Azure VMs instead.

- In the Azure portal, search for and select **Resource groups**, and, on the **Resource groups** blade, click **az104-04-rg1**.
- On the **az104-04-rg1** resource group blade, in the list of its resources, click **az104-04-vnet1**.
- On the **az104-04-vnet1** virtual network blade, review the **Connected devices** section and verify that there are two network interfaces **az104-04-nic0** and **az104-04-nic1** attached to the virtual network.
- Click **az104-04-nic0** and, on the **az104-04-nic0** blade, click **IP configurations**.


Note: Verify that **ipconfig1** is currently set up with a dynamic private IP address.

- In the list IP configurations, click **ipconfig1**.
- On the **ipconfig1** blade, in the **Public IP address settings** section, select **Associate**, click **+ Create new**, specify the following settings, and click **OK**:

Setting	Value
Name	az104-04-pip0
SKU	Standard

- On the **ipconfig1** blade, set **Assignment** to **Static**, leave the default value of **IP address** set to **10.40.0.4**.
- Back on the **ipconfig1** blade, save the changes. Make sure to wait for the save operation to complete before you proceed to the next step.
- Navigate back to the **az104-04-vnet1** blade

10. Click **az104-04-nic1** and, on the **az104-04-nic1** blade, click **IP configurations**.

 **Note:** Verify that **ipconfig1** is currently set up with a dynamic private IP address.

11. In the list IP configurations, click **ipconfig1**.

12. On the **ipconfig1** blade, in the **Public IP address settings** section, select **Associate**, click **+ Create new**, specify the following settings, and click **OK**:


Setting	Value
Name	az104-04-pip1
SKU	Standard

13. On the **ipconfig1** blade, set **Assignment** to **Static**, leave the default value of **IP address** set to **10.40.1.4**.

14. Back on the **ipconfig1** blade, save the changes.

15. Navigate back to the **az104-04-rg1** resource group blade, in the list of its resources, click **az104-04-vm0**, and from the **az104-04-vm0** virtual machine blade, note the public IP address entry.


16. Navigate back to the **az104-04-rg1** resource group blade, in the list of its resources, click **az104-04-vm1**, and from the **az104-04-vm1** virtual machine blade, note the public IP address entry.

 **Note:** You will need both IP addresses in the last task of this lab.


Task 4: Configure network security groups

In this task, you will configure network security groups in order to allow for restricted connectivity to Azure virtual machines.

1. In the Azure portal, navigate back to the **az104-04-rg1** resource group blade, and in the list of its resources, click **az104-04-vm0**.
2. On the **az104-04-vm0** overview blade, click **Connect**, click **RDP** in the drop-down menu, on the **Connect with RDP** blade, click **Download RDP File** using the Public IP address and follow the prompts to start the Remote Desktop session.
3. Note that the connection attempt fails.

 **Note:** This is expected, because public IP addresses of the Standard SKU, by default, require that the network interfaces to which they are assigned are protected by a network security group. In order to allow Remote Desktop connections, you will create a network security group explicitly allowing inbound RDP traffic from Internet and assign it to network interfaces of both virtual machines.

4. Stop the **az104-04-vm0** and **az104-04-vm1** virtual machines.

 **Note:** This is done for lab expediency. If the virtual machines are running when a network security group is attached to their network interface, it can take over 30 minutes for the attachment to take effect. Once the network security group has been created and attached, the virtual machines will be restarted, and the attachment will be in effect immediately.

5. In the Azure portal, search for and select **Network security groups**, and, on the **Network security groups** blade, click **+ Create**.

6. Create a network security group with the following settings (leave others with their default values):

Setting	Value
---------	-------

Setting	Value
Subscription	the name of the Azure subscription you are using in this lab
Resource Group	az104-04-rg1
Name	az104-04-nsg01
Region	the name of the Azure region where you deployed all other resources in this lab

7. Click **Review and Create**. Let validation occur, and hit **Create** to submit your deployment.

 **Note:** Wait for the deployment to complete. This should take about 2 minutes.

8. On the deployment blade, click **Go to resource** to open the **az104-04-nsg01** network security group blade.


9. On the **az104-04-nsg01** network security group blade, in the **Settings** section, click **Inbound security rules**.

10. Add an inbound rule with the following settings (leave others with their default values):

Setting	Value
Source	Any
Source port ranges	*
Destination	Any
Service	RDP
Action	Allow
Priority	300
Name	AllowRDPIInBound


11. On the **az104-04-nsg01** network security group blade, in the **Settings** section, click **Network interfaces** and then click **+ Associate**.

12. Associate the **az104-04-nsg01** network security group with the **az104-04-nic0** and **az104-04-nic1** network interfaces.


 **Note:** It may take up to 5 minutes for the rules from the newly created Network Security Group to be applied to the Network Interface Card.


13. Start the **az104-04-vm0** and **az104-04-vm1** virtual machines.

14. Navigate back to the **az104-04-vm0** virtual machine blade.

 **Note:** In the subsequent steps, you will verify that you can successfully connect to the target virtual machine.

15. On the **az104-04-vm0** blade, click **Connect**, click **RDP**, on the **Connect with RDP** blade, click **Download RDP File** using the Public IP address and follow the prompts to start the Remote Desktop session.

 **Note:** This step refers to connecting via Remote Desktop from a Windows computer. On a Mac, you can use Remote Desktop Client from the Mac App Store and on Linux computers you can use an open source RDP client software.

 **Note:** You can ignore any warning prompts when connecting to the target virtual machines.

16. When prompted, sign in with the user and password in the parameters file.

 **Note:** Leave the Remote Desktop session open. You will need it in the next task.


Task 5: Configure Azure DNS for internal name resolution

In this task, you will configure DNS name resolution within a virtual network by using Azure private DNS zones.

1. In the Azure portal, search for and select **Private DNS zones** and, on the **Private DNS zones** blade, click **+ Create**.
2. Create a private DNS zone with the following settings (leave others with their default values):

Setting	Value
Subscription	the name of the Azure subscription you are using in this lab
Resource Group	az104-04-rg1
Name	contoso.org


3. Click **Review and Create**. Let validation occur, and hit **Create** again to submit your deployment.

 **Note:** Wait for the private DNS zone to be created. This should take about 2 minutes.


4. Click **Go to resource** to open the **contoso.org** DNS private zone blade.
5. On the **contoso.org** private DNS zone blade, in the **Settings** section, click **Virtual network links**
6. Click **+ Add** to create a virtual network link with the following settings (leave others with their default values):

Setting	Value
Link name	az104-04-vnet1-link
Subscription	the name of the Azure subscription you are using in this lab
Virtual network	az104-04-vnet1
Enable auto registration	enabled

7. Click **OK**.


 **Note:** Wait for the virtual network link to be created. This should take less than 1 minute.

8. On the **contoso.org** private DNS zone blade, in the sidebar, click **Overview**
9. Verify that the DNS records for **az104-04-vm0** and **az104-04-vm1** appear in the list of record sets as **Auto registered**.

 **Note:** You might need to wait a few minutes and refresh the page if the record sets are not listed.

10. Switch to the Remote Desktop session to **az104-04-vm0**, right-click the **Start** button and, in the right-click menu, click **Windows PowerShell (Admin)**.

11. In the Windows PowerShell console window, run the following to test internal name resolution in the newly created private DNS zone:

Code	 Copy
<pre>nslookup az104-04-vm0.contoso.org nslookup az104-04-vm1.contoso.org</pre>	

12. Verify that the output of the command includes the private IP address of **az104-04-vm1 (10.40.1.4)**.


Task 6: Configure Azure DNS for external name resolution

In this task, you will configure external DNS name resolution by using Azure public DNS zones.

1. In a web browser, open a new tab and navigate to <https://www.godaddy.com/domains/domain-name-search>.
2. Use the domain name search to identify a domain name which is not in use.
3. In the Azure portal, search for and select **DNS zones** and, on the **DNS zones** blade, click + **Create**.
4. Create a DNS zone with the following settings (leave others with their default values):

Setting	Value
Subscription	the name of the Azure subscription you are using in this lab
Resource Group	az104-04-rg1
Name	the DNS domain name you identified earlier in this task

5. Click **Review and Create**. Let validation occur, and hit **Create** again to submit your deployment.

 **Note:** Wait for the DNS zone to be created. This should take about 2 minutes.

6. Click **Go to resource** to open the blade of the newly created DNS zone.
7. On the DNS zone blade, click + **Record set**.
8. Add a record set with the following settings (leave others with their default values):

Setting	Value
Name	az104-04-vm0
Type	A
Alias record set	No
TTL	1
TTL unit	Hours
IP address	the public IP address of az104-04-vm0 which you identified in the third exercise of this lab

9. Click **OK**.
10. On the DNS zone blade, click + **Record set**.
11. Add a record set with the following settings (leave others with their default values):

Setting	Value
Name	az104-04-vm1


Setting	Value
Type	A
Alias record set	No
TTL	1
TTL unit	Hours
IP address	the public IP address of az104-04-vm1 which you identified in the third exercise of this lab

12. Click **OK**

13. On the DNS zone blade, note the name of the **Name server 1** entry.

14. In the Azure portal, open the **PowerShell** session in **Cloud Shell** by clicking on the icon in the top right of the Azure Portal.


15. From the Cloud Shell pane, run the following to test external name resolution of the **az104-04-vm0** DNS record set in the the newly created DNS zone (replace the placeholder `[Name server 1]` with the name of **Name server 1** you noted earlier in this task and the `[domain name]` placeholder with the name of the DNS domain you created earlier in this task):

Code  Copy

```
nslookup az104-04-vm0.[domain name] [Name server 1]
```

16. Verify that the output of the command includes the public IP address of **az104-04-vm0**.


17. From the Cloud Shell pane, run the following to test external name resolution of the **az104-04-vm1** DNS record set in the the newly created DNS zone (replace the placeholder `[Name server 1]` with the name of **Name server 1** you noted earlier in this task and the `[domain name]` placeholder with the name of the DNS domain you created earlier in this task):


Code  Copy

```
nslookup az104-04-vm1.[domain name] [Name server 1]
```

18. Verify that the output of the command includes the public IP address of **az104-04-vm1**.


Clean up resources

 **Note:** Remember to remove any newly created Azure resources that you no longer use. Removing unused resources ensures you will not see unexpected charges.

 **Note:** Don't worry if the lab resources cannot be immediately removed. Sometimes resources have dependencies and take a longer time to delete. It is a common Administrator task to monitor resource usage, so just periodically review your resources in the Portal to see how the cleanup is going.

1. In the Azure portal, open the **PowerShell** session within the **Cloud Shell** pane.

2. List all resource groups created throughout the labs of this module by running the following command:

Code  Copy


```
Get-AzResourceGroup -Name 'az104-04*'
```

3. Delete all resource groups you created throughout the labs of this module by running the following command:

Code

 Copy

```
Get-AzResourceGroup -Name 'az104-04*' | Remove-AzResourceGroup -Force -AsJob
```

 **Note:** The command executes asynchronously (as determined by the `-AsJob` parameter), so while you will be able to run another PowerShell command immediately afterwards within the same PowerShell session, it will take a few minutes before the resource groups are actually removed.

Review

In this lab, you have:

- Created and configured a virtual network
- Deployed virtual machines into the virtual network
- Configured private and public IP addresses of Azure VMs
- Configured network security groups
- Configured Azure DNS for internal name resolution
- Configured Azure DNS for external name resolution