Use standard Dask configuration

Replace our custom compute-profile system with existing frameworks.

WHERE THIS FITS

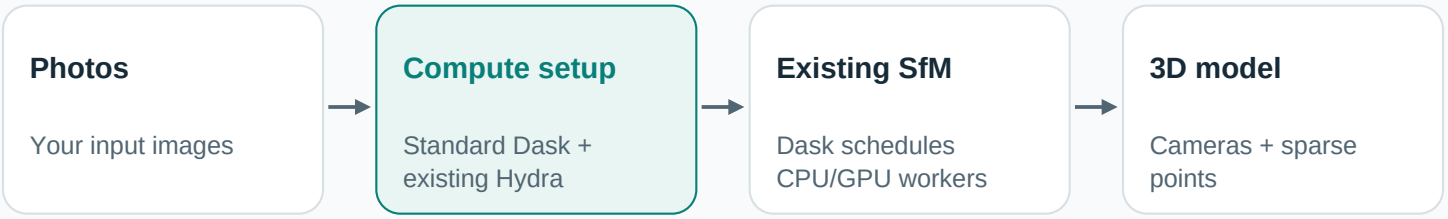

GTSfM turns photos into a 3D model. Dask assigns the work to CPU/GPU workers.

BEFORE: custom profile system

Our own JSON format, saved-profile database, API, validation and UI to maintain.

AFTER: existing frameworks

Existing YAML field + Hydra construct Dask workers. Dask handles policy files, environment settings and memory units.

Reuse standard tools. Keep the reconstruction algorithm unchanged.

CHECK: DID THE RECONSTRUCTION CHANGE?

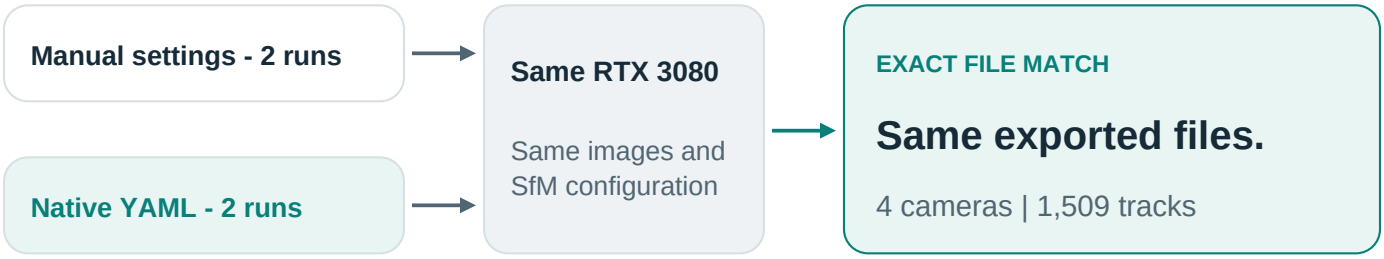

Four real API-to-GPU runs; complete exports and named image pairs compared.

THE GAIN: less custom infrastructure

Exact exported results on four images. This is a maintenance improvement; speed, accuracy and larger-scene gains remain unproven.

Also checked: 14 configuration/lifecycle cases and 62 focused tests.

Detailed methods and raw results: docs/benchmarks/raw/README.md

Source revision: 70a55d48 | Engineering repeatability result