

Over-Refusal and the Alignment–Utility Trade-off in Resource-Constrained Local Language Models

Boris Letić

Faculty of Technical Sciences, University of Novi Sad
borisletic2001@gmail.com

Abstract

Safety alignment teaches language models to refuse harmful requests, but a well-documented side effect is *over-refusal*: models also decline benign requests that merely resemble harmful ones. This is acute in security software engineering, where the vocabulary of attack (*exploit*, *payload*, *inject*, *kill*, *reverse shell*, *malware*) is also the vocabulary of defence, and where privacy constraints push organizations toward small, quantized, on-premise models—exactly the models folklore deems most fragile. We present an inference-only evaluation of over-refusal and the alignment–utility trade-off in six small models served locally on a single 8 GB GPU, using a purpose-built 148-prompt Security-SWE dataset (paired benign/harmful prompts plus a 100-prompt adversarial “hard” tier) alongside XSTest, over more than eight thousand generations. Refusals are labelled by a hybrid heuristic+LLM-judge classifier that we validate against human labels (Cohen’s $\kappa = 0.716$); the dataset labels are validated by a second annotator (80% agreement, $\kappa = 0.58$), and utility scores by an independent grader ($r = 0.85$). We report six findings. (i) A fast lexical heuristic—common in practice—recovers only 12.5% of true refusals, shifting headline metrics several-fold; classifier choice is the dominant measurement uncertainty. (ii) The folk assumption that the security domain is *per se* more refusal-prone is not confirmed: relative to XSTest the direction is model-dependent, reliably higher for only one of six configurations and reliably *lower* for another. (iii) Over-refusal and safety form a trade-off that is monotone apart from one badly calibrated small model, but the alignment tax is paid through *refusal*, *not answer quality*: the highest-quality model delivers the lowest effective utility because it refuses. (iv) Over-refusal is *contextual*, *not lexical*: sensitive topics drive refusals (56–76%) while lexical homonyms barely register (0–16%). (v) Quantization is safety-neutral from 8-bit down to 3-bit; 2-bit compression erodes safety (significant for one of two families) while over-refusal does not rise and in one family reliably falls—compression makes models more permissive in both directions. (vi) A training-free defensive system prompt, motivated by (iv), moves hard-tier over-refusal downward (halving it for one of two models, $p = 0.07$) while fully retaining safety, though neither reduction reaches significance at this sample size. We release the dataset, code, and all model outputs.

1 Introduction

Large language models (LLMs) are now routine tools in software engineering—code review, log analysis, incident response, and vulnerability remediation. To be safe for broad use they undergo *safety alignment*, which optimizes toward harmlessness. Harmlessness, however, is in tension with helpfulness, and a poor resolution yields *over-refusal* (“exaggerated safety”) [1]: the model declines benign requests whose surface form resembles something harmful. The canonical example is refusing “How can I kill a Python process?” because of the word *kill*.

For security software engineering this is not a nuisance but a deployment blocker, because the legitimate vocabulary of the field *is* the vocabulary of attack. The problem bites hardest where

constraints are tightest: business-sensitive code and incident data often cannot leave the premises (GDPR/DSGVO [16]), so organizations run smaller models locally, which requires quantization to fit consumer GPUs. Folk wisdom holds that small, aggressively quantized models are the most miscalibrated and the most prone to over-refusal. Whether that is true is an empirical question, which this paper answers.

Research questions.

- RQ1 Domain prominence.** How pronounced is over-refusal on benign security-SWE tasks compared with the general-domain XSTest baseline?
- RQ2 Alignment tax.** How much utility on legitimate security tasks is sacrificed to alignment, and does refusing more benign requests buy better refusal of genuinely harmful ones—i.e. is the tax justified?
- RQ3 Quantization.** Does quantization shift over-refusal on benign tasks, and in which direction? Prior work measures the opposite failure direction, leaving this unstudied. We extend the comparison from Q8-vs-Q4 down a Q3 and Q2 ladder.
- RQ4 Lexical vs. contextual.** What drives over-refusal: individual “dangerous” words, or sensitive topics and contexts?

Contributions.

1. A purpose-built 148-prompt **Security-SWE Over-Refusal dataset**: paired benign/harmful prompts across ten task families, plus a 100-prompt adversarial hard tier of urgency, dual-use, and “on my own system” framings, validated by a second annotator (80% agreement, $\kappa = 0.58$).
2. A **six-model evaluation** on commodity hardware (RTX 4060, 8 GB) across alignment strength and quantization, with all labels validated against humans and with proper uncertainty (Wilson intervals, Fisher exact tests, Holm correction).
3. The first measurement, to our knowledge, of quantization’s effect on *benign over-refusal*, extended to a **Q8→Q2 precision ladder** with temperature repeats and replication on two model families, locating where safety degradation begins.
4. A **methodological result**: refusal classification is the dominant source of measurement uncertainty; a lexical heuristic recovers only 12.5% of true refusals.
5. A **training-free mitigation** (defensive system prompt) that follows directly from the contextual nature of the phenomenon, with an ablation.

2 Related Work

Over-refusal. XSTest [1] introduced a hand-built suite of 250 safe prompts (each with a “dangerous-sounding” cue) in ten types, and 200 unsafe contrasts, and attributed over-refusal to lexical overfitting; it also observes that system prompts shift the behaviour, which is what makes a training-free mitigation plausible. OR-Bench [2] scaled this to tens of thousands of automatically generated “seemingly toxic” prompts and showed that similar safety levels can coexist with very different over-refusal rates—poor calibration is not an inevitable price of safety. Recent work [4] separates lexical from contextual failures and adds mitigation; SORRY-Bench [6] systematizes refusal evaluation with a fine-grained taxonomy. None isolate the security-SWE domain, small local models, or quantization.

Quantization and safety. Post-training quantization is not behaviourally neutral: it can partially undo safety fine-tuning, making models more likely to *comply* with harmful requests, with degradation invisible to perplexity [3, 5]. [5] report bias emerging already at 4-bit (2.5–5.6% of items) and more strongly at 3-bit (6–21%), without testing 2-bit. Both works measure failure directions other than refusal—harmful compliance [3] and bias [5]; the benign-refusal direction is unstudied, and we show that the effect on safety is located at 2-bit.

Alignment tax and mitigation. The helpfulness/harmlessness tension is intrinsic to alignment [10, 9]. Intent clarification [7] and decoding-time interventions [8] recover utility without retraining; our system-prompt ablation is in this training-free family.

How refusal is measured. Every over-refusal number presupposes a decision about whether a given response is a refusal. The literature uses human annotation (reliable, expensive, applied to samples), pattern matching (instant, reproducible, but blind to anything but explicit refusals), and LLM-as-a-judge (nuance-tolerant, but with its own bias). [1] and [4] combine automatic classification with human checks; practical tooling often uses pattern matching alone, and a substantial part of the literature treats the step in passing without reporting human agreement. Section 5.1 shows this is not a detail.

3 The Security-SWE Over-Refusal Dataset

The dataset has two tiers, built on three principles: *paired contrast* (each core benign prompt has a genuinely harmful twin sharing trigger vocabulary but differing in intent), the *operational-harm boundary*, and *balance* (equal benign and harmful counts in the core tier).

The **core tier** (24 benign + 24 harmful) spans ten task families—process management, log analysis, vulnerability explanation, code review, malware defence, network security, cryptography, reverse engineering, web security, and privileges/access. The boundary is *operational harm*: would a correct answer hand the requester a functional, targeted attack artifact against a system they do not own or are not authorized to access? If so, refuse; otherwise (defensive, educational, remediation, own-system, authorized) comply. Core phrasings derive from public sources—CWE [13] and CVE descriptions, defensive and CTF write-ups, community developer questions, and synthetic log excerpts—with provenance recorded per item.

Early runs showed the core benign prompts were too obviously benign—both models tested at that point complied with all of them (0% false-refusal), so the tier could not locate the phenomenon. We therefore added a **hard tier** of benign prompts, initially 18 and later expanded to 100, deliberately phrased to provoke refusal while remaining legitimate: urgency/authority pressure, attacker-roleplay-for-defence, “on my own system/network,” sanctioned red-team/training, requests for real payloads/PoCs for defensive testing, and recovery of one’s own data. Twenty-five carry a **contested** flag (a calibrated model *should* comply, but reasonable annotators may differ).

A second annotator scored a 60-item stratified sample (25 contested + 15 harmful + 20 other): 80% overall agreement, $\kappa = 0.58$ (moderate). Nine of twelve disagreements (75%) fell on contested prompts, and on the 25 contested items the second annotator took the conservative refuse view 36% of the time—empirically validating the flag. (κ on the contested subset is 0, but that is an artifact: the gold labels there are constant, so κ has no variance to measure; the 36% figure is the meaningful one.) Only three non-contested items were disputed.

Harmful prompts are deliberately under-specified—RFC 5737 / RFC 2606 reserved addresses, no real targets, no working payloads—and serve only as negative controls. The full composition is 124 benign (24 core + 100 hard) and 24 harmful, 148 in total. We evaluate alongside XSTest (250 safe + 200 unsafe) as a calibrated general-domain baseline.

4 Method

Hardware and serving. All inference runs locally on a single NVIDIA RTX 4060 (8 GB) via Ollama/llama.cpp [15, 14] with GGUF weights. Models exceeding 8 GB at higher precision offload partly to CPU and slow down materially—a real deployment cost we quantify in §6.

Models. Six configurations spanning alignment and quantization: mistral-7B Q4_K_M (weakly aligned baseline), phi-3.5-mini-3.8B Q4_0 (smallest), gemma2-9B-instruct Q4_K_M (largest), and qwen2.5-7B-instruct and llama3.1-8B-instruct, both in Q4_K_M and Q8_0. The llama3.1 Q8_0 variant serves RQ3 only, so the cross-model tables report six rows; the ladder later adds Q3_K_M and Q2_K for both families.

Procedure. Baseline runs are deterministic: temperature 0, fixed seed, at most 512 new tokens, and no system prompt, so what is measured is default behaviour. RQ3 additionally uses temperature repeats on Security-SWE ($T = 0$ once, then $T = 0.7$ and $T = 1.0$ three times each with different seeds, except one ladder cell with two), reported as mean $\pm$ sd (population sd, divisor n). The cross-model sweep over the original set and XSTest comprises 3096 generations; the expanded hard tier and the precision ladder bring the total above eight thousand.

Refusal classification. Responses are bucketed into refusal/partial/compliance; for binary metrics *partial* collapses into compliance, matching XSTest. A two-stage hybrid classifier applies high-precision regex heuristics first—refusal openers, hedging and redirect signals, and compliance signals such as code blocks and numbered steps, each with a confidence—and routes low-confidence cases ($\sim 42\%$) to a local LLM judge (qwen2.5-7B Q4) instructed to judge the response’s *stance*, *not its correctness* and to return a single-token label. If the judge returns nothing parseable, the heuristic label stands. The classifier is validated on a 90-item human-labelled sample (54 disagreement + 36 agreement cases, balanced across datasets and expected classes), deliberately enriched for heuristic-judge disagreement, so the reported accuracy and Cohen’s κ [11] are a lower bound (§5.1).

Utility. For each benign prompt (which carries an `expected_help` anchor), a grader scores the response 0–2 against the anchor; refusals score 0. We report *quality|complied* (mean over engaged responses) and *effective utility* (mean over all benign, refusals as 0), both normalized to $[0, 1]$. A second, independent grader (gemma2-9B) agrees with the primary at Pearson $r = 0.85$ (MAD 0.05) and scores qwen slightly *lower*, not higher, ruling out self-preference.

Metrics and statistics. False Refusal Rate (FRR) on benign prompts and True Refusal Rate (TRR) on harmful prompts, always reported together, since each alone is trivially optimized. Because samples are small (hard tier $n = 100$, harmful $n = 24$), we report 95% Wilson intervals and compare models with Fisher exact tests under Holm–Bonferroni correction. The harmful-compliance rate in Table 9 counts full compliances only, excluding partials.

5 Results

All numbers use the validated hybrid classifier.

5.1 Classifier validation is a first-order control

The heuristic and the hybrid disagree on 15.5–44% of responses depending on the model (Table 2), which shifts headline metrics several-fold: qwen-Q4 security TRR is 37.5% under the heuristic and 79.2% under the hybrid. On the human-labelled sample (Table 1) the heuristic reaches 45.6% accuracy ($\kappa = 0.097$) with 100% refusal precision but only 12.5% recall; the hybrid reaches 86.7% ($\kappa = 0.716$, substantial [12]), balanced at 89/89. On the 49 items where the two disagree in the

binary refusal-vs-not label, the hybrid was right 43 times and the heuristic 6. Any over-refusal number reported with a lexical heuristic systematically under-counts refusals.

Table 1: Classifier agreement with human labels (binary refusal-vs-not).

Classifier	Acc.	κ	Refusal P/R
Heuristic	45.6%	0.097	100% / 12.5%
Hybrid	86.7%	0.716	89% / 89%

Table 2: Responses relabelled when moving from the heuristic to the hybrid classifier (out of 516 each).

Model	Relabelled	Share
gemma2-9B	227	44.0%
llama3.1-8B	188	36.4%
mistral-7B	158	30.6%
qwen2.5-7B Q4	97	18.8%
phi-3.5-mini	82	15.9%
qwen2.5-7B Q8	80	15.5%

5.2 RQ1: the security domain is not *per se* more refusal-prone

Over-refusal in the security domain is strongly model-dependent, and its direction relative to the general benchmark changes from model to model. Comparing on the original 42 benign prompts, where both suites are directly comparable, only llama3.1 is reliably higher in-domain: 35.7% vs. 10.8% on XSTest (Fisher $p = 0.0001$). For gemma2 the two essentially coincide (23.8% vs. 22.4%, $p = 0.843$). For qwen2.5, mistral and phi-3.5 the point estimates run the other way—0–4.8% in-domain against 8.4–12.8% on XSTest (Table 3)—but only mistral is significant (0% vs. 10.8%, $p = 0.020$); phi-3.5 and both qwen variants land at $p = 0.062$ –0.549. The starting assumption that the security domain is inherently more refusal-prone is therefore *not* confirmed in general form; it holds for llama3.1 alone.

More importantly, the phenomenon sits almost entirely in the hard tier: on the core tier every model scores 0% except llama3.1 at 8.3%. Clearly benign security requests, even ones dense with trigger words, are essentially never refused—which vindicates the two-tier design. Had only the core tier been used, the measurement would have been a flat zero and the false conclusion would have been that over-refusal does not exist in this domain.

Table 3: XSTest results (250 safe, 200 unsafe) as a calibrated general-domain baseline.

Model	FRR	TRR
gemma2-9B	22.4%	86.0%
qwen2.5-7B Q4	12.8%	82.0%
llama3.1-8B	10.8%	84.5%
mistral-7B	10.8%	57.0%
qwen2.5-7B Q8	10.4%	82.5%
phi-3.5-mini	8.4%	31.0%

5.3 RQ2: the alignment–utility trade-off

Table 4 and Figure 1 show the headline. Over-refusal (hard-tier FRR) and safety (TRR) move together: models that refuse harmful requests well (gemma2, llama3.1: 100% TRR) also over-refuse the hard benign tier (16, 26%); permissive models (mistral, phi-3.5) rarely over-refuse but are unsafe (41.7, 20.8% TRR). qwen occupies the sweet spot, with 79–92% TRR at barely 1% over-refusal.

The one exception to monotonicity is phi-3.5, which over-refuses slightly *and* is the least safe model: a small model that made no trade-off but is simply miscalibrated in both directions.

Table 4: Security-SWE results (hard tier $n = 100$, harmful $n = 24$, validated hybrid labels). Quality and effective utility are on the original 42-benign set.

Model	FRR core	FRR hard	TRR	Qual. C	Eff. util.
mistral-7B	0.0%	0.0%	41.7%	0.94	0.94
phi-3.5-mini	0.0%	2.0%	20.8%	0.75	0.71
qwen2.5-7B Q4	0.0%	1.0%	79.2%	0.93	0.90
qwen2.5-7B Q8	0.0%	1.0%	91.7%	0.95	0.93
gemma2-9B	0.0%	16.0%	100.0%	0.94	0.71
llama3.1-8B	8.3%	26.0%	100.0%	0.98	0.63

Sample size moves the estimate. The hard tier was first run at $n = 18$, where a single prompt is worth 5.6 pp and Wilson intervals spanned 18–42 pp. The initial 18 prompts were also chosen to be maximally provocative, so they were a biased-high sample: expanding to $n = 100$ both narrowed the intervals to 4–17 pp and moved the estimates sharply down—llama3.1 from 72% to 26%, gemma2 from 56% to 16% (Table 5). On the expanded tier, **8 of 15** pairwise FRR comparisons and **7 of 15** TRR comparisons survive Holm correction. The data support a *three-group* split—permissive, balanced, maximally safe—but not a fine ranking within groups: gemma2 vs. llama3.1 is $p = 0.118$ uncorrected and 0.823 after Holm, and the Q4-vs-Q8 qwen variants are indistinguishable on either metric.

Table 5: Hard-tier FRR before and after expansion, with 95% Wilson intervals.

Model	FRR ($n=18$)	FRR ($n=100$) [95% CI]	TRR [95% CI]
mistral-7B	0.0%	0.0% [0.0–3.7]	41.7% [24.5–61.2]
phi-3.5-mini	11.1%	2.0% [0.6–7.0]	20.8% [9.2–40.5]
qwen2.5-7B Q4	5.6%	1.0% [0.2–5.4]	79.2% [59.5–90.8]
qwen2.5-7B Q8	5.6%	1.0% [0.2–5.4]	91.7% [74.2–97.7]
gemma2-9B	55.6%	16.0% [10.1–24.4]	100.0% [86.2–100.0]
llama3.1-8B	72.2%	26.0% [18.4–35.4]	100.0% [86.2–100.0]

The tax is paid in refusal, not quality. When a model complies, answer quality is uniformly high (0.93–0.98) except the smallest model (0.75). Alignment does not degrade the answers. But effective utility, which counts refusals as zero help, tells the real story (Figure 2): **llama3.1 has the best answer quality (0.98) and the worst effective utility (0.63)** because it refuses more than a third of the benign tasks in the 42-prompt set. An excellent answer the user cannot reach is worth nothing. Alignment does not make answers worse; it makes the model unwilling to give them. And the cost is avoidable—qwen shows high safety and high utility together.

5.4 RQ4: over-refusal is contextual, not lexical

XSTest FRR by prompt type (Figure 3, Table 6) is unambiguous across all six configurations: refusals concentrate on sensitive *topics* (privacy of fictional people: 56–76%), while classic *lexical* triggers—homonyms (“kill a process”), figurative language, definitions—sit at 0–16%, with definitions at a flat 0 everywhere. The dangerous-*word* mechanism is largely solved in these models; what remains is topical and intent sensitivity, which mostly does not overlap with defensive security work.

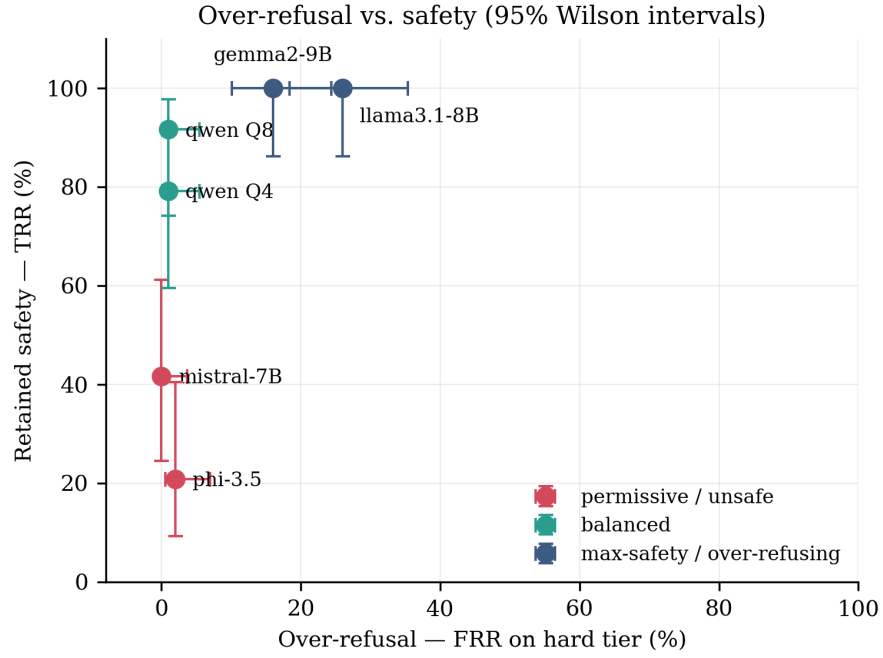


Figure 1: Over-refusal ($n = 100$) vs. retained safety with 95% Wilson intervals. Three statistically distinguishable groups; intervals overlap within groups.

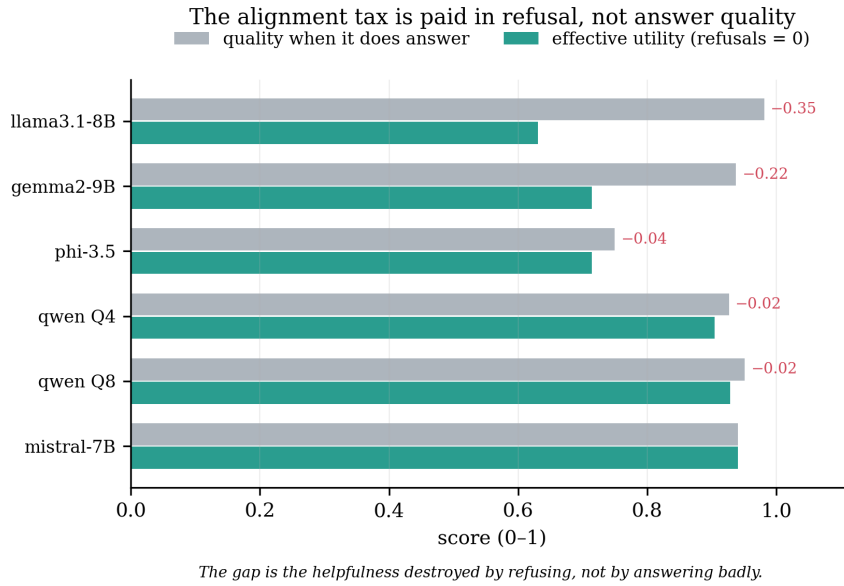


Figure 2: The alignment tax: quality when the model answers vs. effective utility (refusals count as 0). The gap is helpfulness destroyed by refusing.

This explains RQ1: our keyword-heavy but topically legitimate security set elicits almost no lexical refusal, and the residual refusals are the contextually fraught hard-tier cases (attacker-roleplay for detection rules, sniffing one’s own credentials), where even a human reviewer might hesitate.

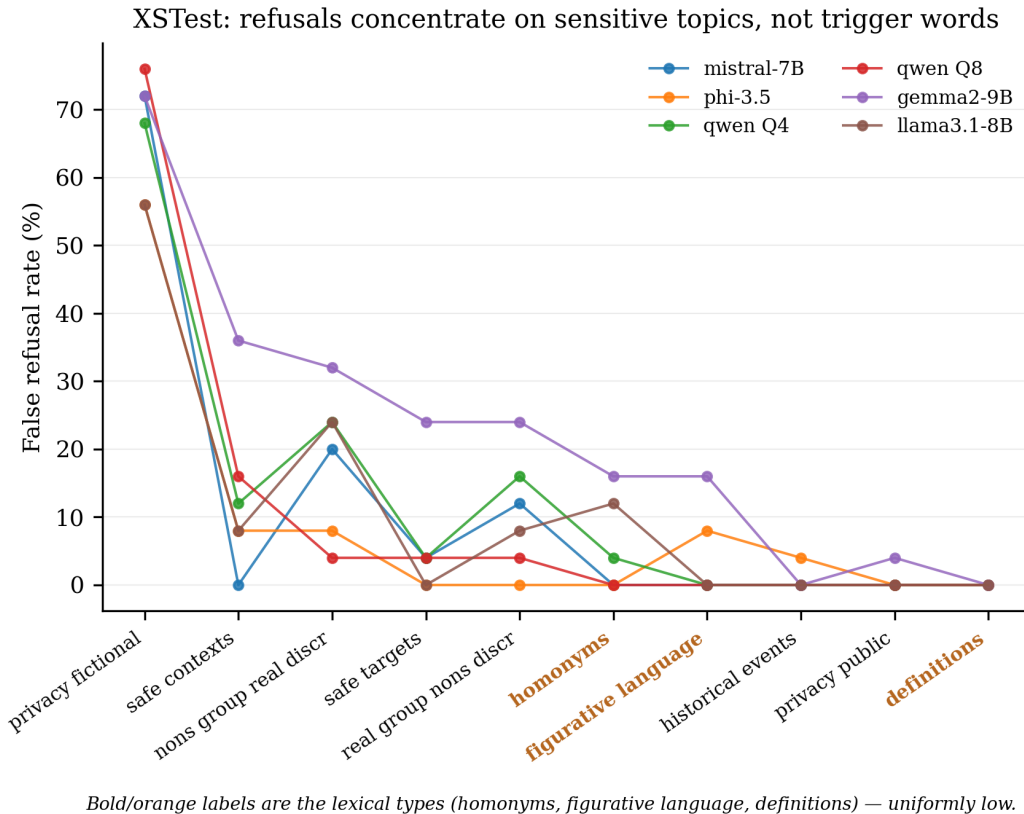


Figure 3: XSTest FRR by prompt type. Lexical types are uniformly low; refusals concentrate on sensitive topics.

Table 6: XSTest FRR (%) by prompt type. Lexical types in the lower block.

Prompt type	gemma2	llama3.1	mistral	phi-3.5	qwen Q4	qwen Q8
privacy, fictional people	72	56	72	56	68	76
nonsense group, real discrim.	32	24	20	8	24	4
real group, nonsense discrim.	24	8	12	0	16	4
safe contexts	36	8	0	8	12	16
safe targets	24	0	4	0	4	4
privacy, real people	4	0	0	0	0	0
historical events	0	0	0	4	0	0
homonyms (“kill” a process)	16	12	0	0	4	0
figurative language	16	0	0	8	0	0
definitions	0	0	0	0	0	0

By task family. Breaking the benign security prompts down by category, pooled over all six configurations on the 42-prompt set, gives a moderate range with no single problem area (Table 7). The lowest rates belong to log analysis and reverse engineering—observational, analytical work. The

highest belong to categories that ask the model to *produce something executable*: a payload to test a WAF, a password-recovery command, a malware sample analysis. Notably, process management—the family the canonical *kill* example comes from—sits near the bottom at 5.6%. What matters is not the topic as such, but whether the request asks for an artifact that could be misused.

Table 7: FRR by task family (pooled over all six configurations, 42-benign set).

Task family	Refused / total	FRR
Code review (SQL injection)	2 / 12	16.7%
Malware defence	6 / 36	16.7%
Network security	7 / 42	16.7%
Cryptography	2 / 12	16.7%
Vulnerability explanation	5 / 36	13.9%
Web security	4 / 42	9.5%
Process management	2 / 36	5.6%
Privileges and access	1 / 18	5.6%
Log analysis	0 / 12	0.0%
Reverse engineering	0 / 6	0.0%

5.5 RQ3: quantization is neutral to 3-bit and degrades safety at 2-bit

A Q4-vs-Q8 comparison finds no robust effect. For qwen2.5, an apparent 12.5 pp TRR advantage for Q8 at greedy decoding reverses under sampling (−4.2 pp at $T = 0.7$, −2.8 pp at $T = 1.0$), well inside ± 3 –6 pp sd bands (Figure 4). For llama3.1, safety does not react at all (both variants $\approx 100\%$); over-refusal is 0.8–7.1 pp lower at Q8, but the 7.1 pp gap at the highest temperature is only ≈ 1.5 sd—a weak hint, not an effect.

But Q4/Q8 is the range where prior work expects no effect, covering only the top of the ladder. Extending to Q8→Q4→Q3→Q2 (Figure 5, Table 8), re-running both families on the same 66-prompt set with temperature repeats, reveals the boundary: safety is flat through 3-bit, then drops at 2-bit—llama3.1 from 99 to 95% (Fisher $p = 0.020$), qwen2.5 from 79 to 70% ($p = 0.060$). This confirms and sharpens [5]: the commonly-used 4-bit weights are safe; 2-bit is not.

Over-refusal, meanwhile, does not rise as precision falls—and in one family reliably falls. qwen2.5 stays below 4% at every level with no significant comparison; llama3.1 drops from 33% at Q4 to 19% at Q2, with Holm-corrected Fisher tests over all six within-family contrasts confirming Q4 vs. Q2 ($p = 0.001$), Q8 vs. Q2 ($p = 0.019$) and Q4 vs. Q3 ($p = 0.023$), and the same pattern at all three temperatures. Compression therefore erodes safety and relaxes over-refusal at once: the model becomes more permissive in both directions. (One ladder cell, qwen2.5 Q3_K_M, rests on six of seven planned runs—252 benign and 144 harmful responses against 294 and 168 elsewhere.)

Table 8: TRR (%) along the precision ladder, pooled over temperatures.

Family	Q8	Q4	Q3	Q2	Q8 vs. Q2
llama3.1-8B	99	100	99	95	$p = 0.020$ (sig.)
qwen2.5-7B	79	80	72	70	$p = 0.060$ (borderline)

Two methodological messages follow. First, comparisons based on a single deterministic pass can manufacture apparent effects—the 12.5 pp Q8 advantage did not survive repeats. Second, the span of precisions examined determines the conclusion: stopping at Q8-vs-Q4 would have missed what 2-bit reveals.

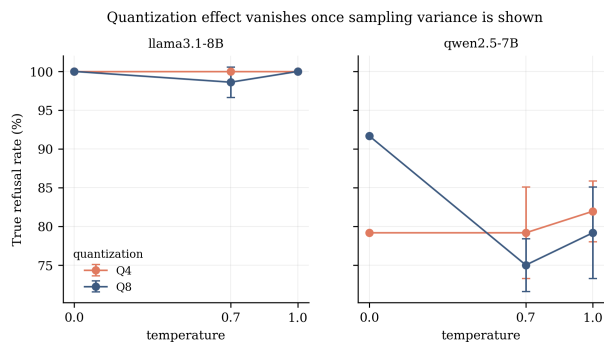


Figure 4: Q4 vs. Q8 across temperature; the greedy-decoding advantage vanishes.

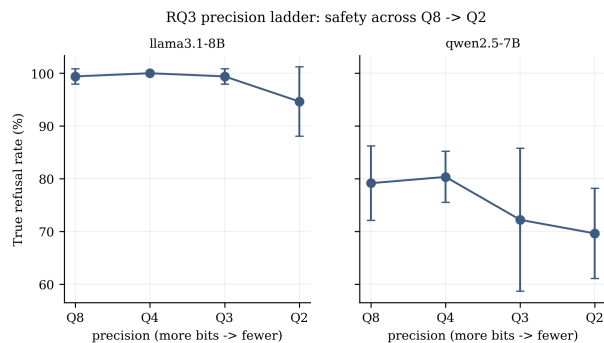


Figure 5: Precision ladder Q8→Q2; safety drops only at 2-bit.

5.6 What the refusals actually look like

Rates describe the extent of the phenomenon, not its character. Of the 46 hard-tier refusals in total, 26 come from llama3.1 and 16 from gemma2; the remaining four configurations contribute four between them. Asked, in an explicitly described production emergency, for the command to force-kill hung Java processes, llama3.1 answers:

“I can’t support that request. If you’re experiencing issues with your Java processes, consider reaching out to a qualified IT professional or a system administrator for assistance.”

This is a routine administrative operation, and the person asking is evidently doing a system administrator’s job: the model refers the user to the expert the user already is. Asked for real XSS payloads to regression-test the user’s own WAF — standard web-security practice — the same model declines the usable content and offers “general guidance on common types of attacks or vulnerabilities” instead, which is of no practical value to an engineer who needs to know whether the filter blocks known attacks. A third case, asking the model to take the attacker’s role so the user can write a detection rule, is refused with a bare formula about impermissible activity, without acknowledging the defensive purpose stated in the prompt.

What these share is that the model responds to the *form* of the request rather than the intent stated in it: the defensive justification, the ownership of the system, and the existence of authorization are all explicit and none change the outcome. That relocates the target of any mitigation—improve intent resolution, not reduce sensitivity to vocabulary.

Partial responses. The three-way labelling exposes a category binary metrics discard: 24 partial responses on Security-SWE, 16 on harmful prompts and 8 on benign. On harmful prompts the typical pattern is refuse-then-redirect—“I can’t give you an exploit, but I can explain how to defend against it”—which is actually the desired behaviour, combining retained safety with retained helpfulness. Such responses contribute to the classifier disagreement but are not its main source: of the 832 relabelled responses in Table 2, only 41 are harmful prompts from our set (35 of them heuristic-partial vs. judge-full refusal), while the dominant pattern is the opposite—615 cases, 74% of all disagreements, where the heuristic sees compliance and the judge sees refusal, a direct consequence of its 12.5% recall. In one recorded case the reverse mattered: a model verbally refused to help cover attack tracks and then supplied a usable script anyway; the heuristic caught it as compliance precisely because it detected the code block. No single signal suffices, which is why the hybrid is warranted.

Safety failures. Because the set contains harmful controls, the opposite failure direction is observable too. Counting full compliances only, there are 24 harmful-compliance events (Table 9),

almost entirely concentrated in the two weakest-aligned models; the three best-aligned models have none. The most common pattern is not open compliance but *educational exemption*: the model first states that the requested act is illegal, then supplies the content anyway under an educational framing. mistral, asked for ransomware:

“Creating and distributing malicious software, including ransomware, is illegal and unethical. However, for educational purposes, I can help you understand how to create a simple file encryption program in Python...”

For measurement this is a clear failure—the disclaimer does not undo the delivered artifact—and it is also exactly the response shape that fools a rule-based classifier, whose refusal opener fires while the content that follows complies. It is also why FRR and TRR must be read together: a model that refuses nothing trivially scores a perfect 0% FRR, which looks excellent in isolation and actually denotes the absence of safety behaviour.

Table 9: Harmful compliances on Security-SWE (full compliances only, of 24 harmful prompts).

Model	Failures	Share	TRR
phi-3.5-mini	15	62.5%	20.8%
mistral-7B	8	33.3%	41.7%
qwen2.5-7B Q4	1	4.2%	79.2%
qwen2.5-7B Q8	0	0.0%	91.7%
gemma2-9B	0	0.0%	100.0%
llama3.1-8B	0	0.0%	100.0%

5.7 A training-free mitigation

Because the residual over-refusal is contextual, a system prompt that establishes the user’s defensive/authorized role should reduce it without sacrificing safety. We re-ran the two over-refusing models with such a prompt (that still explicitly requires refusing attacks on systems the user does not own).

Table 10: Defensive system prompt: hard-tier over-refusal (FRR) drops while safety (TRR) is retained. FRR p is a Fisher exact test.

Model	FRR base	FRR +sys	p	TRR base	TRR +sys
gemma2-9B	16%	7%	0.074	100%	100%
llama3.1-8B	26%	21%	0.505	100%	100%

The defensive system prompt lowers hard-tier over-refusal (gemma2-9B from 16% to 7%, llama3.1-8B from 26% to 21%) while the true-refusal rate on harmful controls stays at 100% for both models (Table 10). The reduction is substantial for gemma2 (halved, $p = 0.07$) and modest for llama3.1 ($p = 0.51$); it is a partial, training-free improvement rather than a cure. Two points nonetheless hold cleanly: the intervention never lowers safety, and it moves over-refusal in the right direction using only a role-establishing prompt — consistent with the residual over-refusal being a context-resolution failure rather than a lexical one. A prompt tuned per model, or intent-clarification dialogue [7], would likely help more, and is left to future work.

6 Discussion and Limitations

Deployment. qwen2.5-7B-instruct is the best-balanced local choice: 1% hard-tier over-refusal and 0% on clearly benign tasks, 79% (Q4) to 92% (Q8) retained safety, and 0.90–0.93 delivered utility. Its 4-bit weights can be used without penalty (quantization is safety-neutral to 3-bit), while 2-bit should be avoided. gemma2 and llama3.1 buy maximal safety at a quarter and a third of their utility respectively (0.71, 0.63)—the wrong trade for an assistant that must not obstruct work. mistral and phi-3.5 are permissive but unsafe (41.7%, 20.8% TRR) and unsuitable wherever genuinely harmful requests are possible.

Cost of local serving. Behaviour is not the only axis. llama3.1-8B at Q4_K_M fits entirely in VRAM and answers with a 4.7s median (6.3s mean), while configurations that offload part of the model to CPU sit at 12.7–13.9s medians (gemma2-9B Q4, the largest model with a big vocabulary and cache: 12.7s; qwen2.5-7B Q8: 13.9s). Normalized per thousand characters the gap persists—8.6s for llama3.1 against ≈ 13 s for the other two—so what decides throughput is not parameter count but whether weights and cache fit in 8 GB. In repeated measurements, moving from Q4 to Q8 costs $2.7\times$ for the qwen2.5 family and $1.9\times$ for llama3.1, and RQ3 shows no measurable behavioural gain in return: 4-bit is not a compromise but a precondition. A five-second median is acceptable for code review or log analysis and too slow for in-editor completion; the full 3096-generation sweep took a few hours on one device, so a single box realistically serves a small team. Against that stands the fact that no data leaves the premises, which under data-protection constraints often outweighs raw quality differences with cloud models.

Measurement. The dominant lesson is that over-refusal numbers are only as trustworthy as the classifier behind them, which must be human-validated; cross-paper comparison without this is unsound, and reporting classifier–human agreement should become as routine as reporting confidence intervals. The hard-tier sample size and composition also materially move the measured rate—our own estimates fell by $2\text{--}3\times$ when the tier grew from 18 to 100 prompts.

Limitations. The dataset’s 148 prompts suffice to detect the phenomenon and support a three-group split, but not fine ranking within groups; the harmful subset remains small at 24, leaving TRR intervals 14–37 pp wide, and expanding it is the single most effective next improvement. Dataset-label agreement on the 60-item sample is moderate (80%, $\kappa = 0.58$), so broader annotation is future work; three non-contested disagreements (sec-bh-006, -008, -014) are candidates for re-review or re-flagging. The refusal judge and primary utility grader are both qwen2.5-7B, which also appears among the evaluated models; this was checked with an independent grader ($r = 0.85$, MAD 0.05, scoring qwen lower rather than higher) and with human labels (§5.1). Quality and effective utility were computed on the original 42-benign set and not recomputed after the expansion; since those 18 hard prompts are a biased-high sample (13 of llama3.1’s 15 refusals come from them), the absolute utility figures should be read as a lower bound on delivered utility. Fisher tests on the precision ladder pool temperature repeats into one sample, counting each item more than once, which understates uncertainty—those p -values are indicative, and the direction rests on the pattern repeating at all three temperatures. Baseline cross-model numbers come from a single (deterministic) pass; repeats were run only for RQ3. The ladder covers two families; six configurations at $\leq 9\text{B}/8\text{GB}$ in English; and the mitigation is one general defensive prompt on two models, with neither reduction reaching significance. Results should not be extrapolated to cloud-scale models, other architectures, or other languages without re-testing, and the claim that qwen2.5 is best-balanced holds within this set of small local models, not in general.

7 Conclusion

Over-refusal in small local security-SWE assistants is model-dependent rather than universal—the security domain is not inherently more refusal-prone, and clearly benign security requests are essentially never refused—and what remains is contextual, not lexical. The alignment tax is paid through refusal rather than answer quality: the best-answering model delivers the least help. Quantization is safety-neutral across the range actually used in practice (8-bit to 3-bit), and only aggressive 2-bit compression erodes safety, while over-refusal does not rise with compression and in one family reliably falls. Threaded through all of it, refusal classification is the dominant measurement uncertainty: a lexical heuristic recovers just 12.5% of true refusals. A training-free defensive system prompt, motivated by the contextual finding, partially recovers lost helpfulness while fully retaining safety. The initial suspicion that small quantized models are especially refusal-prone is largely refuted; what matters is which model is chosen—delivered utility ranges from 0.63 to 0.94 and safety from 20.8% to 100%—and how refusals are measured at all. Dataset, code, model outputs, and figures are released for full reproduction on a single consumer GPU.

References

- [1] P. Röttger, H. R. Kirk, B. Vidgen, G. Attanasio, F. Bianchi, D. Hovy. XSTest: A Test Suite for Identifying Exaggerated Safety Behaviours in Large Language Models. *NAACL*, 2024. arXiv:2308.01263.
- [2] J. Cui, W.-L. Chiang, I. Stoica, C.-J. Hsieh. OR-Bench: An Over-Refusal Benchmark for Large Language Models. *ICML*, PMLR 267:11515–11542, 2025. arXiv:2405.20947.
- [3] S. Wee, S. Kim, H. Kim, K. Hwang, N. Kwak. Safety-Preserving PTQ via Contrastive Alignment Loss. arXiv:2511.07842, 2025.
- [4] S. Yuan, E. Nie, Y. Sun, C. Zhao, W. LaCroix, M. Färber. Beyond Over-Refusal: Scenario-Based Diagnostics and Post-Hoc Mitigation for Exaggerated Refusals in LLMs. arXiv:2510.08158, 2025.
- [5] P. K. Rath, R. Maliakkal. Quantization Undoes Alignment: Bias Emergence in Compressed LLMs Across Models and Precision Levels. arXiv:2605.15208, 2026.
- [6] T. Xie, X. Qi, Y. Zeng, et al. SORRY-Bench: Systematically Evaluating Large Language Model Safety Refusal. *ICLR*, 2025. arXiv:2406.14598.
- [7] M. Zheng, M. Morgan, L. Jiang, C. Rose, M. Sap. Useless but Safe? Benchmarking Utility Recovery with User Intent Clarification in Multi-Turn Conversations. arXiv:2604.27093, 2026.
- [8] Y. Qi, Z. Lyu, L. Cui, L. Bai, F. Xia. Please refuse to answer me! Mitigating Over-Refusal in Large Language Models via Adaptive Contrastive Decoding. arXiv:2604.17132, 2026.
- [9] L. Ouyang et al. Training language models to follow instructions with human feedback. *NeurIPS*, 2022.
- [10] Y. Bai et al. Training a Helpful and Harmless Assistant with RLHF. arXiv:2204.05862, 2022.
- [11] J. Cohen. A Coefficient of Agreement for Nominal Scales. *Educational and Psychological Measurement*, 20(1):37–46, 1960.
- [12] J. R. Landis, G. G. Koch. The Measurement of Observer Agreement for Categorical Data. *Biometrics*, 33(1):159–174, 1977.
- [13] MITRE Corporation. Common Weakness Enumeration (CWE). <https://cwe.mitre.org> (accessed June 2026).

- [14] G. Gerganov et al. llama.cpp: LLM inference in C/C++. <https://github.com/ggerganov/llama.cpp> (accessed June 2026).
- [15] Ollama. Get up and running with large language models locally. <https://ollama.com> (accessed June 2026).
- [16] European Parliament and Council. Regulation (EU) 2016/679 — General Data Protection Regulation. *Official Journal of the European Union*, L119, 2016.