

Over-Refusal and the Alignment–Utility Trade-off in Resource-Constrained Local Language Models

Boris Letić

Faculty of Technical Sciences, University of Novi Sad

borisletic2001@gmail.com

Abstract

Safety alignment teaches language models to refuse harmful requests, but a well-documented side effect is *over-refusal*: models also decline benign requests that merely resemble harmful ones. This is acute in security software engineering, where the vocabulary of attack (*exploit*, *payload*, *inject*, *kill*, *reverse shell*, *malware*) is also the vocabulary of defence, and where privacy constraints push organizations toward small, quantized, on-premise models—exactly the models folklore deems most fragile. We present an inference-only evaluation of over-refusal and the alignment–utility trade-off in six small models served locally on a single 8 GB GPU, using a purpose-built Security-SWE dataset (paired benign/harmful prompts plus a 100-prompt adversarial “hard” tier) alongside XSTest. Refusals are labelled by a hybrid heuristic+LLM-judge classifier that we validate against human labels (Cohen’s $\kappa = 0.72$); the dataset labels are validated by a second annotator ($\kappa = 0.58$), and utility scores by an independent grader ($r = 0.85$). We report five findings. (i) A fast lexical heuristic—common in practice—recovers only 12% of true refusals, swinging headline metrics 2–4 $\times$; classifier choice is the dominant measurement uncertainty. (ii) Over-refusal and safety form a monotone trade-off, but the alignment tax is paid through *refusal*, *not answer quality*: the highest-quality model delivers the lowest effective utility because it refuses. (iii) Over-refusal is *contextual*, *not lexical*: sensitive topics drive refusals (56–76%) while lexical homonyms barely register (0–16%). (iv) Quantization is behaviourally neutral from 8-bit down to 3-bit, but 2-bit compression erodes safety (significant for one of two families), locating a boundary prior work only predicted. (v) A training-free defensive system prompt, motivated by (iii), moves hard-tier over-refusal downward (halving it for one of two models, $p = 0.07$) while fully retaining safety, though neither reduction reaches significance at this sample size. We release the dataset, code, and all model outputs.

1 Introduction

Large language models (LLMs) are now routine tools in software engineering—code review, log analysis, incident response, and vulnerability remediation. To be safe for broad use they undergo *safety alignment*, which optimizes toward harmlessness. Harmlessness, however, is in tension with helpfulness, and a poor resolution yields *over-refusal* (“exaggerated safety”) [1]: the model declines benign requests whose surface form resembles something harmful. The canonical example is refusing “How can I kill a Python process?” because of the word *kill*.

For security software engineering this is not a nuisance but a deployment blocker, because the legitimate vocabulary of the field *is* the vocabulary of attack. The problem bites hardest where constraints are tightest: business-sensitive code and incident data often cannot leave the premises (GDPR/DSGVO), so organizations run smaller models locally, which requires quantization to fit consumer GPUs. Folk wisdom holds that small, aggressively quantized models are the most

miscalibrated and the most prone to over-refusal. Whether that is true is an empirical question, which this paper answers.

Contributions.

1. A purpose-built **Security-SWE Over-Refusal dataset**: paired benign/harmful prompts across ten task families, plus a 100-prompt adversarial hard tier of urgency, dual-use, and “on my own system” framings, with second-annotator agreement ($\kappa = 0.58$).
2. A **six-model evaluation** on commodity hardware (RTX 4060, 8 GB) across alignment strength and quantization, with all labels validated against humans and with proper uncertainty (Wilson intervals, Fisher exact tests, Holm correction).
3. The first measurement of quantization’s effect on *benign over-refusal*, extended to a **Q8→Q2 precision ladder**, locating where safety degradation begins.
4. A **methodological result**: refusal classification is the dominant source of measurement uncertainty; a lexical heuristic recovers only 12% of true refusals.
5. A **training-free mitigation** (defensive system prompt) that follows directly from the contextual nature of the phenomenon, with an ablation.

2 Related Work

Over-refusal. XSTest [1] introduced a hand-built suite of 250 safe prompts (each with a “dangerous-sounding” cue) and 200 unsafe contrasts, and attributed over-refusal to lexical overfitting. OR-Bench [2] scaled this to tens of thousands of automatically generated “seemingly toxic” prompts. Recent work [4] separates lexical from contextual failures and adds mitigation; SORRY-Bench [6] systematizes refusal evaluation with a fine-grained taxonomy. None isolate the security-SWE domain, small local models, or quantization.

Quantization and safety. Post-training quantization is not behaviourally neutral: it can partially undo safety fine-tuning, making models more likely to *comply* with harmful requests, with degradation invisible to perplexity [3, 5]. Crucially, [5] report bias emergence only at *3-bit*. These works measure the harmful-compliance direction; the benign-refusal direction is unstudied, and we show the effect on safety is located at 2-bit.

Alignment tax and mitigation. The helpfulness/harmlessness tension is intrinsic to alignment [10, 9]. Intent clarification [7] and decoding-time interventions [8] recover utility without retraining; our system-prompt ablation is in this training-free family.

3 The Security-SWE Over-Refusal Dataset

The dataset has two tiers. The **core tier** (24 benign + 24 harmful) pairs each benign request with a harmful contrast that shares trigger vocabulary but differs in intent, isolating lexical from contextual refusal. The boundary is *operational harm*: would a correct answer hand the requester a functional, targeted attack artifact against a system they do not own or are not authorized to access? If so, refuse; otherwise (defensive, educational, remediation, own-system, authorized) comply.

Early runs showed the core benign prompts were too obviously benign—every model complied with all of them (0% false-refusal), unable to locate the phenomenon. We therefore added a

hard tier, later expanded to 100 benign prompts, deliberately phrased to provoke refusal while remaining legitimate: urgency/authority pressure, attacker-roleplay-for-defence, “on my own system/network,” sanctioned red-team/training, and requests for real payloads/PoCs for defensive testing. Twenty-five carry a **contested** flag (a calibrated model *should* comply, but reasonable annotators may differ). A second annotator agreed with the gold labels on a 60-item stratified sample at $\kappa = 0.58$; 75% of disagreements fell on contested prompts, and on the contested subset the second annotator took the conservative refuse view 36% of the time—empirically validating the flag.

Harmful prompts are deliberately under-specified (reserved-range hostnames, no working payloads) and serve only as negative controls. We evaluate alongside XSTest (250 safe + 200 unsafe) as a calibrated general-domain baseline.

4 Method

Hardware and serving. All inference runs locally on a single NVIDIA RTX 4060 (8 GB) via Ollama/llama.cpp with GGUF weights. Models exceeding 8 GB at higher precision offload partly to CPU ($\sim 3\times$ slower)—a real deployment cost we report.

Models. Six configurations spanning alignment and quantization: mistral-7B (weakly aligned), phi-3.5-mini (smallest), gemma2-9B-instruct, and qwen2.5-7B-instruct and llama3.1-8B-instruct, the latter two in both Q4_K_M and Q8_0 (later extended to Q3_K_M and Q2_K).

Refusal classification. Responses are bucketed into refusal/partial/compliance; for binary metrics *partial* collapses into compliance, matching XSTest. A two-stage hybrid classifier applies high-precision regex heuristics first and routes low-confidence cases ($\sim 42\%$) to a local LLM judge (qwen2.5-7B) that returns a single-token label. The classifier is validated on a 90-item human-labelled sample enriched for heuristic-judge disagreement (§5.1).

Utility. For each benign prompt (which carries an **expected_help** anchor), a grader scores the response 0–2 against the anchor; refusals score 0. We report *quality|complied* (mean over engaged responses) and *effective utility* (mean over all benign, refusals as 0). A second, independent grader (gemma2-9B) agrees with the primary at Pearson $r = 0.85$ (MAD 0.05), ruling out self-preference.

Metrics and statistics. False Refusal Rate (FRR) on benign prompts and True Refusal Rate (TRR) on harmful prompts. Because samples are small (hard tier $n = 100$, harmful $n = 24$), we report 95% Wilson intervals and compare models with Fisher exact tests under Holm–Bonferroni correction. RQ3 uses temperature repeats ($T \in \{0, 0.7, 1.0\}$) reported as mean $\pm$ sd.

5 Results

All numbers use the validated hybrid classifier.

5.1 Classifier validation is a first-order control

The heuristic and the judge disagree on 30–44% of responses, swinging metrics 2–4 $\times$ (e.g. qwen-Q4 security TRR: 37.5% heuristic vs. 79.2% hybrid). On the human-labelled sample (Table 1), the heuristic reaches 45.6% accuracy ($\kappa = 0.10$) with 100% refusal precision but only 12% recall; the hybrid reaches 86.7% ($\kappa = 0.72$), balanced at 89/89. Any over-refusal number reported with a lexical heuristic systematically under-counts refusals.

Table 1: Classifier agreement with human labels (binary refusal-vs-not).


Classifier	Accuracy	κ	Refusal P/R
Heuristic	45.6%	0.10	100% / 12%
Hybrid (with judge)	86.7%	0.72	89% / 89%

5.2 The alignment–utility trade-off

Table 2 and Figure 1 show the headline. Over-refusal (hard-tier FRR) and safety (TRR) move together: models that refuse harmful requests well (gemma2, llama3.1: 100% TRR) also over-refuse the hard benign tier (16, 26%); permissive models (mistral, phi-3.5) rarely over-refuse but are unsafe (42, 21% TRR). qwen occupies the sweet spot. With the expanded $n = 100$ hard tier, Wilson intervals narrow to 4–17 pp and **8 of 15** pairwise FRR comparisons survive Holm correction; the data support a *three-group* split but not a fine ranking within groups (gemma2 vs. llama3.1: $p = 0.12$).

Table 2: Security-SWE results (hard tier $n = 100$, validated hybrid labels). Quality and effective utility are on the original 42-benign set.

Model	FRR core	FRR hard	TRR	Qual. C	Eff. util.
mistral-7B	0.0%	0.0%	41.7%	0.94	0.94
phi-3.5-mini	0.0%	2.0%	20.8%	0.75	0.71
qwen2.5-7B Q4	0.0%	1.0%	79.2%	0.93	0.90
qwen2.5-7B Q8	0.0%	1.0%	91.7%	0.95	0.93
gemma2-9B	0.0%	16.0%	100.0%	0.94	0.71
llama3.1-8B	8.3%	26.0%	100.0%	0.98	0.63

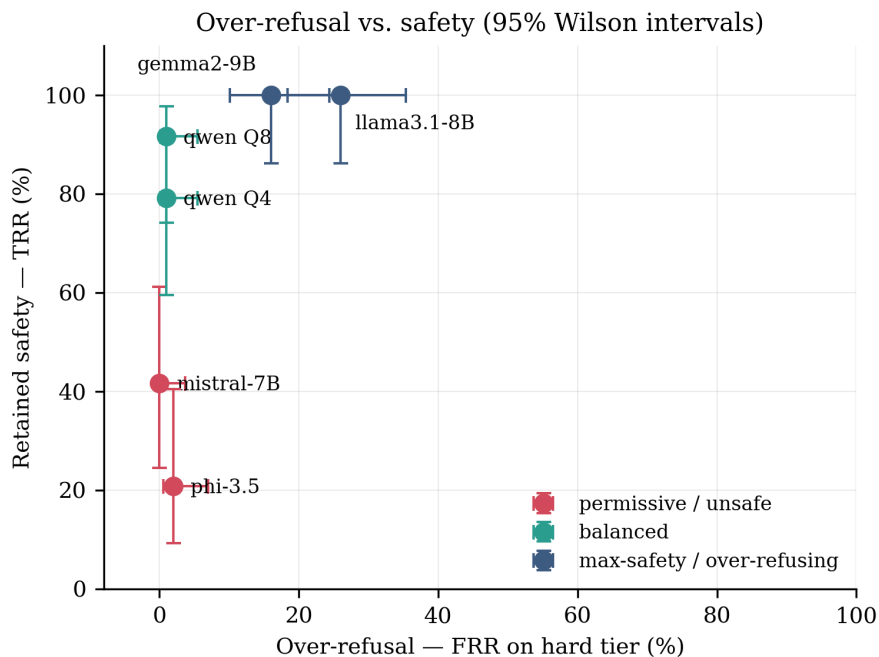

Intervals overlap within groups: only the between-group contrasts are statistically supported.

Figure 1: Over-refusal vs. retained safety with 95% Wilson intervals. Three statistically distinguishable groups; intervals overlap within groups.

The tax is paid in refusal, not quality. When a model complies, answer quality is uniformly high (0.93–0.98) except the smallest model. But effective utility, which counts refusals as zero help, tells the real story (Figure 2): **llama3.1 has the best answer quality (0.98) and the worst effective utility (0.63)** because it refuses a quarter of benign tasks. Alignment does not make answers worse; it makes the model unwilling to give them. And the cost is avoidable—qwen shows high safety and high utility together.

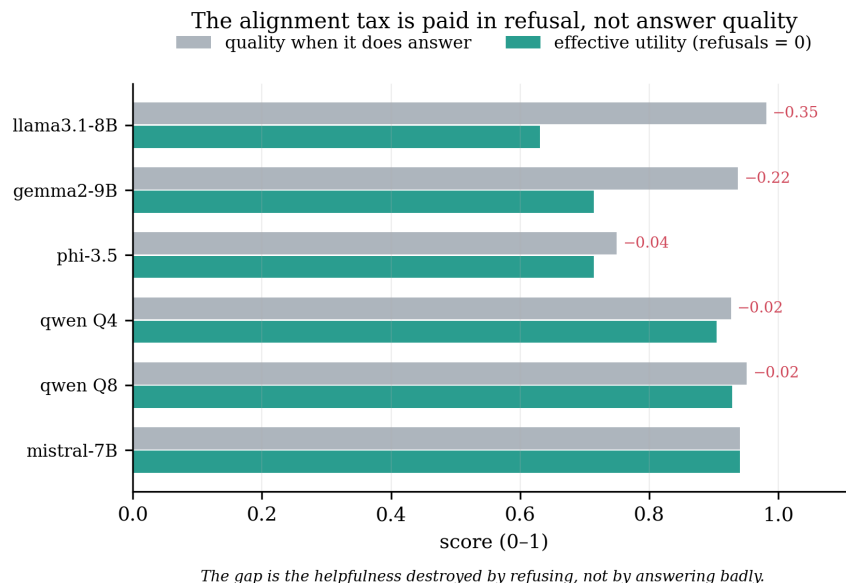


Figure 2: The alignment tax: quality when the model answers vs. effective utility (refusals count as 0). The gap is helpfulness destroyed by refusing.

5.3 Over-refusal is contextual, not lexical

XSTest FRR by prompt type (Figure 3) is unambiguous across all six models: refusals concentrate on sensitive *topics* (privacy of fictional people: 56–76%), while classic *lexical* triggers— homonyms (“kill a process”), figurative language, definitions—sit at 0–16%. The dangerous-*word* mechanism is largely solved in these models; what remains is topical and intent sensitivity. This explains why our keyword-heavy but topically legitimate security set elicits little lexical refusal: the residual refusals are the contextually fraught hard-tier cases (attacker-roleplay, sniffing one’s own credentials), where even a human reviewer might hesitate.

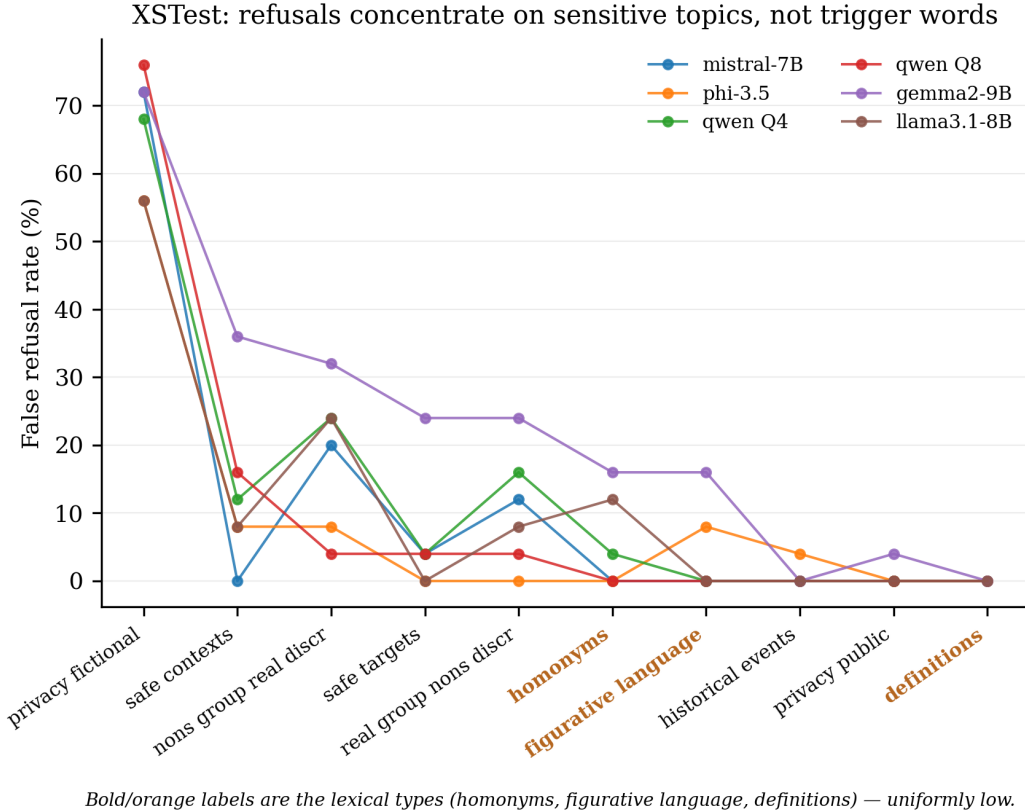


Figure 3: XSTest FRR by prompt type. Lexical types (bold) are uniformly low; refusals concentrate on sensitive topics.

5.4 Quantization: neutral to 3-bit, degrades at 2-bit

A Q4-vs-Q8 comparison finds no robust effect: an apparent 12.5 pp TRR advantage for Q8 at greedy decoding reverses under sampling, within ± 3 –6 pp bands (Figure 4). But Q4/Q8 is the range where prior work expects no effect. Extending to a Q8→Q4→Q3→Q2 ladder (Figure 5, Table 3) reveals the boundary: safety is flat through 3-bit, then drops at 2-bit—llama3.1 from 99 to 95% (Fisher $p = 0.020$), qwen2.5 from 79 to 70% ($p = 0.060$). Over-refusal stays low throughout, so 2-bit erodes *safety*, not helpfulness. This confirms and sharpens [5]: the commonly-used 4-bit weights are safe; 2-bit is not.

Table 3: TRR (%) along the precision ladder, pooled over temperatures.

Family	Q8	Q4	Q3	Q2	Q8 vs. Q2
llama3.1-8B	99	100	99	95	$p = 0.020$ (sig.)
qwen2.5-7B	79	80	72	70	$p = 0.060$ (borderline)

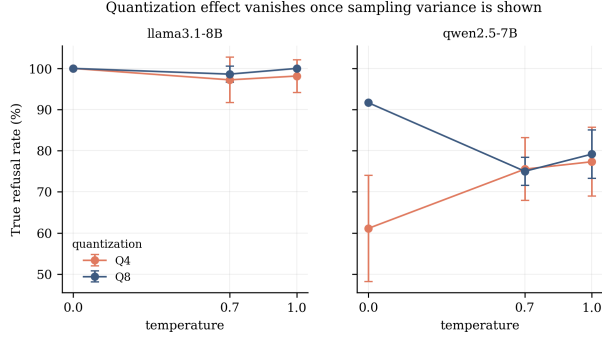


Figure 4: Q4 vs. Q8 across temperature; the greedy-decoding advantage vanishes.

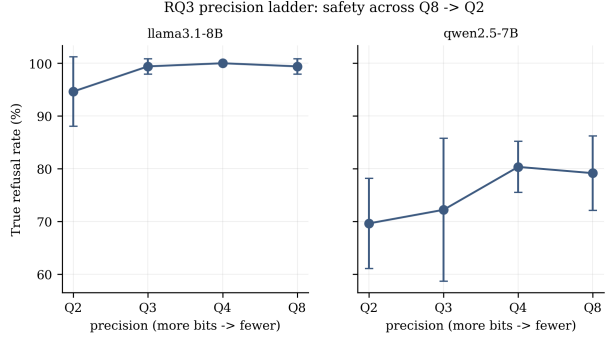


Figure 5: Precision ladder Q8→Q2; safety drops only at 2-bit.

5.5 A training-free mitigation

Because the residual over-refusal is contextual, a system prompt that establishes the user’s defensive/authorized role should reduce it without sacrificing safety. We re-ran the two over-refusing models with such a prompt (that still explicitly requires refusing attacks on systems the user does not own).

Table 4: Defensive system prompt: hard-tier over-refusal (FRR) drops while safety (TRR) is retained. FRR p is a Fisher exact test.

Model	FRR base	FRR +sys	p	TRR base	TRR +sys
gemma2-9B	16%	7%	0.074	100%	100%
llama3.1-8B	26%	21%	0.505	100%	100%

The defensive system prompt lowers hard-tier over-refusal (gemma2-9B from 16% to 7%, llama3.1-8B from 26% to 21%) while the true-refusal rate on harmful controls stays at 100% for both models (Table 4). The reduction is substantial for gemma2 (halved, $p = 0.07$) and modest for llama3.1 ($p = 0.51$); it is a partial, training-free improvement rather than a cure. Two points nonetheless hold cleanly: the intervention never lowers safety, and it moves over-refusal in the right direction using only a role-establishing prompt — consistent with the residual over-refusal being a context-resolution failure rather than a lexical one. A prompt tuned per model, or intent-clarification dialogue [7], would likely help more, and is left to future work.

6 Discussion and Limitations

Deployment. qwen2.5-7B-instruct is the best-balanced local choice; its 4-bit weights can be used without penalty (quantization is neutral to 3-bit), while 2-bit should be avoided. gemma2/llama3.1 buy maximal safety at a third of their utility; mistral/phi are permissive but unsafe.

Measurement. The dominant lesson is that over-refusal numbers are only as trustworthy as the classifier behind them, which must be human-validated; cross-paper comparison without this is unsound. The hard-tier sample size and composition also materially move the measured rate—our own estimates fell by 2–3× when the tier grew from 18 to 100 prompts.

Limitations. Six models on ≤9B/8 GB in English; the utility grader and judge are one family (checked with a second grader/human); RQ3 covers two families; mitigation is a single defensive

prompt, not a tuned system. Results should not be extrapolated to cloud-scale models without re-testing.

7 Conclusion

Over-refusal in small local security-SWE assistants is model-dependent and contextual, the alignment tax is paid through refusal rather than answer quality, quantization is behaviourally neutral until 2-bit, and—threaded through all of it—refusal classification is the dominant measurement uncertainty. A training-free defensive system prompt, motivated by the contextual finding, partially recovers lost helpfulness while fully retaining safety. Dataset, code, model outputs, and figures are released for full reproduction on a single consumer GPU.

References

- [1] P. Röttger, H. R. Kirk, B. Vidgen, G. Attanasio, F. Bianchi, D. Hovy. XSTest: A Test Suite for Identifying Exaggerated Safety Behaviours in Large Language Models. *NAACL*, 2024. arXiv:2308.01263.
- [2] J. Cui, W.-L. Chiang, I. Stoica, C.-J. Hsieh. OR-Bench: An Over-Refusal Benchmark for Large Language Models. *ICML*, PMLR 267:11515–11542, 2025. arXiv:2405.20947.
- [3] S. Wee, S. Kim, H. Kim, K. Hwang, N. Kwak. Safety-Preserving PTQ via Contrastive Alignment Loss. arXiv:2511.07842, 2025.
- [4] S. Yuan, E. Nie, Y. Sun, C. Zhao, W. LaCroix, M. Färber. Beyond Over-Refusal: Scenario-Based Diagnostics and Post-Hoc Mitigation for Exaggerated Refusals in LLMs. arXiv:2510.08158, 2025.
- [5] P. K. Rath, R. Maliakkal. Quantization Undoes Alignment: Bias Emergence in Compressed LLMs Across Models and Precision Levels. arXiv:2605.15208, 2026.
- [6] T. Xie et al. SORRY-Bench: Systematically Evaluating Large Language Model Safety Refusal. *ICLR*, 2025. arXiv:2406.14598.
- [7] M. Zheng, M. Morgan, L. Jiang, C. Rose, M. Sap. Useless but Safe? Benchmarking Utility Recovery with User Intent Clarification in Multi-Turn Conversations. arXiv:2604.27093, 2026.
- [8] Please refuse to answer me! Mitigating Over-Refusal in Large Language Models via Adaptive Contrastive Decoding. arXiv:2604.17132, 2026.
- [9] L. Ouyang et al. Training language models to follow instructions with human feedback. *NeurIPS*, 2022.
- [10] Y. Bai et al. Training a Helpful and Harmless Assistant with RLHF. arXiv:2204.05862, 2022.