

Inputs: composition S (never executed) configurations $\mathbf{x} = (x_1, \ldots, x_K)$, $x_i = \langle r_i, c_i, \kappa_i \rangle$ arrival process (λ, C_a^2) violation probability ε confidence γ

① Learning: one GP per service

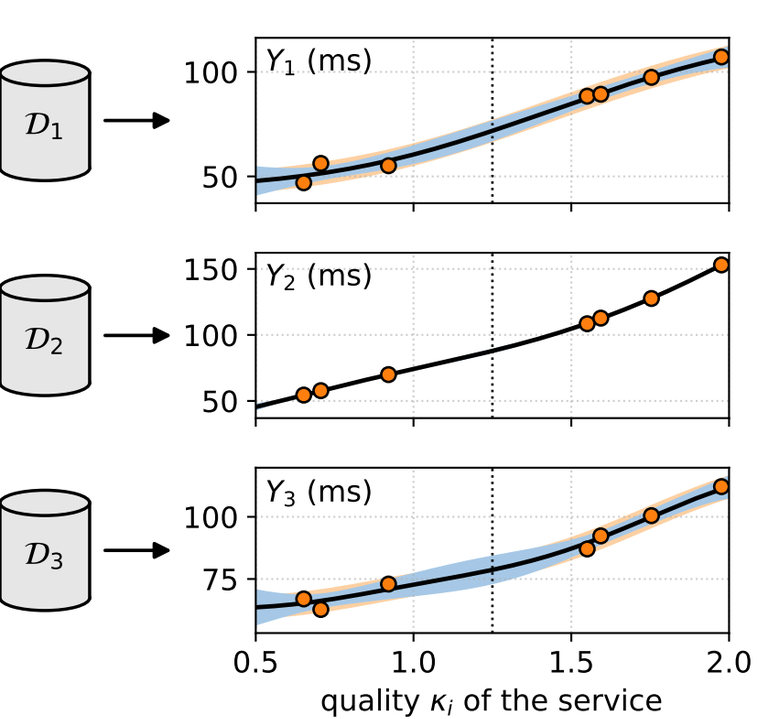

② Execution time and load

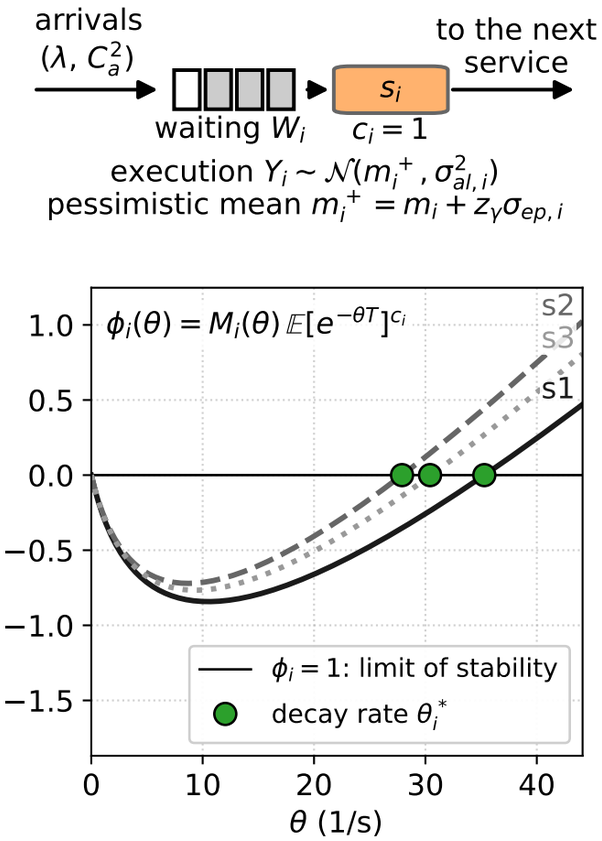

③ Composition into the PPG

