
Inputs: composition S (unseen) configurations **x** workload (arrival rate λ, variability C_a^2) violation probability ε confidence c


needs measurements: of each service alone or in other compositions, once


analytic: no run of the composition

① Learn: one model per service

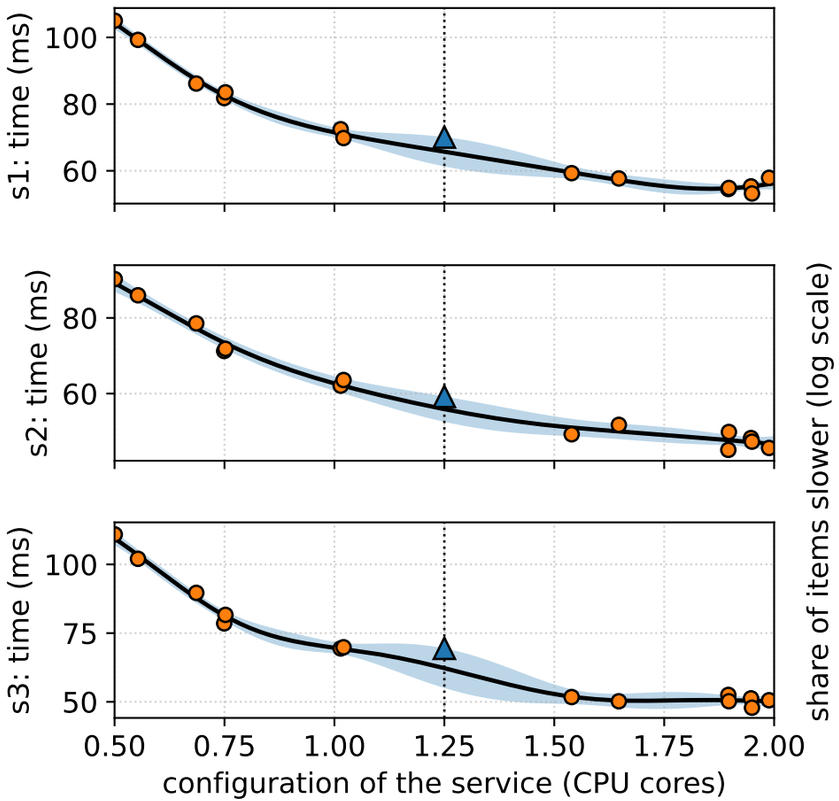


② Bound each service as a queue

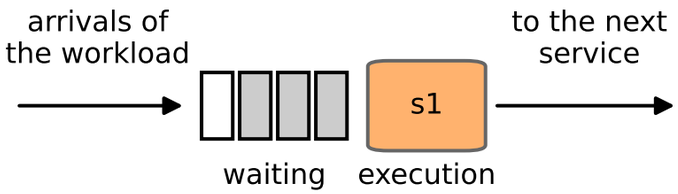


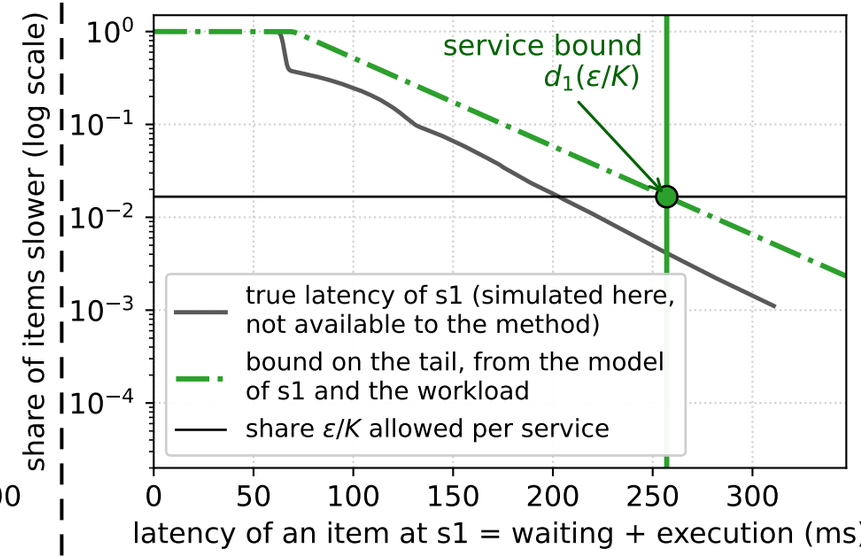

③ Compose the service bounds

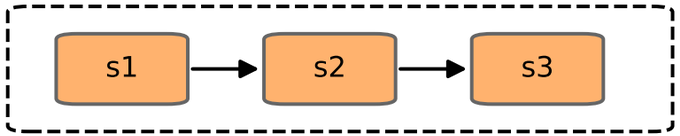

target pipeline: never executed

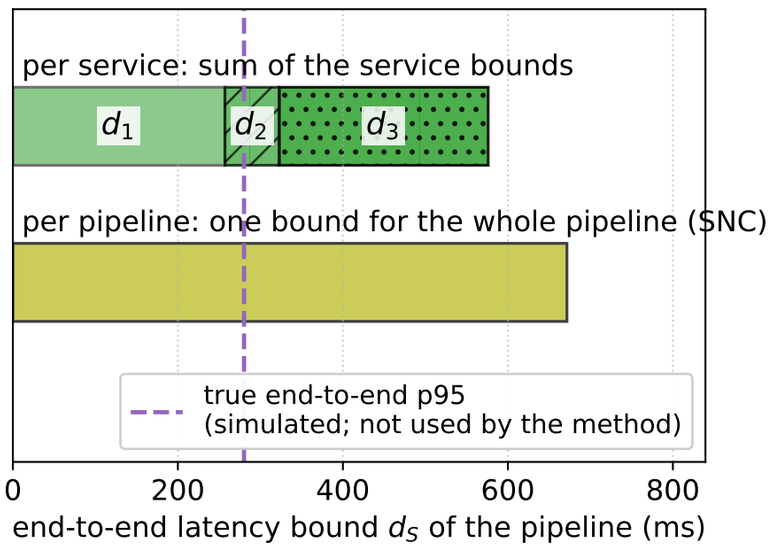

uncertainty of the model — predicted mean — observed execution times — pessimistic mean at the target

new candidate composition or configuration: only ② and ③ are repeated