

Inputs: composition S (never executed) configurations $\mathbf{x} = (x_1, \ldots, x_K)$, $x_i = \langle r_i, c_i, \kappa_i \rangle$ arrival process (λ, C_a^2) violation probability ε confidence γ

① Learning: one GP per service

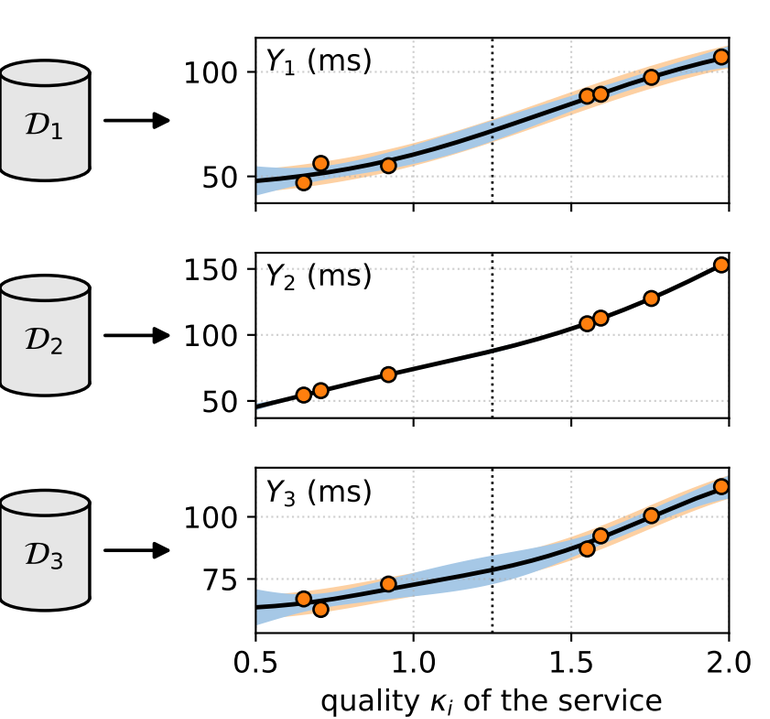


② Execution time and load

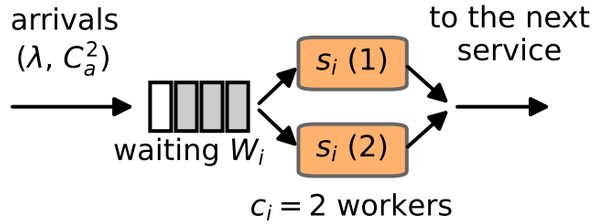


$c_i = 2$ workers

execution $Y_i \sim \mathcal{N}(m_i^+, \sigma_{al,i}^2)$

pessimistic mean $m_i^+ = m_i + z_\gamma \sigma_{ep,i}$

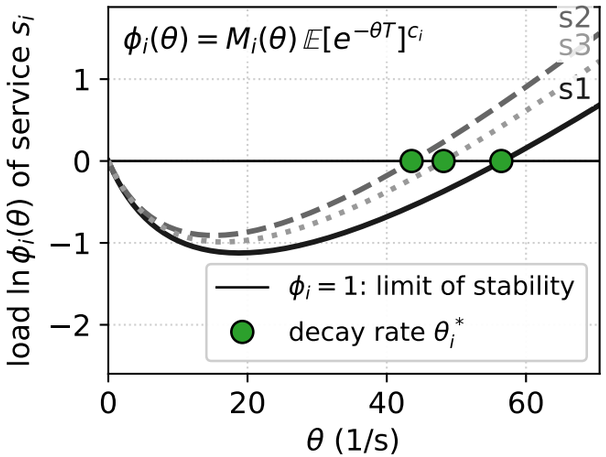

③ Composition into the PPG

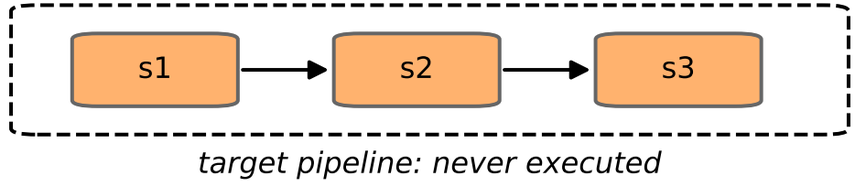

target pipeline: never executed

Node: $d_1(\varepsilon/K)$ of s1

