
Inputs: composition S (never executed) configurations $\mathbf{x} = (x_1, \ldots, x_K)$, $x_i = \langle r_i, c_i, \kappa_i \rangle$ arrival process (λ, C_a^2) violation probability ε confidence γ


needs data: execution times $\mathcal{D}_i$ of each service, alone or in other compositions


analytic, closed form: no run of the composition

① Learning: one GP per service

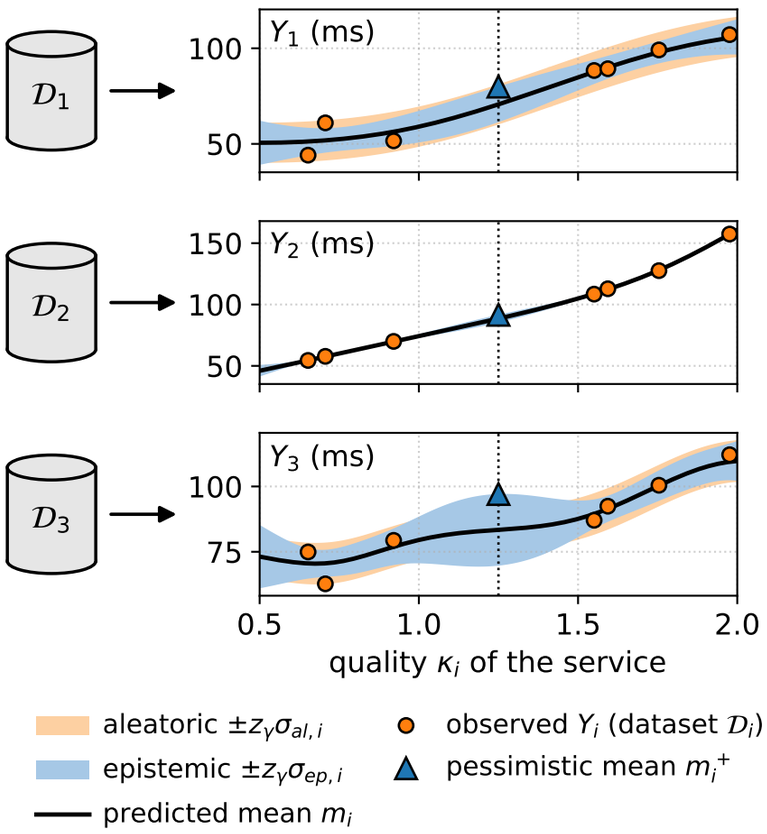


② Service bounds: each service as a queue

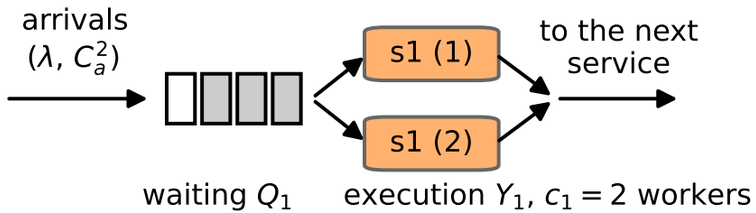

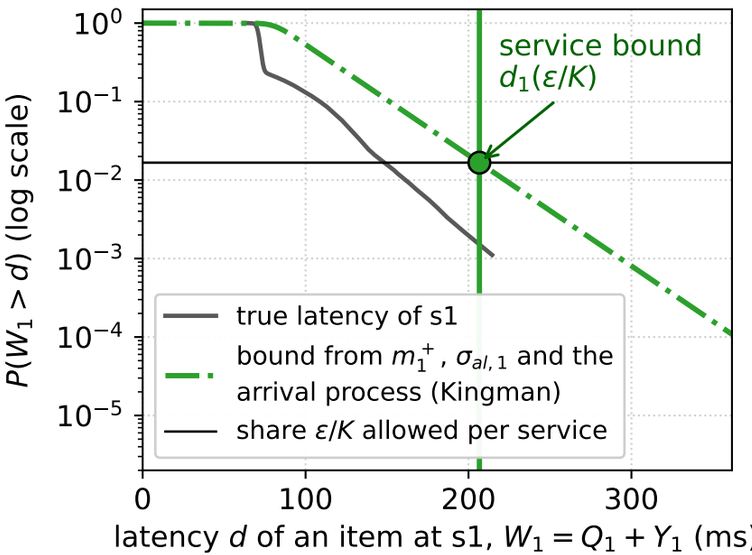

③ Composition into the PPG

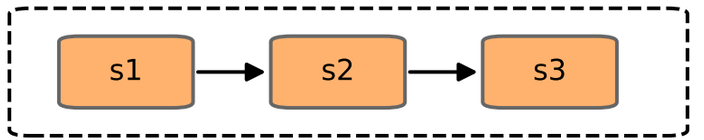

target pipeline: never executed

