

Ahsania Mission University of Science & Technology

Lab Report

Lab No: 07

Course Code: CSE 2202

Course Title: Computer Algorithm Sessional.

Submitted By:

MT.Sumaiya Ajmeri Borsha
ID: 1012320005101020
1st Batch, 2nd Year, 2nd Semester
Department of Computer science and Engineering,
Ahsania Mission University of Science & Technology

Submitted To:

Md. Fahim Faisal
Lecturer,
Department of Computer science and Engineering,
Ahsania Mission University of Science & Technology

Task No.: 01

Problem Statement: Convex Hull using Brute Force Algorithm.

Source Code:

```
#include <iostream>
#include <vector>
using namespace std;
struct Point
{
    int x, y;
};

int direction(Point a, Point b, Point c)
{
    return (b.x - a.x)*(c.y - a.y) - (b.y - a.y)*(c.x - a.x);
}

void convexHull(vector<Point>& points)
{
    int n = points.size();
    cout << "Convex Hull Edges:\n";
    for (int i = 0; i < n; i++)
    {
        for (int j = i + 1; j < n; j++)
        {
            int pos = 0, neg = 0;
            for (int k = 0; k < n; k++)
            {
                if (k == i || k == j)
                {
                    continue;
                }
                int d = direction(points[i], points[j], points[k]);
                if (d > 0)
                {
                    pos++;
                }
                else if (d < 0)
                {

```

```

        neg++;
    }
}
if (pos == 0 || neg == 0)
{
    cout << "(" << points[i].x << ", " << points[i].y << ") - (" << points[j].x << ", " <<
points[j].y << ")\\n";
}
}
}
}
int main()
{
    vector<Point> points = {{0, 3}, {2, 2}, {1, 1}, {2, 1}, {3, 0}, {0, 0}, {3, 3}};
    convexHull(points);
    return 0;
}

```

Output:

```

E:\2.2-CODE\FF-7-th-LAB\task  X  +  v
Convex Hull Edges:
(0,3) - (0,0)
(0,3) - (3,3)
(3,0) - (0,0)
(3,0) - (3,3)

Process returned 0 (0x0)    execution time : 0.083 s
Press any key to continue.

```

Task No.: 02

Problem Statement: Convex Hull using Graham's Scan Algorithm.

Source Code:

```
#include <iostream>
#include <vector>
#include <algorithm>
#include <stack>
using namespace std;
struct Point
{
    int x, y;
};
Point p0;
int orientation(Point p, Point q, Point r)
{
    int val = (q.y - p.y) * (r.x - q.x) - (q.x - p.x) * (r.y - q.y);
    if (val == 0) return 0;
    return (val > 0) ? 1 : 2;
}

int distSq(Point p1, Point p2)
{
    return (p1.x - p2.x)*(p1.x - p2.x) + (p1.y - p2.y)*(p1.y - p2.y);
}

bool compare(Point p1, Point p2)
{
    int o = orientation(p0, p1, p2);
    if (o == 0)
        return distSq(p0, p1) < distSq(p0, p2);
    return (o == 2);
}

void grahamScan(vector<Point>& points)
{
    int n = points.size();

    int ymin = points[0].y, minIndex = 0;
```

```

for (int i = 1; i < n; i++)
{
    if ((points[i].y < ymin) || (points[i].y == ymin && points[i].x < points[minIndex].x))
    {
        ymin = points[i].y;

        minIndex = i;
    }
}
swap(points[0], points[minIndex]);
p0 = points[0];
sort(points.begin() + 1, points.end(), compare);
stack<Point> hull;
hull.push(points[0]);
hull.push(points[1]);
hull.push(points[2]);
for (int i = 3; i < n; i++)
{
    while (hull.size() > 1)
    {
        Point top = hull.top();
        hull.pop();
        Point nextToTop = hull.top();
        if (orientation(nextToTop, top, points[i]) != 2)
            continue;
        else
        {
            hull.push(top);
            break;
        }
    }
    hull.push(points[i]);
}
cout << "Convex Hull Points (Graham's Scan):\n";
while (!hull.empty())
{
    Point p = hull.top();
    cout << "(" << p.x << ", " << p.y << ")\n";
    hull.pop();
}
}


```

```

int main()
{
    vector<Point> points = {{0, 3}, {1, 1}, {2, 2}, {4, 4}, {0, 0}, {1, 2}, {3, 1}, {3, 3}};
    grahamScan(points);
    return 0;
}

```

Output:

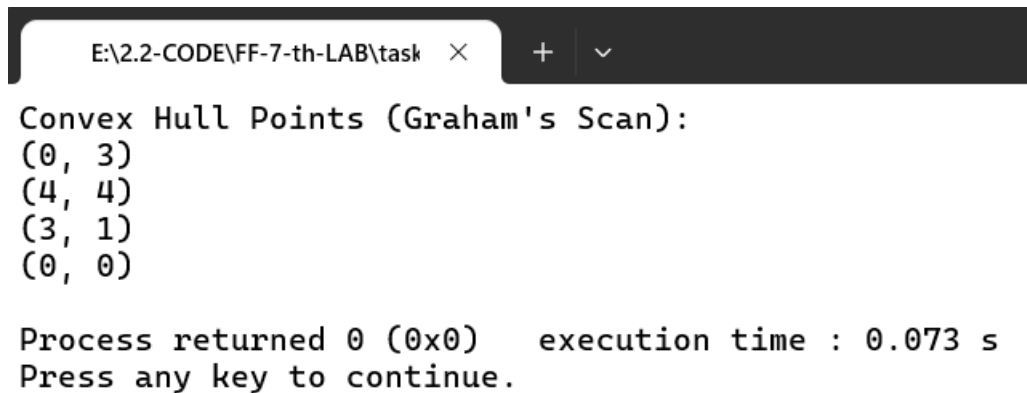

```

E:\2.2-CODE\FF-7-th-LAB\task  X  +  v
Convex Hull Points (Graham's Scan):
(0, 3)
(4, 4)
(3, 1)
(0, 0)

Process returned 0 (0x0)   execution time : 0.073 s
Press any key to continue.

```

Task No.: 03

Problem Statement: Convex Hull using QuickHull Algorithm

Source Code:

```

#include <iostream>
#include <vector>
#include <cmath>
using namespace std;
struct Point
{
    int x, y;
};
// Function to find distance of point C from line AB

```

```

int distance(Point A, Point B, Point C)
{
    return abs((C.y - A.y) * B.x - (C.x - A.x) * B.y + C.x * A.y - C.y * A.x);
}
// Determine the side of point P with respect to line AB
int findSide(Point A, Point B, Point P)
{
    int val = (P.y - A.y) * (B.x - A.x) - (B.y - A.y) * (P.x - A.x);
    if (val > 0) return 1;
    if (val < 0) return -1;
    return 0;
}
// Recursive QuickHull function
void quickHull(vector<Point>& points, Point A, Point B, int side, vector<Point>& hull)
{
    int index = -1;
    int max_dist = 0;
    for (int i = 0; i < points.size(); i++)
    {
        int temp = distance(A, B, points[i]);
        if (findSide(A, B, points[i]) == side && temp > max_dist)
        {
            index = i;

            max_dist = temp;
        }
    }
    if (index == -1)
    {
        hull.push_back(A);
        hull.push_back(B);
        return;
    }
    quickHull(points, points[index], A, -findSide(points[index], A, B), hull);
    quickHull(points, points[index], B, -findSide(points[index], B, A), hull);
}
// Driver function
void findConvexHull(vector<Point>& points)
{
    if (points.size() < 3)
    {

```

```

        cout << "Convex hull not possible\\n";
        return;
    }
    int min_x = 0, max_x = 0;
    for (int i = 1; i < points.size(); i++)
    {
        if (points[i].x < points[min_x].x) min_x = i;
        if (points[i].x > points[max_x].x) max_x = i;
    }
    vector<Point> hull;
    quickHull(points, points[min_x], points[max_x], 1, hull);
    quickHull(points, points[min_x], points[max_x], -1, hull);
    cout << "Convex Hull Points (QuickHull):" << "\\n";
    for (auto& p : hull)
    {
        cout << "(" << p.x << ", " << p.y << ")" << endl;
    }
}

int main()
{
    vector<Point> points = {{0, 3}, {1, 1}, {2, 2}, {4, 4}, {0, 0}, {1, 2}, {3, 1}, {3, 3}};
    findConvexHull(points);
    return 0;
}

```

Output:

```

E:\2.2-CODE\FF-7-th-LAB\task × + v
Convex Hull Points (QuickHull):
(0, 3)
(4, 4)
(0, 0)
(0, 3)
(3, 1)
(0, 0)
(3, 1)
(4, 4)

Process returned 0 (0x0)   execution time : 0.063 s
Press any key to continue.

```