
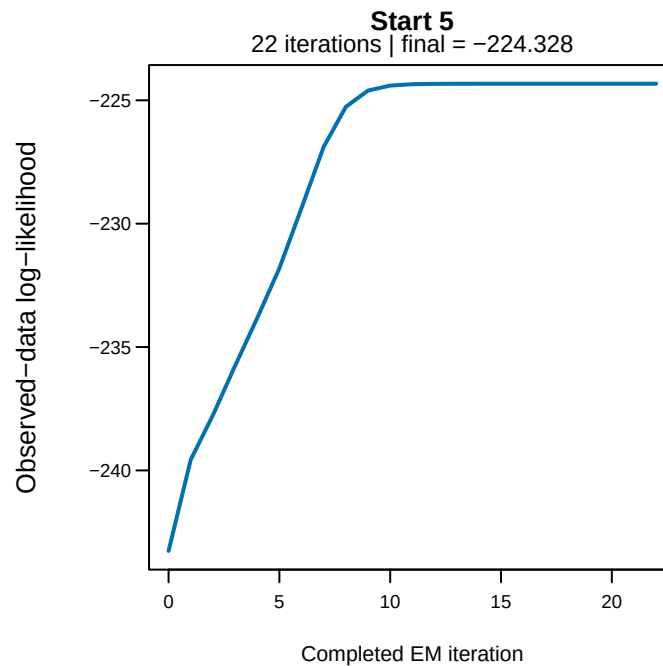
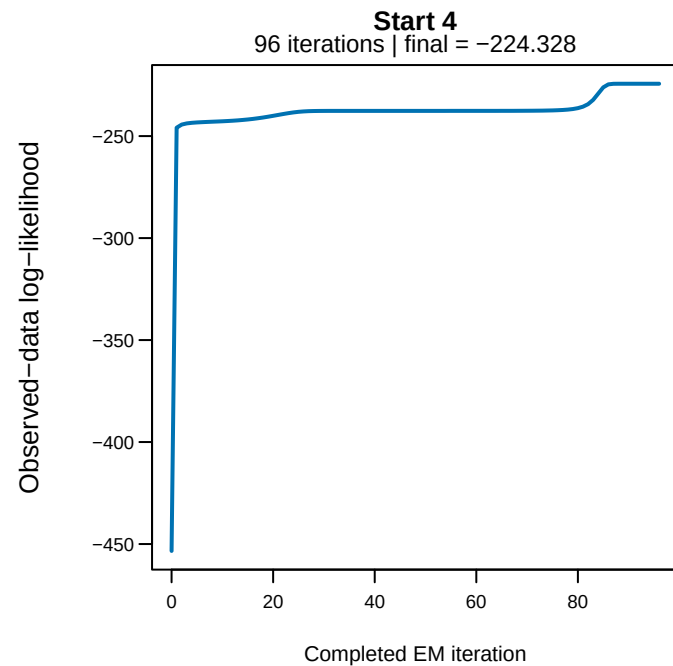
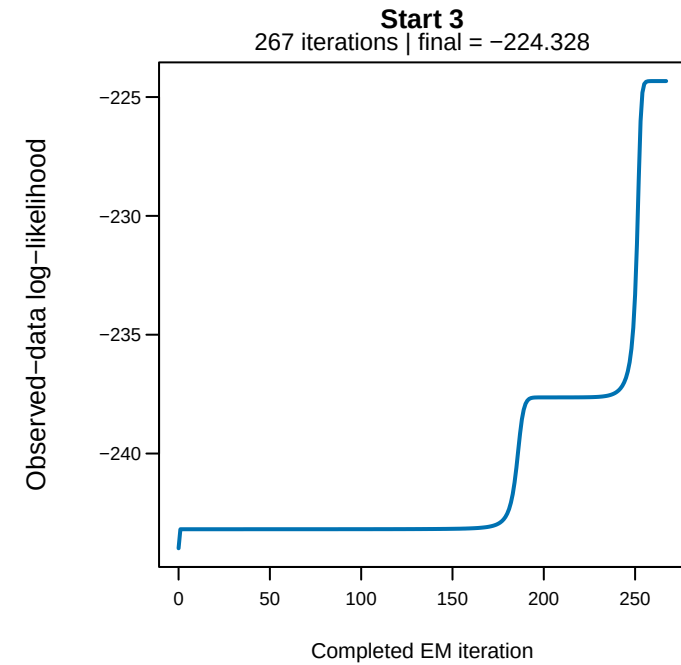
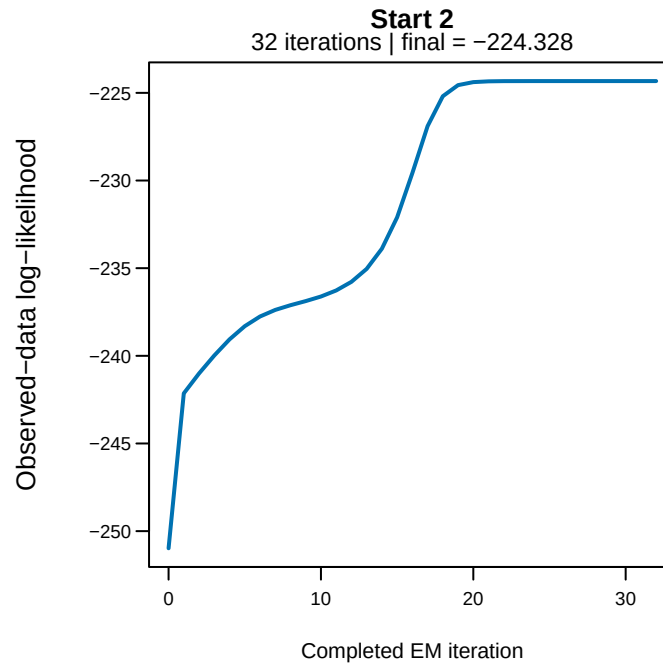


Lab 6: observed-data log-likelihood | $n = 100$

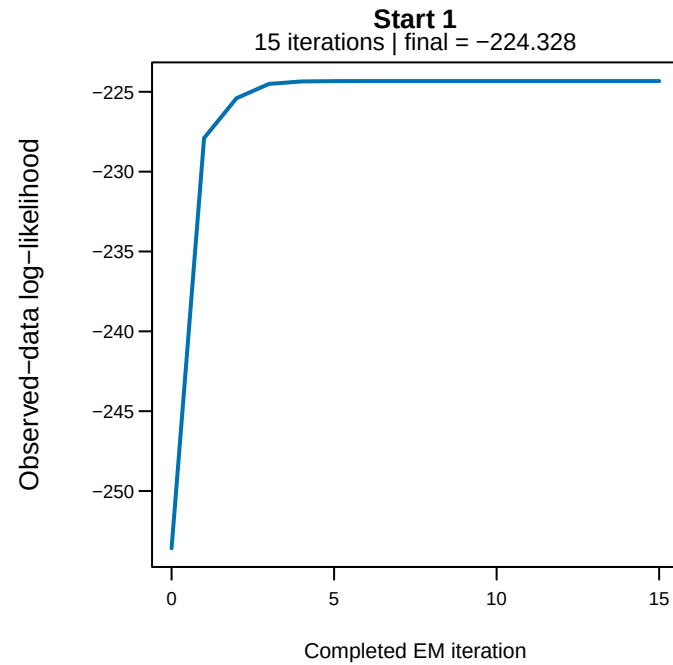

Reading the plots

Iteration 0 is the initialization.

Each panel uses its own axes.






All five fits use the same data.

Check every successive difference.

Numerical tolerance: $1e-8$.

Convergence does not prove optimality.

Lab 6: observed-data log-likelihood | n = 1000

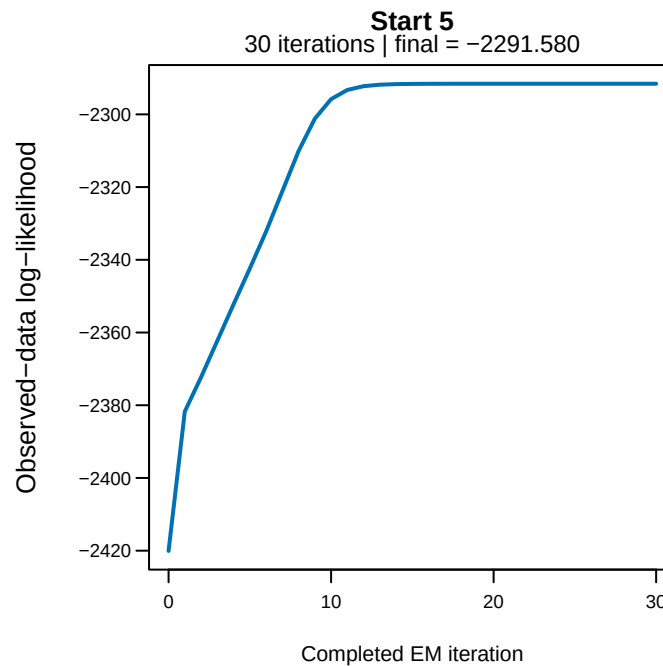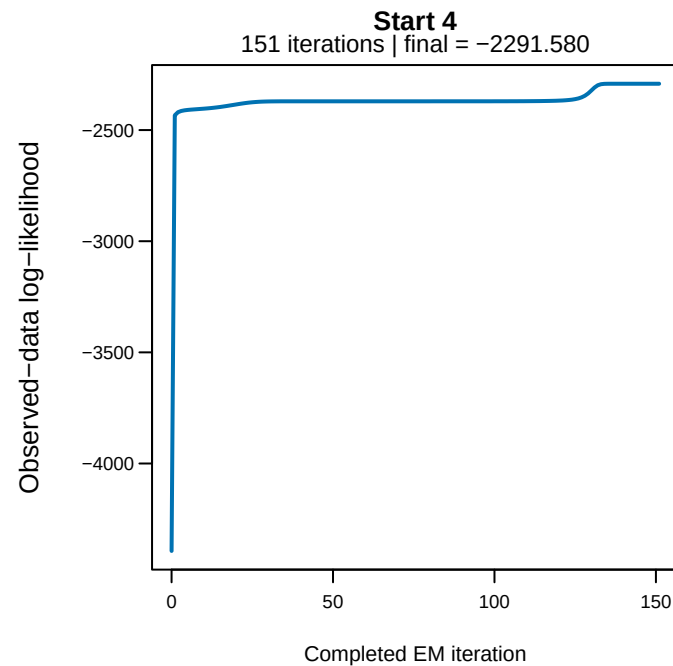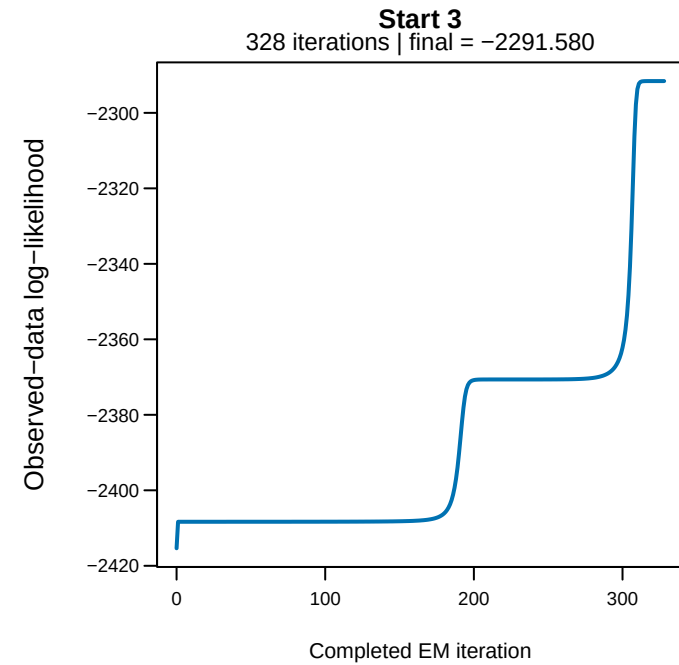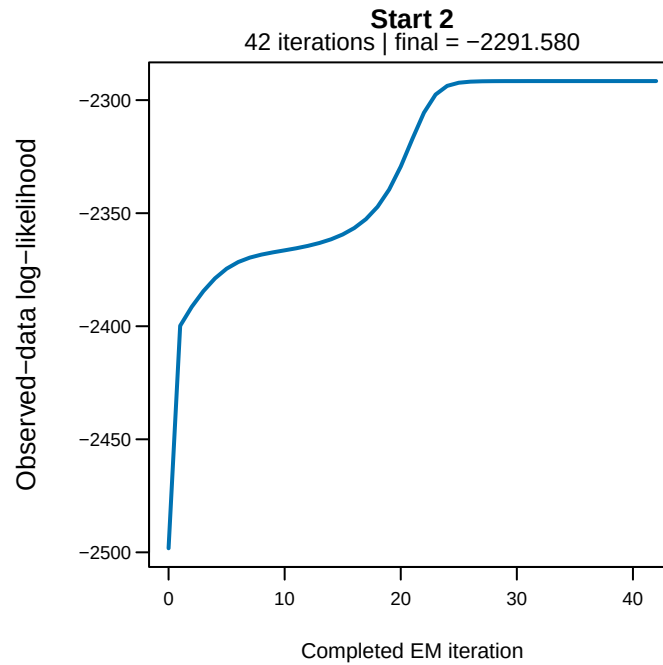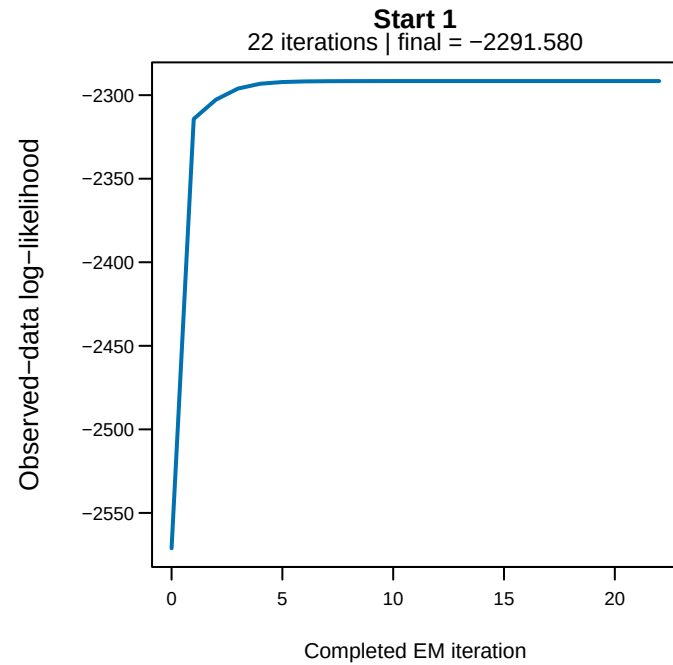

Reading the plots

Iteration 0 is the initialization.

Each panel uses its own axes.






All five fits use the same data.

Check every successive difference.

Numerical tolerance: $1e-8$.

Convergence does not prove optimality.

Lab 6: observed-data log-likelihood | n = 10000

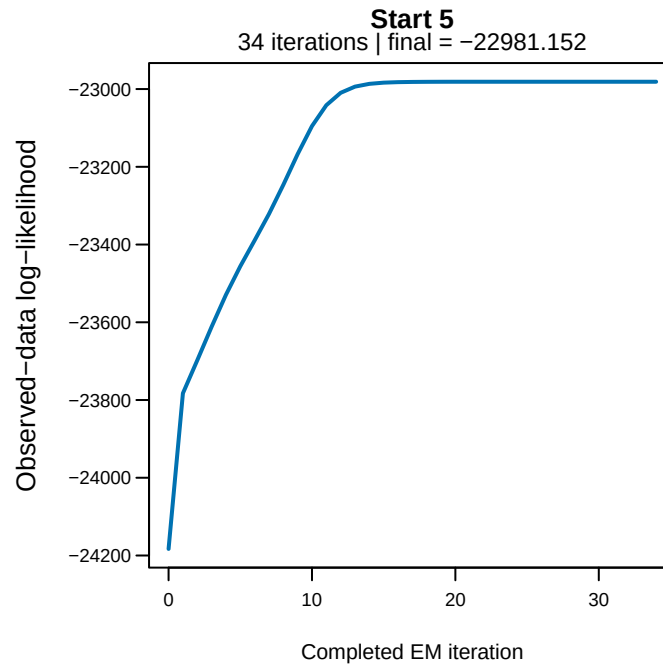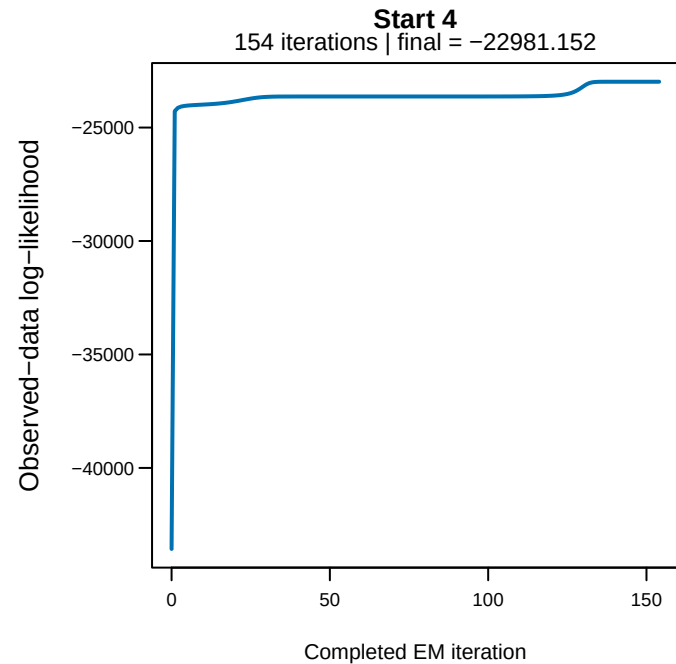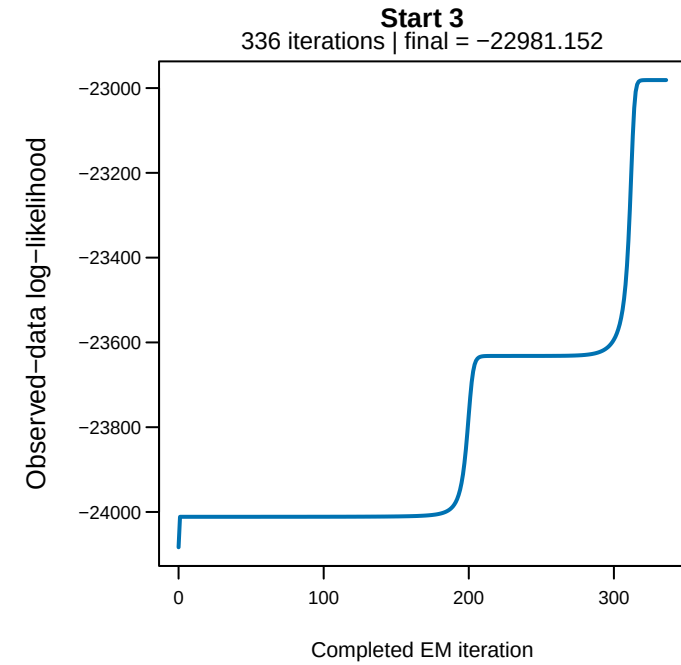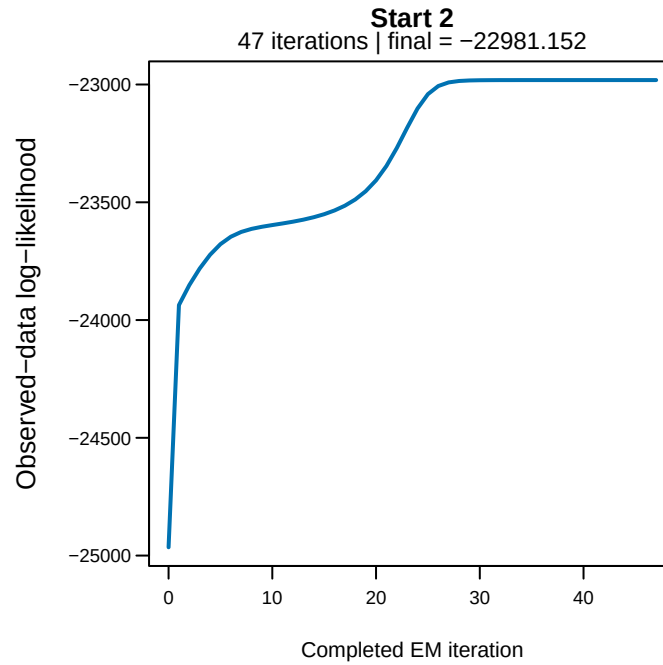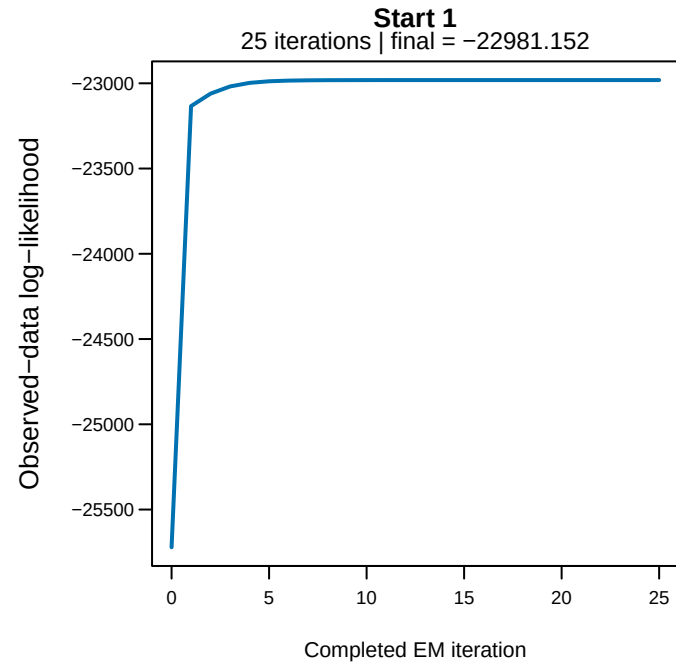

Reading the plots

Iteration 0 is the initialization.

Each panel uses its own axes.

All five fits use the same data.

Check every successive difference.

Numerical tolerance: $1e-8$.

Convergence does not prove optimality.