

# OGC API Hackathon 2019 Engineering Report

# Table of Contents

1. Subject .....	4
2. Executive Summary .....	5
2.1. Document contributor contact points .....	5
2.2. Foreword .....	6
3. References .....	7
4. Terms and definitions .....	8
4.1. Abbreviated terms .....	9
5. Overview .....	10
6. Introduction .....	11
6.1. Overview of the Challenge .....	12
6.2. Scenario .....	12
6.3. What was provided .....	15
6.3.1. Supporting Datasets .....	15
6.3.2. Supporting Services .....	15
6.3.3. Deployment Infrastructure .....	16
6.4. Hackathon Participants .....	16
7. Architecture .....	19
7.1. Service Implementations .....	20
7.1.1. pygeoapi .....	20
7.1.2. 52°North JavaPS .....	20
7.1.3. Esri .....	20
7.1.4. rasdaman .....	20
7.1.5. TBA .....	21
7.2. Client Implementations .....	21
7.2.1. OpenSphere OGC API Plugin .....	21
7.2.2. Hexagon LuciadLightspeed .....	21
7.2.3. Solenix WPS Demo Client .....	21
7.2.4. Esri OGC API-Tiles Demo Client .....	21
7.2.5. TBA .....	21
7.2.6. TBA .....	21
8. OGC API Specifications .....	22
8.1. OGC API - Common .....	22
8.1.1. Key Resources .....	22
8.2. OGC API - Features .....	22
8.2.1. Key Resources .....	23
8.3. OGC API - Processes .....	23
8.3.1. Key Resources .....	23
8.4. OGC API - Map Tiles .....	24

8.4.1. Key Resources .....	24
8.5. OGC API - Coverages .....	25
8.5.1. Key Resources .....	26
9. Results .....	27
9.1. OGC API - Processes .....	27
9.2. OGC API - Map Tiles .....	28
9.3. OGC API - Coverages .....	28
9.4. OGC API - Common .....	29
9.5. Technology Integration Experiments (TIE) .....	30
10. Key Findings .....	31
10.1. What occurred .....	31
10.1.1. Processes .....	31
10.1.2. Organization .....	31
10.1.3. Technology .....	32
10.1.4. Information .....	33
10.2. Experiences .....	35
10.3. Lessons learnt .....	35
10.4. What are the next steps? .....	35
Appendix A: Implementations of OGC APIs .....	36
A.1. 52°North GmbH .....	36
A.1.1. Motivation to Participate .....	36
A.1.2. Implemented Solution .....	36
A.1.3. Proposed Alternatives .....	36
A.1.4. Experiences with OGC API Specifications .....	37
A.1.5. Other Impressions & Recommendations .....	37
A.2. akouas .....	37
A.2.1. Motivation to Participate .....	37
A.2.2. Implemented Solution .....	37
A.2.3. Proposed Alternatives .....	37
A.2.4. Experiences with OGC API Specifications .....	37
A.2.5. Other Impressions & Recommendations .....	37
A.3. ARC .....	37
A.3.1. Motivation to Participate .....	37
A.3.2. Implemented Solution .....	37
A.3.3. Proposed Alternatives .....	37
A.3.4. Experiences with OGC API Specifications .....	38
A.3.5. Other Impressions & Recommendations .....	38
A.4. Arup .....	38
A.4.1. Motivation to Participate .....	38
A.4.2. Implemented Solution .....	38
A.4.3. Proposed Alternatives .....	38

A.4.4. Experiences with OGC API Specifications .....	38
A.4.5. Other Impressions & Recommendations .....	38
A.5. blockdore .....	38
A.5.1. Motivation to Participate .....	38
A.5.2. Implemented Solution.....	38
A.5.3. Proposed Alternatives.....	38
A.5.4. Experiences with OGC API Specifications .....	39
A.5.5. Other Impressions & Recommendations .....	39
A.6. British Antarctic Survey .....	39
A.6.1. Motivation to Participate .....	39
A.6.2. Implemented Solution.....	39
A.6.3. Proposed Alternatives.....	39
A.6.4. Experiences with OGC API Specifications .....	39
A.6.5. Other Impressions & Recommendations .....	39
A.7. Cicy .....	39
A.7.1. Motivation to Participate .....	39
A.7.2. Implemented Solution.....	39
A.7.3. Proposed Alternatives.....	39
A.7.4. Experiences with OGC API Specifications .....	40
A.7.5. Other Impressions & Recommendations .....	40
A.8. CREAF .....	40
A.8.1. Motivation to Participate .....	40
A.8.2. Implemented Solution.....	40
A.8.3. Proposed Alternatives.....	40
A.8.4. Experiences with OGC API Specifications .....	40
A.8.5. Other Impressions & Recommendations .....	40
A.9. CubeWerx Inc. .....	40
A.9.1. Motivation to Participate .....	40
A.9.2. Implemented Solution.....	40
A.9.3. Proposed Alternatives.....	40
A.9.4. Experiences with OGC API Specifications .....	41
A.9.5. Other Impressions & Recommendations .....	41
A.10. Deimos Space UK .....	41
A.10.1. Motivation to Participate .....	41
A.10.2. Implemented Solution.....	41
A.10.3. Proposed Alternatives.....	41
A.10.4. Experiences with OGC API Specifications .....	41
A.10.5. Other Impressions & Recommendations .....	41
A.11. District Government Cologne - Geobasis NRW.....	41
A.11.1. Motivation to Participate .....	41
A.11.2. Implemented Solution.....	41

A.11.3. Proposed Alternatives.....	41
A.11.4. Experiences with OGC API Specifications .....	42
A.11.5. Other Impressions & Recommendations .....	42
<b>A.12. Dstl .....</b>	<b>42</b>
A.12.1. Motivation to Participate .....	42
A.12.2. Implemented Solution.....	42
A.12.3. Proposed Alternatives.....	42
A.12.4. Experiences with OGC API Specifications .....	42
A.12.5. Other Impressions & Recommendations .....	42
<b>A.13. Duisburg Essen university.....</b>	<b>42</b>
A.13.1. Motivation to Participate .....	42
A.13.2. Implemented Solution.....	42
A.13.3. Proposed Alternatives.....	42
A.13.4. Experiences with OGC API Specifications .....	43
A.13.5. Other Impressions & Recommendations .....	43
<b>A.14. Ecere Corporation .....</b>	<b>43</b>
A.14.1. Motivation to Participate .....	43
A.14.2. Implemented Solution.....	43
A.14.3. Proposed Alternatives.....	43
A.14.4. Experiences with OGC API Specifications .....	43
A.14.5. Other Impressions & Recommendations .....	43
<b>A.15. ECMWF .....</b>	<b>43</b>
A.15.1. Motivation to Participate .....	43
A.15.2. Implemented Solution.....	43
A.15.3. Proposed Alternatives.....	43
A.15.4. Experiences with OGC API Specifications .....	44
A.15.5. Other Impressions & Recommendations .....	44
<b>A.16. El Toro .....</b>	<b>44</b>
A.16.1. Motivation to Participate .....	44
A.16.2. Implemented Solution.....	44
A.16.3. Proposed Alternatives.....	44
A.16.4. Experiences with OGC API Specifications .....	44
A.16.5. Other Impressions & Recommendations .....	44
<b>A.17. EOS Data Analytics .....</b>	<b>44</b>
A.17.1. Motivation to Participate .....	44
A.17.2. Implemented Solution.....	44
A.17.3. Proposed Alternatives.....	44
A.17.4. Experiences with OGC API Specifications .....	45
A.17.5. Other Impressions & Recommendations .....	45
<b>A.18. EOX IT Services GmbH .....</b>	<b>45</b>
A.18.1. Motivation to Participate .....	45

A.18.2. Implemented Solution .....	45
A.18.3. Proposed Alternatives .....	45
A.18.4. Experiences with OGC API Specifications .....	45
A.18.5. Other Impressions & Recommendations .....	45
<b>A.19. European Space Agency (ESA) .....</b>	<b>45</b>
A.19.1. Motivation to Participate .....	45
A.19.2. Implemented Solution .....	45
A.19.3. Proposed Alternatives .....	45
A.19.4. Experiences with OGC API Specifications .....	46
A.19.5. Other Impressions & Recommendations .....	46
<b>A.20. Esri UK .....</b>	<b>46</b>
A.20.1. Motivation to Participate .....	46
A.20.2. Implemented Solution .....	46
A.20.3. Proposed Alternatives .....	46
A.20.4. Experiences with OGC API Specifications .....	46
A.20.5. Other Impressions & Recommendations .....	46
<b>A.21. Eurac Research .....</b>	<b>46</b>
A.21.1. Motivation to Participate .....	47
A.21.2. Implemented Solution .....	47
A.21.3. Proposed Alternatives .....	48
A.21.4. Experiences with OGC API Specifications .....	48
A.21.5. Other Impressions & Recommendations .....	49
<b>A.22. Geobeyond .....</b>	<b>49</b>
A.22.1. Motivation to Participate .....	49
A.22.2. Implemented Solution .....	49
A.22.3. Proposed Alternatives .....	49
A.22.4. Experiences with OGC API Specifications .....	50
A.22.5. Other Impressions & Recommendations .....	50
<b>A.23. GeoCat B.V. .....</b>	<b>50</b>
A.23.1. Motivation to Participate .....	50
A.23.2. Implemented Solution .....	50
A.23.3. Proposed Alternatives .....	50
A.23.4. Experiences with OGC API Specifications .....	50
A.23.5. Other Impressions & Recommendations .....	50
<b>A.24. GeoLabs .....</b>	<b>50</b>
A.24.1. Motivation to Participate .....	50
A.24.2. Implemented Solution .....	51
A.24.3. Proposed Alternatives .....	51
A.24.4. Experiences with OGC API Specifications .....	51
A.24.5. Other Impressions & Recommendations .....	51
<b>A.25. GeoSeer .....</b>	<b>51</b>

A.25.1. Motivation to Participate .....	51
A.25.2. Implemented Solution.....	52
A.25.3. Proposed Alternatives.....	52
A.25.4. Experiences with OGC API Specifications .....	52
A.25.5. Other Impressions & Recommendations .....	53
<b>A.26. GeoSolutions .....</b>	<b>53</b>
A.26.1. Motivation to Participate .....	53
A.26.2. Implemented Solution.....	53
A.26.3. Proposed Alternatives.....	53
A.26.4. Experiences with OGC API Specifications .....	53
A.26.5. Other Impressions & Recommendations .....	53
<b>A.27. Geovation .....</b>	<b>53</b>
A.27.1. Motivation to Participate .....	54
A.27.2. Implemented Solution.....	54
A.27.3. Proposed Alternatives.....	54
A.27.4. Experiences with OGC API Specifications .....	54
A.27.5. Other Impressions & Recommendations .....	54
<b>A.28. Heazeltech .....</b>	<b>54</b>
A.28.1. Motivation to Participate .....	54
A.28.2. Implemented Solution.....	54
A.28.3. Proposed Alternatives.....	54
A.28.4. Experiences with OGC API Specifications .....	54
A.28.5. Other Impressions & Recommendations .....	54
<b>A.29. Helyx SIS .....</b>	<b>54</b>
A.29.1. Motivation to Participate .....	55
A.29.2. Implemented Solution.....	55
A.29.3. Proposed Alternatives.....	55
A.29.4. Experiences with OGC API Specifications .....	55
A.29.5. Other Impressions & Recommendations .....	55
<b>A.30. Hexagon .....</b>	<b>55</b>
A.30.1. Motivation to Participate .....	55
A.30.2. Implemented Solution.....	55
A.30.3. Proposed Alternatives.....	57
A.30.4. Experiences with OGC API Specifications .....	57
A.30.5. Other Impressions & Recommendations .....	57
<b>A.31. Infinity Corporation Limited .....</b>	<b>58</b>
A.31.1. Motivation to Participate .....	58
A.31.2. Implemented Solution.....	58
A.31.3. Proposed Alternatives.....	58
A.31.4. Experiences with OGC API Specifications .....	58
A.31.5. Other Impressions & Recommendations .....	58

A.32. interactive instruments GmbH .....	58
A.32.1. Motivation to Participate .....	58
A.32.2. Implemented Solution .....	58
A.32.3. Proposed Alternatives .....	58
A.32.4. Experiences with OGC API Specifications .....	58
A.32.5. Other Impressions & Recommendations .....	59
A.33. ISRIC - World Soil Information .....	59
A.33.1. Motivation to Participate .....	59
A.33.2. Implemented Solution .....	59
A.33.3. Proposed Alternatives .....	59
A.33.4. Experiences with OGC API Specifications .....	59
A.33.5. Other Impressions & Recommendations .....	59
A.34. Jacobs University .....	59
A.34.1. Motivation to Participate .....	59
A.34.2. Implemented Solution .....	59
A.34.3. Proposed Alternatives .....	59
A.34.4. Experiences with OGC API Specifications .....	59
A.34.5. Other Impressions & Recommendations .....	60
A.35. Jet Propulsion Laboratory .....	60
A.35.1. Motivation to Participate .....	60
A.35.2. Implemented Solution .....	60
A.35.3. Proposed Alternatives .....	60
A.35.4. Experiences with OGC API Specifications .....	60
A.35.5. Other Impressions & Recommendations .....	60
A.36. JRC, European Commission .....	60
A.36.1. Motivation to Participate .....	60
A.36.2. Implemented Solution .....	60
A.36.3. Proposed Alternatives .....	60
A.36.4. Experiences with OGC API Specifications .....	60
A.36.5. Other Impressions & Recommendations .....	61
A.37. Landcare Research, New Zealand .....	61
A.37.1. Motivation to Participate .....	61
A.37.2. Implemented Solution .....	61
A.37.3. Proposed Alternatives .....	61
A.37.4. Experiences with OGC API Specifications .....	61
A.37.5. Other Impressions & Recommendations .....	61
A.38. Land Information New Zealand .....	61
A.38.1. Motivation to Participate .....	61
A.38.2. Implemented Solution .....	61
A.38.3. Proposed Alternatives .....	61
A.38.4. Experiences with OGC API Specifications .....	61

A.38.5. Other Impressions & Recommendations .....	62
A.39. lat/lon GmbH .....	62
A.39.1. Motivation to Participate .....	62
A.39.2. Implemented Solution.....	62
A.39.3. Proposed Alternatives.....	62
A.39.4. Experiences with OGC API Specifications .....	62
A.39.5. Other Impressions & Recommendations .....	62
A.40. Meteorological Service of Canada .....	62
A.40.1. Motivation to Participate .....	62
A.40.2. Implemented Solution.....	62
A.40.3. Proposed Alternatives.....	64
A.40.4. Experiences with OGC API Specifications .....	64
A.40.5. Other Impressions & Recommendations .....	64
A.41. Met Office .....	64
A.41.1. Motivation to Participate .....	64
A.41.2. Implemented Solution.....	64
A.41.3. Proposed Alternatives.....	65
A.41.4. Experiences with OGC API Specifications .....	65
A.41.5. Other Impressions & Recommendations .....	65
A.42. National Aeronautics and Space Administration (NASA) .....	65
A.42.1. Motivation to Participate .....	65
A.42.2. Implemented Solution.....	65
A.42.3. Proposed Alternatives.....	65
A.42.4. Experiences with OGC API Specifications .....	65
A.42.5. Other Impressions & Recommendations .....	65
A.43. National Land Survey of Finland .....	65
A.43.1. Motivation to Participate .....	66
A.43.2. Implemented Solution.....	66
A.43.3. Proposed Alternatives.....	66
A.43.4. Experiences with OGC API Specifications .....	66
A.43.5. Other Impressions & Recommendations .....	66
A.44. Natural Resources Canada .....	66
A.44.1. Motivation to Participate .....	66
A.44.2. Implemented Solution.....	66
A.44.3. Proposed Alternatives.....	66
A.44.4. Experiences with OGC API Specifications .....	66
A.44.5. Other Impressions & Recommendations .....	66
A.45. NOAA/NWS .....	66
A.45.1. Motivation to Participate .....	67
A.45.2. Implemented Solution.....	67
A.45.3. Proposed Alternatives.....	67

A.45.4. Experiences with OGC API Specifications .....	67
A.45.5. Other Impressions & Recommendations .....	67
A.46. OSGeo .....	67
A.46.1. Motivation to Participate .....	67
A.46.2. Implemented Solution.....	67
A.46.3. Proposed Alternatives.....	67
A.46.4. Experiences with OGC API Specifications .....	67
A.46.5. Other Impressions & Recommendations .....	67
A.47. Princeton University.....	67
A.47.1. Motivation to Participate .....	68
A.47.2. Implemented Solution.....	68
A.47.3. Proposed Alternatives.....	68
A.47.4. Experiences with OGC API Specifications .....	68
A.47.5. Other Impressions & Recommendations .....	68
A.48. Princeton University Library .....	68
A.48.1. Motivation to Participate .....	68
A.48.2. Implemented Solution.....	68
A.48.3. Proposed Alternatives.....	68
A.48.4. Experiences with OGC API Specifications .....	68
A.48.5. Other Impressions & Recommendations .....	68
A.49. Quick Caption .....	68
A.49.1. Motivation to Participate .....	69
A.49.2. Implemented Solution.....	69
A.49.3. Proposed Alternatives.....	69
A.49.4. Experiences with OGC API Specifications .....	69
A.49.5. Other Impressions & Recommendations .....	69
A.50. Secure Dimensions .....	69
A.50.1. Motivation to Participate .....	69
A.50.2. Implemented Solution.....	69
A.50.3. Proposed Alternatives.....	69
A.50.4. Experiences with OGC API Specifications .....	69
A.50.5. Other Impressions & Recommendations .....	69
A.51. SigmaBravo .....	69
A.51.1. Motivation to Participate .....	70
A.51.2. Implemented Solution.....	70
A.51.3. Experiences with OGC API Specifications .....	70
A.51.4. Other Impressions & Recommendations .....	70
A.52. Simms Reeve.....	70
A.52.1. Motivation to Participate .....	70
A.52.2. Implemented Solution.....	70
A.52.3. Proposed Alternatives.....	70

A.52.4. Experiences with OGC API Specifications .....	70
A.52.5. Other Impressions & Recommendations .....	70
<b>A.53. Sinergise .....</b>	<b>71</b>
A.53.1. Motivation to Participate .....	71
A.53.2. Implemented Solution.....	71
A.53.3. Proposed Alternatives.....	71
A.53.4. Experiences with OGC API Specifications .....	71
A.53.5. Other Impressions & Recommendations .....	71
<b>A.54. Solenix .....</b>	<b>71</b>
A.54.1. Motivation to Participate .....	71
A.54.2. Implemented Solution.....	71
A.54.3. Proposed Alternatives.....	71
A.54.4. Experiences with OGC API Specifications .....	71
A.54.5. Other Impressions & Recommendations .....	71
<b>A.55. Spacebel .....</b>	<b>72</b>
A.55.1. Motivation to Participate .....	72
A.55.2. Implemented Solution.....	72
A.55.3. Proposed Alternatives.....	73
A.55.4. Experiences with OGC API Specifications .....	73
A.55.5. Other Impressions & Recommendations .....	76
<b>A.56. Strategic Alliance Consulting Inc .....</b>	<b>77</b>
A.56.1. Motivation to Participate .....	77
A.56.2. Implemented Solution.....	77
A.56.3. Proposed Alternatives.....	77
A.56.4. Experiences with OGC API Specifications .....	77
A.56.5. Other Impressions & Recommendations .....	77
<b>A.57. University College London .....</b>	<b>77</b>
A.57.1. Motivation to Participate .....	78
A.57.2. Implemented Solution.....	78
A.57.3. Proposed Alternatives.....	78
A.57.4. Experiences with OGC API Specifications .....	78
A.57.5. Other Impressions & Recommendations .....	78
<b>A.58. University of Birmingham .....</b>	<b>78</b>
A.58.1. Motivation to Participate .....	78
A.58.2. Implemented Solution.....	78
A.58.3. Proposed Alternatives.....	78
A.58.4. Experiences with OGC API Specifications .....	78
A.58.5. Other Impressions & Recommendations .....	78
<b>A.59. University of Münster .....</b>	<b>78</b>
A.59.1. Motivation to Participate .....	79
A.59.2. Implemented Solution.....	79

A.59.3. Proposed Alternatives.....	79
A.59.4. Experiences with OGC API Specifications .....	79
A.59.5. Other Impressions & Recommendations .....	79
A.60. University of Notre Dame .....	79
A.60.1. Motivation to Participate .....	79
A.60.2. Implemented Solution.....	79
A.60.3. Proposed Alternatives.....	79
A.60.4. Experiences with OGC API Specifications .....	79
A.60.5. Other Impressions & Recommendations .....	80
A.61. WebGeoDataVore .....	80
A.61.1. Motivation to Participate .....	80
A.61.2. Implemented Solution.....	80
A.61.3. Proposed Alternatives.....	80
A.61.4. Experiences with OGC API Specifications .....	80
A.61.5. Other Impressions & Recommendations .....	80
A.62. West University of Timisoara .....	80
A.62.1. Motivation to Participate .....	80
A.62.2. Implemented Solution.....	80
A.62.3. Proposed Alternatives.....	80
A.62.4. Experiences with OGC API Specifications .....	80
A.62.5. Other Impressions & Recommendations .....	81
Appendix B: Revision History .....	82
Appendix C: Bibliography .....	83

Publication Date: YYYY-MM-DD

Approval Date: YYYY-MM-DD

Submission Date: YYYY-MM-DD

Reference number of this document: OGC XX-XXX

Reference URL for this document: <http://www.opengis.net/doc/PER/t14-ID>

Category: OGC Public Engineering Report

Editor: Name(s)

Title: OGC API Hackathon 2019 Engineering Report

---

## **OGC Public Engineering Report**

### **COPYRIGHT**

Copyright © 2018 Open Geospatial Consortium. To obtain additional rights of use, visit <http://www.opengeospatial.org/>

### **WARNING**

This document is not an OGC Standard. This document is an OGC Public Engineering Report created as a deliverable in an OGC Interoperability Initiative and is not an official position of the OGC membership. It is distributed for review and comment. It is subject to change without notice and may not be referred to as an OGC Standard. Further, any OGC Public Engineering Report should not be referenced as required or mandatory technology in procurements. However, the discussions in this document could very well lead to the definition of an OGC Standard.

## LICENSE AGREEMENT

Permission is hereby granted by the Open Geospatial Consortium, ("Licensor"), free of charge and subject to the terms set forth below, to any person obtaining a copy of this Intellectual Property and any associated documentation, to deal in the Intellectual Property without restriction (except as set forth below), including without limitation the rights to implement, use, copy, modify, merge, publish, distribute, and/or sublicense copies of the Intellectual Property, and to permit persons to whom the Intellectual Property is furnished to do so, provided that all copyright notices on the intellectual property are retained intact and that each person to whom the Intellectual Property is furnished agrees to the terms of this Agreement.

If you modify the Intellectual Property, all copies of the modified Intellectual Property must include, in addition to the above copyright notice, a notice that the Intellectual Property includes modifications that have not been approved or adopted by LICENSOR.

THIS LICENSE IS A COPYRIGHT LICENSE ONLY, AND DOES NOT CONVEY ANY RIGHTS UNDER ANY PATENTS THAT MAY BE IN FORCE ANYWHERE IN THE WORLD. THE INTELLECTUAL PROPERTY IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, AND NONINFRINGEMENT OF THIRD PARTY RIGHTS. THE COPYRIGHT HOLDER OR HOLDERS INCLUDED IN THIS NOTICE DO NOT WARRANT THAT THE FUNCTIONS CONTAINED IN THE INTELLECTUAL PROPERTY WILL MEET YOUR REQUIREMENTS OR THAT THE OPERATION OF THE INTELLECTUAL PROPERTY WILL BE UNINTERRUPTED OR ERROR FREE. ANY USE OF THE INTELLECTUAL PROPERTY SHALL BE MADE ENTIRELY AT THE USER'S OWN RISK. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR ANY CONTRIBUTOR OF INTELLECTUAL PROPERTY RIGHTS TO THE INTELLECTUAL PROPERTY BE LIABLE FOR ANY CLAIM, OR ANY DIRECT, SPECIAL, INDIRECT OR CONSEQUENTIAL DAMAGES, OR ANY DAMAGES WHATSOEVER RESULTING FROM ANY ALLEGED INFRINGEMENT OR ANY LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR UNDER ANY OTHER LEGAL THEORY, ARISING OUT OF OR IN CONNECTION WITH THE IMPLEMENTATION, USE, COMMERCIALIZATION OR PERFORMANCE OF THIS INTELLECTUAL PROPERTY.

This license is effective until terminated. You may terminate it at any time by destroying the Intellectual Property together with all copies in any form. The license will also terminate if you fail to comply with any term or condition of this Agreement. Except as provided in the following sentence, no such termination of this license shall require the termination of any third party end-user sublicense to the Intellectual Property which is in force as of the date of notice of such termination. In addition, should the Intellectual Property, or the operation of the Intellectual Property, infringe, or in LICENSOR's sole opinion be likely to infringe, any patent, copyright, trademark or other right of a third party, you agree that LICENSOR, in its sole discretion, may terminate this license without any compensation or liability to you, your licensees or any other party. You agree upon termination of any kind to destroy or cause to be destroyed the Intellectual Property together with all copies in any form, whether held by you or by any third party.

Except as contained in this notice, the name of LICENSOR or of any other holder of a copyright in all or part of the Intellectual Property shall not be used in advertising or otherwise to promote the sale, use or other dealings in this Intellectual Property without prior written authorization of LICENSOR or such copyright holder. LICENSOR is and shall at all times be the sole entity that may authorize you or any third party to use certification marks, trademarks or other special designations to

indicate compliance with any LICENSOR standards or specifications.

This Agreement is governed by the laws of the Commonwealth of Massachusetts. The application to this Agreement of the United Nations Convention on Contracts for the International Sale of Goods is hereby expressly excluded. In the event any provision of this Agreement shall be deemed unenforceable, void or invalid, such provision shall be modified so as to make it valid and enforceable, and as so modified the entire Agreement shall remain in full force and effect. No decision, action or inaction by LICENSOR shall be construed to be a waiver of any rights or remedies available to it.

None of the Intellectual Property or underlying information or technology may be downloaded or otherwise exported or reexported in violation of U.S. export laws and regulations. In addition, you are responsible for complying with any local laws in your jurisdiction which may impact your right to import, export or use the Intellectual Property, and you represent that you have complied with any regulations or registration procedures required by applicable law to make this license enforceable.

# **Chapter 1. Subject**

The subject of this Engineering Report (ER) is a hackathon event that was held from June 20th to 21st, 2019 to advance the development of OGC Application Programming Interface (API) specifications. An API is a standard set of documented and supported functions and procedures that expose the capabilities or data of an operating system, application or service to other applications (adapted from ISO/IEC TR 13066-2:2016). The OGC API Hackathon 2019, as the event was called, was hosted by the Geovation Hub in London, United Kingdom. The event was sponsored by the European Space Agency (ESA) and the Ordnance Survey.

# Chapter 2. Executive Summary

The following is, as all texts in double square brackets, a helper text. Please remove this and all other helper texts once done.

The Executive Summary clause shall contain the key findings and results in a concise form. A more detailed description of the findings should be in the body of the report.

The Executive Summary shall contain a business value statement that should describe the value of this Engineering Report to improve interoperability, advance location-based technologies or realize innovations.

This section shall include precise descriptions of the requirements that have been addressed by the work documented in this Engineering Report; together with the research motivation that answers the fundamental question: What motivated us to address this topic in this report?

This section provides an overview of recommendations on how to further proceed with the achievements documented in this ER.

This section shall be between 1-3 pages.

The output of this hackathon should lead to a solid, common core and advancement of a whole new generation of OGC standards that are flexible in modern IT environments.

## 2.1. Document contributor contact points

All questions regarding this document should be directed to the editor or the contributors:

### Contacts

Name	Organization	Role
Gobe Hobona	Open Geospatial Consortium	Editor
Scott Simmons	Open Geospatial Consortium	Contributor
Michael Gordon	Ordnance Survey	Contributor
Simon Green	Ordnance Survey	Contributor
Clemens Portele	interactive instruments GmbH	Contributor
Jorge Samuel Mendes de Jesus	ISRIC - World Soil Information	Contributor
Peter Baumann	rasdaman GmbH	Contributor
Francesco Bartoli	Geobeyond	Contributor
Dirk Stenger	lat/lon GmbH	Contributor

Name	Organization	Role
Chuck Heazel	Heazeltech LLC	Contributor
Matthias Mohr	University of Münster	Contributor
Robin Houtmeyers	Hexagon Geospatial	Contributor
Jonathan Moules	GeoSeer	Contributor
Gérald Fenoy	GeoLabs	Contributor
Brad Hards	Sigma Bravo	Contributor
Chris Little	Met Office	Contributor
Yves Coene	Spacebel	Contributor
Adam Branscomb	Esri UK	Contributor
Joan Maso	CREAF	Contributor
Stephan Meißl	EOX	Contributor
TBA	TBA	Contributor

**NOTE**      Role = Editor and/or Contributor

## 2.2. Foreword

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. The Open Geospatial Consortium shall not be held responsible for identifying any or all such patent rights.

Recipients of this document are requested to submit, with their comments, notification of any relevant patent claims or other intellectual property rights of which they may be aware that might be infringed by any implementation of the standard set forth in this document, and to provide supporting documentation.

# Chapter 3. References

The following normative documents are referenced in this document.

*NOTE: Only normative standards are referenced here, e.g. OGC, ISO or other SDO standards. All other references are listed in the bibliography. Example:*

- [OGC: OGC 06-121r9, OGC® Web Services Common Standard](https://portal.opengeospatial.org/files/?artifact_id=38867&version=2) [https://portal.opengeospatial.org/files/?artifact\_id=38867&version=2]
- [OGC: OGC 17-069, OGC Web Feature Service 3.0: Part 1 - Core, Version 3.0.0-draft.1](https://cdn.rawgit.com/opengeospatial/WFS_FES/3.0.0-draft.1/docs/17-069.html) [https://cdn.rawgit.com/opengeospatial/WFS\_FES/3.0.0-draft.1/docs/17-069.html]
- [OpenAPI Initiative: OpenAPI Specification 3.0.1](https://github.com/OAI/OpenAPI-Specification/blob/master/versions/3.0.1.md) [https://github.com/OAI/OpenAPI-Specification/blob/master/versions/3.0.1.md]
- [OGC: OGC 09-146r6, OGC® Coverage Implementation Schema, version 1.1, 2017](http://docs.opengeospatial.org/is/09-146r6/09-146r6.html) [http://docs.opengeospatial.org/is/09-146r6/09-146r6.html]
- [OGC: OGC Web Coverage Service \(WCS\) 2.1 Interface Standard - Core, 2018](http://docs.opengeospatial.org/is/17-089r1/17-089r1.html) [http://docs.opengeospatial.org/is/17-089r1/17-089r1.html]
- [OGC: OGC 14-065r2, OGC® WPS 2.0.2 Interface Standard Corrigendum 2, 2018](http://docs.opengeospatial.org/is/14-065/14-065.html) [http://docs.opengeospatial.org/is/14-065/14-065.html]
- [OGC: OGC OGC 07-057r7, OpenGIS® Web Map Tile Service Implementation Standard, 2010](http://portal.opengeospatial.org/files/?artifact_id=35326) [http://portal.opengeospatial.org/files/?artifact\_id=35326]
- [OGC 09-025r2, OGC® Web Feature Service 2.0 Interface Standard – With Corrigendum, 2014](http://docs.opengeospatial.org/is/09-025r2/09-025r2.html) [http://docs.opengeospatial.org/is/09-025r2/09-025r2.html]

# Chapter 4. Terms and definitions

For the purposes of this report, the definitions specified in Clause 4 of the OWS Common Implementation Standard [OGC 06-121r9](https://portal.opengeospatial.org/files/?artifact_id=38867&version=2) [[https://portal.opengeospatial.org/files/?artifact\\_id=38867&version=2](https://portal.opengeospatial.org/files/?artifact_id=38867&version=2)] shall apply. In addition, the following terms and definitions apply.

- **application programming interface**

standard set of documented and supported functions and procedures that expose the capabilities or data of an operating system, application or service to other applications (adapted from ISO/IEC TR 13066-2:2016)

- **feature**

abstraction of real world phenomena (source: ISO 19101-1:2014)

- **OpenAPI definition | OpenAPI document**

a document (or set of documents) that defines or describes an API and conforms to the OpenAPI Specification [derived from the OpenAPI Specification]

- **coverage**

feature that acts as a function to return values from its range for any direct position within its spatiotemporal domain, as defined in OGC Abstract Topic 6 (OGC 07-011).

- **Regular grid**

grid whose grid lines have a constant distance along each grid axis

- **process**

A process  $p$  is a function that for each input returns a corresponding output

$$p: X \rightarrow Y$$

where  $X$  denotes the domain of arguments  $x$  and  $Y$  denotes the co-domain of values  $y$ . Within the Web Processing Service (WPS) standard, process arguments are referred to as process inputs and result values are referred to as process outputs. Processes that have no process inputs represent value generators that deliver constant or random process outputs.

- **service**

distinct part of the functionality that is provided by an entity through interfaces (source: ISO/IEC TR 14252)

- **operation**

specification of a transformation or query that an object may be called to execute (source: ISO 19119)

- **request**

invocation of an operation by a client

- **response**

result of an operation, returned from a server to a client

## 4.1. Abbreviated terms

- API Application Programming Interface
- CRS Coordinate Reference System
- GML Geography Markup Language
- HTML Hypertext Markup Language
- HTTP Hypertext Transfer Protocol
- JSON Java Script Object Notation
- WCS Web Coverage Service
- WFS Web Feature Service
- WMTS Web Map Tile Service
- OWS OGC Web Services
- REST Representational State Transfer
- XML Extensible Markup Language

# Chapter 5. Overview

Section 6 introduces the OGC API Hackathon by describing the challenge, the scenario adopted, and the infrastructure used by the participants. The section also presents overviews of the datasets and services identified to support participants during the Hackathon. The section also presents a list of the organizations represented by the participants.

Section 7 presents the solution architecture developed in this hackathon. The section identifies the client and service implementations of the OGC API specifications.

Section 8 describes each of the OGC API specifications that were involved in the hackathon.

Section 9 provides summary of the main findings and discusses alternative approaches that could have been taken, as well as experiences and lessons learnt.

Appendix A provides reports from each participating organisation, covering their motivation for participating, a description of their implementation of the OGC API specifications, alternative approaches, their experiences, impressions and recommendations.

# Chapter 6. Introduction

The development of OGC API specifications is not a new activity within the Consortium, as OGC members and staff have been investigating OpenAPI (and its commercial equivalent, Swagger) in a concentrated effort since 2016. This effort was the result of a recognition that although the existing OGC web service standards are in effect web APIs, there are a number approaches adopted by modern web API frameworks that would require a fairly fundamental change in underlying design.

Two documents really provided the initial energy to get serious about redesign: the OGC Open Geospatial APIs White Paper, edited by George Percivall [1], and the Spatial Data on the Web Best Practices, jointly developed by OGC and the World Wide Web Consortium (W3C) [2]. These documents highlighted how geospatial data should be more native to the web. Further, OGC staff were working on “implementer-friendly” views of OGC standards and experimented with an OpenAPI definition for the Web Map Tile Service (WMTS).

But perhaps the most important impact was the leap of the OGC Web Feature Service (WFS) and Filter Encoding Service (FES) Standards Working Group (SWG) that rebuilt the WFS standard with an integrated OpenAPI definition as core to description of how to build against the standard. The work on WFS, which has resulted in the OGC API - Features specification (formerly called WFS 3.0), benefited from a two-day Hackathon held in 2018. Since then, other OGC web service SWGs have begun to independently develop API specifications based on their relevant OGC web service standards.

Numerous discussions occurred at OGC quarterly Technical Committee (TC) Meetings to consider those elements being developed in each SWG which should be common to all web API standards. These discussions came to a head at the February 2019 TC Meeting in Singapore, where a series of working group meetings and common sessions for the whole TC Membership reinforced the desire to work on a common framework for many OGC web standards and to develop a nomenclature for labeling these standards. Thus, the pattern “OGC API [resource]” was coined. The discussions in Singapore also resulted in the planning of the OGC API Hackathon to define and test common elements from Coverages, Map Tiles, and Processing standards work using foundational material from the Features work.

The OGC API Hackathon 2019 was hosted by the Geovation Hub in London, United Kingdom, from June 20th to 21st, 2019. The hackathon was sponsored by the European Space Agency (ESA) and the Ordnance Survey. The **goal** of the hackathon was to advance the development of OGC API specifications.

The objectives of the hackathon were set out as to:

- develop, deploy and test services/clients that support OGC APIs
- suggest improvements for a common core
- define rules/guidance that can be documented
- validate work that has been completed to date
- contribute to the GitHub repositories

## 6.1. Overview of the Challenge

The challenge of the Hackathon was to define and test common elements from Coverages, Map Tiles, and Processing standards work using foundational material from the Features work. The magnitude of this challenge was reflected by the fact that the OGC API specifications for Coverages, Map Tiles, and Processing were all at different stages of development. Therefore the Hackathon had to advance the development of all of the specifications to a stage where common elements across all of the specifications could be identified.

## 6.2. Scenario

**NOTE** This section is a working draft.

To facilitate the development of the OGC API specifications, the scenario presented in this section was provided as a reference for the teams. The scenario is based on flood risk management and is motivated by recent events such as the 2018 floods that affected parts of Europe (including the United Kingdom, Italy, France, Spain and Portugal) [3] and the 2019 floods that affected parts of the United States [4]. The scenario draws from the OGC's Disasters Interoperability Concept Development Study (CDS) which assessed geospatial Web services across the disaster domain, defining the core components of National Spatial Data Infrastructure (SDI) architecture for disasters (Disasters SDI), and defining use cases and scenarios for future implementations as part of a follow-on pilot phase [5].

Risk mitigation is one of the phases in the 'life cycle' of disaster management [5], which includes the steps shown in [Figure 1](#). *Mitigation* refers to taking sustained actions to minimise or completely eliminate the long-term risk from hazards and their effects to individuals and property. *Preparedness* refers to building the emergency management capabilities to respond effectively to any hazard, as well as to recover from the hazard. *Response* refers to conducting emergency operations that reduce the hazard to acceptable levels (or eliminate it entirely) in order to save lives, through evacuation of potential victims, and provision of food, water, medical care and shelter to those affected by the disaster. *Recovery* refers to the rebuilding of communities that have been affected by a disaster so that those communities, as well as their governments, can return to normality and function on their own. A more detailed discussion on disaster management can be found in the OGC Development of Disaster Spatial Data Infrastructures for Disaster Resilience Engineering Report [5].



*Figure 1. Disaster management cycle*

As part of Government flood risk management policy, Local Authorities have to carry out a preliminary flood risk analysis. Using satellite imagery, flood risk data, along with asset information, vulnerable property information and topographic data, Local Authorities carry out analysis to improve resilience and promote a more efficient use of resource.

A Local Authority is tasked with identifying at-risk residential properties in order to assist in flood prevention and amelioration. By carrying out this task, the Local Authority aims to reduce the number of residential properties affected by floods, as well as to decrease the economic and social costs associated with such devastating events. The Geospatial Specialists at the Local Authority embark on the steps presented in [Table 1](#) in order to carry out the task.

*Table 1. Steps in the flood risk management scenario*

Step	Description	Notes
1	Receive satellite imagery, digital terrain model, Flood Risk Zone, address, and topographic data	
2	Overlay flood assets such as culverts, levees etc.	
3	Combine multiple datasets together.	
4	Data analysis to assess/quantify flood risk.	A number of hydrology approaches may be applied e.g. run-off modelling
5	Identify at risk properties and possible remediation strategies.	

Step	Description	Notes
6	Execute cost-benefit analysis to determine priorities.	
7	Commission work for on-the-ground implementation. This may be carried out by internal or external teams.	
8	Impact of remediation work assessed by external engineering consultant.	

The illustration in [Figure 2](#) shows the Area of Interest (AOI) that was selected to facilitate prototyping, demonstration and briefings. The AOI covered the region of Carmarthenshire, Wales and focused on the town of Carmarthen. The region was the site of significant flooding in October 2018 and hence provided an appropriate location to base the flood-based scenario adopted for the Hackathon.



*Figure 2. Area-of-Interest (Contains OS data © Crown copyright and database right 2019; Satellite image: ESA Copyright)*

Whereas the Time-Of-Interest (TOI) was October 2018, the AOI had the polygonal bounds in World Geodetic System 1984 (WGS84) coordinates:

```
-4.09247619415462,51.6507504017036  
-4.59606172257991,51.6468710002251  
-4.59750580025958,52.0105126182078  
-4.09303085864973,52.0127870676365  
-4.09247619415462,51.6507504017036
```

## 6.3. What was provided

### 6.3.1. Supporting Datasets

The following datasets were identified as relevant to the scenario, and thus recommended for testing implementations of the specifications.

- ESA Sentinel Data: The Sentinels are a family of missions developed by ESA for Copernicus, the European Union's Earth Observation programme. The data supplied to the OGC API Hackathon included imagery from the Sentinel-2 mission. Launched on 23 June 2015, the Sentinel-2 mission is a polar-orbiting, multispectral high-resolution imaging mission for land monitoring to support emergency services, imagery of vegetation, soil and water cover, inland waterways and coastal areas [6]. The Sentinel imagery was supplied by Sinergise, the providers of sentinelhub.com [7].
- UK Met Office DataPoint: DataPoint is a freely available service that offers meteorological feeds for use by professionals, the scientific community, and developers. It is an unsupported service, with a primary goal of facilitating research, development and innovation [8].
- UK Met Office Atmospheric Deterministic and Probabilistic Forecasts: This dataset includes atmospheric deterministic and probabilistic forecasts provided as downloadable gridded data [9]. The data includes 2km deterministic high-resolution atmospheric data for the UK and 10km deterministic high-resolution atmospheric data for the Globe. There is also data from the Global and Regional Ensemble Prediction System.
- Ordnance Survey - OS Open Zoomstack: This dataset provides a single, customisable map of Great Britain to be used at national and local levels. The dataset is available in OGC GeoPackage format. The dataset includes vector data at a variety of scales, from a whole-country view to a street-level view (1:10,000) [10].
- Meteorological Service of Canada Datamart: A variety of raw meteorological data types and forecast data provided by the Meteorological Service of Canada (MSC). It is aimed at specialized users with good meteorological and Information Technology knowledge. The datasets are available through direct download from an HTTP server, as well as through a Web Map Service (WMS) [11].

### 6.3.2. Supporting Services

The following datasets were identified as relevant to the scenario, and thus recommended for testing implementations of the specifications.

- Meteorological Service of Canada Geospatial web services: This service provides access to the MSC's open data, including raw numerical weather prediction (NWP) model data layers and the

weather radar mosaic. The service provides meteorological layers through a Web Map Service (WMS) interface to enable end-users to display meteorological data within their own tools, on interactive web maps and in mobile apps [12].

- National Oceanic and Atmospheric Administration (NOAA) National Weather Service Data as OGC Web Services: These web services provide meteorological data covering the United States, through interfaces that conform to the Web Map Service (WMS), Web Feature Service (WFS) and Web Coverage Service (WCS) standards of the OGC [13].

### 6.3.3. Deployment Infrastructure

Participants were advised to bring their own laptops to the hackathon. To support testing, the following infrastructure options were available to participants:

- Participants could deploy services into their own computers.
- Participants could deploy services into their own Cloud infrastructure.
- By prior arrangement, participants could deploy services into Ordnance Survey-sponsored Cloud infrastructure.

## 6.4. Hackathon Participants

**NOTE** This list will be updated at the start of the Hackathon

The Hackathon was sponsored by the European Space Agency (ESA) and the Ordnance Survey.

The following organizations participated in the Hackathon:


- 52°North GmbH
- akouas
- ARC
- Arup
- blockdore
- Board Adviser
- British Antarctic Survey
- Cicy
- CREAF
- CubeWerx Inc.
- Deimos Space UK
- developer
- District Government Cologne - Geobasis NRW
- Defence Science and Technology Laboratory (Dstl)
- Duisburg Essen university

- Ecere Corporation
- ECMWF
- El Toro
- EOS Data Analytics
- EOX IT Services GmbH
- Esri UK
- Eurac Research
- European Space Agency (ESA)
- Geobeyond
- GeoCat B.V.
- GeoLabs
- GeoSeer
- GeoSolutions
- Geovation
- Heazeltech
- Helyx SIS
- Hexagon
- Infinity Corporation Limited
- interactive instruments GmbH
- ISRIC - World Soil Information
- Jet Propulsion Laboratory (JPL)
- JRC, European Commission
- Land Information New Zealand
- Landcare Research, New Zealand
- lat/lon GmbH
- Met Office
- Meteorological Service of Canada
- National Aeronautics and Space Administration (NASA)
- National Geospatial Intelligence Agency (NGA)
- National Land Survey of Finland
- Natural Resources Canada
- NOAA/NWS
- Open Geospatial Consortium
- Ordnance Survey
- OSGeo

- Princeton University
- Princeton University Library
- Quick Caption
- rasdaman GmbH
- Secure Dimensions
- Sigma Bravo
- Simms Reeve
- Sinergise
- Solenix
- Spacebel s.a.
- Strategic Alliance Consulting Inc
- University College London
- University of Birmingham
- University of Münster
- University of Notre Dame
- WebGeoDataVore
- West University of Timisoara

# Chapter 7. Architecture

The focus of the hackathon was on development of the OGC API - Common, the OGC API - Features, OGC API – Processes, the OGC API – Coverages and the OGC API – Map Tiles standards. Implementations of these specifications were deployed in the Hackathon infrastructure in order to build a solution with the architecture shown in [Figure 3](#). As shown on the illustration, the architecture adopted a multi-tier approach that included one or more implementations of each OGC API specification deployed on the wider Internet (e.g. in participants' own Cloud environments), as well as some implementations deployed in the Ordnance Survey's Cloud which is hosted on Microsoft Azure.

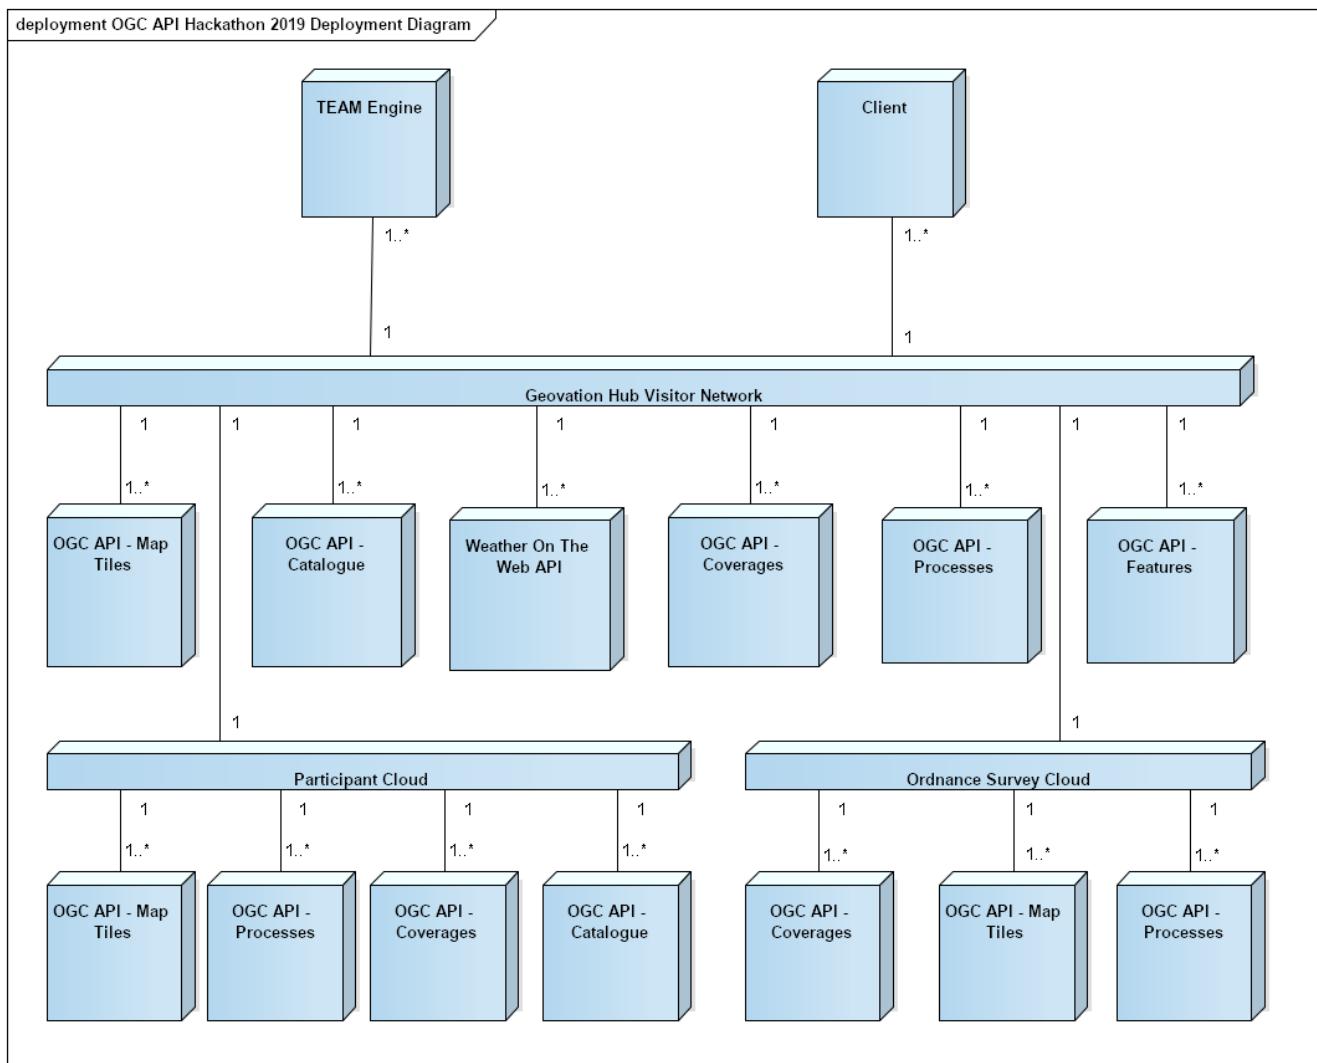

*Figure 3. Solution Architecture of the OGC API Hackathon*

The OGC API - Common specification documents the set of common practices and shared requirements that have emerged from the development of Resource Oriented Architectures and Web APIs within the OGC. The specification serves as a common foundation upon which all OGC APIs will be built. The OGC API - Processes specification defines how a client application can request the execution of a process, how the inputs to that process can be provided, and how the output from the process is handled. The OGC API - Map Tiles specification defines an OGC standard for a Web Map Tile API that can serve map tiles of spatially referenced data using tile images with predefined content, extent, and resolution. The OGC API - Coverages specification defines a Web API for accessing coverages that are modelled according to the [Coverage Implementation Schema \(CIS\)](#)

[1.1](http://docs.opengeospatial.org/is/09-146r6/09-146r6.html) [http://docs.opengeospatial.org/is/09-146r6/09-146r6.html]. The hackathon also sought to maintain consistency between the aforementioned specifications and the OGC API - Features specification. The OGC API - Features specification offers the capability to create, modify and query geospatial feature data on the Web.

## 7.1. Service Implementations

### 7.1.1. pygeoapi

pygeoapi is a Python server implementation of the emerging OGC API specifications. Early versions of this software implemented the OGC API - Features specification (formerly WFS 3.0). Recent versions of the software have included support for both the OGC API - Features and the OGC API - Processes specifications. Support for these specifications makes it possible publish feature data and geospatial processes. As the name suggests the software is built using the Python programming language and is supported by a developer toolchain that includes Docker and Git/Github.

### 7.1.2. 52°North JavaPS

The 52°North JavaPS product is an open source implementation of both the Web Processing Service (WPS) standard and the OGC API - Processes specification. JavaPS enables the deployment of geospatial processes on the Web in a way that conforms to OGC standards. The software is built using the Java programming language and is supported by a developer toolchain that includes Maven and Git/Github. The software features a pluggable architecture for processes and data encodings that is based on the 52°North [Iceland](https://wiki.52north.org/SensorWeb/Iceland) [https://wiki.52north.org/SensorWeb/Iceland] project which represents a generic Java framework for OGC Web Services. By virtue of being based on the Iceland project, JavaPS provides components that are associated with processing geospatial data, for example request objects, response objects, decoders, encoders, parsers.

### 7.1.3. Esri

Esri produce both an installable product (ArcGIS Enterprise) and SaaS product (ArcGIS Online) which support adopted OGC specifications. ArcGIS Enterprise as a server implements WMS, WMTS, WCS2, WPS, WFS2, KML, Geopackage etc as well as other de-facto standards. ArcGIS Online as a server implements WMTS, WFS2 as well as other de-facto standards. Until the OGC API standards are stable and formally adopted, it is not feasible to implement them in the released products. Therefore for the purposes of the Hackathon and further R&D, Esri have implemented the OGC-API tiles as a facade on to ArcGIS Online tiled services. Technically this is currently implemented as a node.js server running in Microsoft Azure. <https://ogc-tiles-esri-server.azurewebsites.net>

### 7.1.4. rasdaman

rasdaman ("raster data manager") is a flexible, scalable datacube engine with location-transparent federation capabilities. Open-source rasdaman is available from [www.rasdaman.org](http://www.rasdaman.org). Being WCS reference implementation rasdaman supports OGC WMS, WCS, and WCPS (the OGC datacube analytics standard). For experimentation with the emerging OGC OpenAPI interface for coverages a rasdaman server has been made available on Amazon with an OpenAPI facade to WCS; access has been demonstrated with EURAC and Sinergise OpenAPI clients.

## **7.1.5. TBA**

TBA

# **7.2. Client Implementations**

## **7.2.1. OpenSphere OGC API Plugin**

[OpenSphere](https://github.com/ngageoint/opensphere) [<https://github.com/ngageoint/opensphere>] is a pluggable, single-page, GIS web application that supports both 2D and 3D views. It supports hooking up to many common servers and formats such as ArcGIS, Geoserver (and other OGC WMS/WFS services), XYZ, TMS, KML, GeoJSON, Shapefiles and CSVs. Other features include animation of both raster and vector data, import and export of various formats, and saving files and layers between sessions. Sigma Bravo extended OpenSphere to support OGC API - Features and OGC API - Map Tiles.

## **7.2.2. Hexagon LuciadLightspeed**

LuciadLightspeed provides a foundation for advanced geospatial analytics applications. It allows users to create high performance command & control and location intelligence applications with clean design implementation and rapid application development. A desktop client application was implemented using LuciadLightspeed and configured to interface services implementing the OGC API - Map Tiles specification.

## **7.2.3. Solenix WPS Demo Client**

The Solenix WPS Demo client is an adaptation of the OGC Testbed 14 client, accounting for some of the changes introduced with the OGC API - Processing.

The client application runs from a web browser.

## **7.2.4. Esri OGC API-Tiles Demo Client**

The Esri client application is a simple Leaflet application which connects to the Esri OGC API-Tiles server implementation for testing purposes.

## **7.2.5. TBA**

TBA

## **7.2.6. TBA**

TBA

# Chapter 8. OGC API Specifications

This chapter describes each of the OGC API specifications that were advanced by the Hackathon. The section presents an overview of each specification and is not intended to be a substitute for reading the complete specification.

## 8.1. OGC API - Common

The OGC API - Common specification documents the set of common practices and shared requirements that have emerged from the development of Resource Oriented Architectures and Web APIs within the OGC. The specification serves as a common foundation upon which all OGC APIs will be built. As such, the OGC API - Common standard serves as the "OWS Common" standard for OGC Resource Oriented APIs. Consistent with the architecture of the Web, this specification uses a resource architecture that conforms to principles of Representational State Transfer (REST). The specification establishes a common pattern that is based on [OpenAPI](https://www.openapis.org/) [<https://www.openapis.org/>].

In addition to identifying core resources, the OGC API - Common specification goes on to specify HTTP status codes that may be supported by an OGC API, as well as how to handle web caching, coordinate reference systems and encodings. The specification also describes how to handle common parameters such as bounding boxes and date-time constraints.

The following subsection presents a summary of the core resources.

### 8.1.1. Key Resources

A summary of the paths offered by the OGC API - Common specification is presented below:

- Path = /
  - Returns landing page
- Path = /api
  - Returns API Description document (OpenAPI)
- Path = /conformance
  - Returns a set of conformance class URIs.
- Path = /collections
  - Returns metadata describing the collections accessible through this API
- Path = /collections/{collectionId} \*\*Returns metadata describing the collection identified by {collectionId} \*Path = /collections/{collectionId}/items
  - Returns --- TBD. This may be where Common leaves off and resource specific standards take over.

## 8.2. OGC API - Features

The OGC API - Features specification offers the capability to create, modify and query spatial data on the Web. This standard specifies requirements and recommendations for APIs that want to

follow a standard way of sharing feature data. The specification is a multi-part document. The Core part of the specification describes the mandatory capabilities that every implementing service has to support and is restricted to read-access to spatial data. Additional capabilities that address specific needs will be specified in additional parts. Envisaged future capabilities include, for example, support for creating and modifying data, more complex data models, richer queries, and additional coordinate reference systems. This specification builds on the Web Feature Service (WFS) standard and has previously been referred to as WFS 3.0.

### 8.2.1. Key Resources

A summary of the paths offered by the OGC API - Features specification is presented below:

- Path = /
  - Returns the landing page of this API (inherited from OGC API - Common)
- Path = /conformance
  - Returns information about standards that this API conforms to (inherited from OGC API - Common)
- Path = /collections
  - Returns a description of the feature collections in the dataset (inherited from OGC API - Common)
- Path = /collections/{collectionId}
  - Returns a description of the {collectionId} feature collection (inherited from OGC API - Common)
- Path = /collections/{collectionId}/items
  - Returns features of feature collection {collectionId}
- Path = /collections/{collectionId}/items/{featureId}
  - Returns a feature; using content negotiation to request HTML, GeoJSON or other

## 8.3. OGC API - Processes

The OGC API - Processes specification provides defines how a client application can request the execution of a process, how the inputs to that process can be provided, and how the output from the process is handled. The specification allows for the wrapping of computational tasks into an executable process that can be invoked by a client application. Examples of computational processes that can be supported by implementations of this specification include raster algebra, geometry buffering, constructive area geometry, routing and several others. This specification builds on the Web Processing Service (WPS) standard.

### 8.3.1. Key Resources

A summary of the paths offered by the OGC API - Processes specification is presented below:

- Path = /

- Returns landing page (inherited from OGC API - Common)
- Path = /api
  - Returns API Description document (OpenAPI) (inherited from OGC API - Common)
- Path = /conformance
  - Returns a set of conformance class URIs. (inherited from OGC API - Common)
- Path = /processes
  - Returns available processes
- Path = /processes/{id}/
  - Returns a process description
- Path = /processes/{id}/jobs
  - Returns the list of jobs for a process.
- Path = /processes/{id}/jobs/{jobID}/
  - Returns the status of a job
- Path = /processes/{id}/jobs/{jobID}/result
  - Returns the result(s) of a job

## 8.4. OGC API - Map Tiles

The OGC API - Map Tiles specification defines an OGC standard for a Web Map Tile API that can serve map tiles of spatially referenced data using tile images with predefined content, extent, and resolution. The specification describes the discovery and query operations of an API that provides access to Map Tiles in a manner independent of the underlying data store. The discovery operations allow the API to be interrogated to determine its capabilities and retrieve metadata about the organisation and distribution of tiles. The query operations allow tiles to be retrieved from the underlying data store based upon simple selection criteria, defined by the client. This specification builds on the Web Map Tile Service (WMTS) standard.

### 8.4.1. Key Resources

A summary of the paths offered by the OGC API - Processes specification is presented below:

- Path = /
  - Returns landing page (inherited from OGC API - Common)
- Path = /conformance
  - Returns a set of conformance class URIs. (inherited from OGC API - Common)
- Path = /collections
  - Returns metadata describing the collections accessible through this API (inherited from OGC API - Common)
- Path = /collections/{collectionId}
  - Returns metadata describing the collection identified by {collectionId}

- Path = /collections/{collectionId}/queryables
  - Returns the queryable properties of the feature collection
- Path = /collections/{collectionId}/items
  - Returns features of the feature collection
- Path = /collections/{collectionId}/items/{featureId}
  - Returns a feature
- Path = /tileMatrixSet
  - Returns all available tile matrix sets (tiling schemes)
- Path = /tileMatrixSet/{tileMatrixSetId}
  - Returns a tiling scheme by id
- Path = /tiles/{tileMatrixSetId}/{tileMatrix}/{tileRow}/{tileCol}
  - Returns a tile of the dataset
- Path = /collections/{collectionId}/tiles/{tileMatrixSetId}/{tileMatrix}/{tileRow}/{tileCol}
  - Returns a tile of the collection with or without style
- Path = /tiles/{tileMatrixSetId}/{tileMatrix}/{tileRow}/{tileCol}/info
  - Returns information on a point of a tile with or without style
- Path = /collections/{collectionId}/tiles/{tileMatrixSetId}/{tileMatrix}/{tileRow}/{tileCol}/info
  - Returns information of a point in a tile of the collection with or without style
- Path = /tiles/{tileMatrixSetId}
  - Returns tiles from several collections.
- Path = /collections/{collectionId}/tiles/{tileMatrixSetId}
  - Returns tiles of a collection
- Path = /map
  - Returns a map of collections with or without style
- Path = /collections/{collectionId}/map
  - Returns a maps from the collection with or without style
- Path = /map/info
  - Returns information about a map of the collection with or without style
- Path = /collections/{collectionId}/map/info
  - Returns information about a map from the collection with or without style

## 8.5. OGC API - Coverages

The OGC API - Coverages specification defines a Web API for accessing coverages that are modelled according to the [Coverage Implementation Schema \(CIS\) 1.1](#) [<http://docs.opengeospatial.org/is/09-146r6/09-146r6.html>]. Coverages are represented by some binary or ASCII serialization, specified by some data

(encoding) format. Arguably the most popular type of coverage is that of a gridded coverage. Gridded coverages have a grid as their domain set describing the direct positions in multi-dimensional coordinate space, depending on the type of grid. Satellite imagery is typically modelled as a gridded coverage, for example. The OGC API - Coverages specification builds on the Web Coverage Service (WCS) standard.

### 8.5.1. Key Resources

A summary of the paths offered by the OGC API - Coverages specification is presented below:

- Path = /
  - Returns landing page (inherited from OGC API - Common)
- Path = /api
  - Returns API Description document (OpenAPI) (inherited from OGC API - Common)
- Path = /conformance
  - Returns a set of conformance class URIs. (inherited from OGC API - Common)
- Path = /collections
  - Returns metadata describing the collections accessible through this API (inherited from OGC API - Common)
- Path = /collections/{collectionId}
  - Returns metadata describing the collection identified by {collectionId}
- Path = /collections/{collectionId}/coverages
  - Returns metadata about each coverage in the collection
- Path = /collections/{collectionId}/coverages/{coverageID}
  - Returns the coverage itself. Typically as an image file.
- Path = /collections/{collectionId}/coverages/{coverageID}/metadata
  - Returns metadata about a coverage.
- Path = /collections/{collectionId}/coverages/{coverageID}/domainset
  - Returns a description of the domain set of the coverage
- Path = /collections/{collectionId}/coverages/{coverageID}/rangertype
  - Returns a description of the range type of the coverage

# Chapter 9. Results

This section presents results from the Hackathon.

## 9.1. OGC API - Processes

The participants made an observation that some attributes for referenceValue were missing. As a result, changes were made to add attributes for identifying the MIME type, schema and encoding in a referenceValue object. These changes were needed for providing input in a specific format or returning output in a specific format.

There was a [suggestion](https://github.com/opengeospatial/wps-rest-binding/issues/42) [https://github.com/opengeospatial/wps-rest-binding/issues/42] to add ows:additionalProperties and ows:context to metadata. It was observed that ows:additionalParameters allows a service to provide key value pairs metadata information. It was also observed that Testbed 13 and testbed 14 had demonstrated the utility of such a capability. As a result, the hackathon participants committed changes to the OGC API - Process specification adding the definition of additionalParameters.

There was also a [discussion](https://github.com/opengeospatial/wps-rest-binding/issues/37) [https://github.com/opengeospatial/wps-rest-binding/issues/37] about whether process output arrays are fully supported. The participants observed that currently the [output-value-cardinality](http://www.opengis.net/spec/WPS/2.0/req/conceptual-model/process/output-value-cardinality) [http://www.opengis.net/spec/WPS/2.0/req/conceptual-model/process/output-value-cardinality] requirement limits cardinality of the output to one. A number of workarounds were suggested including returning a list of outputs, returning an archive (zip), returning a Metalink, or returning Multipart/mixed responses. The participants concluded that a solution would need to handle all kind of outputs, including outputs by reference, as well as binary files.

There was a [discussion](https://github.com/opengeospatial/wps-rest-binding/issues/30) [https://github.com/opengeospatial/wps-rest-binding/issues/30] about how to specify synchronous execution OGC API Hackathon. The options identified included i) Either use a query parameter or a HTTP header to specify the execution mode, ii) Return a result object, iii) Do not return a header with the location (as there technically is no location, i.e. its a temp. This issue was also related to the broader issue of how to choose between synchronous and asynchronous mode for job creation. The participants observed that indeed the WPS 2.0 specification has a jobID in the the status object, and therefore the OGC API - Processes specification should also include a jobID into the statusInfo object.

There was a [suggestion](https://github.com/opengeospatial/wps-rest-binding/issues/31) [https://github.com/opengeospatial/wps-rest-binding/issues/31] for an extension supporting triggers according to job status. In particular the suggestion was for the user/client to be able to specify triggers for conditions like: **onSuccess** a Url to be triggered upon process completion, or **onFail** a URL to be triggered on process failure, **progressUpdate** a URL to be triggered by the job while progressing and should contain progress status (eg. procent of job completion). Participants considered whether such a capability might be more appropriate as an extension, perhaps associated with a pub/sub notification capability.

There was a [suggestion](https://github.com/opengeospatial/wps-rest-binding/issues/32) [https://github.com/opengeospatial/wps-rest-binding/issues/32] to add the exception information to the status information at GET **/processes/{id}/jobs/{jobID}** and remove the GET **/processes/{id}/jobs/{jobID}/exception** endpoint. The participants considered whether an HTTP 201 code should be returned with POST /processes/{id}/jobs. The participants resolved that allowing for plural form results could address this issue, for example

[processes/{processId}/jobs/{jobId}/results/{resultId}](#). Use of an HTTP 201 code was however inconclusive.

## 9.2. OGC API - Map Tiles

The participants identified three roots for API building blocks, namely the root of the service, collection ID, and collection ID combined the coverage ID. A need to combine these root paths with maps and tiles was identified. There was an observation made that if the roots are combined with maps and tiles, there is an opportunity to provide much more information through data tiles such as vector tiles or coverage tiles. There was also an observation made that if a style and style id are concatenated with the path then the API would be able to combine data tiles with portrayals of the information. There was a third alternative identified, which is the concatenation of both the aforementioned approaches.

These paths have specific query parameters associated with them. Participants observed that such a capability may not be fully supported by OpenAPI 3.0.

There was a discussion about whether the response for maps should return raster or vector maps. Related to this was whether a map was at the same level as a collection. There was agreement that maps are not at the same level as collections.

There was a [suggestion](#) [<https://github.com/opengeospatial/OGC-API-Map-Tiles/issues/12>] to normalize the case used by attributes of the tileMatrix construct. Before the hackathon some of the attribute names were in UpperCamelCase whereas others were in lowerCamelCase. Normalizing the attribute names would ensure consistency of naming and thus make it easier for developers to implement.

There was also an [observation](#) [<https://github.com/opengeospatial/OGC-API-Map-Tiles/issues/13>] made that there is a need to determine where metadata fields supported by WMS could be applied in the OGC API - Map Tiles standard. The metadata fields supported by the WMS standard include: Name, Title, Abstract, KeywordList, Style, CRS, EX\_GeographicBoundingBox, BoundingBox, Dimension, Attribution, AuthorityURL, Identifier, MetadataURL,DataURL, FeatureListURL, MinScaleDenominator, MaxScaleDenominator, queryable, cascaded, opaque, noSubsets, fixedWidth, and fixedHeight.

The participants [observed](#) [<https://github.com/opengeospatial/OGC-API-Map-Tiles/issues/14>] that the extents and bounding box classes used by the OGC API - Map Tiles specification have been defined in different ways. The extent class defines a bounding extent as an array of numbers indicating bounding coordinates, whereas the boundingBox class defines the bounding coordinates as separate attributes for the lower and upper corner coordinates.

## 9.3. OGC API - Coverages

The participants agreed that OGC API - Coverages should inherit from OGC API - Common as much as possible. This meant that wherever a requirement is specified in OGC API - Common, if it is relevant to coverages, the OGC API - Coverages specification would reference the requirement in the OGC API - Common specification.

The participants agreed that a request for the coverages path would return a list of all of the coverage identifiers included in the collection.

There was also agreement that a request for the coverage description would only return the essential information instead of the complete metadata associated with the coverage.

There was discussion about how to support bounding box (BBOX) filters on multidimensional coverages. The participants expressed the need to inherit the BBOX and time parameters from OGC API - Common, however also they also observed that there would be a need to identify a CRS for height. One of the suggestions was for each axis to have a separate coverage filter. The participants concluded that there is currently no construct in the Core part of the OGC API - Common specification that supports filtering of coverages.

There was discussion about the retrieval of coverages. The OGC API - Coverages specification was updated to allow for different ways for getting the coverages individually. Since not every format is suitable for transferring all of the coverage information, participants identified different ways for getting the different types of coverages. It was also noted that for applications that do not want to use collections, they can just use the [coverages/{coverageid}](#) path.

There was a discussion about whether parameters, values and URL bases were case sensitive. This issue was observed to be applicable to all of the specifications. There was a suggestion that the OGC API - Common specification should specify a rule for case sensitivity and that that rule should be consistent with the RFC.

## 9.4. OGC API - Common

There was a discussion about whether OGC API - Common should support the CRS:84 coordinate system (WGS84) by default. The participants observed that the collectionInfo metadata (returned for each collection) allows one to specify the CRS supported by the collection. The client can specify one of the other CRS if they do not support the default. For coverages, the default CRS was observed to be the native CRS. The participants concluded that there will be a default CRS for the API and the OGC API - Common specification should have complete control over the CRS and the default CRS should not constrain the resource.

The participants discussed what role version numbers would play within an OGC API, recognising that the current suite of OGC web service standards require implementations to indicate the supported versions as a query parameter. The participants determined that the version of the standard would be reflected in the conformance class. Each conformance class would be made uniquely identifiable and any change to that conformance class would relate in the creation of a new conformance class. It would therefore not be necessary to indicate the version on the standard on the path or the query parameters of an implementation of the OGC APIs.

The participants observed that there is a need for something like CRS:84 that has ellipsoid height. EPSG:4327 was suggested as a possible basis for such a CRS, with the caveat that it has been deprecated. It was agreed to discuss the issue of a height or elevation CRS with the WFS SWG and the CRS DWG at the OGC TC meeting in Leuven.

## 9.5. Technology Integration Experiments (TIE)

The following table presents Technology Integration Experiments (TIE) that were completed during the Hackathon.

*Table 2. Technology Integration Experiments (TIE) for OGC APIs*

Services\ Client	Hexagon	Helyx	SigmaBra vo	Esri	Solenix	EURAC	Sinergise
52 North		Processes			Processes		
CubeWerx		Processes			Processes		
Esri	Map Tiles		Map Tiles	Map Tiles			
Helyx		Processes					
pygeoapi			Features		Processes		
Geoserver			Features				
Spacebel			Features, Catalogue		Processes		
West University of Timisoara					Processes		
rasdaman						Coverages	Coverages

**NOTE** Services on rows and Clients on columns


# Chapter 10. Key Findings

This section presents the key findings from the Hackathon.

## 10.1. What occurred

### 10.1.1. Processes

The decision to hold the OGC API Hackathon was made by the TC at the 2019 TC meeting in Singapore. Following this decision, OGC staff engaged a number of potential sponsors from the OGC membership. Having identified sponsors and hosts, a series of teleconferences were held for planning the event. These teleconferences discussed venue logistics, computing infrastructure, data, scenarios, catering and other topics. A Gantt chart of the planning and execution of the hackathon is shown in [Figure 4](#).

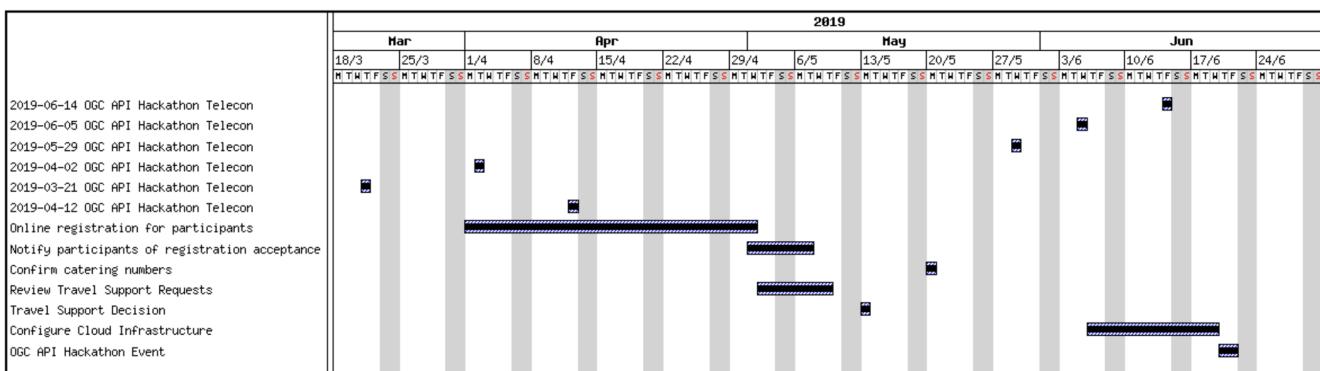

*Figure 4. A Gantt chart of the planning and execution of the hackathon*

During the hackathon, the process involved alternation between briefings, discussions and coding. On the first day of the hackathon, three back-briefs were held, that is one in the morning, another in the afternoon and another in the evening. These briefings provided an opportunity for issues to be discussed across teams. Agreements and resolutions from the discussions triggered by the briefings were then fed back into the team-specific work.

### 10.1.2. Organization

By the event date, 76 individuals had been registered to participate in-person and 35 participants had been registered to participate remotely. A questionnaire sent out just before the hackathon to collect information about which OGC API specifications the participants would focus on received 27 responses. The spread of responses to the hackathon is shown in [Figure 5](#).

## Which team will you work mostly with during the Hackathon?

27 responses

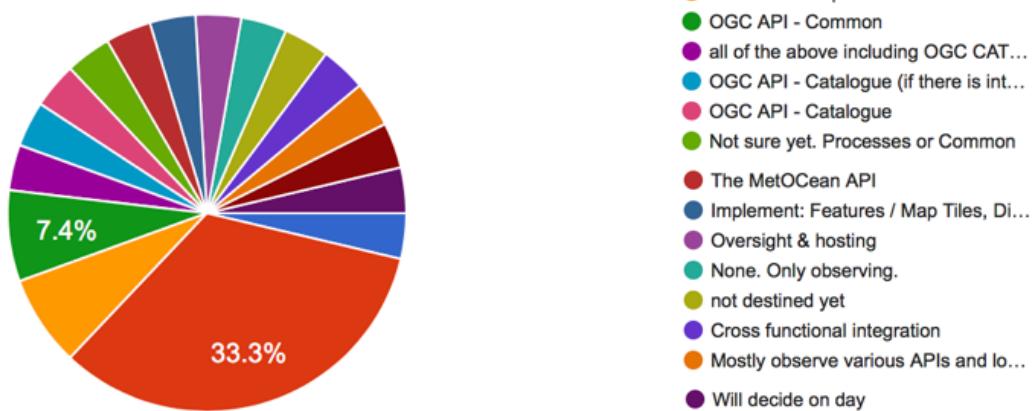


Figure 5. Participants' interests

The hackathon was therefore organized around teams based on the OGC API specifications. Participants interested in APIs other than those for coverages, processes, and map tiles, were asked to contribute to the work on advancing the OGC API - Common specification. This would help ensure that the OGC API - Common specification provides an appropriate base for all future OGC APIs.

### 10.1.3. Technology

The client and service applications were bound together through interfaces conforming to the OGC APIs for Map Tiles, Processes, Features, Catalogues, and Coverages. The client applications included software from Hexagon, Helyx, OpenSphere, Esri, Solenix, EURAC and Sinergise. The service applications included software from 52 North, CubeWerx, Esri, Helyx, pygeoapi, Geoserver, Spacebel, West University of Timisoara, and rasdaman. The variety of software implementations suggests that the OGC API specifications widely implementable and do not depend on any single vendor's technology.

As discussed in [Architecture](#), the software products that were deployed by the aforementioned organizations included:

- pygeoapi
- 52°North JavaPS
- Esri prototype facade on to ArcGIS Online tiled services
- rasdaman
- OpenSphere OGC API Plugin
- Hexagon LuciadLightspeed
- Solenix WPS Demo Client
- Esri OGC API-Tiles Demo Client

The deployed technologies includes software implemented in Python, Java, and NodeJS. Some of the deployed technologies include Python adapters to software implemented in C++. This variety of programming languages shows that the OGC API specifications are independent of any

programming language.

#### 10.1.4. Information

##### Communication

A key aspect of executing a hackathon is the communication within and between the participating teams. A number of communication tools were used within the OGC API Hackathon to facilitate communication.

- OGC Portal: Used for event planning.
- Gitter: Used for communication relating to technical information, due to its close integration with Github.
- Github: Used for logging issues and sharing documents (including the engineering report) across teams.
- OGC Mailing list: Used for sharing administrative information with all participants ahead of the hackathon.
- Gotomeeting: Used for the pre-event webinar and for teleconferencing with remote participants during the hackathon.

**NOTE**

The Ordnance Survey provided the Microsoft Teams platform for supporting participants that had requested access to the Ordnance Survey Cloud.

##### Knowledge Capture

The various teams involved in the hackathon used the Github repositories of their relevant OGC API specifications to log issues that were identified during discussions. Note that the hackathon took place at the end of the week, and thus some of the participants were only able to log issues at the beginning of the week after the hackathon. [Figure 6](#) presents a graph of the total number of issues logged in Github repositories on the lead up to the hackathon event, during the event and the week after the event. The effect of the hackathon is clearly visible from the 'spike' in the number of issues logged during the two days of the hackathon event (i.e. June 20th & 21st).


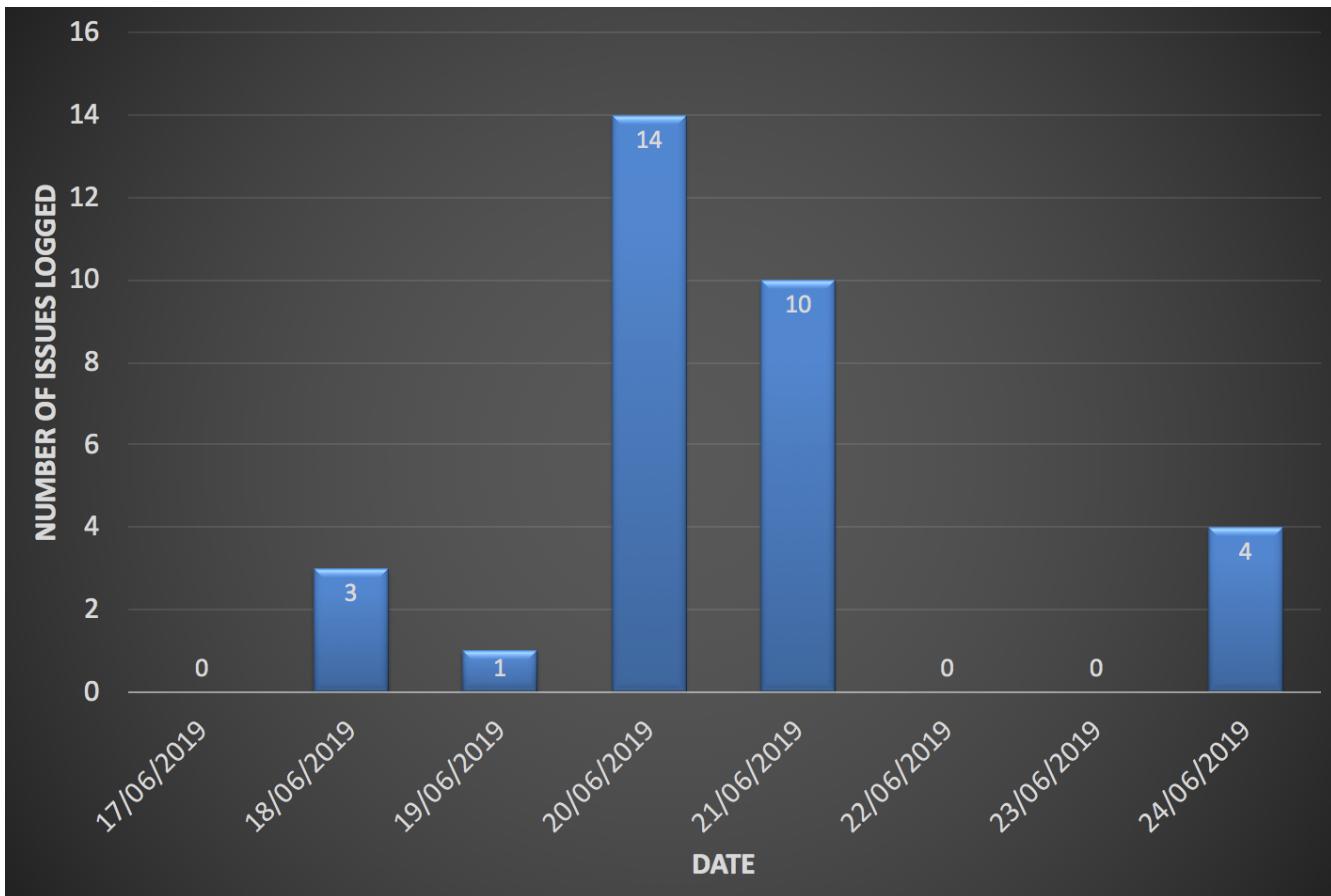


Figure 6. The total number of issues logged in Github repositories for Processes, Map Tiles, Common and Coverages

Changes to the OGC API specifications were made on the lead up to the hackathon, and during the event. Figure 7 presents the total number of commits in Github repositories for OGC APIs on the lead up to the hackathon event, during the event and the week after the event. The commits represent more than 4600 additions and 3200 deletions to the draft API specifications.

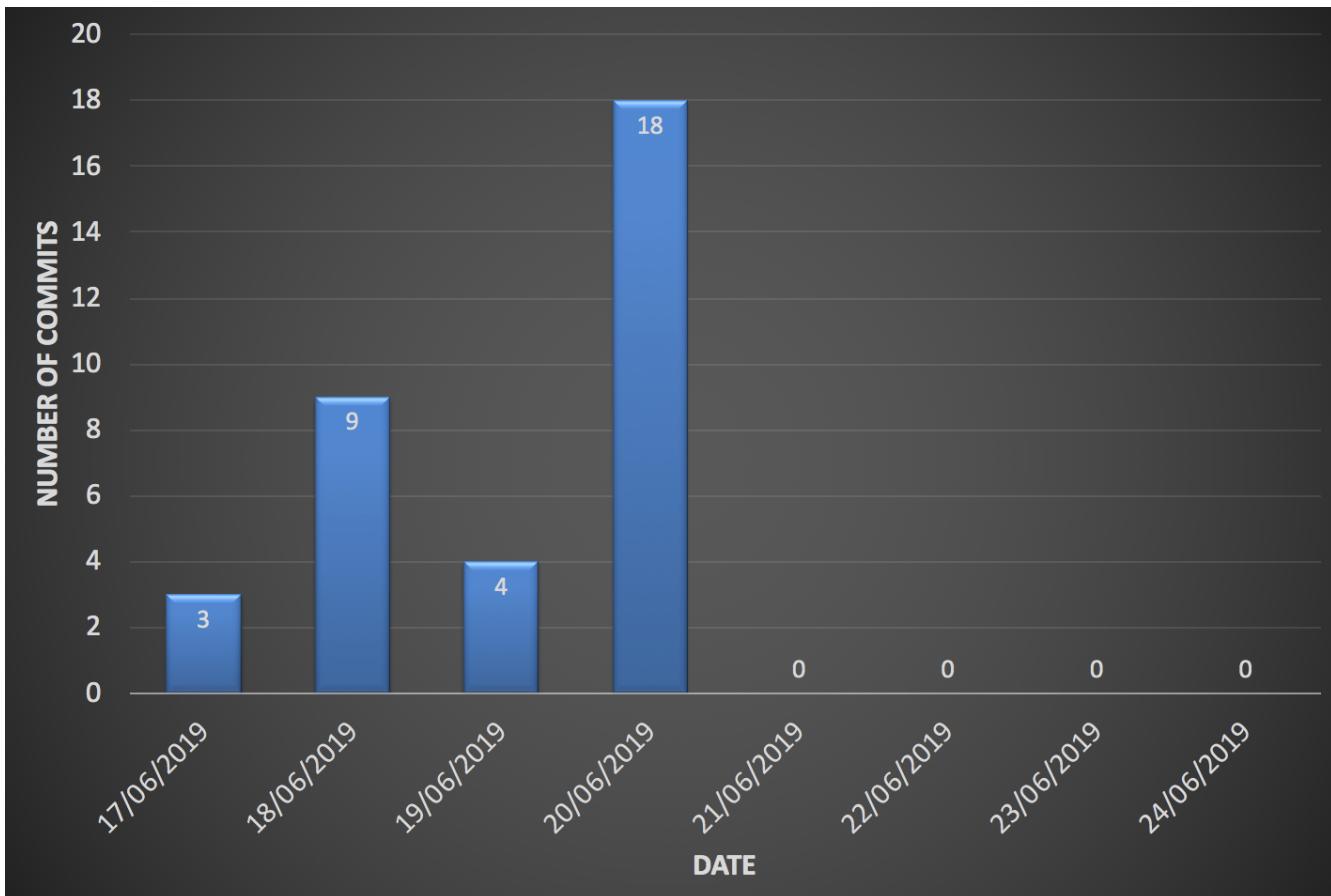

*Figure 7. The total number of commits made to Github repositories for Processes, Map Tiles, Common and Coverages*

It should be noted that although the hackathon resulted in additions and deletions to the draft API specifications, the outputs of the hackathon are subject to vetting and approval processes of the relevant OGC Standards Working Groups. Therefore there is always the possibility that the Standards Working Groups may reject all of the outputs of the hackathon. To an extent, such an outcome is mitigated by the participation of several members of the Standards Working Group in the hackathon. Further, appointing the editors of the OGC API specifications as the Team Leads of the hackathon appeared to improve the likelihood of acceptance of changes made during the hackathon.

## 10.2. Experiences

TBA

## 10.3. Lessons learnt

TBA

## 10.4. What are the next steps?

TBA

# Appendix A: Implementations of OGC APIs

## A.1. 52°North GmbH

TBA

### A.1.1. Motivation to Participate

TBA

### A.1.2. Implemented Solution

52°North implemented and deployed an instance of the 52°North JavaPS software, which is an implementation of the OGC Web Processing Service (WPS) standard and the OGC API - Processes specification. A screenshot of the deployed service is shown in [Figure 8](#). The software was configured to offer an interface that conforms to the OGC API - Processes specification.

The screenshot shows a SwaggerHub page for an OGC API - Processes implementation. The left sidebar lists various API endpoints under categories like CAPABILITIES, PROCESSES, CONFORMANCE, PROCESSDESCRIPTION, JOBLIST, EXECUTE, STATUS, and RESULT. The main content area displays a YAML representation of the API's OpenAPI specification. The specification includes details such as the title 'The OGC Web Processing Service 2.0 REST/JSON Extension API', version '1.0-draft', and a warning that it is 'WORK IN PROGRESS'. It also specifies contact information for the Open Geospatial Consortium and a license under CC-BY 4.0. The right side of the screen shows a summary of the API's capabilities, including a 'Capabilities' section with a 'GET /' endpoint and a 'Processes' section with a 'GET /processes' endpoint. The overall interface is clean and follows the design principles of the Swagger specification.

*Figure 8. Swagger Hub page of the OGC API - Processes implementation deployed by 52°North GmbH*

### A.1.3. Proposed Alternatives

TBA

#### **A.1.4. Experiences with OGC API Specifications**

TBA

#### **A.1.5. Other Impressions & Recommendations**

TBA

### **A.2. akouas**

TBA

#### **A.2.1. Motivation to Participate**

TBA

#### **A.2.2. Implemented Solution**

TBA

#### **A.2.3. Proposed Alternatives**

TBA

#### **A.2.4. Experiences with OGC API Specifications**

TBA

#### **A.2.5. Other Impressions & Recommendations**

TBA

### **A.3. ARC**

TBA

#### **A.3.1. Motivation to Participate**

TBA

#### **A.3.2. Implemented Solution**

TBA

#### **A.3.3. Proposed Alternatives**

TBA

#### **A.3.4. Experiences with OGC API Specifications**

TBA

#### **A.3.5. Other Impressions & Recommendations**

TBA

### **A.4. Arup**

TBA

#### **A.4.1. Motivation to Participate**

TBA

#### **A.4.2. Implemented Solution**

TBA

#### **A.4.3. Proposed Alternatives**

TBA

#### **A.4.4. Experiences with OGC API Specifications**

TBA

#### **A.4.5. Other Impressions & Recommendations**

TBA

### **A.5. blockdore**

TBA

#### **A.5.1. Motivation to Participate**

TBA

#### **A.5.2. Implemented Solution**

TBA

#### **A.5.3. Proposed Alternatives**

TBA

#### **A.5.4. Experiences with OGC API Specifications**

TBA

#### **A.5.5. Other Impressions & Recommendations**

TBA

### **A.6. British Antarctic Survey**

TBA

#### **A.6.1. Motivation to Participate**

TBA

#### **A.6.2. Implemented Solution**

TBA

#### **A.6.3. Proposed Alternatives**

TBA

#### **A.6.4. Experiences with OGC API Specifications**

TBA

#### **A.6.5. Other Impressions & Recommendations**

TBA

### **A.7. Cicy**

TBA

#### **A.7.1. Motivation to Participate**

TBA

#### **A.7.2. Implemented Solution**

TBA

#### **A.7.3. Proposed Alternatives**

TBA

## **A.7.4. Experiences with OGC API Specifications**

TBA

## **A.7.5. Other Impressions & Recommendations**

TBA

# **A.8. CREAF**

TBA

## **A.8.1. Motivation to Participate**

TBA

## **A.8.2. Implemented Solution**

TBA

## **A.8.3. Proposed Alternatives**

TBA

## **A.8.4. Experiences with OGC API Specifications**

TBA

## **A.8.5. Other Impressions & Recommendations**

TBA

# **A.9. CubeWerx Inc.**

TBA

## **A.9.1. Motivation to Participate**

TBA

## **A.9.2. Implemented Solution**

TBA

## **A.9.3. Proposed Alternatives**

TBA

#### **A.9.4. Experiences with OGC API Specifications**

TBA

#### **A.9.5. Other Impressions & Recommendations**

TBA

### **A.10. Deimos Space UK**

TBA

#### **A.10.1. Motivation to Participate**

TBA

#### **A.10.2. Implemented Solution**

TBA

#### **A.10.3. Proposed Alternatives**

TBA

#### **A.10.4. Experiences with OGC API Specifications**

TBA

#### **A.10.5. Other Impressions & Recommendations**

TBA

### **A.11. District Government Cologne - Geobasis NRW**

TBA

#### **A.11.1. Motivation to Participate**

TBA

#### **A.11.2. Implemented Solution**

TBA

#### **A.11.3. Proposed Alternatives**

TBA

#### **A.11.4. Experiences with OGC API Specifications**

TBA

#### **A.11.5. Other Impressions & Recommendations**

TBA

### **A.12. Dstl**

TBA

#### **A.12.1. Motivation to Participate**

TBA

#### **A.12.2. Implemented Solution**

TBA

#### **A.12.3. Proposed Alternatives**

TBA

#### **A.12.4. Experiences with OGC API Specifications**

TBA

#### **A.12.5. Other Impressions & Recommendations**

TBA

### **A.13. Duisburg Essen university**

TBA

#### **A.13.1. Motivation to Participate**

TBA

#### **A.13.2. Implemented Solution**

TBA

#### **A.13.3. Proposed Alternatives**

TBA

## **A.13.4. Experiences with OGC API Specifications**

TBA

## **A.13.5. Other Impressions & Recommendations**

TBA

# **A.14. Ecere Corporation**

TBA

## **A.14.1. Motivation to Participate**

TBA

## **A.14.2. Implemented Solution**

TBA

## **A.14.3. Proposed Alternatives**

TBA

## **A.14.4. Experiences with OGC API Specifications**

TBA

## **A.14.5. Other Impressions & Recommendations**

TBA

# **A.15. ECMWF**

TBA

## **A.15.1. Motivation to Participate**

TBA

## **A.15.2. Implemented Solution**

TBA

## **A.15.3. Proposed Alternatives**

TBA

## **A.15.4. Experiences with OGC API Specifications**

TBA

## **A.15.5. Other Impressions & Recommendations**

TBA

# **A.16. El Toro**

TBA

## **A.16.1. Motivation to Participate**

TBA

## **A.16.2. Implemented Solution**

TBA

## **A.16.3. Proposed Alternatives**

TBA

## **A.16.4. Experiences with OGC API Specifications**

TBA

## **A.16.5. Other Impressions & Recommendations**

TBA

# **A.17. EOS Data Analytics**

TBA

## **A.17.1. Motivation to Participate**

TBA

## **A.17.2. Implemented Solution**

TBA

## **A.17.3. Proposed Alternatives**

TBA

## **A.17.4. Experiences with OGC API Specifications**

TBA

## **A.17.5. Other Impressions & Recommendations**

TBA

# **A.18. EOX IT Services GmbH**

TBA

## **A.18.1. Motivation to Participate**

TBA

## **A.18.2. Implemented Solution**

TBA

## **A.18.3. Proposed Alternatives**

TBA

## **A.18.4. Experiences with OGC API Specifications**

TBA

## **A.18.5. Other Impressions & Recommendations**

TBA

# **A.19. European Space Agency (ESA)**

TBA

## **A.19.1. Motivation to Participate**

TBA

## **A.19.2. Implemented Solution**

TBA

## **A.19.3. Proposed Alternatives**

TBA

## **A.19.4. Experiences with OGC API Specifications**

TBA

## **A.19.5. Other Impressions & Recommendations**

TBA

# **A.20. Esri UK**

Esri make ArcGIS mapping and analytics software.

## **A.20.1. Motivation to Participate**

Evolution of the OGC specifications to a modern, developer-friendly API is essential.

## **A.20.2. Implemented Solution**

To date we have not implemented any of the new draft OGC API standards in our released software. We have been working on various R&D prototypes of server and client.

## **A.20.3. Proposed Alternatives**

TBA

## **A.20.4. Experiences with OGC API Specifications**

Esri has been involved in the OGC since its inception, and have widely implemented many other OGC standards in both server and client software.

## **A.20.5. Other Impressions & Recommendations**

TBA

# **A.21. Eurac Research**

Eurac Research (<http://www.eurac.edu>) is an advanced private not-for-profit research centre established in 1992 with headquarters in Bolzano. Its 430 staff members, united by shared values of passion for their work and an unwavering commitment to quality, have the opportunity to work in a multicultural environment thanks to a wide diversity of nationalities represented among its team. This diversity, of gender and nationality, ensures a positive environment that enables respect and an understanding of different cultural patterns. Eurac Research is internally organized in 11 Research Institutes, supported by 11 Service Departments, performing research activities in different fields from issues related to minority rights protection, federal, regional and local governmental trends and the efficient management of public administrations to studies on renewable energies, promotion of sustainable development and the protection of natural resources. The contributing body for this hackathon is the Institute for Earth Observation (<http://www.eurac.edu/en/research/mountains/remsen/Pages/default.aspx>) with its research groups

for Advanced Computing for Earth Observation ( <http://www.eurac.edu/en/research/mountains/remsen/researchfields/Pages/Technology-for-Environmental-Monitoring.aspx>). Purpose of the Institute is the advanced analysis of Earth Observation data and their integration into products and services tackling most relevant environmental issues in mountain areas. The Group for Advanced Computing for Earth Observation focuses on the research in the field of big data science for developing and implementing novel technology and methodology for handling and analysis of big earth observation data as well as management and processing of earth observation data for the Institute for Earth Observation.

Participating from Eurac Research: Alexander Jacob - Research Group Leader - Advanced Computing for Earth Observation ([alexander.jacob@eurac.edu](mailto:alexander.jacob@eurac.edu) [mailto:[alexander.jacob@eurac.edu](mailto:alexander.jacob@eurac.edu)])

### A.21.1. Motivation to Participate

Eurac Research is actively contributing to openEO (<https://openeo.org/>) an open source initiative aiming to federate EO cloud service providers by developing a standardised interface together with back-end and client implementations. This allows users to approach diverse EO data infrastructures, using source code with the same processing commands. Eurac Research develops a back-end driver (<https://github.com/Open-EO/openeo-wcps-driver>) towards high level interfaces for data cubes via OGC standard WC(P)S and contributes further with the implementation of a use case for operational snow monitoring using openEO. Since a lot of the developments of OGC API now are moving in a similar direction, we wanted to participate in this hackathon event in order to understand well the intent and orientation of OGC API and also to align as much as possible the implementations, in order to make them compatible. Already now several pieces of the openEO API are very similar to the OGC API, since we were from the start of the development also looking at what was happening inside OGC. Especially WFS-3 now known as OGC API - Features we followed with great interest as they were the first going into a restful implementation. We are also looking and following the development of the Spatial Temporal Asset Catalogue (STAC) of the Radian Earth Foundation (<https://github.com/radiantearth/stac-spec>).

### A.21.2. Implemented Solution

During the hackathon event in London we have first further specified out the OGC API - Coverages on the first day and then have implemented a number of back-end implementations. I personally have implemented a first implementation of the latest agreed on spec on the second day. The implemented solution is available at: [http://saocompute.eurac.edu/openEO\\_WCPS\\_Driver/openeo/](http://saocompute.eurac.edu/openEO_WCPS_Driver/openeo/). This solution is based on the aforementioned openEO WCPS driver and has adopted some new REST endpoints considering OGC API - coverages. In particular:

- /collections
  - lists all available collections within server. For this hackathon two collections have been hard-coded for demonstration purpose only: [http://saocompute.eurac.edu/openEO\\_WCPS\\_Driver/openeo/collections](http://saocompute.eurac.edu/openEO_WCPS_Driver/openeo/collections)
- /collections/{collectionid}
  - lists all available coverages in collections specified within server, including most essential meta data like spatial and temporal extent of all coverages: <http://saocompute.eurac.edu/>

## [openEO\\_WCPS\\_Driver/openeo/collections/Sentinel-2](http://saocompute.eurac.edu/openEO_WCPS_Driver/openeo/collections/Sentinel-2)

- /collections/{collectionid}/coverages
  - currently identical to /collections/{collectionid}: [http://saocompute.eurac.edu/openEO\\_WCPS\\_Driver/openeo/collections/Sentinel-2/coverages](http://saocompute.eurac.edu/openEO_WCPS_Driver/openeo/collections/Sentinel-2/coverages)
- /collections/{collectionid}/coverages/{coverageid}
  - this endpoint is supposed to deliver the actual coverage in it's native format or a specified format and subset via query parameters. In the current implementation however it is just delivering the meta data: [http://saocompute.eurac.edu/openEO\\_WCPS\\_Driver/openeo/collections/Sentinel-2/coverages/openEO\\_S2\\_32632\\_20m\\_L2A](http://saocompute.eurac.edu/openEO_WCPS_Driver/openeo/collections/Sentinel-2/coverages/openEO_S2_32632_20m_L2A)
- /coverages
  - lists all available coverages, indepently of if they are belonging to a collections or not. This listing includes again most essential metadata like spatial and temporal extent of all coverages: [http://saocompute.eurac.edu/openEO\\_WCPS\\_Driver/openeo/coverages](http://saocompute.eurac.edu/openEO_WCPS_Driver/openeo/coverages)
- /coverages/{coverageid}
  - this endpoint gives actual access to the data included in a coverage. The following examples demonstrates also how query parameters can be used to limit to a specific subset along all available dimensions of the coverage and how a specific output format can be specified: [http://saocompute.eurac.edu/openEO\\_WCPS\\_Driver/openeo/coverages/openEO\\_S2\\_32632\\_60m\\_L2A&format=json&subset=E\(399960,419960\)&subset=N\(5090220,5100220\)&subset=DATE\(%222018-06-04%22\)](http://saocompute.eurac.edu/openEO_WCPS_Driver/openeo/coverages/openEO_S2_32632_60m_L2A&format=json&subset=E(399960,419960)&subset=N(5090220,5100220)&subset=DATE(%222018-06-04%22)). Available query parameters are:
    - format
      - available formats are listed at [http://saocompute.eurac.edu/openEO\\_WCPS\\_Driver/openeo/output\\_formats](http://saocompute.eurac.edu/openEO_WCPS_Driver/openeo/output_formats)
    - subset
      - works just like the original subset from WCS 2

The existing driver works on top of an installation of rasdaman community edition, exposing both the already existing WCS 2 and it's extension WCPS 1.

### A.21.3. Proposed Alternatives

I personally don't see the need for /collections/{collectionid}/coverages and would just propose to use directly /collections/{collectionid}/{coverageid}. If collections can have different types of collections e.g. a feature collection and a coverage collection, would rather have this information delivered in the metadata of the collection with a type field.

### A.21.4. Experiences with OGC API Specifications

The overall impression of the Hackathon was for me, that there still needs to be more integration between the different standards of the OGC API. The goal should not be to just "restify" the existing standards, but to create a new well defined suit of functionality that take the current state of available data and technology into account. Most importantly the data available today is multi-dimensional covering at least 3 ofter more dimensions and that should be considered everywhere

in the API. Secondly, in order to make actual use of the enormous amount of data available today, one cannot simply download the data and then process everything on the client side. Processing should be performed as much as possible, where the data is, in order to avoid unnecessary copies and unnecessary delay due to long IO times. Finally processing should be as flexible as possible and allow for chaining of arbitrary functions or operations in order to allow a user to achieve whatever he wants with the data. Here I would greatly urge to look into how processing is designed in openEO (<https://open-eo.github.io/openeo-api/v/0.4.1/index.html>) with its concept of a graph representation of workflows, that can contain any number of processes chained into arbitrarily complex graphs including even user defined functions, when necessary processes are not natively supported by a given back-end implementation.

### A.21.5. Other Impressions & Recommendations

The concept of collections of coverages needs to be spiced more precisely. In particular it needs to be discussed and decided if collections should have the same projection and underlying grid, or if they can have arbitrary projections and grids. In the latter case a defined behavior should be decided of how to access a collection as opposed to an individual coverage. Questions like how are we mosaicking and integrating data from coverages on the fly when belonging to same collections, need to be answered. Are re-sampling methods, blending and mosaicking decided implicitly by the back-end implementation or can those be selected by query parameters or other means as well? How do we deal with multi-temporal (or arbitrary n-dimensional) mosaicking and resampling?

## A.22. Geobeyond

Participant: Francesco Bartoli

### A.22.1. Motivation to Participate

- Port the GEE-Bridge API to OGC API - Commons and OGC API - Processes.
- Discuss with the community how to handle WPS remote processes and process chaining (local and remote)
- Understand and find the way how to implement several specifications together for the new GeoNode API
- Align with the CSW community about the new OpenAPI based specification

### A.22.2. Implemented Solution

- GeoNode API draft work of OGC API - Processes which would implement a generic solution for algorithms as functions

### A.22.3. Proposed Alternatives

- Process chaining and consequently workflows should be part of the perimeter of the specification or can be an abstract concept within GeoNode?
- Processing from cloud infrastructure (Google Earth Engine, IBM Geoscope, etc) have to be considered remote or local? Sort of WPS Cascading?

## **A.22.4. Experiences with OGC API Specifications**

- Basic experience with OGC API - Features
- Basic experience with OGC API - Commons and OGC API - Processes

## **A.22.5. Other Impressions & Recommendations**

TBA

# **A.23. GeoCat B.V.**

TBA

## **A.23.1. Motivation to Participate**

TBA

## **A.23.2. Implemented Solution**

TBA

## **A.23.3. Proposed Alternatives**

TBA

## **A.23.4. Experiences with OGC API Specifications**

TBA

## **A.23.5. Other Impressions & Recommendations**

TBA

# **A.24. GeoLabs**

<http://www.geolabs.fr>

GeoLabs is a high-tech SME providing geospatial management solutions world-wide based on open source technologies. GeoLabs is leading the development of numerous open source geospatial projects and provides SaaS/PaaS services for geospatial data. GeoLabs has developed MapMint ([mapmint.com](http://mapmint.com)), a complete web based web mapping infrastructure, participated in the development of [geoportail.fr](http://geoportail.fr), the development of the Senegal's National Cadastre. Further, it provides commercial cloud-based GIS services, and contributes in numerous open source projects.

## **A.24.1. Motivation to Participate**

Get more informations about the directions followed by the working groups for the different standards. Get answer to some questions we got about the Processes api specifically. Indeed, as we

implemented part of (or should I say adaptation of) the wps-rest-binding before attending the hackathon, we were facing some issue in trying mimicing the different options available in WPS 2.0 and, we would like to discuss with other to see their point of view and share ours.

### A.24.2. Implemented Solution

We came with the ZOO-Project implementation demonstration swagger interface available at: <https://demo.mapmint.com/swagger-ui/dist/> for interracting with two WPS instances available at: <http://demo.mapmint.com/WPS2/> and <http://demo.mapmint.com/WPS3/> (where WPS2 is using the model available on the opengeospatial github repository when the second one is made based on the tests we have made to change the wps-rest-binding and attempt to make it fitting the current WPS 2.0 defintions).

This WPS implementation is based on the one available at <http://www.zoo-project.org> with some modifications.

As it is based on an implementation able to offer access to libraries and applications such as GDAL, OGR, GEOS, PROJ, the Orfeo ToolBox (<https://www.orfeo-toolbox.org/>) and the SAGA-GIS application. The demonstration include numerous services available to be run using the wps-rest-binding.

### A.24.3. Proposed Alternatives

TBA

### A.24.4. Experiences with OGC API Specifications

TBA

### A.24.5. Other Impressions & Recommendations

TBA

## A.25. GeoSeer

GeoSeer is a search engine for OGC Services. At the time of writing it has just shy of 200,000 such services in its index, making their data easily and freely searchable.

### A.25.1. Motivation to Participate

The Motivation behind creating GeoSeer was to help solve the discoverability problem. End users often find it difficult to find the services or data that exists. GeoSeer's participation was an extension of this seeking to facilitate making life easier for finding data through the new OGC API Specifications, or at least to ensure it did not get even harder. In fact team behind GeoSeer suggests that discovery is one of the aspects that could be improved in current OGC services and should be getting more consideration in the new OGC API specifications.

## A.25.2. Implemented Solution

N/A

## A.25.3. Proposed Alternatives

N/A

## A.25.4. Experiences with OGC API Specifications

The OGC API specifications all seem quite interesting, though the concept of "collections" took some getting used to and remains somewhat confusing. This suggests they may not be as intuitive as could be desired and users may struggle with it.

In relation to discoverability:

### Good

- The HTML reports that are created are good for improving discoverability with mainstream search engines.
- The OGC API specifications are easily parsable.

### Issues

A number of potential discoverability issues were identified with the current specification.

- The specifications do not include "keywords" currently. Ideally this should be mandatory in core to facilitate discovery. While popular search engines may not currently use this field, that does not mean they and/or others would not in the future. GeoSeer does use this field for indexing, and many current OGC Web Services have this set with meaningful keywords by their deployers. GeoSeer would suggest having it both at the root level (to indicate the type of "service"), and at the /collections level for each collection. This would improve discoverability.
- There may be too much reliance on extensions. Many deployers will NOT install extensions even if they should. For example, the data for services that claim to be compliant to Implementing Rules of the European Union's INSPIRE directive shows that only around half of the services actually have the INSPIRE ExtendedCapabilities. And that is for something that INSPIRE says is mandatory. An extension for "discovery" would therefore not provide its peak usefulness unless its components were in core.
- The "Title", and "Description", fields are both optional in Core, and Features/Maps as far as we can see. These fields should be mandatory. If they are not they will not be there for many services and that will make them considerably less discoverable. It will also significantly reduce usability with desktop GIS (imagine selecting a feature collection when none of them have these...).
- There should be a mandatory BBOX in WGS84 in Core required for each collection. This will facilitate discovery of spatial data - "WHERE" being critical to such data. There are many thousands of "tree" datasets out there for instance, how can a user otherwise know where the data is without this? Some wording to allow exclusion for non-spatial datasets could be incorporated. This could be in addition to a native BBOX defined by the extensions as necessary.

- Metadata url should be included too. While GeoSeer were no big fan of external metadata documents, many large organisations find them extremely important and they are used a fair percentage on current services. A consistent way to specify them would make access to this information automatically easier.
- GeoSeer would like to highlight that if something is not explicitly specified in the OGC API specifications and instead relies on the deployer deciding what/how to implement it (as has been suggested with Keywords), this obviates much of the benefit of a standard. Even **with** standards, developers end up finding many different ways to do things! Without standards the number of ways to do things just makes life extremely difficult for anyone who wishes to automate access to services. Never rely on the deployers/implementers being consistent.

Many of the above would also make it easier for end-users who are accessing these services via a desktop client like QGIS/ArcGIS. Without title/description information in a JSON format it will be impossible for such a user to know what they want without opening stuff in parallel web-browser; hardly easy.

### **A.25.5. Other Impressions & Recommendations**

TBA

## **A.26. GeoSolutions**

TBA

### **A.26.1. Motivation to Participate**

TBA

### **A.26.2. Implemented Solution**

TBA

### **A.26.3. Proposed Alternatives**

TBA

### **A.26.4. Experiences with OGC API Specifications**

TBA

### **A.26.5. Other Impressions & Recommendations**

TBA

## **A.27. Geovation**

TBA

### **A.27.1. Motivation to Participate**

TBA

### **A.27.2. Implemented Solution**

TBA

### **A.27.3. Proposed Alternatives**

TBA

### **A.27.4. Experiences with OGC API Specifications**

TBA

### **A.27.5. Other Impressions & Recommendations**

TBA

## **A.28. Heazeltech**

TBA

### **A.28.1. Motivation to Participate**

TBA

### **A.28.2. Implemented Solution**

TBA

### **A.28.3. Proposed Alternatives**

TBA

### **A.28.4. Experiences with OGC API Specifications**

TBA

### **A.28.5. Other Impressions & Recommendations**

TBA

## **A.29. Helyx SIS**

TBA

## **A.29.1. Motivation to Participate**

TBA

## **A.29.2. Implemented Solution**

TBA

## **A.29.3. Proposed Alternatives**

TBA

## **A.29.4. Experiences with OGC API Specifications**

TBA

## **A.29.5. Other Impressions & Recommendations**

TBA

# **A.30. Hexagon**

Hexagon is a global leader in sensor, software and autonomous solutions. We are putting data to work to boost efficiency, productivity, and quality across industrial, manufacturing, infrastructure, safety, and mobility applications. Our technologies are shaping urban and production ecosystems to become increasingly connected and autonomous — ensuring a scalable, sustainable future.

Within Hexagon Geospatial, we create solutions that visualize location intelligence. From the desktop to the browser to the edge, we bridge the divide between the geospatial and the operational worlds.

## **A.30.1. Motivation to Participate**

Hexagon Geospatial has been an active supporter of OGC and OGC standards for many years. Next to implementing a wide range of OGC standards, we have ample experience in applying OGC standards within industry solutions for a variety of domains, such as Aviation, Defense & Intelligence, Maritime, Transportation, Mining or Disaster Management. By being part of many testbeds and interoperability experiments the past decade and contributing numerous software components and engineering reports, we also learned that cooperation with other people on real-world use cases is an excellent way of testing and improving specifications. Hexagon Geospatial is motivated to share its expertise as long-term implementer and user to support the advancements of OGC standards related to map tiles, coverages and processes.

## **A.30.2. Implemented Solution**

We implemented a desktop Java-based fat client to experiment with the Map Tiles API. The client retrieved data from the server provided by EsriUK, accessing the maps using the tile-based approach.

Interesting about the client implementation is that it started from `/collections/{collectionId}` and used the provided metadata to look up the appropriate tile matrix set from `/tileMatrixSets/{tileMatrixSetId}`. Now that the tile structure was known, the client used `/collections/{collectionId}/tiles/{styleId}/{tileMatrixSetId}/…` to get the actual tile data. Note that the specification was still evolving and there was no `map/` before `{styleId}/` yet.

The implementation showed that the necessary metadata is available to access the map tiles generically.

[Figure 9](#) shows the client accessing a map tiles collection from the server. The tiles are shown in the native CRS of the tile matrix set.

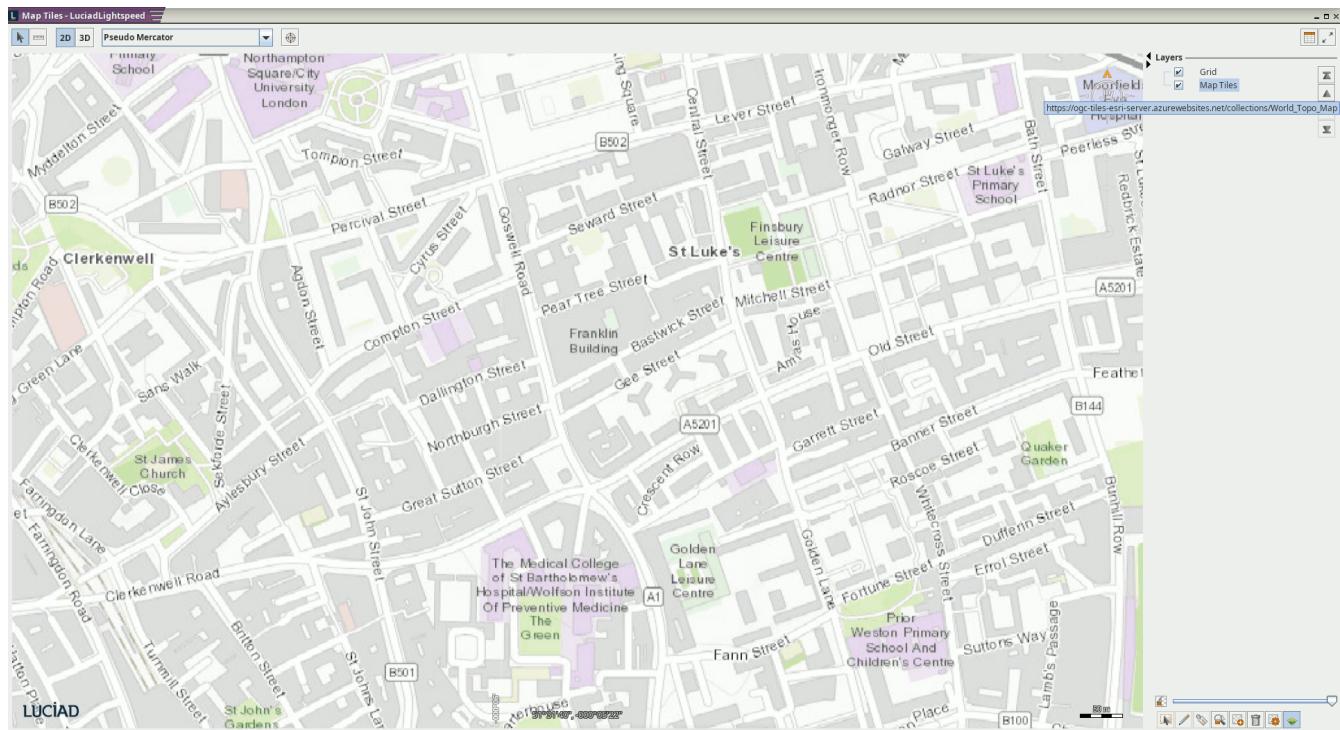


Figure 9. Hexagon client showing map tiles using native CRS of the tile matrix set

[Figure 10](#) shows the client accessing a map tiles collection from the server. The tiles are requested in their native CRS, but reprojected onto a 3D globe.

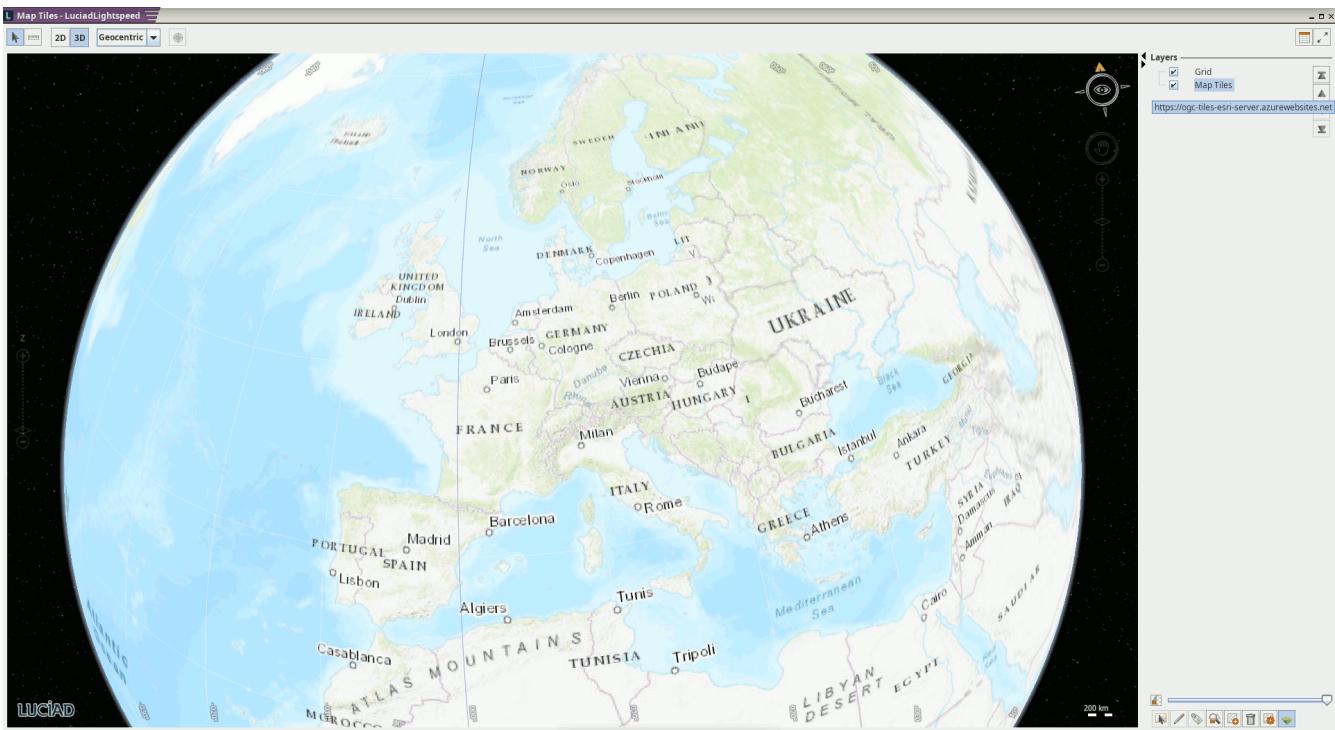


Figure 10. Hexagon client showing map tiles projected onto 3D globe

### A.30.3. Proposed Alternatives

We raised some questions related to the consistency and duplication in various parts of the metadata in the API.

We participated in the discussions about composability of the tiling scheme on top of collections or maps.

We noted that there seems to be an opportunity for having more concepts in the Common API. Specifically, it seems that *extent* could be in there.

When generating a map depicting multiple collections, the request will probably get quite complex. Perhaps it is useful to think of such a map as a composition of multiple single-collection maps. The multiple-collection map request could perhaps refer to multiple single-collection maps?

### A.30.4. Experiences with OGC API Specifications

The Hexagon Geospatial product portfolios applied OGC standards from the start and currently implement more than a dozen OGC standards and candidate standards, including implementations of WFS, WMS, WCS, WMPS, WPS, CSW, GeoPackage, Filter Encoding, SLD / SE, GML, KML, 3D Tiles and NetCDF.

### A.30.5. Other Impressions & Recommendations

It is very good to hear that OGC is trying to make the APIs more easily consumable by users. However, and perhaps specifically to the Map Tiles, the variety of use cases and access patterns still leads to considerable complexity, for instance by having request parameters related to parts of the URL path.

We believe the hackaton was useful to get a feel for the practicality of the proposed APIs. However, when each group goes off to work on their specification separately, it is easy for the APIs to start diverging. It would be good to have a convergence phase where ideas from the various group are compared and commonalities can be extracted for the Common API.

## **A.31. Infinity Corporation Limited**

TBA

### **A.31.1. Motivation to Participate**

TBA

### **A.31.2. Implemented Solution**

TBA

### **A.31.3. Proposed Alternatives**

TBA

### **A.31.4. Experiences with OGC API Specifications**

TBA

### **A.31.5. Other Impressions & Recommendations**

TBA

## **A.32. interactive instruments GmbH**

TBA

### **A.32.1. Motivation to Participate**

TBA

### **A.32.2. Implemented Solution**

TBA

### **A.32.3. Proposed Alternatives**

TBA

### **A.32.4. Experiences with OGC API Specifications**

TBA

### **A.32.5. Other Impressions & Recommendations**

TBA

## **A.33. ISRIC - World Soil Information**

TBA

### **A.33.1. Motivation to Participate**

TBA

### **A.33.2. Implemented Solution**

TBA

### **A.33.3. Proposed Alternatives**

TBA

### **A.33.4. Experiences with OGC API Specifications**

TBA

### **A.33.5. Other Impressions & Recommendations**

TBA

## **A.34. Jacobs University**

TBA

### **A.34.1. Motivation to Participate**

TBA

### **A.34.2. Implemented Solution**

TBA

### **A.34.3. Proposed Alternatives**

TBA

### **A.34.4. Experiences with OGC API Specifications**

TBA

## **A.34.5. Other Impressions & Recommendations**

TBA

## **A.35. Jet Propulsion Laboratory**

TBA

### **A.35.1. Motivation to Participate**

TBA

### **A.35.2. Implemented Solution**

TBA

### **A.35.3. Proposed Alternatives**

TBA

### **A.35.4. Experiences with OGC API Specifications**

TBA

### **A.35.5. Other Impressions & Recommendations**

TBA

## **A.36. JRC, European Commission**

TBA

### **A.36.1. Motivation to Participate**

TBA

### **A.36.2. Implemented Solution**

TBA

### **A.36.3. Proposed Alternatives**

TBA

### **A.36.4. Experiences with OGC API Specifications**

TBA

## **A.36.5. Other Impressions & Recommendations**

TBA

# **A.37. Landcare Research, New Zealand**

TBA

## **A.37.1. Motivation to Participate**

TBA

## **A.37.2. Implemented Solution**

TBA

## **A.37.3. Proposed Alternatives**

TBA

## **A.37.4. Experiences with OGC API Specifications**

TBA

## **A.37.5. Other Impressions & Recommendations**

TBA

# **A.38. Land Information New Zealand**

TBA

## **A.38.1. Motivation to Participate**

TBA

## **A.38.2. Implemented Solution**

TBA

## **A.38.3. Proposed Alternatives**

TBA

## **A.38.4. Experiences with OGC API Specifications**

TBA

## **A.38.5. Other Impressions & Recommendations**

TBA

# **A.39. lat/lon GmbH**

TBA

## **A.39.1. Motivation to Participate**

TBA

## **A.39.2. Implemented Solution**

TBA

## **A.39.3. Proposed Alternatives**

TBA

## **A.39.4. Experiences with OGC API Specifications**

TBA

## **A.39.5. Other Impressions & Recommendations**

TBA

# **A.40. Meteorological Service of Canada**

The Meteorological Service of Canada (MSC) is the national meteorological agency of Canada. It is a division of Environment and Climate Change Canada. The MSC primarily provides public meteorological information, weather forecasts, and warnings of severe weather and other environmental hazards.

## **A.40.1. Motivation to Participate**

TBA

## **A.40.2. Implemented Solution**

The MSC implemented and deployed an instance of pygeoapi - a Python server implementation of the emerging OGC API specifications. A screenshot of the landing page of the deployed service is shown in [Figure 11](#). The software was configured to offer an interface that conforms to the OGC API - Features and OGC API - Processes specifications.

The screenshot shows the landing page of a pygeoapi instance. At the top, it says "pygeoapi Demo instance - running latest GitHub version". Below that is a "Contact" section with "Home" and "JSON" links. The main content area has sections for "Conformance", "Collections", "Processes", and "Links". On the right side, there are three boxes: "Provider" (pygeoapi Development Team, https://pygeoapi.io), "Contact point" (Email: you@example.org, Telephone: +xxx-xxx-xxx-xxxx, Fax: +xxx-xxx-xxx-xxxx, Contact URL: Contact URL, Hours: Hours of Service, Contact instructions: During hours of service. Off on weekends.), and "Address" (Mailing Address, Zip or Postal Code, City, Administrative Area, Canada). At the bottom left is a note "Powered by pygeoapi 0.6.0".

Figure 11. The landing page of the pygeoapi instance deployed by the Meteorological Service of Canada

A screenshot of the OpenAPI page of the deployed service is shown in Figure 12.

The screenshot shows the OpenAPI definition for the pygeoapi instance. It includes sections for "Servers" (https://demo.pygeoapi.io/stable/api) and two main resource definitions: "server" and "obs".

- server:** Described as "pygeoapi provides an API to geospatial data". It lists several GET endpoints:
  - / API
  - /api This document
  - /collections Feature Collections
  - /conformance API conformance definition
  - /processes Processes
- obs:** Described as "Observations". It lists three GET endpoints:
  - /collections/obs Get feature collection metadata
  - /collections/obs/items Get Observations features
  - /collections/obs/items/{featureId} Get Observations feature by id

Figure 12. The OpenAPI definition of the pygeoapi instance deployed by the Meteorological Service of Canada

### **A.40.3. Proposed Alternatives**

TBA

### **A.40.4. Experiences with OGC API Specifications**

TBA

### **A.40.5. Other Impressions & Recommendations**

TBA

## **A.41. Met Office**

The Met Office is the national meteorological service for the United Kingdom. It produces both daily weather forecasts and long term climate predictions as well as performing fundamental science. It also runs several forecasting services for oceanography. Its customers cover a wide range of domains, such as aviation, defence, public sector, marine, private industry, media.

It has been an active Member of OGC since 2009, and, along with several other national meteorological services, founded the OGC Met-Ocean Domain Working Group and initiated a Memorandum of Understanding between OGC and the World Meteorological Organisation (WMO). WMO is the United Nations international treaty organisation that coordinates 193 national hydrometeorological services. It also defines international standards for meteorology, hydrology and oceanography.

The Met Office is also active in the World Wide Web Consortium (W3C) standards development organisation.

### **A.41.1. Motivation to Participate**

Meteorology has had a long tradition of inventing and using technologies for its specific and very demanding requirements. As weather and climate information become ever more important to many aspects of society, it has become increasingly important to make information available using widespread technologies and approaches. We think using OpenAPI version 3 for defining public and private APIs to our data and information will have many benefits, for both customers and our infrastructure, especially when supporting services from computing clouds. We would like the APIs to be consistent with, and conformant to, any OGC OpenAPI standards.

### **A.41.2. Implemented Solution**

[Weather on the Web](https://github.com/opengeospatial/weather-on-the-web) [<https://github.com/opengeospatial/weather-on-the-web>] (WotW) is an initiative to agree APIs for common data retrieval patterns, such as points, time-series, polygons, and trajectories, in 2, 3 and 4 Dimensions. The intent is to make it a global standard for meteorological and environmental services.

Point Data has been working for some time, as have Time-series at a point, and Polygons. Trajectories and Data Tiles are being developed.

### **A.41.3. Proposed Alternatives**

Fall-back is to develop our meteorological APIs separately from the OGC proposals and standardise through WMO, though this will be much slower.

### **A.41.4. Experiences with OGC API Specifications**

A Hackathon was held in December 2018 in Washington DC, USA, building on the OGC WFS3.0 specification. Servers and clients based on existing WFS software were readily developed. Agreement was reached on the initial data retrieval patterns to support: point, timeseries, etc..

### **A.41.5. Other Impressions & Recommendations**

In the WFS3.0 spec, /Items/ needs to be replaced by 'point', 'timeseries', 'trajectory', etc. This is consistent with the approach advocated by Joan Maso for maps and tiles.

## **A.42. National Aeronautics and Space Administration (NASA)**

TBA

### **A.42.1. Motivation to Participate**

TBA

### **A.42.2. Implemented Solution**

TBA

### **A.42.3. Proposed Alternatives**

TBA

### **A.42.4. Experiences with OGC API Specifications**

TBA

### **A.42.5. Other Impressions & Recommendations**

TBA

## **A.43. National Land Survey of Finland**

TBA

### **A.43.1. Motivation to Participate**

TBA

### **A.43.2. Implemented Solution**

TBA

### **A.43.3. Proposed Alternatives**

TBA

### **A.43.4. Experiences with OGC API Specifications**

TBA

### **A.43.5. Other Impressions & Recommendations**

TBA

## **A.44. Natural Resources Canada**

TBA

### **A.44.1. Motivation to Participate**

TBA

### **A.44.2. Implemented Solution**

TBA

### **A.44.3. Proposed Alternatives**

TBA

### **A.44.4. Experiences with OGC API Specifications**

TBA

### **A.44.5. Other Impressions & Recommendations**

TBA

## **A.45. NOAA/NWS**

TBA

### **A.45.1. Motivation to Participate**

TBA

### **A.45.2. Implemented Solution**

TBA

### **A.45.3. Proposed Alternatives**

TBA

### **A.45.4. Experiences with OGC API Specifications**

TBA

### **A.45.5. Other Impressions & Recommendations**

TBA

## **A.46. OSGeo**

TBA

### **A.46.1. Motivation to Participate**

TBA

### **A.46.2. Implemented Solution**

TBA

### **A.46.3. Proposed Alternatives**

TBA

### **A.46.4. Experiences with OGC API Specifications**

TBA

### **A.46.5. Other Impressions & Recommendations**

TBA

## **A.47. Princeton University**

TBA

### **A.47.1. Motivation to Participate**

TBA

### **A.47.2. Implemented Solution**

TBA

### **A.47.3. Proposed Alternatives**

TBA

### **A.47.4. Experiences with OGC API Specifications**

TBA

### **A.47.5. Other Impressions & Recommendations**

TBA

## **A.48. Princeton University Library**

TBA

### **A.48.1. Motivation to Participate**

TBA

### **A.48.2. Implemented Solution**

TBA

### **A.48.3. Proposed Alternatives**

TBA

### **A.48.4. Experiences with OGC API Specifications**

TBA

### **A.48.5. Other Impressions & Recommendations**

TBA

## **A.49. Quick Caption**

TBA

### **A.49.1. Motivation to Participate**

TBA

### **A.49.2. Implemented Solution**

TBA

### **A.49.3. Proposed Alternatives**

TBA

### **A.49.4. Experiences with OGC API Specifications**

TBA

### **A.49.5. Other Impressions & Recommendations**

TBA

## **A.50. Secure Dimensions**

TBA

### **A.50.1. Motivation to Participate**

TBA

### **A.50.2. Implemented Solution**

TBA

### **A.50.3. Proposed Alternatives**

TBA

### **A.50.4. Experiences with OGC API Specifications**

TBA

### **A.50.5. Other Impressions & Recommendations**

TBA

## **A.51. SigmaBravo**

Sigma Bravo is a specialist provider of ICT services focused specifically on military operations. We enable and support an integrated, informed and agile 5th generation force.

### **A.51.1. Motivation to Participate**

Sigma Bravo has a strong support of open standards as a path to interoperability. We recognise the value of simple, implementer-friendly standards.

### **A.51.2. Implemented Solution**

Sigma Bravo extended the OpenSphere web application to support OGC API - Features and OGC API - Map Tiles. Interoperability with GeoServer, pygeoapi and SpaceBel OGC API - Features servers was demonstrated. Interoperability with ESRI OGC API - Map Tiles was also demonstrated.

### **A.51.3. Experiences with OGC API Specifications**

Sigma Bravo has significant experience with previous OGC Specifications, particularly on GeoPackage. The most mature part of our OGC API implementation is OGC API - Features.

### **A.51.4. Other Impressions & Recommendations**

Sigma Bravo commends the OGC on the OGC API program of work, and thanks OGC staff and GeoVation for their work in organising and hosting the hackathon. Sigma Bravo recommends that OGC seek to mature the OGC API standards through ongoing engagement and outreach activities, development of comprehensive Executable Test Suites and ongoing "in the open" standards development.

## **A.52. Simms Reeve**

TBA

### **A.52.1. Motivation to Participate**

TBA

### **A.52.2. Implemented Solution**

TBA

### **A.52.3. Proposed Alternatives**

TBA

### **A.52.4. Experiences with OGC API Specifications**

TBA

### **A.52.5. Other Impressions & Recommendations**

TBA

## **A.53. Sinergise**

TBA

### **A.53.1. Motivation to Participate**

TBA

### **A.53.2. Implemented Solution**

TBA

### **A.53.3. Proposed Alternatives**

TBA

### **A.53.4. Experiences with OGC API Specifications**

TBA

### **A.53.5. Other Impressions & Recommendations**

TBA

## **A.54. Solenix**

TBA

### **A.54.1. Motivation to Participate**

TBA

### **A.54.2. Implemented Solution**

TBA

### **A.54.3. Proposed Alternatives**

TBA

### **A.54.4. Experiences with OGC API Specifications**

TBA

### **A.54.5. Other Impressions & Recommendations**

TBA

## A.55. Spacebel

### A.55.1. Motivation to Participate

Spacebel was present in London to participate to the OGC API for Processes activities contributing an OGC API Processes implementation (Proxy).

In addition, Spacebel participated remotely on behalf of the H2020 DataBio project [<https://www.databio.eu/en/>] contributing a Catalog Server implementation hosting application and collection metadata from the DataBio Hub (<https://www.databiohub.eu/registry/>) aiming to improve alignment of the DataBio catalog and Hub implementation with the OGC API Common specification in addition to the Testbed-15 EOPAD discovery approach.

[ DataBio Hub   OGC Testbed-15   OGC API Hack 2019   OGC API Common   EOPAD Engineering Report ]	
Landing Page	<a href="http://databio.spacebel.be/eo-catalog/">http://databio.spacebel.be/eo-catalog/</a>
Conformance	<a href="#">/conformance</a>
Collections	<a href="#">/collections</a>
(Collection) /collections/{collection-id}	<ul style="list-style-type: none"><li>• resources - <a href="#">/collections/resources</a></li><li>• services - <a href="#">/collections/services</a></li><li>• series - <a href="#">/collections/series</a></li></ul>
APIDefinition	<a href="#">/description?httpAccept=application/opensearchdescription+xml</a> (OpenSearch Description Document) <a href="#">/description?httpAccept=application/openapi+json;version=3.0</a> (OpenAPI Definition) [Open with Redoc   Open with Swagger.io]
(Services) /resources	<ul style="list-style-type: none"><li>• DataBio (Filter by dc:type, dc:subject) - <a href="#">/resources?type=service&amp;subject=databio</a></li><li>• DataBio (Filter by os:startIndex, os:count) - <a href="#">/resources?type=service&amp;subject=databio&amp;startRecord=2&amp;maximumRecords=1</a></li><li>• Testbed-15 (Filter by dc:subject) - <a href="#">/resources?type=service&amp;subject=testbed-15</a></li><li>• Testbed-15 (Filter by dc:type, eo:organisationName) - <a href="#">/resources?type=service&amp;organisationName="52%20North"</a></li><li>• Testbed-15 (Filter by eo:offering) - <a href="#">/resources?type=service&amp;offering=docker</a></li></ul>
(Service) /resources/{service-id}	<ul style="list-style-type: none"><li>• DataBio Component C07.01 - <a href="#">/resources/59c264f8e4b00685883826c7</a></li><li>• DataBio Component C05.01 - <a href="#">/resources/59c3b4fae4b00685883826d7</a></li><li>• DataBio Component C14.01 - <a href="#">/resources/59c3e48e4b006858838270d</a></li><li>• Testbed-15 Ndv1 Calculation - <a href="#">/resources/org.n52.project.tb15.eopad.Ndv1Calculation</a></li><li>• Testbed-15 SentinelQualityAreaOfInterest - <a href="#">/resources/org.n52.project.tb15.eopad.SentinelQualityAreaOfInterest</a></li><li>• Testbed-15 MultiSensorNDVI - <a href="#">/resources/MultiSensorNDVI</a></li><li>• Testbed-15 WPS - <a href="#">/resources/testbed.dev.52north.org.javaps-eopad.rest</a></li></ul>
(Series) /resources	<ul style="list-style-type: none"><li>• Testbed-14 (Filter by dc:subject) - <a href="#">/resources?type=collection&amp;subject=testbed-14</a></li><li>• DataBio (Filter by os:searchTerms) - <a href="#">/resources?type=collection&amp;query=Copernicus</a></li></ul>
(Series) /resources/{series-id}	<ul style="list-style-type: none"><li>• Sentinel-2 - <a href="#">/resources/EOP_ESA_Sentinel-2</a></li><li>• Landsat-5 - <a href="#">/resources/LANDSAT_TM_GTC</a></li><li>• Landsat-7 - <a href="#">/resources/LANDSAT_ETM_GTC</a></li><li>• Synergise Sentinel2 - <a href="#">/resources/EOP_SENTINEL-HUB_Sentinel2</a></li><li>• Testbed-14 IPT_Sentinel2 - <a href="#">/resources/EOP_IPT_Sentinel2</a></li><li>• Testbed-14 IPT_Landsat8 - <a href="#">/resources/EOP_IPT_Landsat8</a></li><li>• Testbed-14 DE2_MS4_L1B - <a href="#">/resources/DE2_MS4_L1B</a></li></ul>

Figure 13. DataBio Catalog Server test page

### A.55.2. Implemented Solution

- (1) DataBio Catalog Server (<https://databio.spacebel.be/eo-catalog/readme.html>) hosting EO applications and services (OGC 19-020), EO collections (OGC 17-084) and EO product (OGC 17-003) metadata implementing OpenSearch (OGC 10-032r8 and OGC 13-026r8) and Open API Common interfaces. Resources [/](#), [/conformance](#), [/collections](#) were implemented and interoperability was demonstrated through TIE testing with the [OpenSphere](#) client [<http://frozen-lime.surge.sh/>] implementing OGC API Features provided by another participant. A [limit](#) parameter needed to be added server-side in addition to the [maximumRecords](#) parameter (which was used to comply with

OASIS searchRetrieve (SRU) specifications) which was originally mapped on `{count}`.

(2) Web Processing Service (<http://34.77.240.214/ades-proxy/swagger-ui/index.html>) with a OGC API for Processes as defined in OGC Testbed 14 ([https://raw.githubusercontent.com/spacebel/testbed14/master/json-spec/wps-t\\_tb14\\_spacebel-v1.6.yaml](https://raw.githubusercontent.com/spacebel/testbed14/master/json-spec/wps-t_tb14_spacebel-v1.6.yaml)), including the Transactional and the Quoting & Billing extensions. Resources `/`, `/conformance`, `/processes`, ``/jobs`` were implemented and interoperability was shown through TIE testing with the Solenix client.

### A.55.3. Proposed Alternatives

The Catalog Server combines an OpenSearch interface with GeoJSON responses (OGC 13-026r8, OGC 17-047) for simple clients and a more advanced OpenAPI-based interface.

### A.55.4. Experiences with OGC API Specifications

Spacebel has experience with Swagger and OpenAPI since 2016 and already used this technology in previous OGC Testbeds.

#### OGC API Common

Wrapping an OpenSearch compliant catalog with an OGC API Common interface was achieved as part of the hackaton. Extending the interface to OGC API Features (mainly temporal and geographical searches) is future work.

The main issue encountered was to define what `/collections` (which has a fixed response) format might return in the case of an OpenSearch catalog hosting EO application and service metadata, EO collection metadata and EO product metadata simultaneously. The proposed approach can be seen at <https://databio.spacebel.be/eo-catalog/collections>. The hyperlinks included in this response allow to refer directly to an OpenSearch OSDD (rel="search") and to the applicable JSON Schemas (rel="describedby").

The figure below shows that service and application data could be sucessfully discovered via the OpenSphere client accessing the DataBio Catalog Server.

The screenshot shows the OpenSphere client interface with the following details:

- Top Bar:** Includes buttons for 'Add Data', 'Layers', 'Save' (with dropdown for 'States'), 'Search All Types...', and 'Support'.
- Layers Panel:** Shows a tree view of layers:
  - Feature Layers (6):** Drawing Layer, Saved Places (0), EO Products Features (0/5), EO Series Features (0/19), EO services and applications Feature Layer (selected), and Resources Features (0/26).
  - Map Layers (2):** Street Map Tiles and World Imagery Tiles.
- Style Panel:** Allows adjusting Opacity, Size, and Style (Default, Label, Options).
- EO services and applications Window:** A modal window titled 'EO services and applications' containing a table with 7 records. The columns are TIME, identifier, title, hasPart, and cor. The data is as follows:

TIME	identifier	title	hasPart	cor
2019-06-18 00:00:00Z	59ce3e48e4b0068588382...	Atmospheric corrections of Sentinel-2 data		
2019-06-06 00:00:00Z	59c264f8e4b00685883826...	FedEO Gateway		
2019-06-05 00:00:00Z	testbed.dev.52north.org.j...	Processing API at testbed.dev.52north.org		
2019-06-05 00:00:00Z	org.n52.project.tb15.eopa...	Calculation of quality of an area of interes...		
2019-06-05 00:00:00Z	org.n52.project.tb15.eopa...	Calculation of NDVI using the SNAP toolb...		
2019-06-04 00:00:00Z	59c3b4fae4b0068588382...	Rasdaman		
2019-02-01 00:00:00Z	MultiSensorNDVI	Multi Sensor NDVI		

Figure 14. EO Service and Application metadata (OGC 19-020) from DataBio and OGC Testbed-15 shown in OpenSphere

The OpenSphere client also allows browsing EO Product metadata, visualise corresponding footprints on the map and display metadata properties for a particular EO Product.

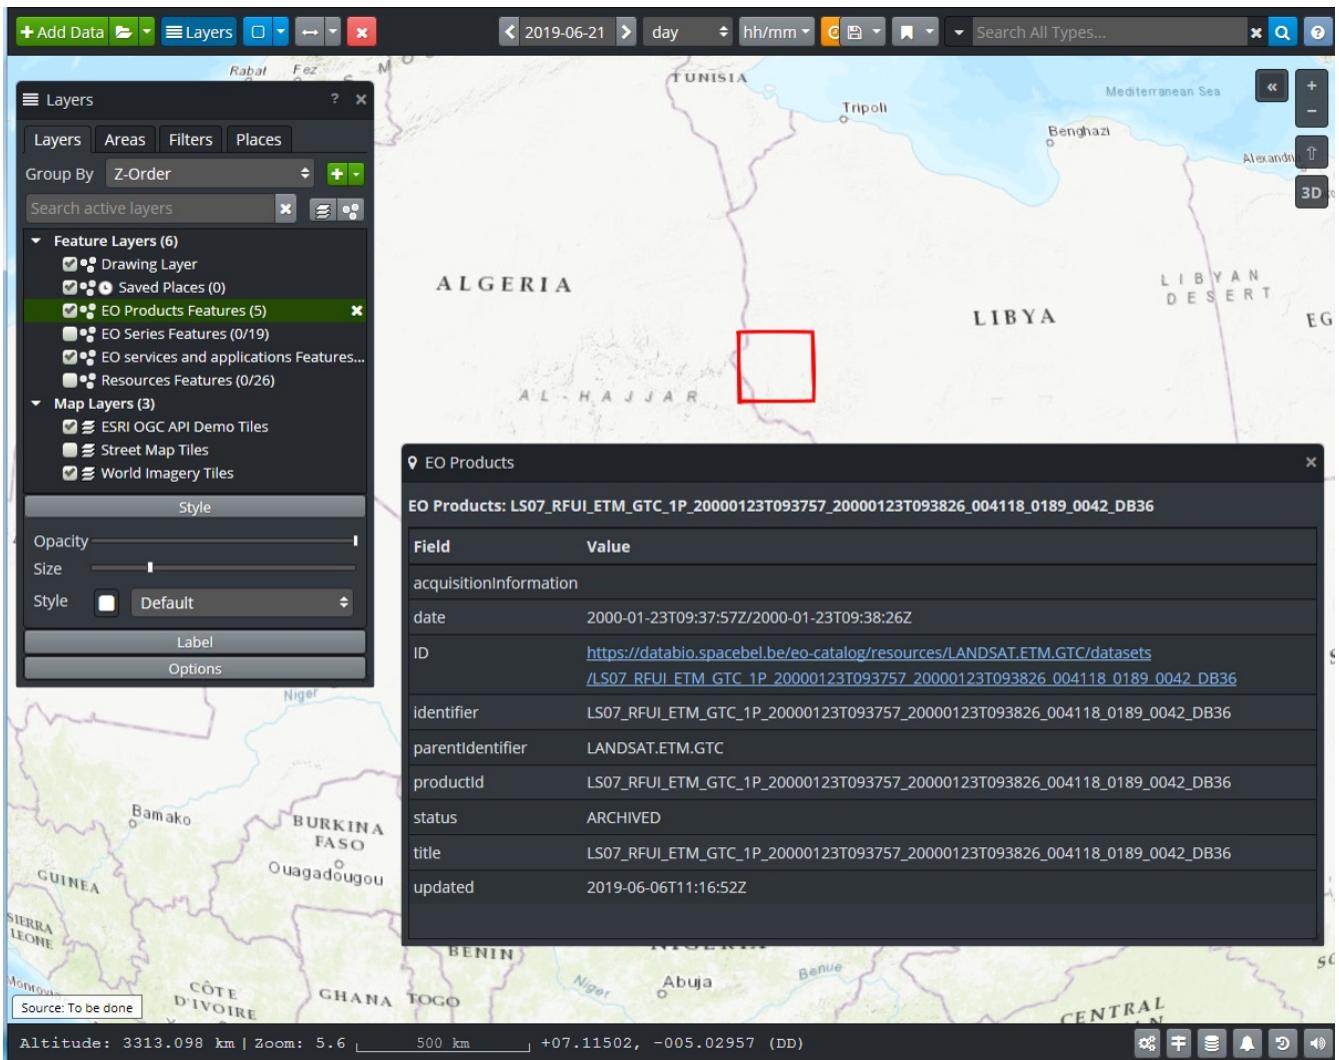


Figure 15. EO Product metadata (OGC 17-003) shown in OpenSphere

## OGC API for Processes

A major discussion during the OGC Hackaton 2019 (London) was about describing the process interfaces (i.e. the Process Description including inputs and outputs definitions) directly in JSON Schema and/or OpenAPI. Indeed, as OpenAPI already supports descriptions of schemas/interfaces, this would remove the need of using a specific Process Description schema, and this would also ease the work of Web client developers.

For each existing process, a resource with a HTTP path is defined in the API document. Therefore, processes are discovered through the API document (no need of discovery and describe process operations) and the Client directly knows how to invoke the execution. The API document is illustrated below:

## *Example of processes exposed as OpenAPI operations*

```
openapi: 3.0.0
paths:
  # For each process the path and interface is provided as below
  '/processes/mySampleProcess/jobs':
    post:
      summary: Start mySampleProcess execution.
      requestBody:
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/mySampleProcessExecuteRequest'
      responses:
        '201':
          headers:
            Location:
              schema:
                type: string
            description: URL to check the status of the execution/job.
```

A complete report about the mapping between the Process Description specification and the JSON Schema format is available at <https://github.com/spacebel/testbed14/wiki/OGC-Hackaton-2019>.

Others topics have also been covered during the Hackaton:

- The transactional extension specification has been submitted to the official github repository at <https://github.com/opengeospatial/wps-rest-binding/commit/7bdee9df5652ad3a7ad13075c535b84f9b264d0b>.
- An extension supporting callbacks would allow a more modern pattern for monitoring the jobs status. Instead of observing (repeated polling), the client can be notified on the following event: onSuccess, onFailure, onUpdate. Spacebel has proposed a draft specification for such notification feature (relying on OpenAPI callbacks): <https://github.com/opengeospatial/wps-rest-binding/commit/8cc2bdaf6483af7d8c5a85c7ad0a45b8e68cc4b6>
- A very classical issue related to the possibility to report list of files as outputs was discussed. The conclusion of the discussion was that the new Processing API should support the presence of output file arrays.
- Some fixes listed at <https://github.com/opengeospatial/wps-rest-binding/issues> have been proposed during the Hackaton.

## **A.55.5. Other Impressions & Recommendations**

Further alignment of the OpenSearch Catalog Server with OGC API Features interfaces, requires reconciling the time and bbox related search parameters from OGC 10-032 and OGC API Features. While OGC 10-032r8 has separate search parameters representing the start and end of a search interval `{time:start}` and `{time:end}` respectively, OGC API Features imposes a single search parameter to represent the interval.

OpenSearch and OpenAPI Common convergence would benefit from a revision of OGC 10-032r8 to ensure that the geo:box, time:start and time:end can be combined in a single URL template with the actual HTTP query parameter names imposed by OpenAPI Common for temporal and geographical search.

The approach to represent hyperlinks in JSON is unfortunately different from the encoding proposed by OGC 14-055r2 which means that an OpenSearch implementation based simultaneously on OGC 14-055r2 and OGC 17-047 in combination with OGC API Common will have different encodings for links in search responses and in other resource representations (e.g. [/conformance](#), / etc).

The OGC API specifications are imposing to advertise "paths" in the Landing Page response and also contain wording suggesting that actual path names such as "api", "conformance", "collections" are mandatory and not just examples. This should be made clearer and it seems redundant to impose the declaration of paths in the landing page if indeed the path names are "fixed".

Making (JSON) data models available as separate JSON Schemas (<https://swagger.io/docs/specification/data-models/keywords/>) and not mixing them with actual OpenAPI descriptions (but refer to them) would allow validating JSON representations separately with JSON schema validation tools and before a service is put up.

## A.56. Strategic Alliance Consulting Inc

TBA

### A.56.1. Motivation to Participate

TBA

### A.56.2. Implemented Solution

TBA

### A.56.3. Proposed Alternatives

TBA

### A.56.4. Experiences with OGC API Specifications

TBA

### A.56.5. Other Impressions & Recommendations

TBA

## A.57. University College London

TBA

### **A.57.1. Motivation to Participate**

TBA

### **A.57.2. Implemented Solution**

TBA

### **A.57.3. Proposed Alternatives**

TBA

### **A.57.4. Experiences with OGC API Specifications**

TBA

### **A.57.5. Other Impressions & Recommendations**

TBA

## **A.58. University of Birmingham**

TBA

### **A.58.1. Motivation to Participate**

TBA

### **A.58.2. Implemented Solution**

TBA

### **A.58.3. Proposed Alternatives**

TBA

### **A.58.4. Experiences with OGC API Specifications**

TBA

### **A.58.5. Other Impressions & Recommendations**

TBA

## **A.59. University of Münster**

Participant: Matthias Mohr

### **A.59.1. Motivation to Participate**

- Align the openEO API with OGC API - Commons.
- Start discussions with the WPS community about alignment and their take on process chaining.
- Figure out future steps of WFS3 to port them back to the STAC specification.
- Discuss with CSW/CAT people about the planned steps and alignment with STAC.

### **A.59.2. Implemented Solution**

- openEO API implementation, which partly implements and aligns with OGC API - Commons / WFS3.

### **A.59.3. Proposed Alternatives**

- Workflows (process chaining) for WPS?
- Base CSW/CAT work on STAC?
- ...

### **A.59.4. Experiences with OGC API Specifications**

- WFS3 experience through STAC, contributed to WFS3 with some proposals for changes.
- Basic understanding of WPS and Commons

### **A.59.5. Other Impressions & Recommendations**

TBA

## **A.60. University of Notre Dame**

TBA

### **A.60.1. Motivation to Participate**

TBA

### **A.60.2. Implemented Solution**

TBA

### **A.60.3. Proposed Alternatives**

TBA

### **A.60.4. Experiences with OGC API Specifications**

TBA

## **A.60.5. Other Impressions & Recommendations**

TBA

# **A.61. WebGeoDataVore**

TBA

## **A.61.1. Motivation to Participate**

TBA

## **A.61.2. Implemented Solution**

TBA

## **A.61.3. Proposed Alternatives**

TBA

## **A.61.4. Experiences with OGC API Specifications**

TBA

## **A.61.5. Other Impressions & Recommendations**

TBA

# **A.62. West University of Timisoara**

TBA

## **A.62.1. Motivation to Participate**

TBA

## **A.62.2. Implemented Solution**

TBA

## **A.62.3. Proposed Alternatives**

TBA

## **A.62.4. Experiences with OGC API Specifications**

TBA

### **A.62.5. Other Impressions & Recommendations**

TBA

# Appendix B: Revision History

*Table 3. Revision History*

Date	Editor	Release	Primary clauses modified	Descriptions
June 2, 2019	G. Hobona	.1	5	Adapted Scott Simmons's blog
June 3, 2019	G. Hobona	.2	all	initial version
TBA	TBA	TBA	TBA	TBA
TBA	TBA	TBA	TBA	TBA

# Appendix C: Bibliography

1. Percivall, G.: OGC® Open Geospatial APIs - White Paper. OGC 16-019r4,Open Geospatial Consortium, <http://docs.opengeospatial.org/wp/16-019r4/16-019r4.html> (2017).
2. Tandy, J., Brink, L. van den, Barnaghi, P.: OGC/W3C Spatial Data on the Web Best Practices. OGC 15-107,Open Geospatial Consortium & World Wide Web Consortium, <https://www.w3.org/TR/sdw-bp/> (2017).
3. Wikipedia: 2018 European floods, [https://en.wikipedia.org/wiki/2018\\_European\\_floods](https://en.wikipedia.org/wiki/2018_European_floods).
4. Wikipedia: 2019 Midwestern U.S. floods, [https://en.wikipedia.org/wiki/2019\\_Midwestern\\_U.S.\\_floods](https://en.wikipedia.org/wiki/2019_Midwestern_U.S._floods).
5. Idol, T., Thomas, R.: OGC Development of Disaster Spatial Data Infrastructures for Disaster Resilience. OGC 18-087r5,Open Geospatial Consortium, <https://portal.opengeospatial.org/files/18-087r5> (2018).
6. European Space Agency: Copernicus - Observing the Earth, [https://www.esa.int/Our\\_Activities/Observing\\_the\\_Earth/Copernicus/Overview4](https://www.esa.int/Our_Activities/Observing_the_Earth/Copernicus/Overview4), (2018).
7. Sinergise: Sentinel Hub, <https://www.sentinel-hub.com/develop/capabilities/wms>.
8. MetOffice: Data Point, <https://www.metoffice.gov.uk/datapoint>.
9. MetOffice: UK Met Office Atmospheric Deterministic and Probabilistic Forecasts, <https://registry.opendata.aws/uk-met-office/>.
10. Ordnance Survey: OS Open Zoomstack, <https://www.ordnancesurvey.co.uk/business-and-government/products/os-open-zoomstack.html>.
11. Meteorological Service of Canada: Meteorological Service of Canada Datamart, <https://dd.weather.gc.ca>.
12. Meteorological Service of Canada: Geospatial web services, <https://www.canada.ca/en/environment-climate-change/services/weather-general-tools-resources/weather-tools-specialized-data/geospatial-web-services.html>.
13. National Oceanic and Atmospheric Administration: National Weather Service Data as OGC Web Services, <https://www.weather.gov/gis/WebServices>.