

Práctica Postman - 10 APIs CRUD

API 1: Restful-API.dev (Objects)

URL Base: <https://api.restful-api.dev>

CREATE (POST)

Endpoint: <https://api.restful-api.dev/objects>

Body JSON: {"name":"Laptop","data":{"year":2026,"price":1200}}

The screenshot shows a Postman interface for a POST request. The URL is <https://api.restful-api.dev/objects>. The request body is a JSON object: {"name": "Portatil Dell", "data": {"year": 2025, "price": 1200, "cpu": "Intel i7", "ram": "16GB"}}. The response is also a JSON object, including an "id" and a "createdAt" timestamp.

```
1 {
2   "name": "Portatil Dell",
3   "data": {
4     "year": 2025,
5     "price": 1200,
6     "cpu": "Intel i7",
7     "ram": "16GB"
8   }
9 }
```


```
1 {
2   "id": "ff808181a067127101a07fb385174636",
3   "name": "Portatil Dell",
4   "createdAt": 1788848866583,
5   "data": {
6     "year": 2025,
7     "price": 1200,
8     "cpu": "Intel i7",
9     "ram": "16GB"
10  }
11 }
```

Respuesta :

```
{
  "id": "ff808181a067127101a07fb385174636",
  "name": "Portatil Dell",
  "createdAt": 1788848866583,
  "data": {
    "year": 2025,
    "price": 1200,
    "cpu": "Intel i7",
    "ram": "16GB"
  }
}
```

READ (GET)

Endpoint: <https://api.restful-api.dev/objects/ff808181a067127101a07fb385174636>

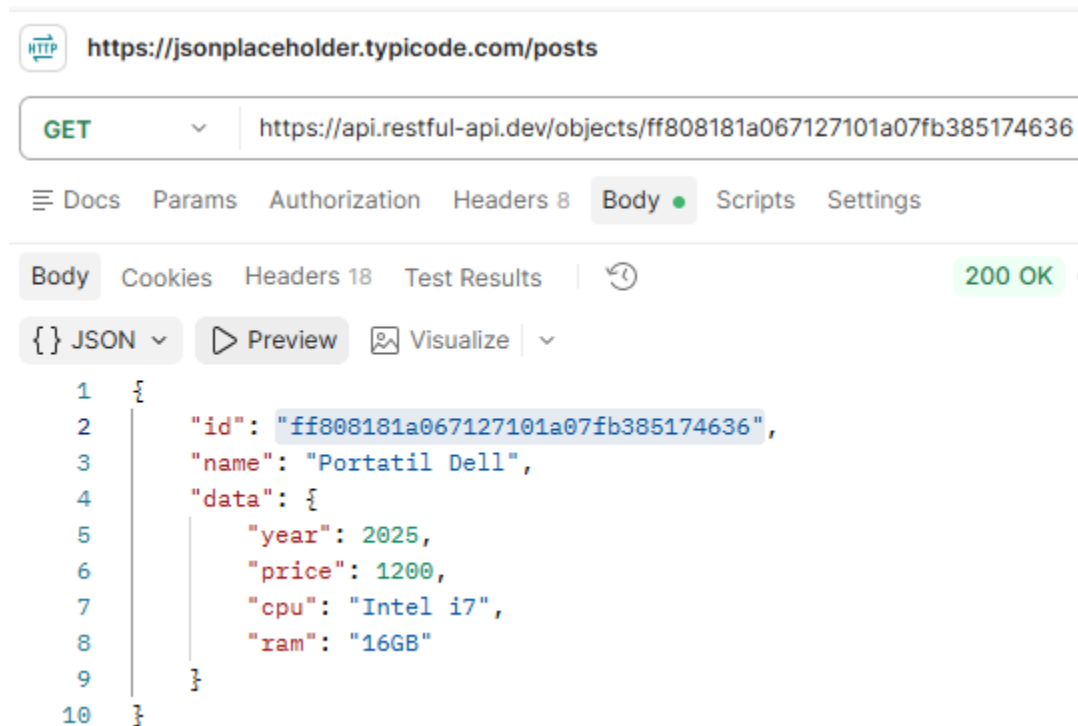

The screenshot shows a REST client interface with the following details:

- URL:** <https://jsonplaceholder.typicode.com/posts>
- Method:** GET
- Endpoint:** <https://api.restful-api.dev/objects/ff808181a067127101a07fb385174636>
- Response Status:** 200 OK
- Response Body (JSON):**

```
1 {
2   "id": "ff808181a067127101a07fb385174636",
3   "name": "Portatil Dell",
4   "data": {
5     "year": 2025,
6     "price": 1200,
7     "cpu": "Intel i7",
8     "ram": "16GB"
9   }
10 }
```

UPDATE (PUT)

Endpoint: <https://api.restful-api.dev/objects/ff808181a067127101a07fb385174636>

Body JSON: {"name":"Laptop Pro","data":{"year":2026,"price":1400}}

The screenshot shows a REST client interface. At the top, the URL bar displays `https://jsonplaceholder.typicode.com/posts`. Below it, the method is set to `PUT` and the full URL is `https://api.restful-api.dev/objects/ff808181a067127101a07fb385174636`. The interface has tabs for `Docs`, `Params`, `Authorization`, `Headers 8`, `Body` (selected), `Scripts`, and `Settings`. Under the `Body` tab, the format is set to `JSON`. The request body contains a single line of JSON: `1 {"name":"Laptop Pro","data":{"year":2026,"price":1400}}`. Below the request, the response section shows a status of `200 OK`. The response body is displayed in a JSON viewer with tabs for `{ } JSON` (selected), `Preview`, and `Visualize`. The JSON response is:

```
1 {
2   "id": "ff808181a067127101a07fb385174636",
3   "name": "Laptop Pro",
4   "updatedAt": 1788850241687,
5   "data": {
6     "year": 2026,
7     "price": 1400
8   }
9 }
```

Respuesta:

```
{
  "id": "ff808181a067127101a07fb385174636",
  "name": "Laptop Pro",
  "updatedAt": 1788850241687,
  "data": {
    "year": 2026,
    "price": 1400
  }
}
```

}

DELETE (DELETE)

Endpoint: <https://api.restful-api.dev/objects/ff808181a067127101a07fb385174636>

The screenshot shows a REST client interface with the following details:

- URL: `https://jsonplaceholder.typicode.com/posts`
- Method: `DELETE`
- Endpoint: `https://api.restful-api.dev/objects/ff808181a067127101a07fb385174636`
- Response Status: `200 OK`
- Response Time: `268 ms`
- Response Size: `942 B`
- Response Body (JSON):

```
{  "message": "Object with id = ff808181a067127101a07fb385174636 has been deleted."}
```

Respuesta: {

"message": "Object with id = ff808181a067127101a07fb385174636 has been deleted."

}

API 2: CrudCrud Usuarios

URL Base: <https://crudcrud.com/api/>

CREATE (POST)

Endpoint: `/usuarios`

Body JSON: `{"nombre":"Boubacar","edad":25}`

https://jsonplaceholder.typicode.com/posts

POST https://crudcrud.com/api/

Docs Params Authorization Headers 8 Body ●

raw JSON

```
1 {"nombre": "Boubacar", "edad": 25}
```

Body Cookies Headers 9 Test Results ↺

Raw Preview Visualize

```
1 ace648240c4644f19a7acac758537a6
```

Respuesta:

```
{
  "nombre": "Boubacar",
  "edad": 25,
  "_id": "6a9fb42f49b3b803e88a8619"
}
```

READ (GET)

Endpoint: ae5ce518b7544157bd3580391321a4de /usuarios/

HTTP <https://jsonplaceholder.typicode.com/posts> 

POST  <https://crudcrud.com/api/ae5ce518b7544157bd3580391321a4de/usuarios>

 Docs Params Authorization Headers 8 **Body**  Scripts Settings

raw  JSON 

```
1 {"nombre": "Boubacar", "edad": 25}
2
```

Body Cookies Headers 10 Test Results  **201 Created** 

{ } JSON   Preview  Visualize 

```
1 {
2   "nombre": "Boubacar",
3   "edad": 25,
4   "_id": "6a9fb58a49b3b803e88a861f"
5 }
```

UPDATE (PUT)

Endpoint: /usuarios/

Body JSON: {"nombre": "Boubacar Seck", "edad": 25}

HTTP <https://jsonplaceholder.typicode.com/posts> Save

PUT <https://crudcrud.com/api/ae5ce518b7544157bd3580391321a4de/usuarios/6a9f...>

Docs Params Authorization Headers 8 Body ● Scripts Settings

raw JSON Sch

```
1 {"nombre": "Boubacar", "edad": 25}
2
```

Body Cookies Headers 8 Test Results 200 OK · 1.00 s

Raw Preview Visualize

1

DELETE (DELETE)

Endpoint: /usuarios/6a9fb42f49b3b803e88a8619

HTTP <https://jsonplaceholder.typicode.com/posts> Save

DELETE <https://crudcrud.com/api/ae5ce518b7544157bd3580391321a4de/usuarios/6a9f...>

Docs Params Authorization Headers 8 Body ● Scripts Settings

raw JSON Sch

```
1 {"nombre": "Boubacar", "edad": 25}
2
```

Body Cookies Headers 8 Test Results 200 OK · 63 ms

Raw Preview Visualize

1

API 3: JSONBin

URL Base: <https://api.jsonbin.io/v3>

CREATE (POST)

Endpoint: /b

Body JSON: {"nombre":"Boubacar"}

The screenshot shows a Postman interface for a POST request to <https://api.jsonbin.io/v3/b>. The request body is a JSON object: `{ "nombre": "Boubacar", "curso": "APIs con Postman", "centro": "IES" }`. The response is also a JSON object, showing the stored record and its metadata.

```
1 {
2   "nombre": "Boubacar",
3   "curso": "APIs con Postman",
4   "centro": "IES"
5 }
```

Body Cookies Headers 15 Test Results

{ } JSON Preview Visualize

```
1 {
2   "record": {
3     "nombre": "Boubacar",
4     "curso": "APIs con Postman",
5     "centro": "IES"
6   },
7   "metadata": {
8     "id": "6a9fc417ffd5d16053ec467f",
9     "createdAt": "2026-09-08T08:15:19.705Z",
10    "private": true
11  }
12 }
```

Resultado: {

"record": {

"nombre": "Boubacar",

"curso": "APIs con Postman",


```
    "centro": "IES"
  },
  "metadata": {
    "id": "6a9fc417ffd5d16053ec467f",
    "createdAt": "2026-09-08T08:15:19.705Z",
    "private": true
  }
}
```

READ (GET)

Endpoint: /b/{id}

HTTP <https://jsonplaceholder.typicode.com/posts>

GET <https://api.jsonbin.io/v3/b/6a9fc417ffd5d16053ec467f>

Docs Params Authorization Headers 10 ● Body ● Scripts Settings

raw ▼ JSON ▼

```
1 {
2   "nombre": "Boubacar",
3   "curso": "APIs con Postman",
4   "centro": "IES"
5 }
```

Body Cookies Headers 15 Test Results | ↺

{ } JSON ▼ ▶ Preview 🖼 Visualize ▼

```
1 {
2   "record": {
3     "nombre": "Boubacar",
4     "curso": "APIs con Postman",
5     "centro": "IES"
6   },
7   "metadata": {
8     "id": "6a9fc417ffd5d16053ec467f",
9     "private": true,
10    "createdAt": "2026-09-08T08:15:19.705Z"
11  }
12 }
```

Respuesta JSON: {

"record": {

"nombre": "Boubacar",

"curso": "APIs con Postman",

"centro": "IES"

},

"metadata": {

"id": "6a9fc417ffd5d16053ec467f",

"private": true,

"createdAt": "2026-09-08T08:15:19.705Z"

}

}

UPDATE (PUT)

Endpoint: /b/6a9fc417ffd5d16053ec467f

Body JSON: {"nombre":"Boubacar Seck"}

https://jsonplaceholder.typicode.com/posts

PUT https://api.jsonbin.io/v3/b/6a9fc417ffd5d16053ec467f

Docs Params Authorization Headers 10 Body Scripts Settings

raw JSON

```
1 {
2   "nombre": "Boubacar",
3   "curso": "APIs con Postman",
4   "centro": "IES"
5 }
```


Body Cookies Headers 15 Test Results 200 OK

{ } JSON Preview Visualize

```
1 {
2   "record": {
3     "nombre": "Boubacar",
4     "curso": "APIs con Postman",
5     "centro": "IES"
6   },
7   "metadata": {
8     "parentId": "6a9fc417ffd5d16053ec467f",
9     "private": true
10  }
11 }
```

DELETE (DELETE)

Endpoint: /b/6a9fc417ffd5d16053ec467f

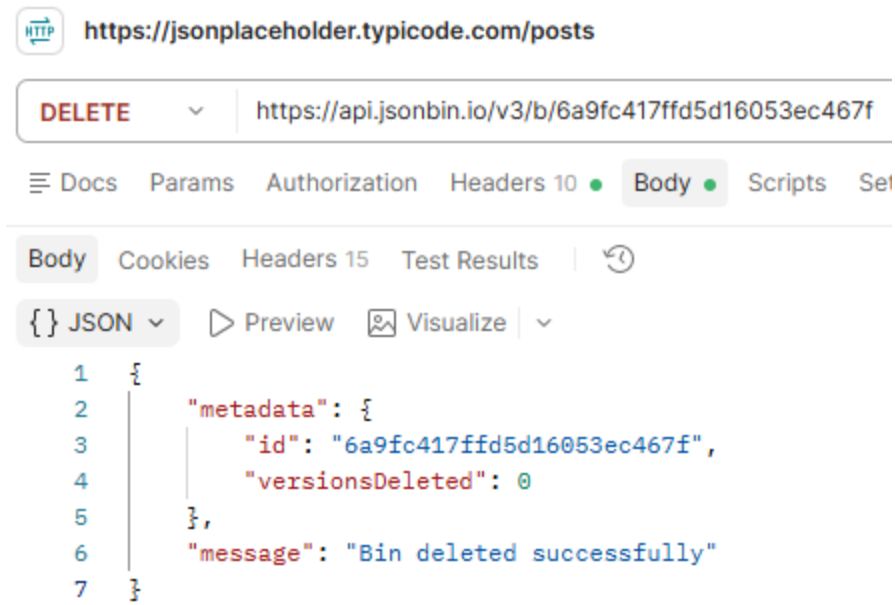

Respuesta JSON: {

```
"metadata": {  
  "id": "6a9fc417ffd5d16053ec467f",  
  "versionsDeleted": 0  
},  
"message": "Bin deleted successfully"  
}
```

API 4: MockAPI Usuarios

URL Base: <https://6a9fc6793e0d88d3d7e4fe03.mockapi.io/api/v1>

CREATE (POST)

Endpoint: /usuarios

Body JSON: {"nombre":"Boubacar","email":"test@test.com"}



https://jsonplaceholder.typicode.com/posts

POST

https://6a9fc6793e0d88d3d7e4fe03.mockapi.io/api/v1/usuarios

Docs Params Authorization Headers 10 Body Scripts Settings

raw

JSON

```
1 {  
2   "nombre": "Boubacar",  
3   "email": "boubacar@email.com",  
4   "edad": 25  
5 }
```

Body

Cookies

Headers 12

Test Results



201 Created

{ } JSON

Preview

Visualize

```
1 {  
2   "createdAt": "2026-09-07T16:02:43.833Z",  
3   "name": "Mario Spinka",  
4   "avatar": "https://avatars.githubusercontent.com/u/57748693",  
5   "id": "1",  
6   "nombre": "Boubacar",  
7   "email": "boubacar@email.com",  
8   "edad": 25  
9 }
```

Respuesta JSON: {

"createdAt": "2026-09-07T16:02:43.833Z",

"name": "Mario Spinka",

"avatar": "https://avatars.githubusercontent.com/u/57748693",

"id": "1",

"nombre": "Boubacar",

"email": "boubacar@email.com",

"edad": 25

}

READ (GET)

Endpoint: /usuarios/1

https://jsonplaceholder.typicode.com/posts

GET https://6a9fc6793e0d88d3d7e4fe03.mockapi.io/api/v1/usuarios/1

Docs Params Authorization Headers 10 Body Scripts Settings

raw JSON

```
1 {
2   "nombre": "Boubacar",
3   "email": "boubacar@email.com",
4   "edad": 25
5 }
```

Body Cookies Headers 13 Test Results 200 OK

{ JSON Preview Visualize

```
1 {
2   "createdAt": "2026-09-07T16:02:43.833Z",
3   "name": "Mario Spinka",
4   "avatar": "https://avatars.githubusercontent.com/u/57748693",
5   "id": "1",
6   "nombre": "Boubacar",
7   "email": "boubacar@email.com",
8   "edad": 25
9 }
```

UPDATE (PUT)

Endpoint: /usuarios/{id}

Body JSON: {"nombre":"Boubacar Seck"}

https://jsonplaceholder.typicode.com/posts

PUT https://6a9fc6793e0d88d3d7e4fe03.mockapi.io/api/v1/usuarios/1

Docs Params Authorization Headers 10 Body Scripts Settings

raw JSON

```
1 {
2   "nombre": "Boubacar",
3   "email": "boubacar@email.com",
4   "edad": 26
5 }
```

Body Cookies Headers 12 Test Results 200 OK

{ JSON Preview Visualize

```
1 {
2   "createdAt": "2026-09-07T16:02:43.833Z",
3   "name": "Mario Spinka",
4   "avatar": "https://avatars.githubusercontent.com/u/57748693",
5   "id": "1",
6   "nombre": "Boubacar",
7   "email": "boubacar@email.com",
8   "edad": 26
9 }
```

Respuesta JSON: {

"createdAt": "2026-09-07T16:02:43.833Z",

"name": "Mario Spinka",

"avatar": "https://avatars.githubusercontent.com/u/57748693",

"id": "1",

"nombre": "Boubacar",

"email": "boubacar@email.com",

"edad": 26

}

DELETE (DELETE)

Endpoint: /usuarios/1

The screenshot shows a REST client interface. At the top, the URL bar displays `https://jsonplaceholder.typicode.com/posts`. Below it, a dropdown menu is set to `DELETE` and the request URL is `https://6a9fc6793e0d88d3d7e4fe03.mockapi.io/api/v1/usuarios/3`. The `Send` button is visible. The interface has tabs for `Docs`, `Params`, `Authorization`, `Headers 10`, `Body` (selected), `Scripts`, and `Settings`. Below the tabs, there are options for `raw` and `JSON` (selected), along with `Schema` and `Beautify` buttons. The main area displays the request body as a JSON object:

```
1 {
2   "nombre": "Boubacar",
3   "email": "boubacar@email.com",
4   "edad": 26
5 }
```

Below the request body, there are tabs for `Body`, `Cookies`, `Headers 12`, and `Test Results`. The `Test Results` tab is active, showing a status of `200 OK` with a response time of `126 ms` and a size of `1.06 KB`. Below the status, there are icons for `JSON`, `Preview`, and `Visualize`. The response body is displayed as a JSON object:

```
1 {
2   "createdAt": "2026-09-07T19:42:02.158Z",
3   "name": "Deborah Wuckert",
4   "avatar": "https://cdn.jsdelivr.net/gh/faker-js/assets-person-portrait/female/512/95.jpg",
5   "id": "3",
6   "nombre": "Boubacar",
7   "email": "boubacar@email.com",
8   "edad": 26
9 }
```

Respuesta JSON: {

"createdAt": "2026-09-07T19:42:02.158Z",

"name": "Deborah Wuckert",

"avatar": "https://cdn.jsdelivr.net/gh/faker-js/assets-person-portrait/female/512/95.jpg",

"id": "1",

"nombre": "Boubacar",

"email": "boubacar@email.com",

"edad": 26

}

API 5: Swagger Petstore

URL Base: `https://petstore.swagger.io/v2`

CREATE (POST)

Endpoint: /pet

Body JSON: {"id":10001,"name":"Rocky"}

The screenshot shows a REST client interface with the following details:

- URL:** `https://petstore.swagger.io/v2/pet`
- Method:** `POST`
- Body:**

```
{
  "id": 1,
  "name": "mascota"
},
{
  "status": "available"
}
```
- Response:** `200 OK` (109 ms)
- Response Body (JSON):**

```
{
  "id": 10001,
  "category": {
    "id": 1,
    "name": "Perros"
  },
  "name": "Rocky",
  "photoUrls": [
    "https://example.com/rocky.jpg"
  ],
  "tags": [
    {
      "id": 1,
      "name": "mascota"
    }
  ],
  "status": "available"
}
```

Respuesta JSON: {

"id": 10001,

"category": {

"id": 1,

"name": "Perros"

```
},
"name": "Rocky",
"urls": [
  "https://example.com/rocky.jpg"
],
"tags": [
  {
    "id": 1,
    "name": "mascota"
  }
],
"status": "available"
}
```

READ (GET)

Endpoint: /pet/10001

HTTP <https://jsonplaceholder.typicode.com/posts>

GET <https://petstore.swagger.io/v2/pet/10001>

Docs Params Authorization Headers 10 Body Scripts Settings

raw JSON

```
1 {
2   "id": 10001,
3   "category": {
4     "id": 1,
5     "name": "Perros"
6   },
7   "name": "Rocky".
```

Body 2

{ } JSON Preview Visualize

```
1 {
2   "id": 10001,
3   "category": {
4     "id": 1,
5     "name": "Perros"
6   },
7   "name": "Rocky",
8   "photoUrls": [
9     "https://example.com/rocky.jpg"
10  ],
11  "tags": [
12    {
13      "id": 1,
14      "name": "mascota"
15    }
16  ],
17  "status": "available"
18 }
```

Respuesta JSON: {

"id": 10001,

"category": {

"id": 1,

"name": "Perros"

},

"name": "Rocky",

"photoUrls": [

```

    "https://example.com/rocky.jpg"
  ],
  "tags": [
    {
      "id": 1,
      "name": "mascota"
    }
  ],
  "status": "available"
}

```

UPDATE (PUT)

Endpoint: /pet


Body JSON: {"id":10001,"name":"Rocky Actualizado"}

Captura: _____

Respuesta JSON: _____

DELETE (DELETE)

Endpoint: /pet/10001

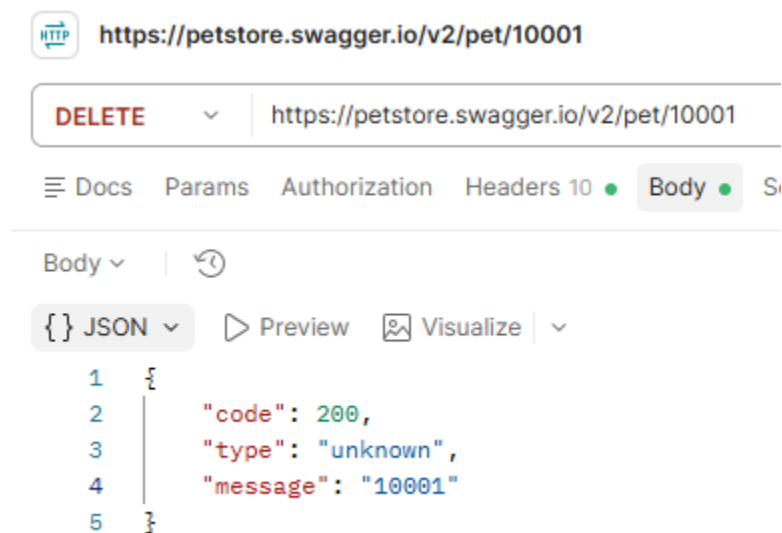

The screenshot shows the Swagger UI interface for a DELETE request. The URL bar displays `https://petstore.swagger.io/v2/pet/10001`. Below the URL bar, the method `DELETE` is selected. The response body is shown in JSON format:

```

1  {
2    "code": 200,
3    "type": "unknown",
4    "message": "10001"
5  }

```

Respuesta JSON: {

```
"code": 200,  
"type": "unknown",  
"message": "10001"  
}
```

API 6: MockAPI Productos

URL Base: <https://TU.mockapi.io/api/v1>

CREATE (POST)

Endpoint: /productos

Body JSON: {"nombre":"Monitor","precio":300}

HTTP <https://fakestoreapi.com/products> Save

POST <https://fakestoreapi.com/products>

Docs Params Authorization Headers 10 ● **Body** ● Scripts Settings

raw JSON S

```
1 {
2   "title": "Portátil Gaming",
3   "price": 1299.99,
4   "description": "Portátil para desarrollo y gaming",
5   "image": "https://i.pravatar.cc",
6   "category": "electronics"
7 }
```

Body 🕒 201 Created • 65 ms

{ } JSON Preview Visualize ⋮

```
1 {
2   "id": 21,
3   "title": "Portátil Gaming",
4   "price": 1299.99,
5   "description": "Portátil para desarrollo y gaming",
6   "image": "https://i.pravatar.cc",
7   "category": "electronics"
8 }
```

Respuesta JSON: {

"id": 21,

"title": "Portátil Gaming",

"price": 1299.99,

"description": "Portátil para desarrollo y gaming",

"image": "https://i.pravatar.cc",

"category": "electronics"

}

READ (GET)

Endpoint: /productos/20

https://fakestoreapi.com/products/20

GET https://fakestoreapi.com/products/20

200 OK • 66 ms • 1.02 KB

```
{
  "id": 20,
  "title": "DANVOUY Womens T Shirt Casual Cotton Short",
  "price": 12.99,
  "description": "95%Cotton,5%Spandex, Features: Casual, Short Sleeve, Letter Print, V-Neck,Fashion Tees, The fabric is soft and has some stretch., Occasion: Casual/Office/Beach/School/Home/Street. Season: Spring,Summer,Autumn,Winter.",
  "category": "women's clothing",
  "image": "https://fakestoreapi.com/img/61pHAEJ4NML._AC_UX679_t.png",
  "rating": {
    "rate": 3.6,
    "count": 145
  }
}
```

UPDATE (PUT)

Endpoint: /productos/21

Body JSON: {"nombre":"Monitor Pro","precio":350}

HTTP <https://fakestoreapi.com/products/21>  Save

PUT <https://fakestoreapi.com/products/21>

Docs Params Authorization Headers 10 ● Body ● Scripts Settings

raw JSON 

```
1 {
2   "title": "Portátil Gaming Pro",
3   "price": 1499.99,
4   "description": "Portátil actualizado con mayores prestaciones",
5   "image": "https://i.pravatar.cc",
6   "category": "electronics"
7 }
```

Body  200 OK • 67 m

{ } JSON  Preview  Visualize 

```
1 {
2   "id": 21,
3   "title": "Portátil Gaming Pro",
4   "price": 1499.99,
5   "description": "Portátil actualizado con mayores prestaciones",
6   "image": "https://i.pravatar.cc",
7   "category": "electronics"
8 }
```

Respuesta JSON: {

"id": 21,

"title": "Portátil Gaming Pro",

"price": 1499.99,

"description": "Portátil actualizado con mayores prestaciones",


"image": "https://i.pravatar.cc",

"category": "electronics"

}

DELETE (DELETE)

Endpoint: /productos/21

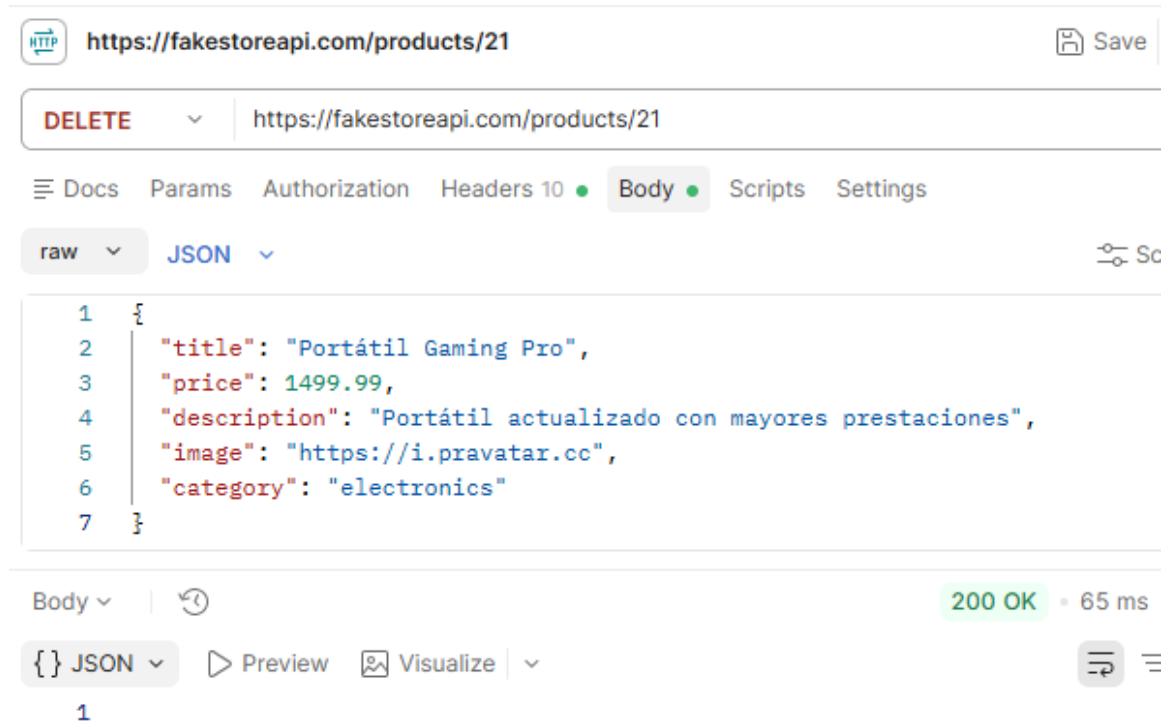

https://fakestoreapi.com/products/21

DELETE https://fakestoreapi.com/products/21

Docs Params Authorization Headers 10 Body Scripts Settings

raw JSON

```
1 {
2   "title": "Portátil Gaming Pro",
3   "price": 1499.99,
4   "description": "Portátil actualizado con mayores prestaciones",
5   "image": "https://i.pravatar.cc",
6   "category": "electronics"
7 }
```

Body 200 OK • 65 ms

{ } JSON Preview Visualize

1

Respuesta JSON:

API 7: Fake Store API

URL Base: https://fakestoreapi.com/carts

CREATE (POST)

Endpoint: /clientcatses

Body JSON: {

"userId": 5,

"date": "2026-09-07",

"products": [

{

"productId": 1,

"quantity": 2

```
},
```

```
{
```

```
"productId": 5,
```

```
"quantity": 1
```

```
}
```

```
]
```

```
}
```

HTTP <https://fakestoreapi.com/carts>

POST <https://fakestoreapi.com/carts>

Docs Params Authorization Headers 10 ● Body

raw JSON

```
8      },
9      {
10         "productId": 5,
11         "quantity": 1
12     }
13 ]
14 }
```

Body 

{ } JSON  Preview  Visualize

```
1  {
2      "id": 11,
3      "userId": 5,
4      "date": "2026-09-07",
5      "products": [
6          {
7              "productId": 1,
8              "quantity": 2
9          },
10         {
11             "productId": 5,
12             "quantity": 1
13         }
14     ]
15 }
```

Respuesta JSON: {

"id": 11,

"userId": 5,

"date": "2026-09-07",

"products": [

{

"productId": 1,

"quantity": 2


```

    },
    {
      "productId": 5,
      "quantity": 1
    }
  ]
}

```

READ (GET)

Endpoint: /carts/11

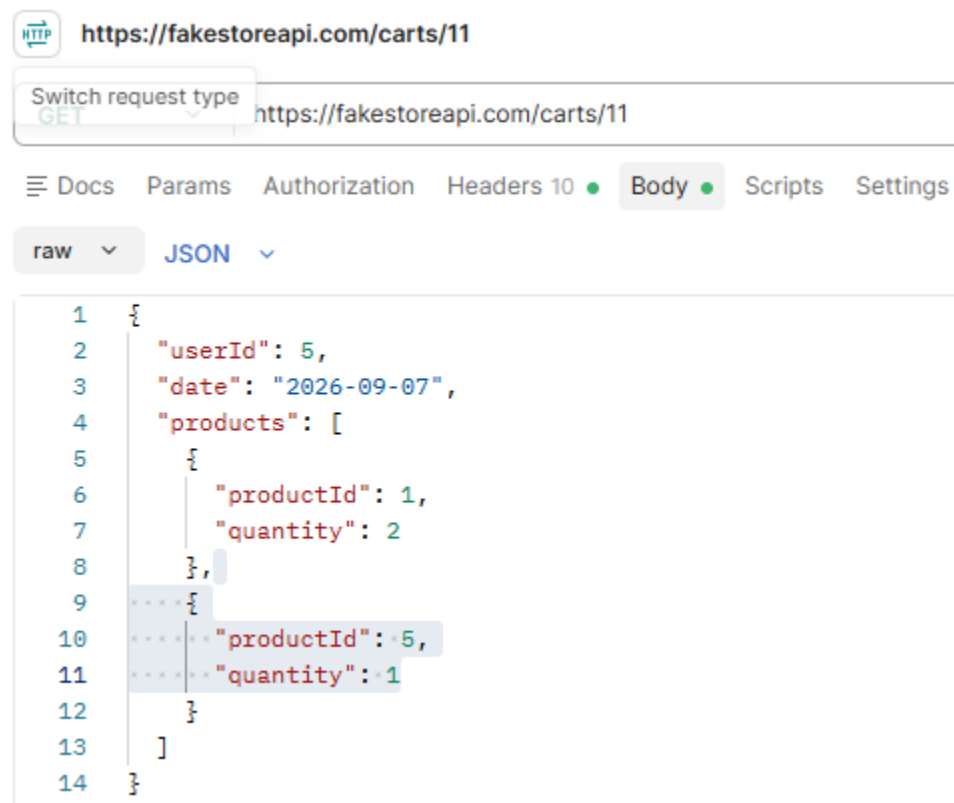

Respuesta JSON: {

```

  "id": 7,
  "userId": 8,
  "date": "2020-03-01T00:00:00.000Z",
  "products": [

```

```
{  
  "productId": 18,  
  "quantity": 1  
}  
],  
  "_v": 0  
}
```

UPDATE (PUT)

Endpoint: /carts/7

Body JSON: {

```
"userId": 5,  
  
"date": "2026-09-07",  
  
"products": [  
  
  {  
  
    "productId": 1,  
  
    "quantity": 3  
  
  },  
  
  {  
  
    "productId": 5,  
  
    "quantity": 2  
  
  },  
  
  {  
  
    "productId": 7,  
  
    "quantity": 1
```

}

]

}

The screenshot shows a REST client interface with a PUT request to `https://fakestoreapi.com/carts/11`. The request body is a JSON object with a `products` array containing three items. The response status is `200 OK`. The response body is a JSON object with `id`, `userId`, `date`, and a `products` array.

Request URL: `https://fakestoreapi.com/carts/11`

Method: `PUT`

Request Body (JSON):

```
4  "products": [  
5    {  
6      "productId": 1,  
7      "quantity": 3  
8    },  
9    {  
10     "productId": 5,  
11     "quantity": 2  
12    },  
13    {  
14     "productId": 7,  
15     "quantity": 1  
16    }  
17  ]  
18 }
```

Response Status: `200 OK`

Response Body (JSON):

```
1  {  
2    "id": 11,  
3    "userId": 5,  
4    "date": "2026-09-07",  
5    "products": [  
6      {  
7        "productId": 1,  
8        "quantity": 3  
9      },  
10     {  
11       "productId": 5,  
12       "quantity": 2  
13     },  
14     {  
15       "productId": 7,  
16       "quantity": 1  
17     }  
18   ]  
19 }
```

Respuesta JSON: {

"id": 11,

"userId": 5,

"date": "2026-09-07",

```
"products": [  
  {  
    "productId": 1,  
    "quantity": 3  
  },  
  {  
    "productId": 5,  
    "quantity": 2  
  },  
  {  
    "productId": 7,  
    "quantity": 1  
  }  
]  
}
```

DELETE (DELETE)

Endpoint: /clientes/{id}

HTTP <https://fakestoreapi.com/carts/11>

DELETE [▼](#) <https://fakestoreapi.com/carts/11>

☰ Docs Params Authorization Headers 10 ● Body ●

raw [▼](#) JSON [▼](#)

```
4  "products": [  
5    {  
6      "productId": 1,  
7      "quantity": 3  
8    },  
9    {  
10     "productId": 5,  
11     "quantity": 2  
12   },  
13   {  
14     "productId": 7,  
15     "quantity": 1  
16   }  
17 ]  
18 }
```

Body [▼](#) | ↺

{ } JSON [▼](#) ▶ Preview 🖼 Visualize [▼](#)

1 null

API 8: CrudCrud Productos

URL Base: https://crudcrud.com/api/TU_ID

CREATE (POST)

Endpoint: /productos

Body JSON: {"nombre":"Teclado","precio":50}

HTTP <https://crudcrud.com/api/ae5ce518b7544157bd3580391321a4de/productos> Save

POST <https://crudcrud.com/api/ae5ce518b7544157bd3580391321a4de/productos>

Docs Params Authorization Headers 10 Body Scripts Settings

raw JSON

```
1 {
2   "nombre": "Monitor LG UltraWide",
3   "precio": 349.99,
4   "categoria": "Monitores",
5   "stock": 25
6 }
```

Body 201 Created • 56 ms

{ } JSON Preview Visualize

```
1 {
2   "nombre": "Monitor LG UltraWide",
3   "precio": 349.99,
4   "categoria": "Monitores",
5   "stock": 25,
6   "_id": "6a9fd1fdbbe1f103e8cc3892"
7 }
```

Respuesta JSON: {

"nombre": "Monitor LG UltraWide",

"precio": 349.99,

"categoria": "Monitores",

"stock": 25,

"_id": "6a9fd1fdbbe1f103e8cc3892"

}

READ (GET)

Endpoint: /productos/{id}

HTTP <https://crudcrud.com/api/ae5ce518b7544157bd3580391321a4de/productos...> Save

GET <https://crudcrud.com/api/ae5ce518b7544157bd3580391321a4de/productos/6a9fd1fdbbe1f103e8cc3892>

Docs Params Authorization Headers 10 Body Scripts Settings

raw JSON Schema

```
1 {
2   "nombre": "Monitor LG UltraWide",
3   "precio": 349.99,
4   "categoria": "Monitores",
5   "stock": 25
6 }
```

Body 200 OK • 56 ms • 56

{ JSON Preview Visualize

```
1 {
2   "_id": "6a9fd1fdbbe1f103e8cc3892",
3   "nombre": "Monitor LG UltraWide",
4   "precio": 349.99,
5   "categoria": "Monitores",
6   "stock": 25
7 }
```

Respuesta JSON: {

"_id": "6a9fd1fdbbe1f103e8cc3892",

"nombre": "Monitor LG UltraWide",

"precio": 349.99,

"categoria": "Monitores",

"stock": 25

}

UPDATE (PUT)

Endpoint: /productos/{id}

Body JSON: {"nombre": "Teclado RGB", "precio": 70}

HTTP <https://crudcrud.com/api/ae5ce518b7544157bd3580391321a4de/productos...> Save

PUT <https://crudcrud.com/api/ae5ce518b7544157bd3580391321a4de/productos/6a...>

Docs Params Authorization Headers 10 Body Scripts Settings

raw JSON Schem

```
1 {
2   "nombre": "Monitor LG UltraWide Curvo",
3   "precio": 399.99,
4   "categoria": "Monitores Gaming",
5   "stock": 30
6 }
```

Body 200 OK • 57 ms • 39

Raw Preview Visualize

1

DELETE (DELETE)

Endpoint: /productos/{id}

HTTP <https://crudcrud.com/api/ae5ce518b7544157bd3580391321a4de/productos...> Save

DELETE <https://crudcrud.com/api/ae5ce518b7544157bd3580391321a4de/productos/6a...>

Docs Params Authorization Headers 10 Body Scripts Settings

raw JSON S

```
1 {
2   "nombre": "Monitor LG UltraWide Curvo",
3   "precio": 399.99,
4   "categoria": "Monitores Gaming",
5   "stock": 30
6 }
```

Body 200 OK • 58 ms

Raw Preview Visualize

1

API 9: CrudCrud Clientes

URL Base: https://crudcrud.com/api/TU_ID

CREATE (POST)

Endpoint: /clientes

Body JSON: {"nombre":"Maria"}

The screenshot shows a REST client interface with the following details:

- URL:** `https://crudcrud.com/api/ae5ce518b7544157bd3580391321a4de/clientes`
- Method:** `POST`
- Body (raw JSON):**

```
1 {
2   "nombre": "María González",
3   "email": "maria.gonzalez@email.com",
4   "telefono": "600123456",
5   "empresa": "InnovateTech"
6 }
```
- Response:** `201 Created` (56 ms)
- Response Body (JSON):**

```
1 {
2   "nombre": "María González",
3   "email": "maria.gonzalez@email.com",
4   "telefono": "600123456",
5   "empresa": "InnovateTech",
6   "_id": "6a9fd2f5bbe1f103e8cc3895"
7 }
```

Respuesta JSON: _____

READ (GET)

Endpoint: /clientes/{id}

HTTP <https://crudcrud.com/api/ae5ce518b7544157bd3580391321a4de/clientes/6a9fc..>  Save

GET  <https://crudcrud.com/api/ae5ce518b7544157bd3580391321a4de/clientes/6a9fc..>

 Docs Params Authorization Headers 10 **Body**  Scripts Settings

raw  JSON   S

```
1 {
2   "nombre": "María González",
3   "email": "maria.gonzalez@email.com",
4   "telefono": "600123456",
5   "empresa": "InnovateTech"
6 }
```

Body   200 OK • 56 ms

{ } JSON   Preview  Visualize  

```
1 {
2   "_id": "6a9fd2f5bbe1f103e8cc3895",
3   "nombre": "María González",
4   "email": "maria.gonzalez@email.com",
5   "telefono": "600123456",
6   "empresa": "InnovateTech"
7 }
```

Respuesta JSON: {

"_id": "6a9fd2f5bbe1f103e8cc3895",

"nombre": "María González",

"email": "maria.gonzalez@email.com",

"telefono": "600123456",


"empresa": "InnovateTech"

}

UPDATE (PUT)

Endpoint: /clientes/{id}


Body JSON: {"nombre": "Maria Lopez"}

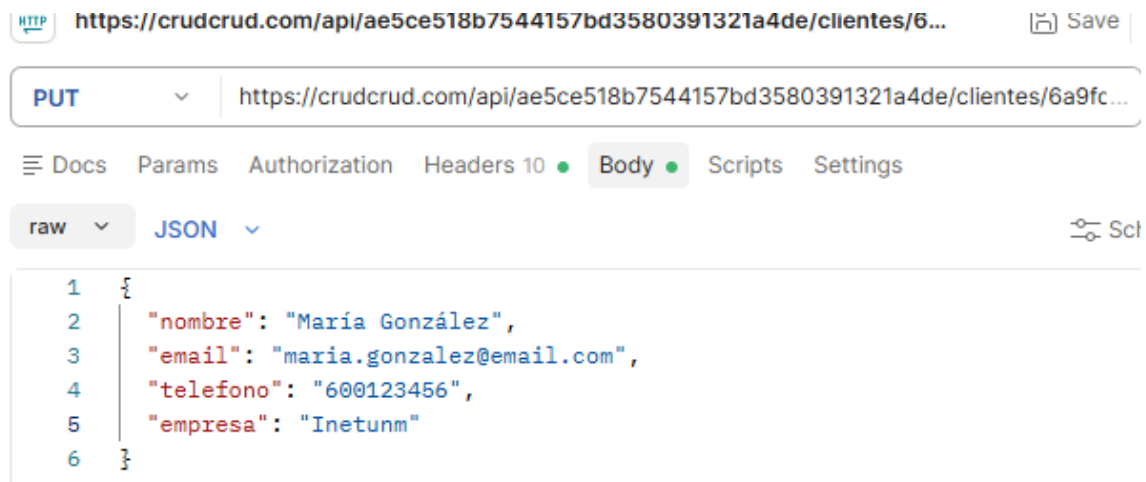

Respuesta JSON:

DELETE (DELETE)

Endpoint: /clientes/{id}

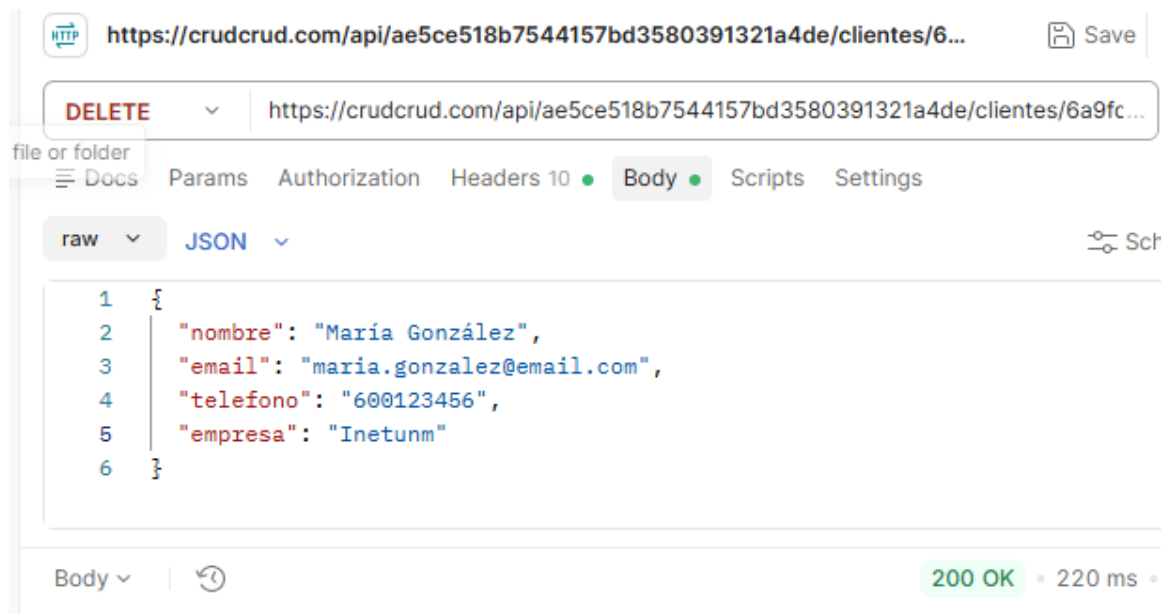

API 10: Restful-API.dev Empleados

URL Base: <https://api.restful-api.dev>

CREATE (POST)

Endpoint: <https://api.restful-api.dev/objects>

Body JSON: {"name":"Empleado","data":{"departamento":"IT"}}

The screenshot shows a REST client interface with the following details:

- URL:** `https://api.restful-api.dev/objects`
- Method:** `POST`
- Body (raw):**

```
3  "data": {  
4    "nombre": "Boubacar Seck",  
5    "departamento": "IT",  
6    "cargo": "Desarrollador",  
7    "salario": 32000  
8  }  
9  }
```
- Status:** `200 OK`
- Body (JSON):**

```
1  {  
2    "id": "ff808181a067127101a08053fda947a7",  
3    "name": "Empleado",  
4    "createdAt": 1788859383209,  
5    "data": {  
6      "nombre": "Boubacar Seck",  
7      "departamento": "IT",  
8      "cargo": "Desarrollador",  
9      "salario": 32000  
10   }  
11 }
```

Respuesta JSON: _____

READ (GET)

Endpoint: `https://api.restful-api.dev/objects/{id}`

Captura: _____

Respuesta JSON: _____

UPDATE (PUT)

Endpoint: `https://api.restful-api.dev/objects/{id}`

Body JSON: `{"name": "Empleado", "data": {"departamento": "Cloud"}}`

Captura: _____

Respuesta JSON: _____

DELETE (DELETE)

Endpoint: `https://api.restful-api.dev/objects/{id}`

Captura: _____

Respuesta JSON: _____