


NEW HEAD

The state of the **index** becomes
the tree of the next commit

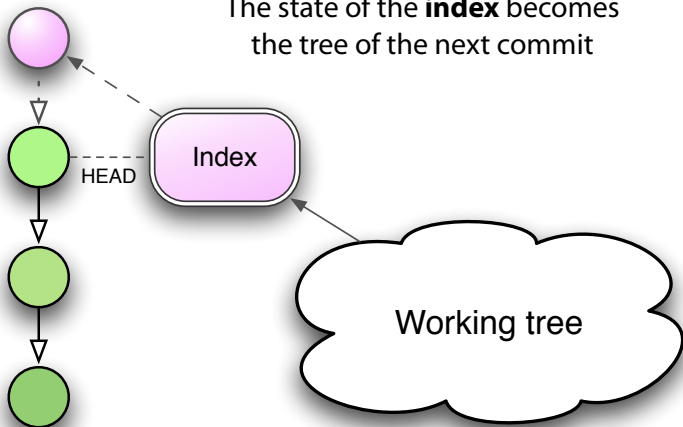

Files, directories and "hunks" (individual changes within a file) are added to the **index** using `git-add` and `git-add --patch`