

CS460 Fall 2019

Name: Ryan Dang


Student ID: 01658601

Due Date: 10/11/2019

Assignment 5: Scene Control with dat.GUI and Transformations!

Welcome back to framework country! This time we will use XTK and Three.js to study rotations.

In class, we connected the `dat.gui` library with XTK to control properties of a single cube. We also introduced the `transformer` object to rotate the cube along the world `x`- and `y` axis. In this assignment, we will create a website with two 3D scenes. One scene will be based on XTK, and the other will be based on Three.js. Then, we will use `dat.gui` to control objects in the scene. As a final result, each scene will contain two objects. We then can observe two different ways of rotating objects since XTK and Three.js.

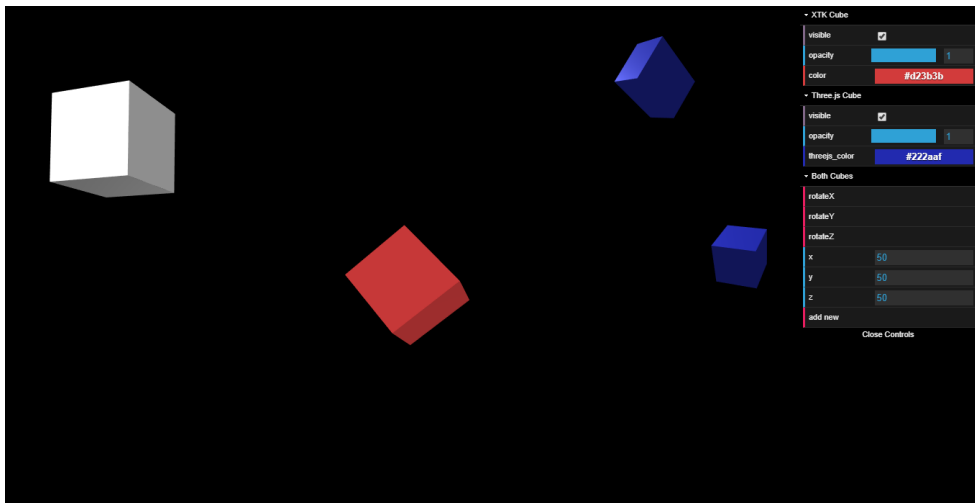

There is no starter code for assignment 5. Please start from scratch and save your code your fork as `05/index.html`.

Part 1 Coding: Configure the `<div>`s. (10 points)

We will create two viewports next to each other. Please add two `<div>` containers in the body of the HTML document. Name these containers `r1` and `r2` using the `id` property. Then, add styling to the header of the HTML document as follows:

```
<style>
  html, body {
    background-color: #000;
    margin: 0;
    padding: 0;
    height: 100%;
    overflow: hidden !important;
  }
  #r1 {
    width: 50%;
    height: 100%;
    float: left;
```

```

}
#r2 {
  width:50%;
  height:100%;
  float:left;
}
</style>

```

You can verify the placement of the `<div>` containers using the Web Developer Tools. They should be next to each other and together, fill the whole window.

Part 2 Coding: Setup the XTK scene. (10 points)

Add the `xtk_edge.js` and `xtk_xdat.gui.js` libraries using the `<script>` tags as we did in class and in assignment 2. Then, create the `window.onload` function to set up the `X.renderer3D` and add a single `X.cube`. **Since we place the renderer into the `r1` container, we need to set `r.container='r1'`; just before calling `r.init()`;** Please check if the XTK cube appears by reloading the website.

Part 3 Coding: Setup the Three.js scene. (15 points)

For Three.js, please add the `three.min.js` and `TrackballControls.js` as we did in assignment 3. Then, follow our old code to setup a `THREE.Scene` with the `THREE.PerspectiveCamera`, the `THREE.WebGLRenderer`, the `THREE.AmbientLight`, the `THREE.DirectionalLight`, and the `THREE.TrackballControls`. **Since we now use a `<div>` container as our viewport, we need to do the following:**

```

var r2 = document.getElementById('r2'); // get the div container!!!
// ...
var ratio = r2.clientWidth / r2.clientHeight; // use the container's clientWidth and clientHeight
// rather than window.innerWidth and window.innerHeight
// ...
var camera = new THREE.PerspectiveCamera(fov, ratio, zNear, zFar);

var renderer = new THREE.WebGLRenderer({antialias:true});
renderer.setSize( r2.clientWidth, r2.clientHeight ); // again use the container
r2.appendChild( renderer.domElement ); // and append the domElement to the container

// ...

var controls = new THREE.TrackballControls( camera, r2 ); // pass the container to the camera

```

Please don't forget the animate loop! Then, please add the `THREE.BoxBufferGeometry` and the `THREE.MeshStandardMaterial` to create a new `THREE.Mesh` and add it to the scene. **When you reload the page, there should be now two cubes - one with XTK and one with Three.js!**

Part 4 Coding: Connect XTK to `dat.GUI` to control cube properties. (10 points)

Please create the `dat.GUI()` user interface for XTK. For this, we will use `gui.addFolder` and access the `visible`, `opacity`, and `color` properties as we did in class. After reloading, this should work right away.

Part 5 Coding: Introduce the helper object for `dat.GUI`. (5 points)

XTK's properties connect well with `dat.GUI` but for more advanced functionality, and especially to control Three.js, we will need a helper object. Please add the following code just before the `dat.GUI()` setup.

```

var controller = {

  'threejs_color': 0xffffff

```

```
};
```

Part 6 Coding: Connect Three.js to dat.GUI to control cube properties. (5 points)

To connect dat.GUI and Three.js, we will first use `gui.addFolder` to group the controls. Then, we want to access the same properties as in the XTK case. However, connecting Three.js with dat.GUI is not as straight forward—even with a helper object :(. It requires the following code:

```
var threejsUI = gui.addFolder('Three.js Cube');
threejsUI.add(cube, 'visible');
threejsUI.add(cube.material, 'opacity', 0, 1).onChange( function() {
  cube.material.transparent = true;
});
threejsUI.addColor(controller, 'threejs_color').onChange( function() {
  cube.material.color.set( controller.threejs_color );
} );
threejsUI.open();
```

After reloading, this should allow to control the visibility, opacity, and color for both the XTK cube and the THREE.js cube.

Part 7 Coding: Extend the helper object for dat.GUI and rotate both cubes. (10 points)

We now want to rotate both cubes with three buttons. For this, we will add a new folder to dat.GUI as follows:

```
var both = gui.addFolder('Both Cubes');
both.add(controller, 'rotateX');
both.add(controller, 'rotateY');
both.add(controller, 'rotateZ');
both.open();
```

Then, we will extend the `controller` helper object with three rotate methods that rotate by 20 degrees:

```
var controller = {
  'threejs_color': 0xffffffff,

  'rotateX': function() {
    c.transform.rotateX(20);
    cube.rotateX(20);
  },
  'rotateY': function() {
    c.transform.rotateY(20);
    cube.rotateY(20);
  },
  'rotateZ': function() {
    c.transform.rotateZ(20);
    cube.rotateZ(20);
  }
};
```

In the code above, we assume that the XTK cube is accessible as `c` and the THREE.js cube is accessible as `cube`. After reloading, this should allow to rotate the cubes in X,Y, and Z using the three new buttons.

Part 8 Coding: Add a second cube. (10 points)

Please extend the `controller` helper object with a new method 'add new' and update the dat.GUI controls.

```

var controller = {
  // ...
  'add new': function() {
    // TODO!
  }
};

// ...

both.add(controller, 'add new');
both.open();

```

Now, please replace the `//TODO!` above with code that creates for both, XTK and Three.js, a second cube and adds it the viewport. **The new cube should be positioned at (50, 50, 50).** After reloading, and pressing 'add new', both viewports should show two cubes (maybe hidden by the dat.GUI panel).

Part 9 Explaining: Different rotations? (20 points)

So, if we rotate the cubes before adding the second cube, the rotations in XTK and Three.js are very similar. But, after adding the second cube the rotations are very different. Please try to explain what happens.

Rotating along Y and Z both scenes rotate differently, this may just be due to the camera set up or both APIs use different axes for up and forward (I know some 3D programs have different ones like Blender and Unity). I used Three.js's axis helper to visualize the axis and magicmode in xtk (I'm just guessing but it seems like it sets the colors axis on the cube), and xtk had y and forwards and z as up while three.js had z as forwards and y as up.

Both also seem to rotate differently, xtk rotated a lot slower and it took 18 rotations to get back to the original transformation and $18 * 20 = 360$ so I assume that xtk uses matrices for the rotation. ThreeJS was faster and it took 15 rotations, and that is only 300 degrees so I assume that it is using quaternions for rotations.

I challenged myself and made it so the added objects rotate as well, I noticed that xtk seems to group the meshes together while three.js keeps them separate so the cubes rotate individually in three.js while in xtk they rotate as a group.


Part 10 Cleanup: Replace the screenshot above, activate Github pages, edit the URL below, and add this PDF to your repo. Then, send a pull request or assignment submission (or do the bonus first). (5 points)

Link to your assignment: <https://ryanhdang.github.io/cs460student/05/index.html>


Bonus (33 points):

We will use `spector.js` to analyse the two viewports. If you did not install this extension yet, please do so by following the instructions at <https://spector.babylonjs.com/>. Then, you can use the extension to capture/record WebGL activity.

Part 1 (5 points): Please use spector.js to capture the viewport that uses XTK and insert a screenshot here.

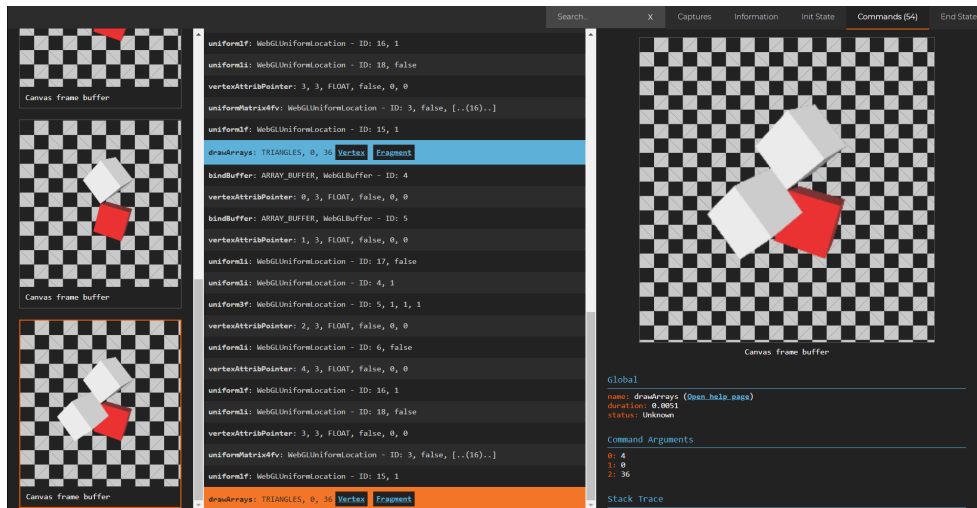

Part 2 (5 points): Please use `spector.js` capture the viewport that uses `Three.js` and insert a screenshot here.

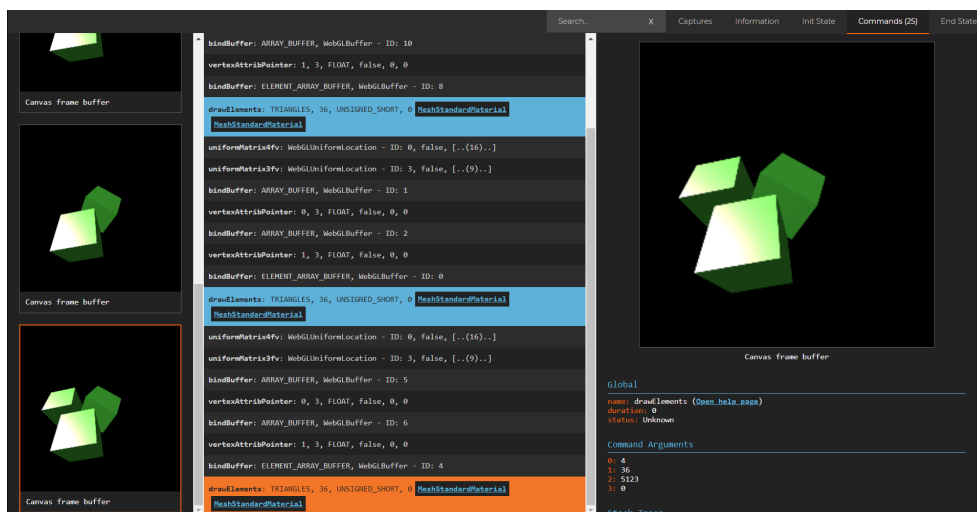

Part 3 (23 points): Compare the `spector.js` recordings. (a) Please report if either XTK or Three.js use an indexed geometry. (b) Also, please explore and compare the length of the GLSL shader codes both libraries use. (c) And, please figure out how the object transformations are passed to the shaders.

A) XTK does not use indexed geometry, while Three.js does, this can be seen with Three.js having a bind element array buffer after binding the array buffer. XTK does not have this.

B) Three.js's shader is a lot more robust and seems like it has a lot more functions defined so the material can do a lot more like have multiple textures. I believe XTK uses simple phong lighting (since specular seems to be based on the reflection vector and not half like in blinn-phong), while Three.js is PBR since it handles maps like normal maps, roughness, metallic, etc.

C) Both get the object transforms from the main code and it uses that as an attribute in the vertex shader.