

CS460 Fall 2020


Github Username: nandiniys

Due Date: 10/19/2020

Assignment 5: Scene Control with dat.GUI and Transformations!

Welcome back to framework country! This time we will use XTK and Three.js to study rotations.

In class, we connected the `dat.gui` library with XTK to control properties of a single cube. We also introduced the `transformer` object to rotate the cube along the world `x`- and `y` axis. In this assignment, we will create a website with two 3D scenes. One scene will be based on XTK, and the other will be based on Three.js. Then, we will use `dat.gui` to control objects in the scene. As a final result, each scene will contain two objects. We then can observe two different ways of rotating objects since XTK and Three.js.

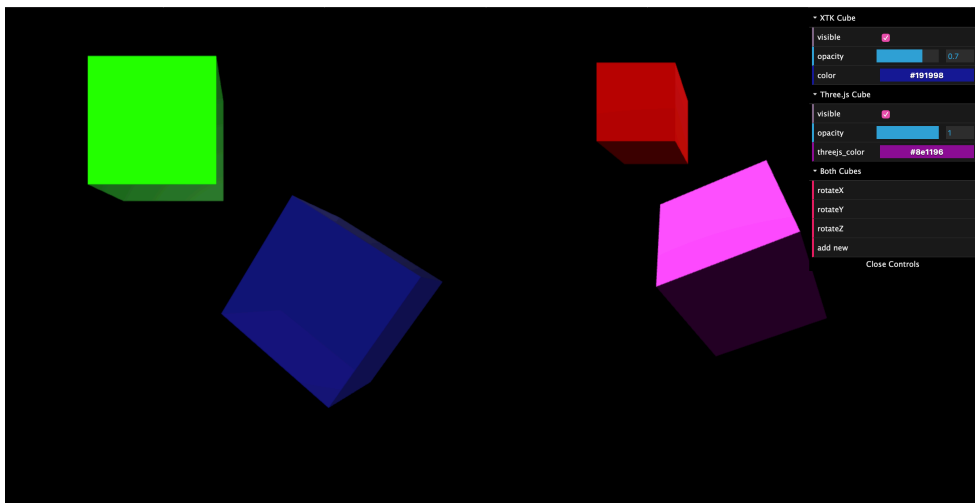

There is no starter code for assignment 5. Please start from scratch and save your code your fork as `05/index.html`.

Part 1 Coding: Configure the `<div>`s. (10 points)

We will create two viewports next to each other. Please add two `<div>` containers in the body of the HTML document. Name these containers `r1` and `r2` using the `id` property. Then, add styling to the header of the HTML document as follows:

```
<style>
  html, body {
    background-color: #000;
    margin: 0;
    padding: 0;
    height: 100%;
    overflow: hidden !important;
  }
  #r1 {
    width: 50%;
    height: 100%;
    float: left;
  }
```

```

#r2 {
  width:50%;
  height:100%;
  float:left;
}
</style>

```

You can verify the placement of the `<div>` containers using the Web Developer Tools. They should be next to each other and together, fill the whole window.

Part 2 Coding: Setup the XTK scene. (10 points)

Add the `xtk_edge.js` and `xtk_xdat.gui.js` libraries using the `<script>` tags as we did in class and in assignment 2. Then, create the `window.onload` function to set up the `X.renderer3D` and add a single `X.cube`. **Since we place the renderer into the `r1` container, we need to set `r.container='r1'`; just before calling `r.init()`;** Please check if the XTK cube appears by reloading the website.

Part 3 Coding: Setup the Three.js scene. (15 points)

For Three.js, please add the `three.min.js` and `TrackballControls.js` as we did in assignment 3. Then, follow our old code to setup a `THREE.Scene` with the `THREE.PerspectiveCamera`, the `THREE.WebGLRenderer`, the `THREE.AmbientLight`, the `THREE.DirectionalLight`, and the `THREE.TrackballControls`. **Since we now use a `<div>` container as our viewport, we need to do the following:**

```

var r2 = document.getElementById('r2'); // get the div container!!!
// ...
var ratio = r2.clientWidth / r2.clientHeight; // use the container's clientWidth and clientHeight
// rather than window.innerWidth and window.innerHeight
// ...
var camera = new THREE.PerspectiveCamera(fov, ratio, zNear, zFar);

var renderer = new THREE.WebGLRenderer({antialias:true});
renderer.setSize( r2.clientWidth, r2.clientHeight ); // again use the container
r2.appendChild( renderer.domElement ); // and append the domElement to the container

// ...

var controls = new THREE.TrackballControls( camera, r2 ); // pass the container to the camera

```

Please don't forget the animate loop! Then, please add the `THREE.BoxBufferGeometry` and the `THREE.MeshStandardMaterial` to create a new `THREE.Mesh` and add it to the scene. **When you reload the page, there should be now two cubes - one with XTK and one with Three.js!**

Part 4 Coding: Connect XTK to `dat.GUI` to control cube properties. (10 points)

Please create the `dat.GUI()` user interface for XTK. For this, we will use `gui.addFolder` and access the `visible`, `opacity`, and `color` properties as we did in class. After reloading, this should work right away.

Part 5 Coding: Introduce the helper object for `dat.GUI`. (5 points)

XTK's properties connect well with `dat.GUI` but for more advanced functionality, and especially to control Three.js, we will need a helper object. Please add the following code just before the `dat.GUI()` setup.

```

var controller = {

  'threejs_color': 0xffffff

```

```
};
```

Part 6 Coding: Connect Three.js to dat.GUI to control cube properties. (5 points)

To connect dat.GUI and Three.js, we will first use `gui.addFolder` to group the controls. Then, we want to access the same properties as in the XTK case. However, connecting Three.js with dat.GUI is not as straight forward—even with a helper object `:`. It requires the following code:

```
var threejsUI = gui.addFolder('Three.js Cube');
threejsUI.add(cube, 'visible');
threejsUI.add(cube.material, 'opacity', 0, 1).onChange( function() {
  cube.material.transparent = true;
});
threejsUI.addColor(controller, 'threejs_color').onChange( function() {
  cube.material.color.set( controller.threejs_color );
} );
threejsUI.open();
```

After reloading, this should allow to control the visibility, opacity, and color for both the XTK cube and the THREE.js cube.

Part 7 Coding: Extend the helper object for dat.GUI and rotate both cubes. (10 points)

We now want to rotate both cubes with three buttons. For this, we will add a new folder to dat.GUI as follows:

```
var both = gui.addFolder('Both Cubes');
both.add(controller, 'rotateX');
both.add(controller, 'rotateY');
both.add(controller, 'rotateZ');
both.open();
```

Then, we will extend the `controller` helper object with three rotate methods that rotate by 20 degrees:

```
var controller = {
  'threejs_color': 0xffffffff,

  'rotateX': function() {
    c.transform.rotateX(20);
    cube.rotateX(20);
  },
  'rotateY': function() {
    c.transform.rotateY(20);
    cube.rotateY(20);
  },
  'rotateZ': function() {
    c.transform.rotateZ(20);
    cube.rotateZ(20);
  }
};
```

In the code above, we assume that the XTK cube is accessible as `c` and the THREE.js cube is accessible as `cube`. After reloading, this should allow to rotate the cubes in X,Y, and Z using the three new buttons.

Part 8 Coding: Add a second cube. (10 points)

Please extend the `controller` helper object with a new method 'add new' and update the dat.GUI controls.

```

var controller = {
  // ...
  'add new': function() {
    // TODO!
  }
};

// ...

both.add(controller, 'add new');
both.open();

```

Now, please replace the `//TODO!` above with code that creates for both, XTK and Three.js, a second cube and adds it the viewport. **The new cube should be positioned at (50, 50, 50).** After reloading, and pressing 'add new', both viewports should show two cubes (maybe hidden by the dat.GUI panel).

Part 9 Explaining: Different rotations? (20 points)

So, if we rotate the cubes before adding the second cube, the rotations in XTK and Three.js are very similar. But, after adding the second cube the rotations are very different. Please try to explain what happens.

- When we rotate the cubes before adding the second pair, both cubes seem to rotate around their individual local coordinate systems i.e according to their object frames of reference.
- When the second pair of cubes are added, the ThreeJs cube seems like it continues to rotate around its object frame of reference where as the XTK cube now rotates relative to the second cubes' coordinate system. This makes it look like the whole cube not only rotates but it rotates around a distant axis and thus looking like its also moving (like a translation mixed with a rotation).

Part 10 Cleanup: Replace the screenshot above, activate Github pages, edit the URL below, and add this PDF to your repo. Then, send a pull request or assignment submission (or do the bonus first). (5 points)

Link to your assignment: nandiniis.github.io/cs460student/05/index.html

Bonus (33 points):

We will use `spector.js` to analyse the two viewports. If you did not install this extension yet, please do so by following the instructions at <https://spector.babylonjs.com/>. Then, you can use the extension to capture/record WebGL activity.


NOTE: I couldn't run SpectorJs on my machine. I kept getting "Sorry, experimental-webgl context is not supported on this machine!" I tried to restart the browser, remove the extension and add it again, restart the machine and yet it didn't work.

I asked a friend of mine who is also in the class if his was working on my github pages to see if my code was faulty but it worked on his machine.


Thus, I asked my friend to walk me through how to use SpectorJs on a zoom call and take the screenshots for me. Those are the screenshots I've uploaded below. Although I didn't take them myself on my machine, I do understand how they were produced and how SpectorJs was used to get them.

Myfriends' githubhandle: @sg9293

Part 1 (5 points): Please use `spector.js` to capture the viewport that uses XTK and insert a screenshot here.

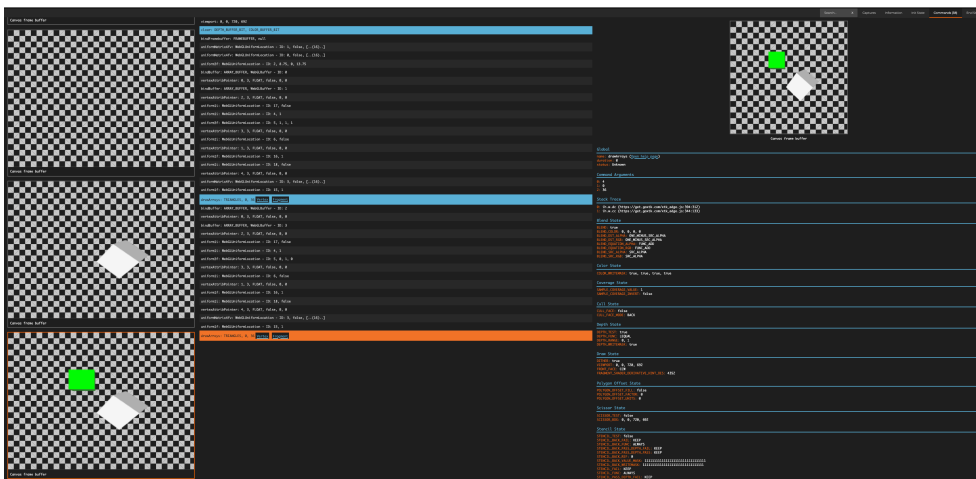

Part 2 (5 points): Please use `spector.js` capture the viewport that uses Three.js and insert a screenshot here.

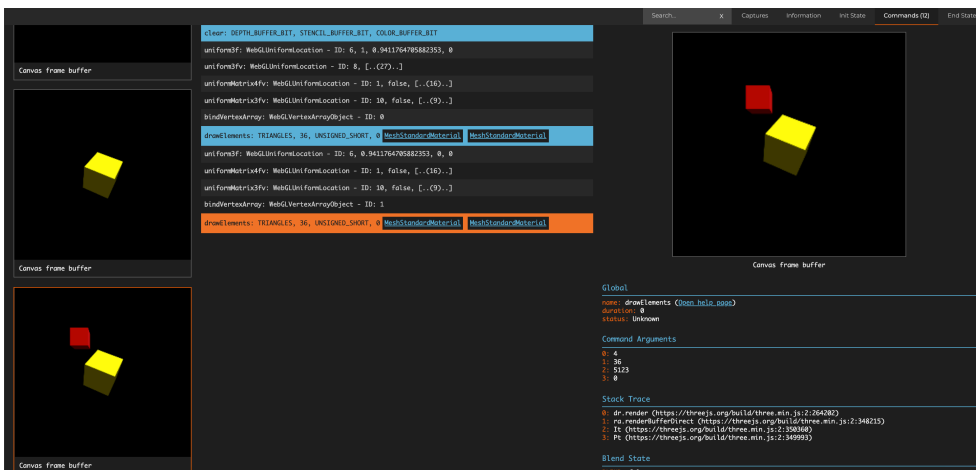

Part 3 (23 points): Compare the `spector.js` recordings. (a) Please report if either XTK or Three.js use an indexed

geometry. (b) Also, please explore and compare the length of the GLSL shader codes both libraries use. (c) And, please figure out how the object transformations are passed to the shaders.

a) ThreeJs uses indexed geometry but XTK doesn't. We can see THreejs's use of indexed geometry through the use of ELEMENT ARRAY BUFFER.

b) XTK's shaders code is much shorter than that of ThreeJS but the ThreeJs shaders offer more features.

c) The object transformations in both frameworks are passed to the shaders as uniforms.