REPORTING WITH R MARKDOWN

Introduction

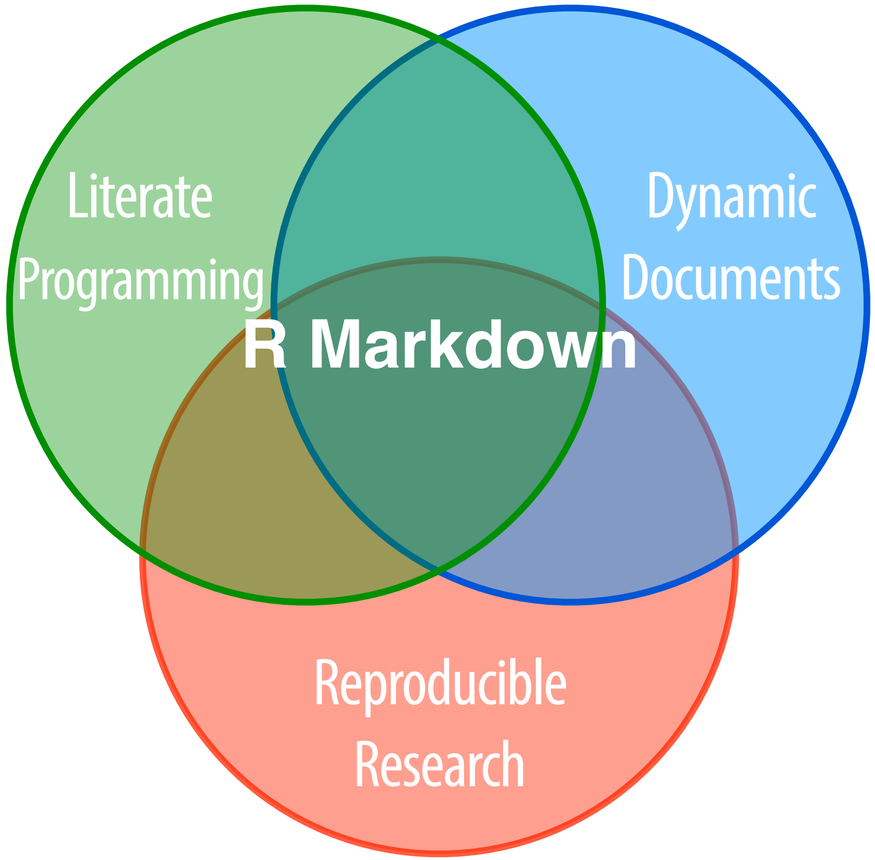
Literate Programming
Dynamic Documents
R Markdown
Reproducible Research

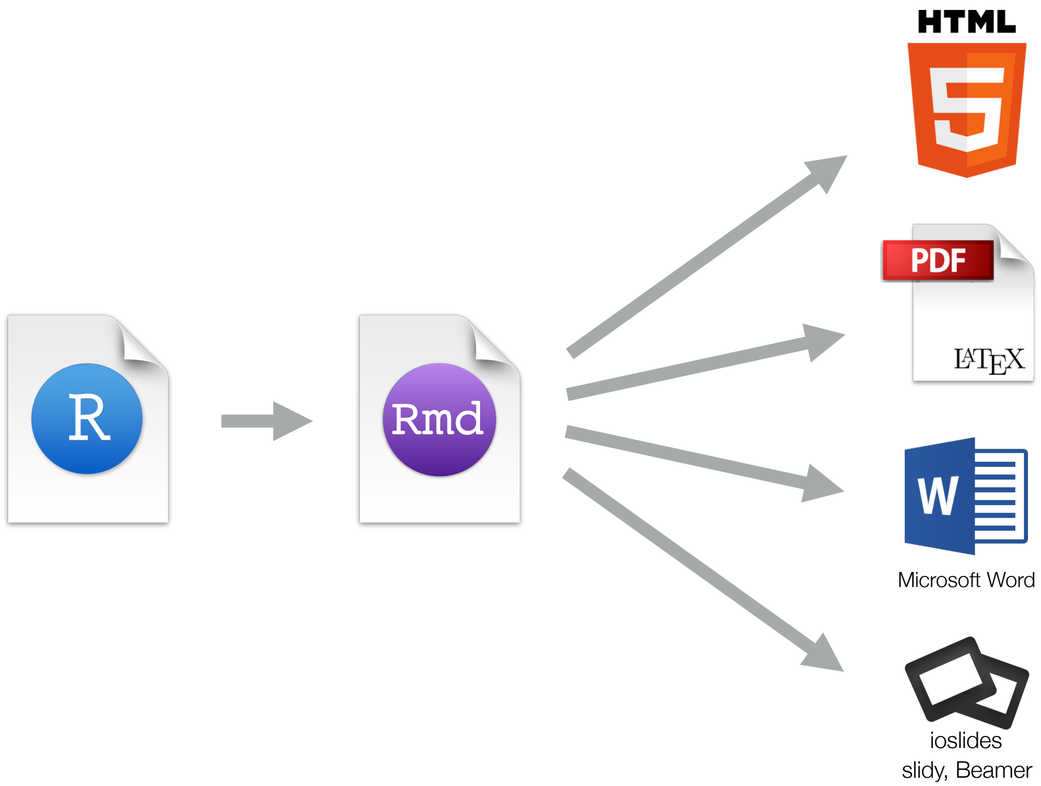
R
Rmd
HTML
PDF
LaTeX
W
Microsoft Word
ioslides
slidy, Beamer

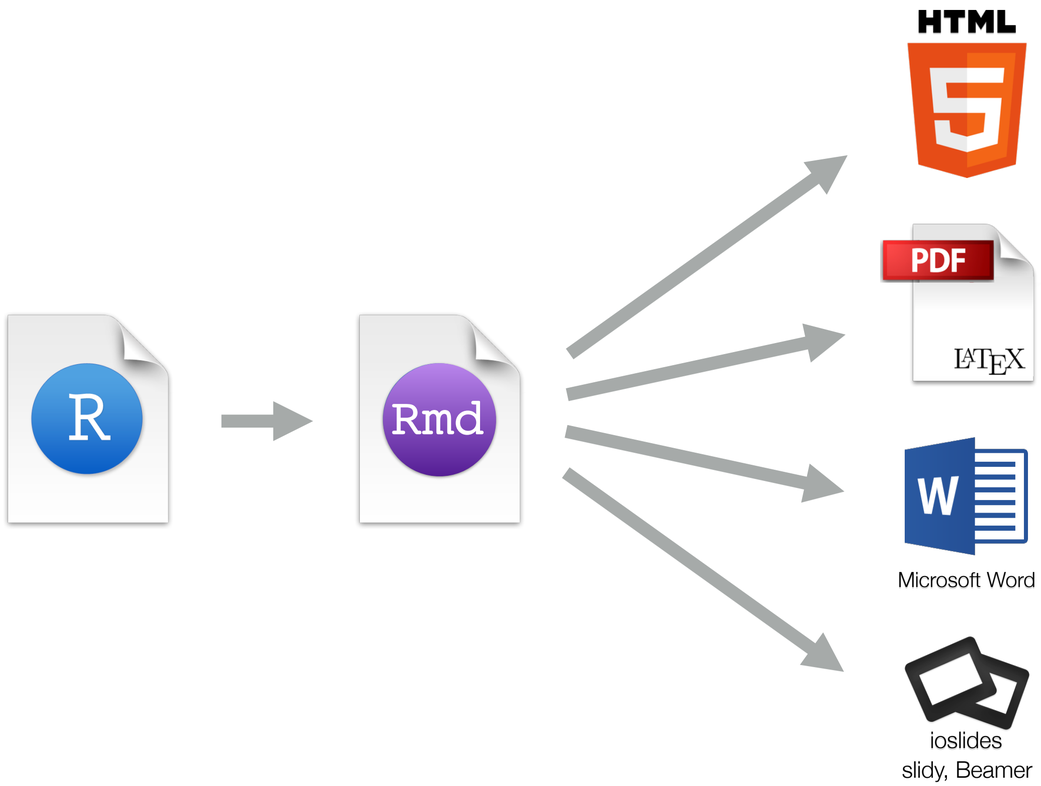
R
Rmd
HTML
PDF
LaTeX
W
Microsoft Word
ioslides
slidy, Beamer

RStudio®

REPORTING WITH R MARKDOWN

Let's practice!

REPORTING WITH R MARKDOWN

R

R Markdown
R
Markdown
Knitr
Pandoc
Shiny
RStudio
IDE

R Markdown
R
Markdown
Knitr
Pandoc
Shiny
RStudio
IDE

REPORTING WITH R MARKDOWN

Let's practice!

REPORTING WITH R MARKDOWN

Markdown

R Markdown
R
Markdown
Knitr
Pandoc
Shiny
RStudio
IDE

R Markdown
R
Markdown
Knitr
Pandoc
Shiny
RStudio
IDE

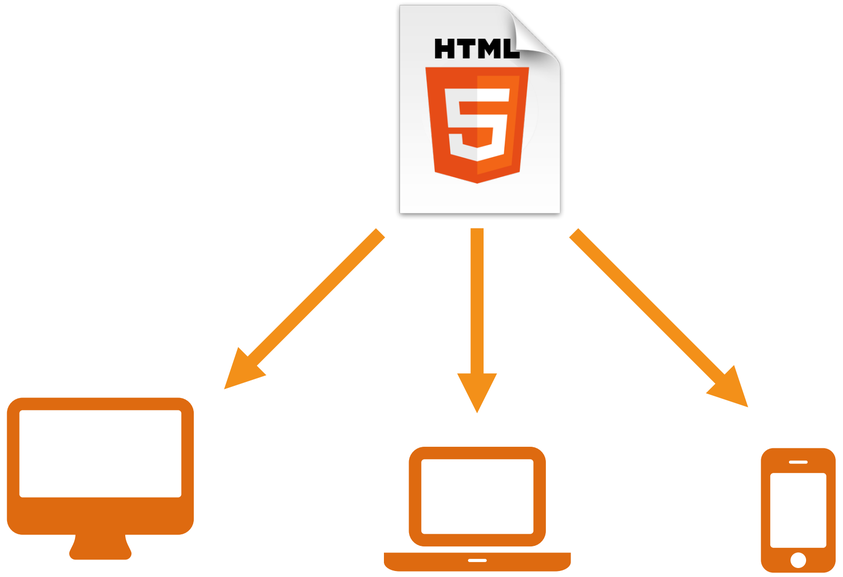
HTML

```
<!DOCTYPE html>
<html>
<head>
  <title>Page Title</title>
</head>

<body>

  <h1>A header</h1>

  <p>A list with three items:</p>
  <ul style="list-style-type:circle">
    <li>Moe</li>
    <li>Larry</li>
    <li>Curly</li>
  </ul>

  <p>Some <strong>bold</strong> text.</p>

</body>
```

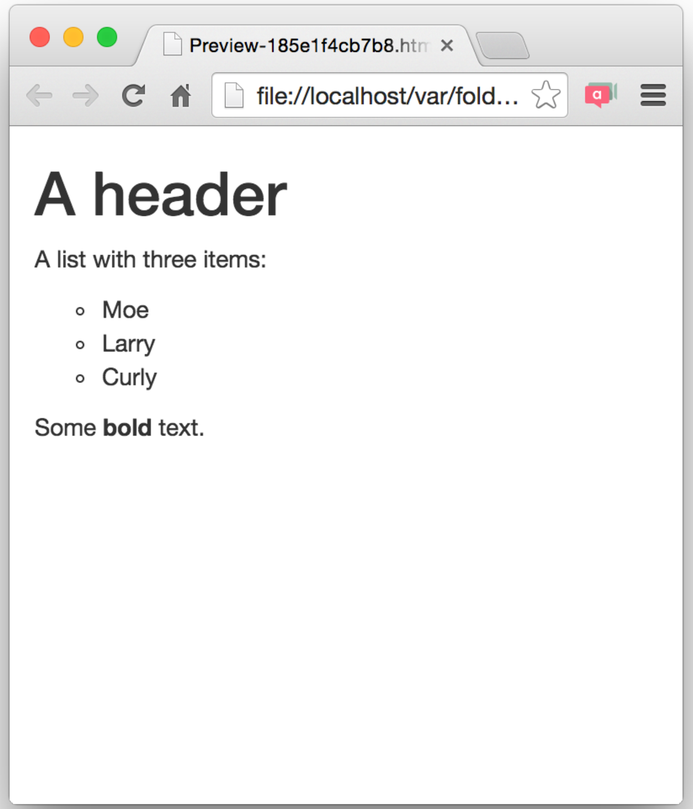

html

```
<!DOCTYPE html>
<html>
<head>
 <title>Page Title</title>
</head>

<body>

 <h1>A header</h1>

 <p>A list with three items:</p>
 <ul style="list-style-type:circle">
  <li>Moe</li>
  <li>Larry</li>
  <li>Curly</li>
 </ul>

 <p>Some <strong>bold</strong> text.</p>

</body>
```

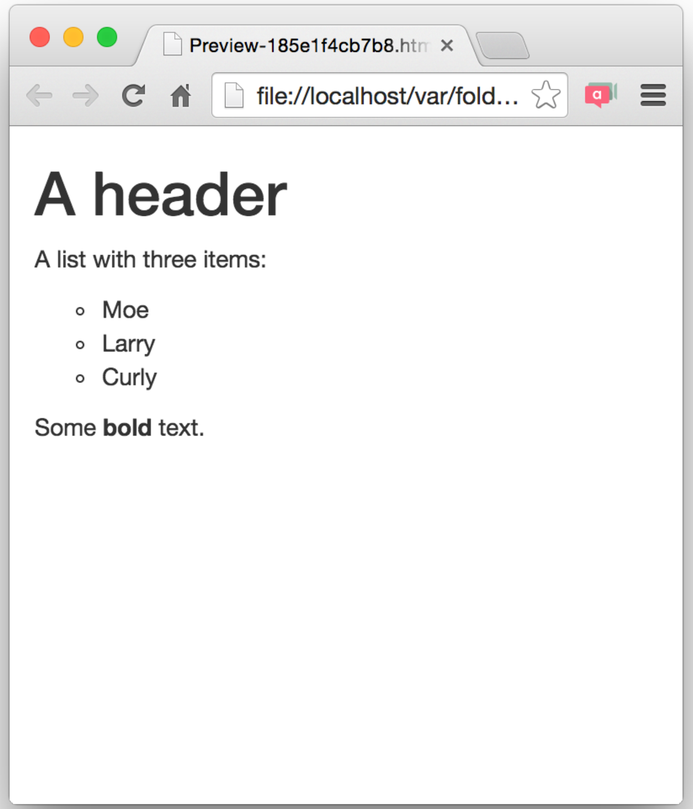

html

```
<!DOCTYPE html>
<html>
<head>
 <title>Page Title</title>
</head>

<body>

 <h1>A header</h1>

 <p>A list with three items:</p>
 <ul style="list-style-type:circle">
  <li>Moe</li>
  <li>Larry</li>
  <li>Curly</li>
 </ul>

 <p>Some <strong>bold</strong> text.</p>

</body>
```

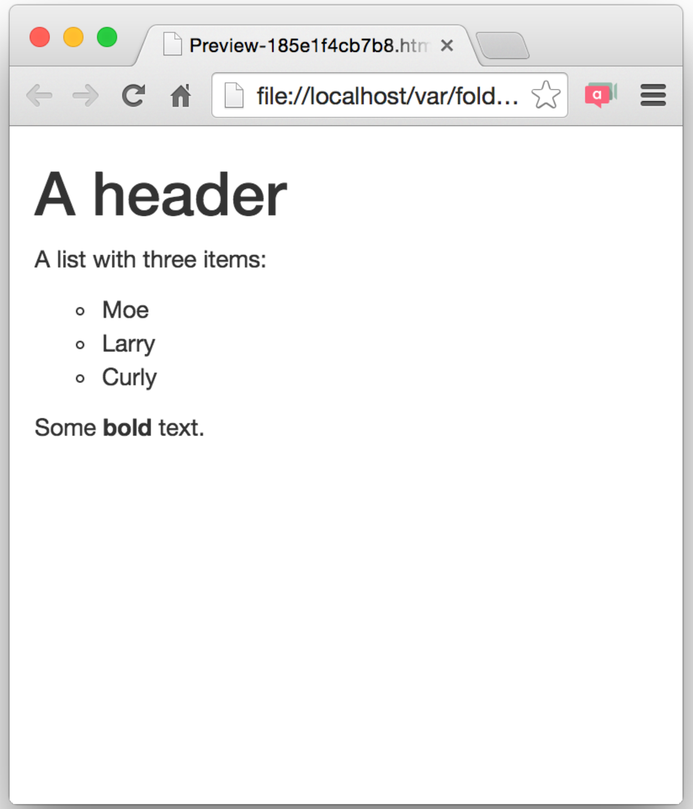

html

```
<!DOCTYPE html>
<html>
<head>
 <title>Page Title</title>
</head>

<body>

 <h1>A header</h1>

 <p>A list with three items:</p>
 <ul style="list-style-type:circle">
  <li>Moe</li>
  <li>Larry</li>
  <li>Curly</li>
 </ul>

 <p>Some <strong>bold</strong> text.</p>

</body>
```

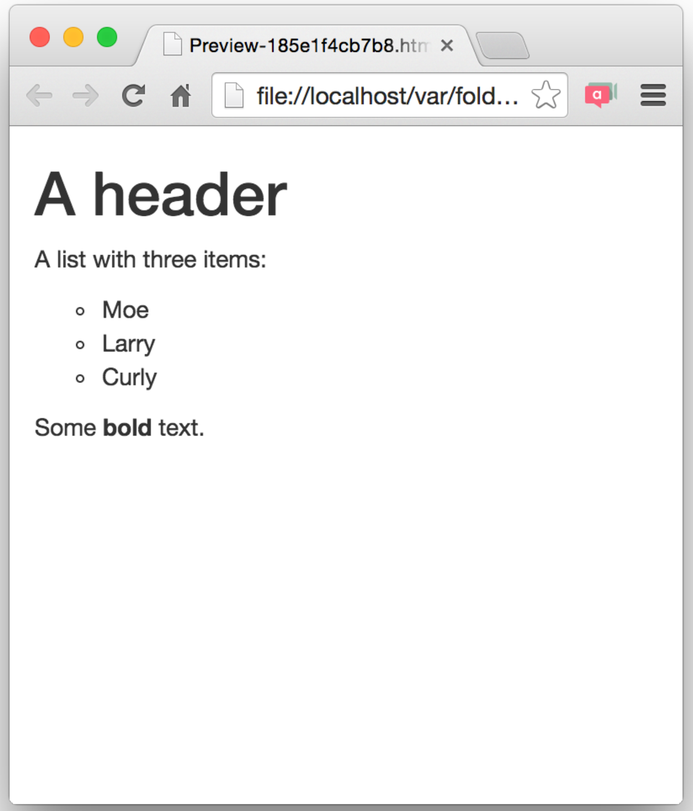

html

```
<!DOCTYPE html>
<html>
<head>
  <title>Page Title</title>
</head>

<body>

  <h1>A header</h1>

  <p>A list with three items:</p>
  <ul style="list-style-type:circle">
    <li>Moe</li>
    <li>Larry</li>
    <li>Curly</li>
  </ul>

  <p>Some <strong>bold</strong> text.</p>

</body>
```

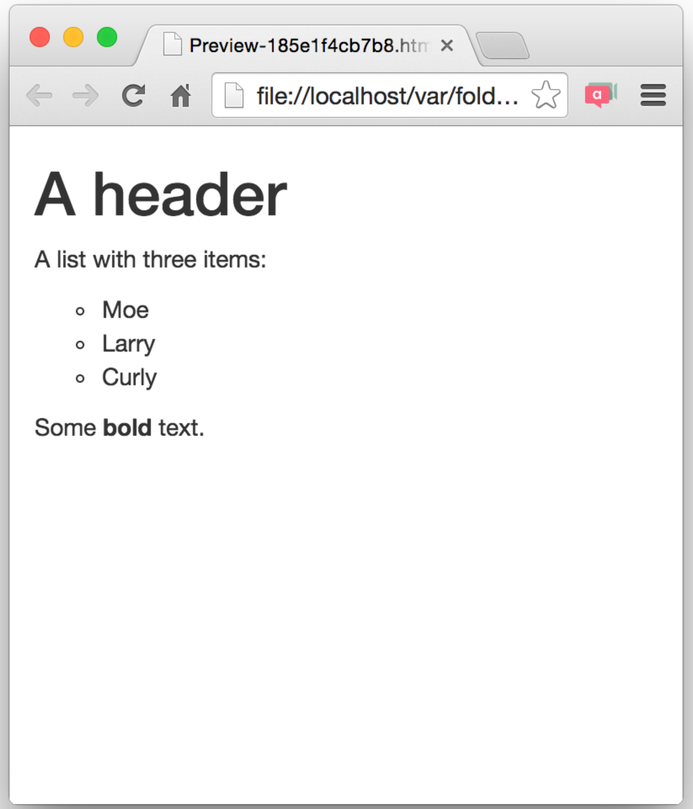

html

```
# A header

A list with three items:

* Moe
* Larry
* Curly

Some **bold** text.
```

markdown

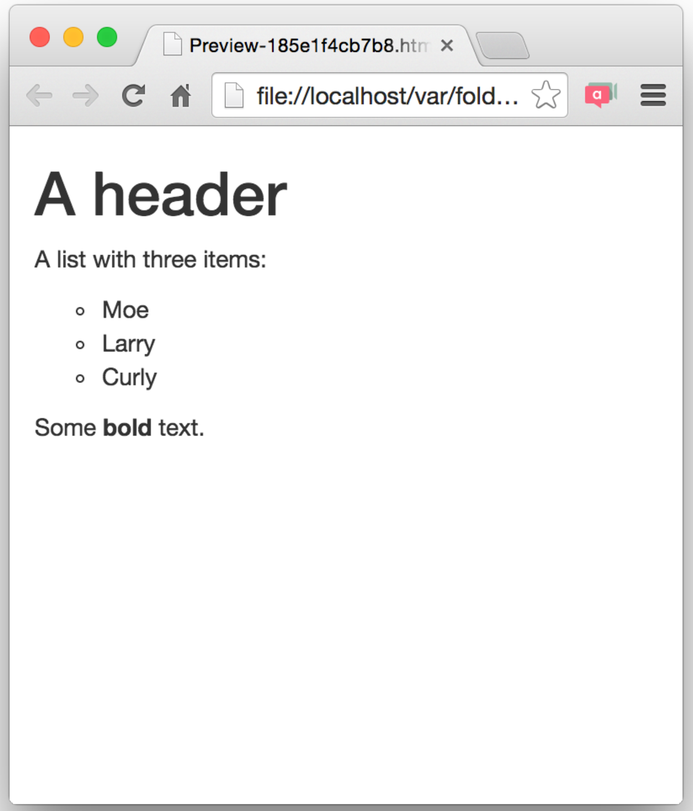

```
# A header

A list with three items:

* Moe
* Larry
* Curly

Some **bold** text.
```

markdown

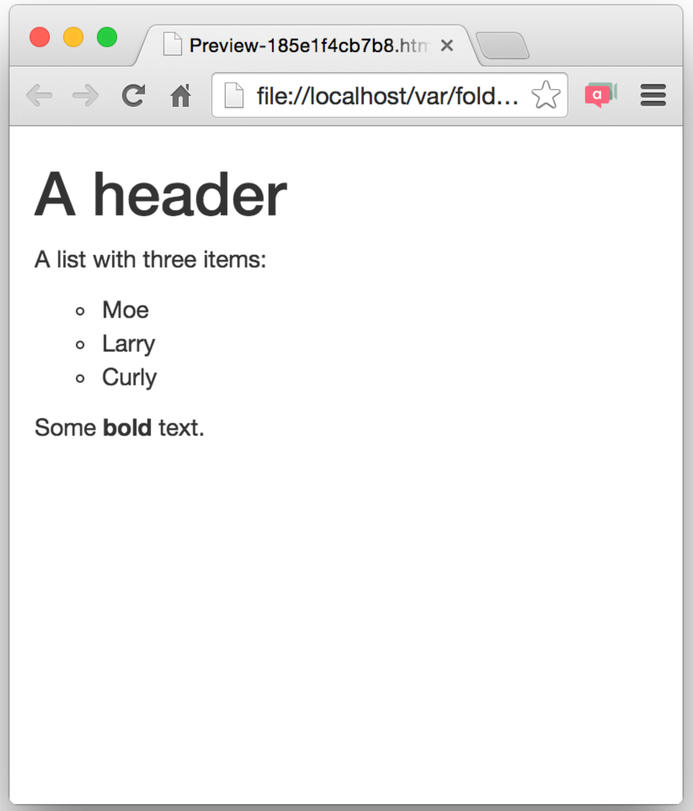

```
# A header

A list with three items:

* Moe
* Larry
* Curly

Some **bold** text.
```

markdown

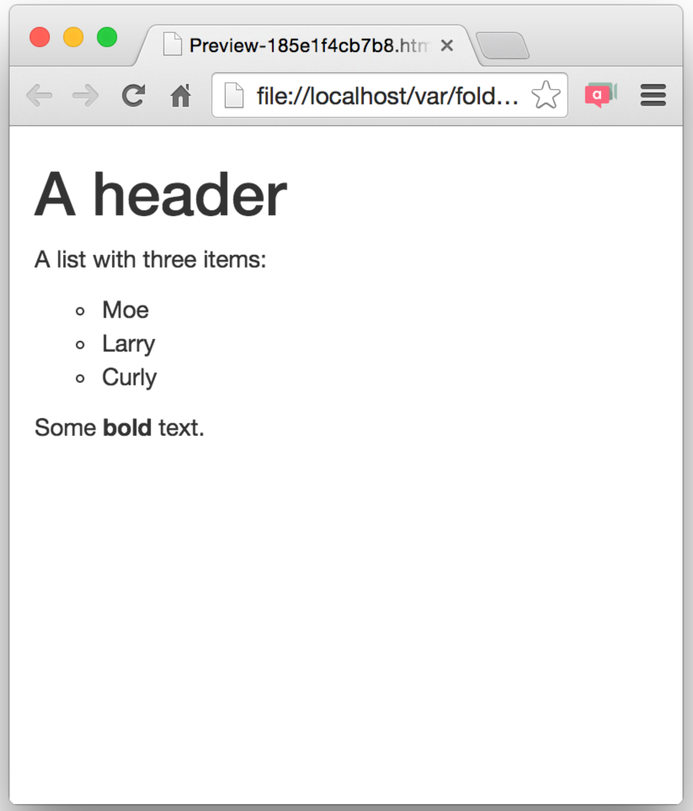

```
# A header

A list with three items:

* Moe
* Larry
* Curly

Some **bold** text.
```

markdown

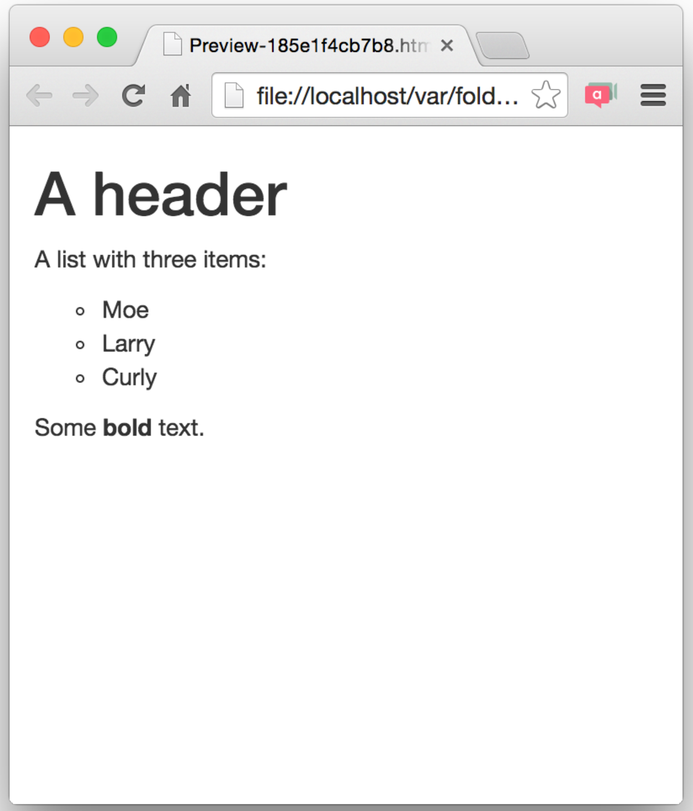

```
# A header

A list with three items:

* Moe
* Larry
* Curly

Some **bold** text.
```

markdown

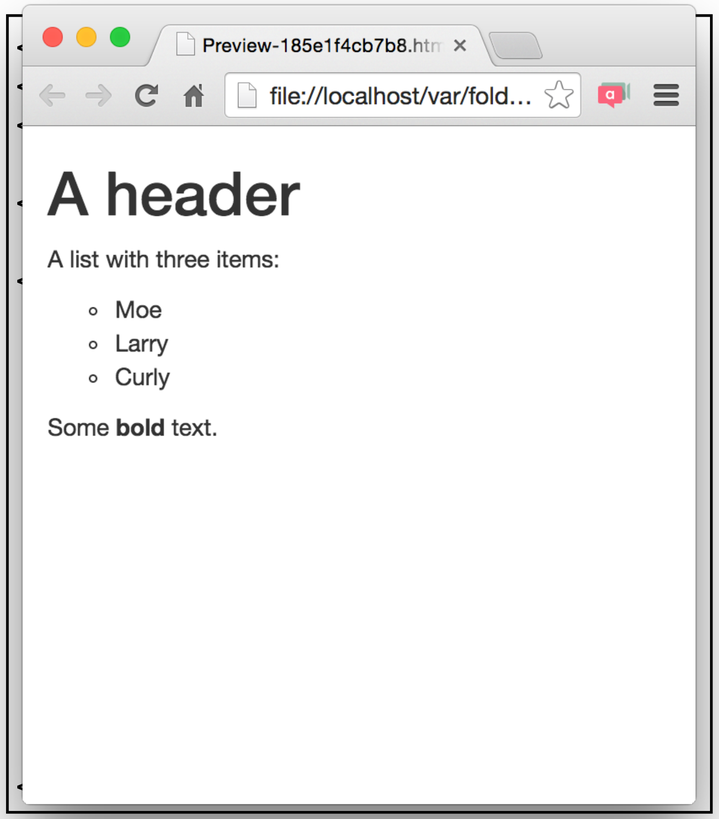

html

```
# A header

A list with three items:

* Moe
* Larry
* Curly

Some **bold** text.
```

markdown

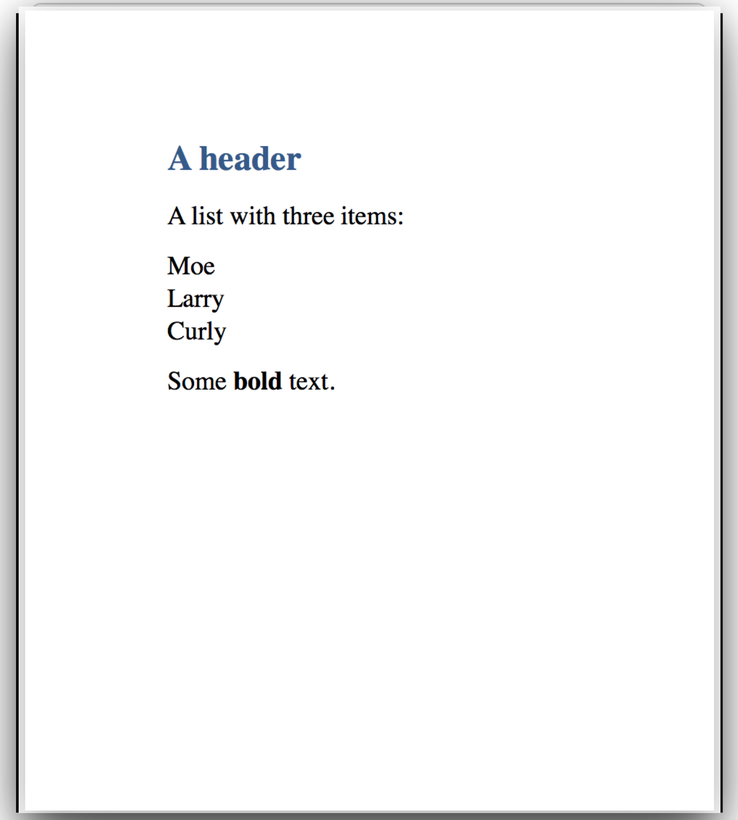

MS Word

REPORTING WITH R MARKDOWN

Let's practice!