


Pour accéder au projet PHP

- 1) Cliquer le lien du git.
- 2) Cliquer sur le bouton vert du Repository

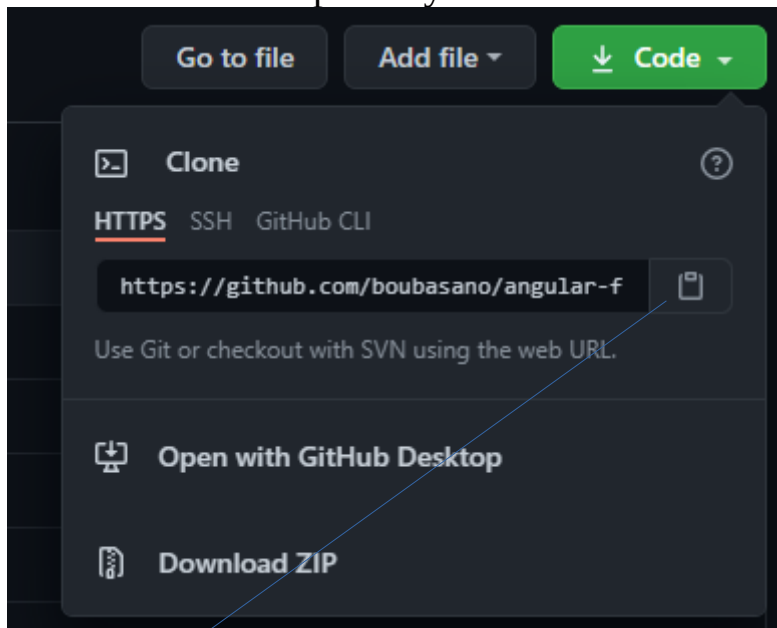

3) => Copier le dossier en cliquant sur le lien si on veut utiliser le **git-command**.

=> Ce lien décrit les différentes étapes. <https://www.journaldunet.fr/web-tech/developpement/1202921-comment-cloner-un-repository-git-dans-un-repertoire-specifique-de-mon-serveur-web/>

3) => On peut aussi charger directement le fichier en cliquant sur **Download Zip**.

=> décompresser le dossier.

4) => Une fois le dossier téléchargé, l'ouvrir dans un IDE

5) => Pour installer les dépendances : `composer install`

6) => Copier le fichier **.env.dist** qui contient la configuration de l'environnement par défaut et de le renommer **.env**

7) => Si le fichier **.env.dist** est manquant, créer un fichier **.env** à la racine du projet et coller ce contenu dans le fichier.

=> Créer une base de données et configurer ce fichier **.env**

```
1 # This file is a "template" of which env vars need to be defined for your application
2 # Copy this file to .env file for development, create environment variables when deployi
3 # https://symfony.com/doc/current/best_practices/configuration.html#infrastructure-relat
4
5 ###> symfony/framework-bundle ###
6 APP_ENV=dev
7 APP_SECRET=8c22edb34b3000e96c22813aae1df00a
8 #TRUSTED_PROXIES=127.0.0.1,127.0.0.2
9 #TRUSTED_HOSTS=localhost,example.com
10 ###< symfony/framework-bundle ###
11
12 ###> doctrine/doctrine-bundle ###
13 # Format described at http://docs.doctrine-project.org/projects/doctrine-dbal/en/latest/
14 # For an SQLite database, use: "sqlite:///kernel.project_dir/var/data.db"
15 # Configure your db driver and server_version in config/packages/doctrine.yaml
16 DATABASE_URL=mysql://db_user:db_password@127.0.0.1:3306/db_name
17 ###< doctrine/doctrine-bundle ###
18
19 ###> symfony/swiftmailer-bundle ###
20 # For Gmail as a transport, use: "gmail://username:password@localhost"
21 # For a generic SMTP server, use: "smtp://localhost:25?encryption=&auth_mode="
22 # Delivery is disabled by default via "null://localhost"
23 MAILER_URL=null://localhost
24 ###< symfony/swiftmailer-bundle ###
```