



GE VERNOVA

ADMS

16.25.1

Reports Installation Guide

Copyright

Copyright 2026, GE Vernova and/or its affiliates ("GE Vernova"). All Rights Reserved.

GE and the GE Monogram are trademarks of General Electric Company used under trademark license.

This document is the confidential and proprietary information of GE Vernova and may not be reproduced, transmitted, stored, or copied in whole or in part, or used to furnish information to others, without the prior written permission of GE Vernova.

Change History

Date	Change Description
Jan 26, 2023	ADMS 3.16: • Editorial and formatting updates.
Oct 20, 2023	ADMS 16.1.0: • The product version numbering has changed. The prefix '3' is no longer included in the version numbering for ADMS.
Apr 16, 2024	ADMS 16.7.0: • Updated document format and styling.

Contents

1. Introduction	4
2. Installing SQL Server Reporting Services	6
3. Installing Reports	13
3.1. Prerequisites	13
3.2. Reports Installation	14
4. Running Reports	16
4.1. Starting the Reports Application	16
4.2. Using the Reports Application	17
4.3. Troubleshooting Database Connections	17

1. Introduction

The ADMS Reports application provides some sample distribution and outage management reports that power companies may use directly, or as templates for their own custom reports.

Historical data stored in the Archive database is the data source for these reports. The reports are accessible from any web browser. Users may specify the desired date range and export the reports in various formats. The following figure shows a sample Distribution Reliability Summary report.

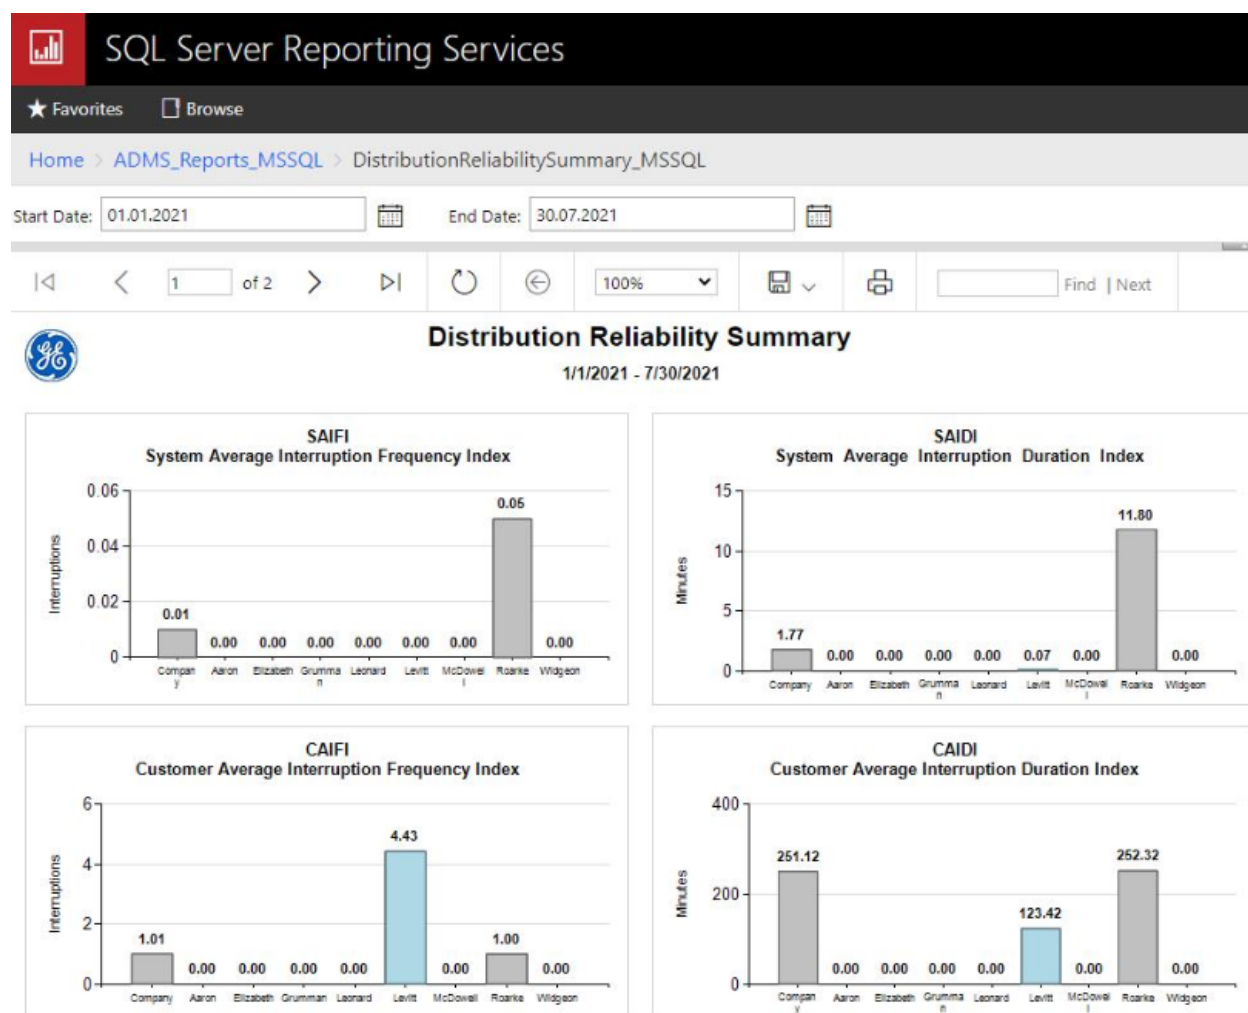


Figure 1. Sample Summary Report

To produce reports, the Reports application queries the Archive database, which may be an Oracle or SQL Server database. The Archive database contains historical data such as incidents, switching orders, safety documents, distribution power flow summaries, DMS advanced application (FISR, LVM, AFR) solutions, etc. For a complete list of the types of data that may be stored in the Archive database, refer to the *ADMS Archive User Guide*.

Reports are created with Microsoft SQL Server Reporting Services (SSRS). In SSRS, the report definitions (which specify report format and queries) are stored in a SQL Server database.

Therefore, in order to use these reports, you must install SQL Server with the Reporting Services option, even if your Archive database is in Oracle.

2. Installing SQL Server Reporting Services

! Important


Before installing Microsoft SQL Server Reporting Services 2019, you must have Microsoft SQL Server 2019 installed.

To install Microsoft SQL Server Reporting Services 2019, follow the procedure below:


1. Download Microsoft SQL Server Reporting Services 2019 from <https://www.microsoft.com/en-us/download/details.aspx?id=100122>.
2. Run the Microsoft SQL Server Reporting Services 2019 setup file.
3. At the Product Key step, enter your product key or choose the evaluation option.
4. At the License Terms step, accept the License Terms of the product.
5. Use the default installation options.
6. On the Setup Completed page, click the Configure Report Server button.




7. Enter the server name and click Connect.

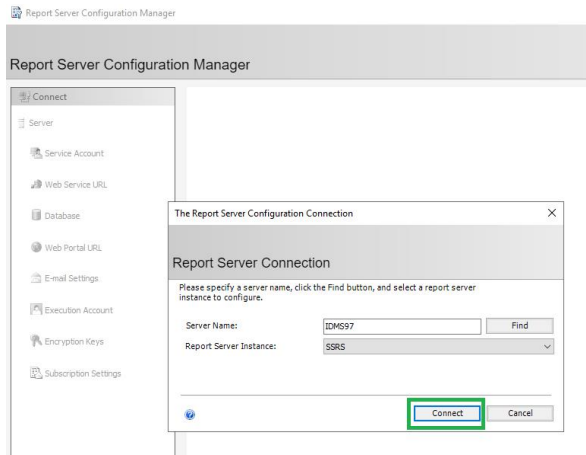


8. Configure the web service URL.

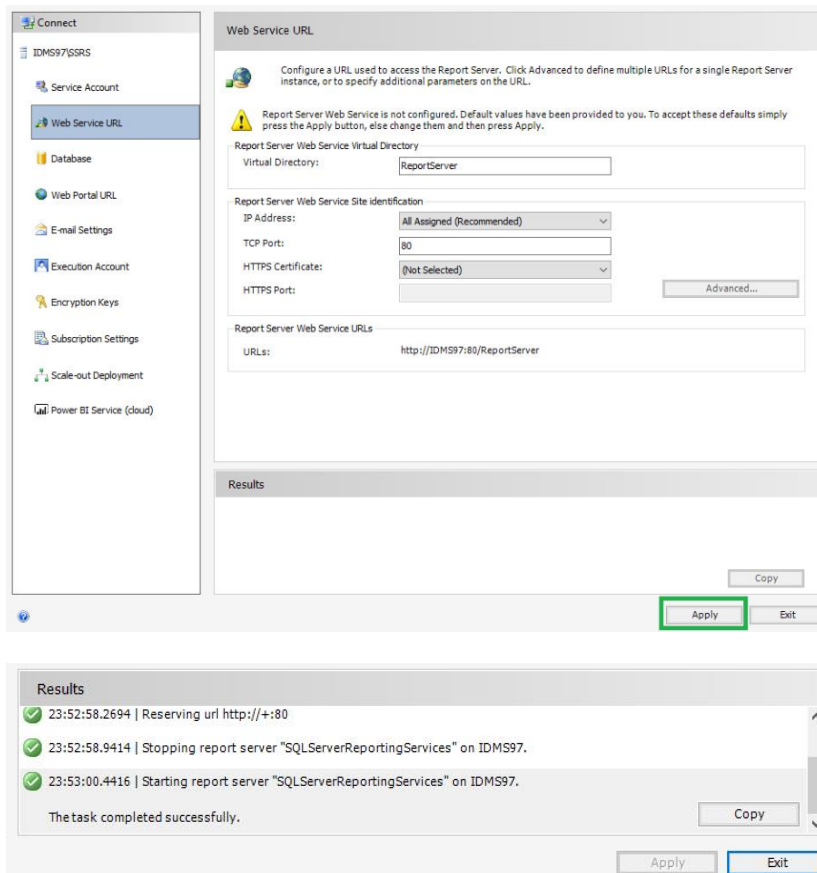

9. Configure the web portal URL.

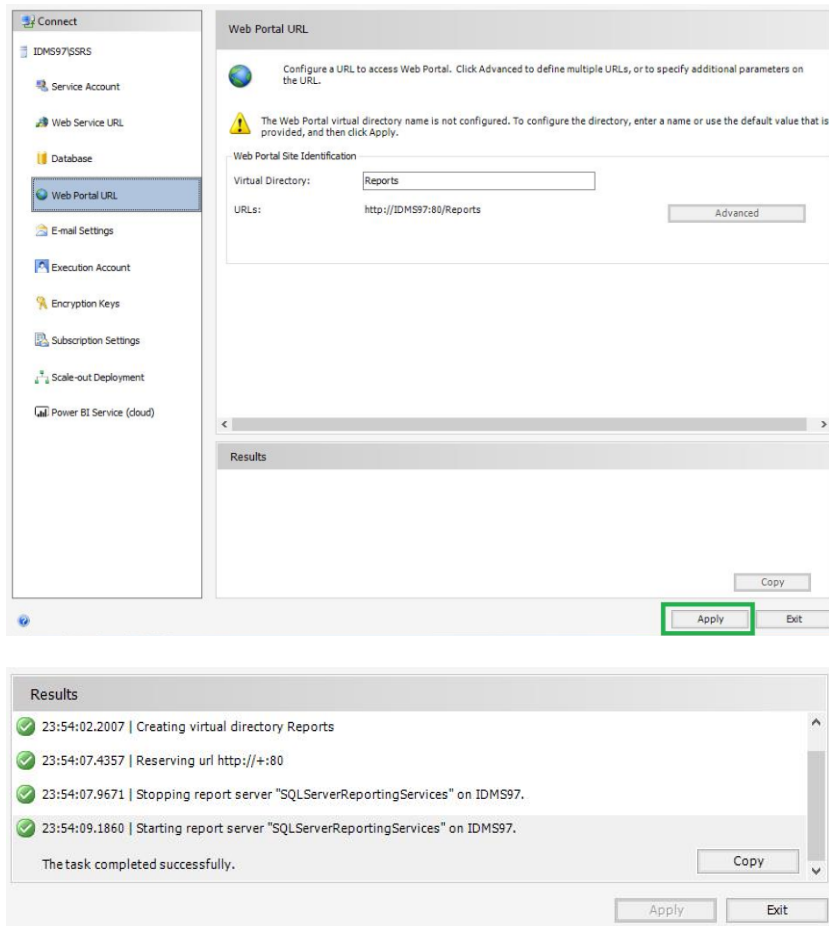

10. On the Database page, click Change Database.

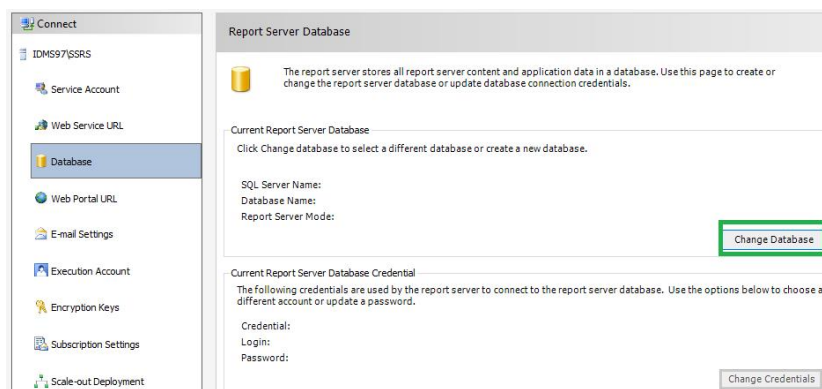

11. On the Change Database page, select the Create a New Report Server Database option and click Next.

Report Server Database Configuration Wizard

Change Database

Choose whether to create or configure a report server database.

Action Database Server Database Credentials Summary Progress and Finish	Select one of the following options to create an empty report server database or select an existing report server database that has content you want to use. Select a task from the following list: ☒ Create a new report server database. ☐ Choose an existing report server database.
---	--

Previous **Next** Cancel

12. Enter the database server name.

Report Server Database Configuration Wizard

Change Database

Choose whether to create or configure a report server database.

Action Database Server Database Credentials Summary Progress and Finish	Choose a local or remote instance of a SQL Server Database Engine and specify credentials that have permission to connect to that server. Connect to the Database Server: Server Name: IDMS97 Authentication Type: Current User - Integrated Security Username: IDMS97\hab06 Password: Test Connection
--	---

Previous **Next** Cancel

13. Enter the database name.

Report Server Database Configuration Wizard

Change Database

Choose whether to create or configure a report server database.

Action

- Database Server
- Database**
- Credentials
- Summary
- Progress and Finish

Enter a database name and select the language to use for running SQL scripts.

Database Name: ReportServer

Temp Database Name: ReportServerTemp

Language: English (United States)

Report Server Mode: Native

Previous Next Cancel

14. Specify the credentials option.

Report Server Database Configuration Wizard

Change Database

Choose whether to create or configure a report server database.

Action

- Database Server
- Database
- Credentials**
- Summary
- Progress and Finish

Specify the credentials of an existing account that the report server will use to connect to the report server database. Permission to access the report server database will be automatically granted to the account you specify.

Credentials:

Authentication Type: Service Credentials

User name: NT SERVICE\SQLServerReportingServices

Password:

Previous Next Cancel

15. Review the configuration summary.

Report Server Database Configuration Wizard

Change Database

Choose whether to create or configure a report server database.

Action
Database Server
Database
Credentials
Summary
Progress and Finish

The following information will be used to create a new report server database. Verify this information is correct before you continue.

SQL Server Instance:	IDMS97
Report Server Database:	ReportServer
Temp Database:	ReportServerTempDB
Report Server Language:	English (United States)
Report Server Mode:	Native
Authentication Type:	Service Account
Username:	NT SERVICE\SQLServerReportingServic...
Password:	*****

Previous
Next
Cancel

16. Complete the database configuration.

Report Server Database Configuration Wizard

Change Database

Choose whether to create or configure a report server


Action
Database Server
Database
Credentials
Summary
Progress and Finish

Please wait while the Report Server Database Configuration wizard configures the database. This might take several minutes to complete.


Verifying database sku	Success
Generating database script	Success
Running database script	Success
Generating rights scripts	Success
Applying connection rights	Success
Setting DSN	Success

Previous
Finish
Cancel

17. Exit the Report Server Configuration Manager.

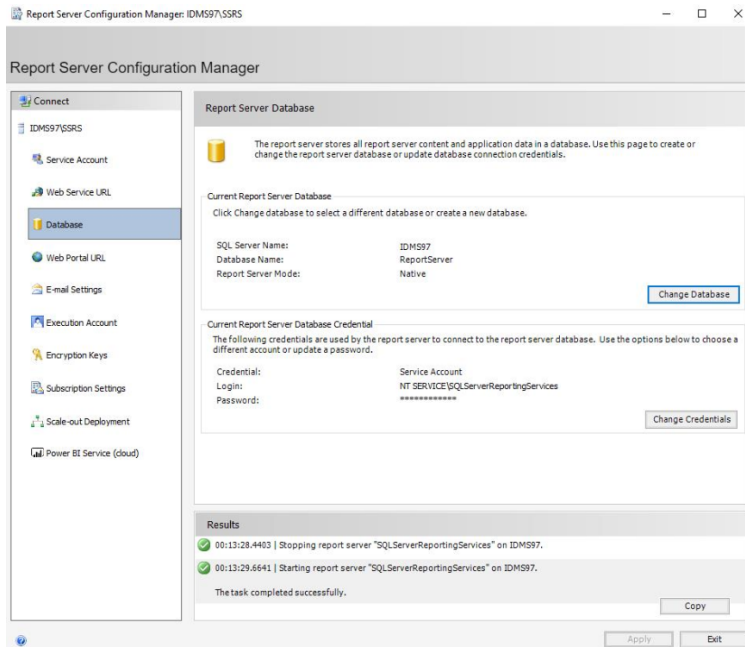

18. In the Microsoft SQL Server Management Studio, make sure that the new database is listed.

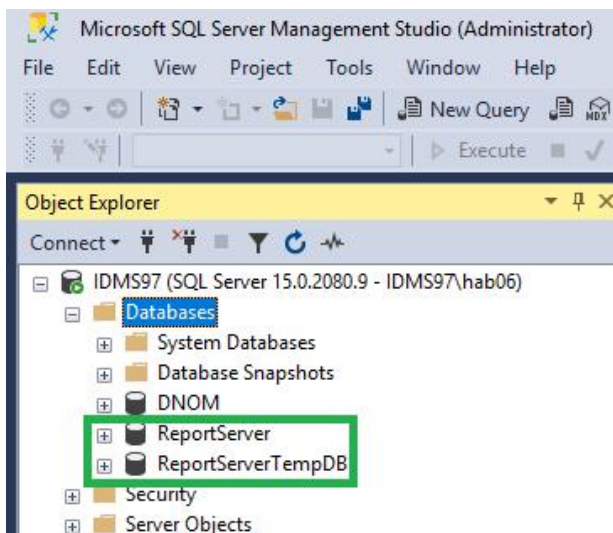

3. Installing Reports

3.1. Prerequisites

Important

The Reports feature only supports the Archive database in Oracle 19c or Microsoft SQL Server 2019.

Before installing ADMS Reports, you need to address a number of prerequisites:

1. Install a relational database management system (RDBMS) to contain the Archive database on the database server. This is typically done by a database administrator (DBA).

For more information, refer to the installation documentation for your RDBMS (Oracle or SQL Server). Supported RDBMS versions are specified in the *ADMS Archive User Guide*.

2. Create the Archive database (schema) on the database server and load the database with company-specific reference data (for example, stations).

For more information, refer to the *ADMS Relational Database Installation Guide*.

3. Install the ADMS applications that supply data to the Archive database.

For more information, refer to *ADMS Installation Guide*.

4. Load the Archive database with historical data by running the ADMS applications.

For more information, refer to the *Distribution Management System User Guide* and the *ADMS Archive User Guide*.

5. Install MS SQL Server 2019.

6. Install SQL Server Reporting Services (SSRS) to contain the report definitions on the report server. For more information, refer to [Installing SQL Server Reporting Services](#).

7. If SQL Server Reporting Services must connect to an Archive database on Oracle Database, install Oracle Database Client or Oracle Database Instant Client on the report server. GE recommends Oracle Database Instant Client since it is much smaller than Oracle Database Client.

Oracle Database Instant Client is included in Oracle Data Access Components (ODAC) installation packages. If you have already installed Oracle Data Provider for .NET from an ODAC installation package (in order to run ADMS Archive), you may already have installed Oracle Database Instant Client.

Download Oracle Database Instant Client from Oracle.com at <https://www.oracle.com/database/technologies/dotnet-odacdeploy-downloads.html>. Click on the appropriate link for your operating system. You may also install Instant Client Package – SQL*Plus. SQL*Plus is not used by Reports, but is used to test database connections from the report server to the


database server without running ADMS Reports. Follow the Oracle instructions to install and configure Oracle Database Instant Client.

8. Verify that you can connect to the Archive database from the report server, without running reports (for example, via SQL*Plus). If you cannot connect to the database, the reports will also not be able to connect to the database. Firewalls often block such connections. Database connectivity issues must be resolved before proceeding.

3.2. Reports Installation

To install ADMS Reports:

1. Run the ADMS Reports installer.
2. Select the SQL Server Reporting Service instance to deploy the reports to.
3. Choose the relational database management system to use as the data source (Oracle or SQL Server).

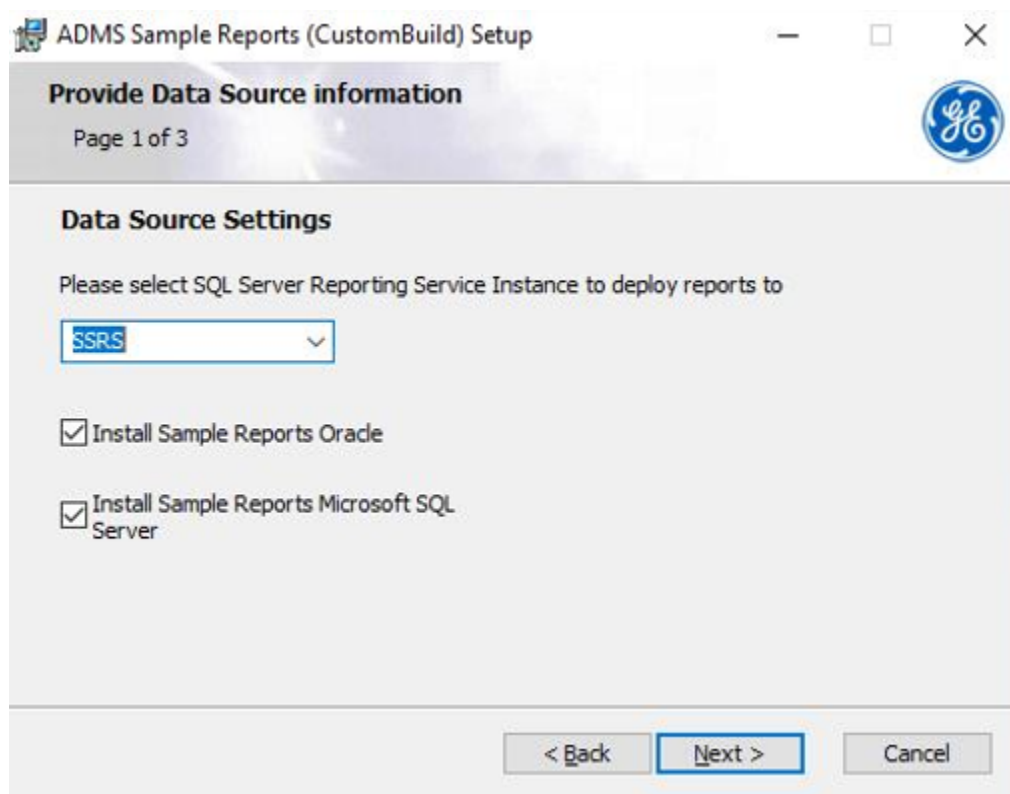

4. In the Provide Data Source Information dialog box, enter the following:
 - **Server Host:** Enter the database server host name or IP address.
 - **Server Port (Oracle only):** Enter the database server port number (usually 1521).
 - **Service Name (Oracle only):** Enter the database service name.
 -

Username: Enter the Archive database user name.

- **Password:** Enter the Archive database user password.

Note

The data source information can be changed later on the Reports home page.

The screenshot shows a Windows-style window titled "ADMS Sample Reports (CustomBuild) Setup". The window has standard minimize, maximize, and close buttons in the top right. Below the title bar, there is a header area with the text "Provide Data Source information" and "Page 2 of 3". A GE logo is visible in the top right corner of the header. The main content area is titled "Oracle Data Source Settings" and contains five input fields: "Server Host" with the value "localhost", "Server Port" with the value "1521", "Service Name" with the value "ORCL", "Username" with the value "ARCHIVE", and "Password" which is masked with seven dots. At the bottom of the window, there are three buttons: "< Back", "Next >" (which is highlighted with a blue border), and "Cancel".


5. Click Next.
6. Click Install and wait until the setup process is finished.

4. Running Reports


4.1. Starting the Reports Application

To start the Reports application, open it from the Windows Start menu.

- For Oracle, navigate to Eterra > Distribution > Tools > Reports Oracle.

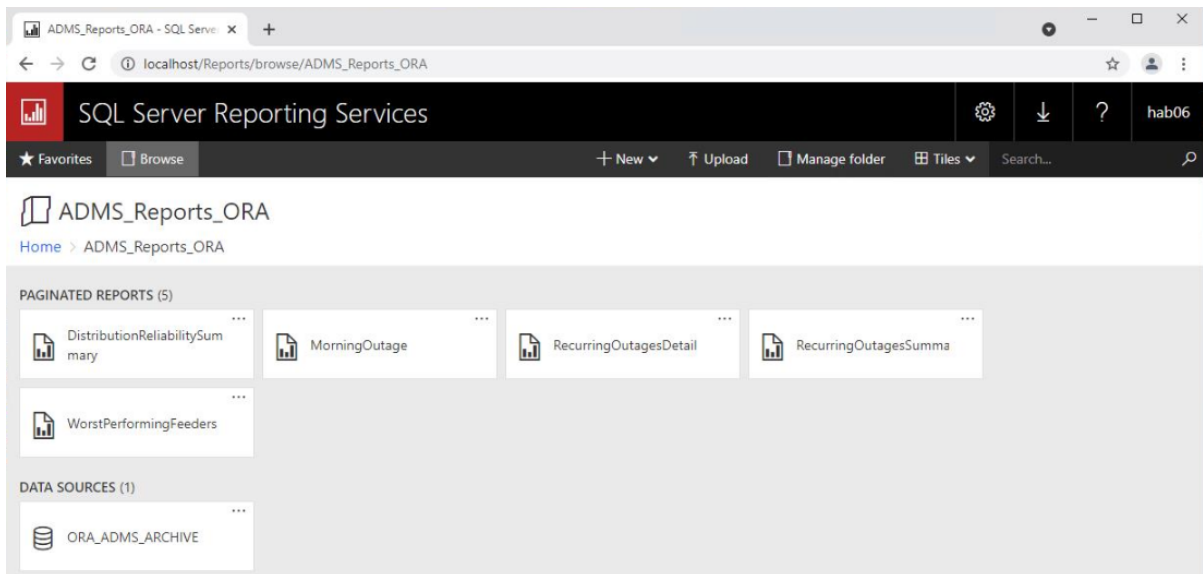

- For SQL Server, navigate to Eterra > Distribution > Tools > Reports MS SQL.

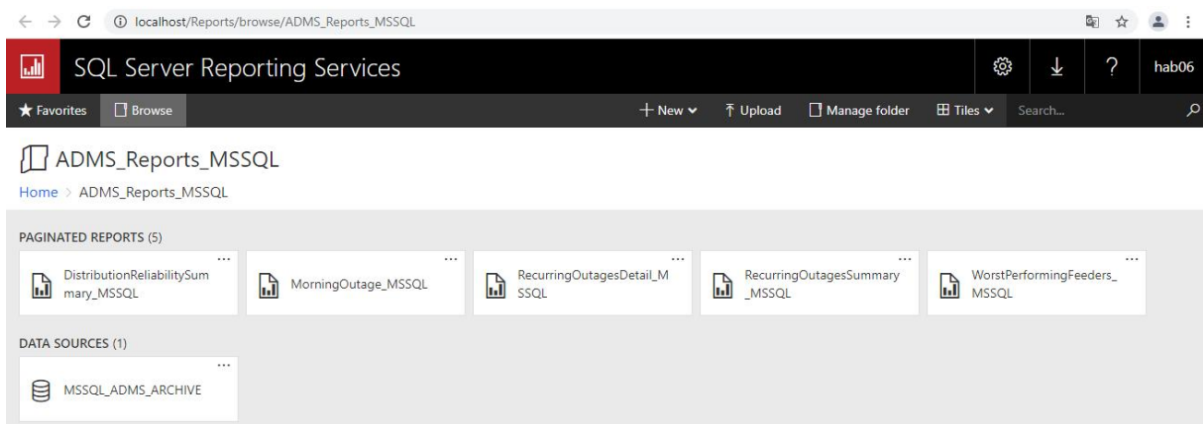

Alternatively, open a web browser and open one of the following URLs:

- For an Oracle data source:
http://localhost/Reports/Pages/Folder.aspx?ItemPath=%2fIDMS_Reports_ORA
- For a SQL Server data source:
http://localhost/Reports/Pages/Folder.aspx?ItemPath=%2fIDMS_Reports_MSSQL

To access reports on another report server, replace "localhost" with the name or IP address of the

remote report server.

4.2. Using the Reports Application

When the Reports page is loaded, select the desired report, set the time period as needed, and click View Report.

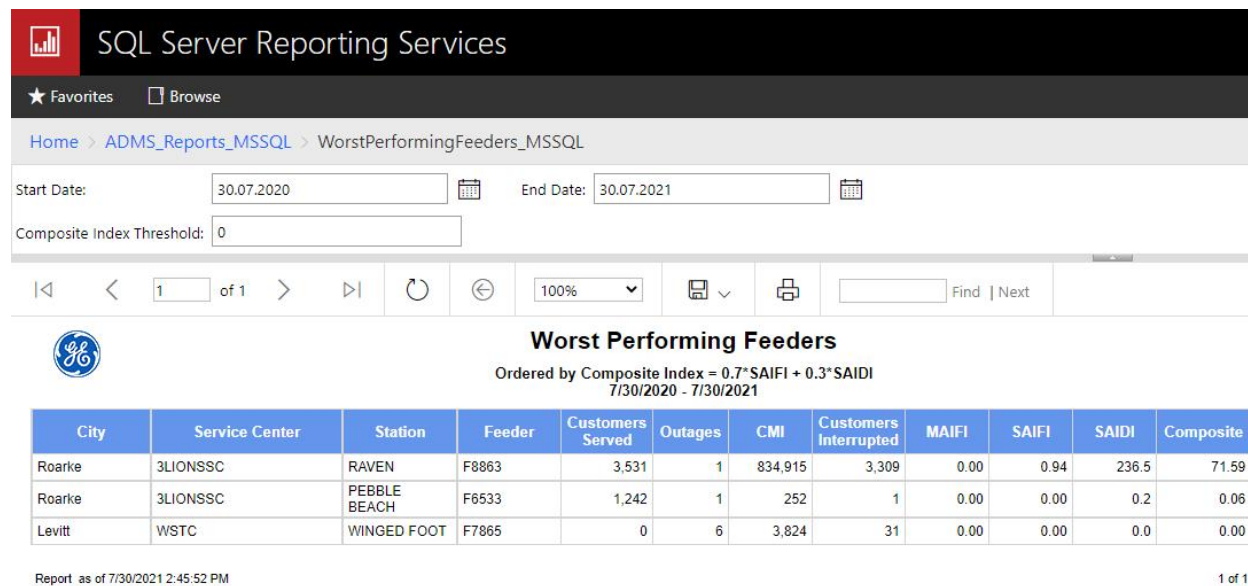


Figure 2. Using the Reports Application

4.3. Troubleshooting Database Connections

If the reports are empty and you are sure that the Archive database contains data for the specified time period, test the database connection as follows.

1. On the Reports page, click ORA_IDMS_ARCHIVE or MSSQL_IDMS_ARCHIVE.
2. In the Data Source Settings window, click the "Test Connection" button. If the message "Connection created successfully." is not displayed, the reports are not able to connect to the database. Correct the Data Source Settings and make sure that the database is started and listening for client connections.