



GE VERNOVA

ADMS

16.25.1

Resource Editor User Guide

Copyright

Copyright 2026, GE Vernova and/or its affiliates ("GE Vernova"). All Rights Reserved.

GE and the GE Monogram are trademarks of General Electric Company used under trademark license.

This document is the confidential and proprietary information of GE Vernova and may not be reproduced, transmitted, stored, or copied in whole or in part, or used to furnish information to others, without the prior written permission of GE Vernova.

Change History

Date	Change Description
May 31, 2023	ADMS 3.16: • Corrected the link to Language IDs in Using Generated Localization Files. • Editorial and formatting updates.
Oct 20, 2023	ADMS 16.1.0: • The product version numbering has changed. The prefix '3' is no longer included in the version numbering for ADMS.
Apr 1, 2024	ADMS 16.7.0: • Updated document format and styling.

Contents

1. Overview	4
1.1. About the Resource Editor	4
1.2. About the Toolbar	5
1.2.1. File and Edit Operations	5
1.2.2. Views	5
1.2.3. Filters	6
1.2.4. Search	6
1.3. View Descriptions	6
1.3.1. View Common String Resources	7
1.3.2. View All String Resources	8
1.3.3. View Other Type Resources	9
1.3.4. View All Resources	9
2. Using the Resource Editor	10
2.1. Starting the Resource Editor	10
2.2. Creating a New Localization Project	10
2.3. Opening an Existing Localization Project	11
2.4. Configuration	12
2.5. Importing Resources	14
2.6. Estimating the Level of Effort to Localize	15
2.7. Translating Resources to Other Languages	15
2.8. Filtering Resources	17
2.9. Searching for Resources	18
2.10. Using "Find and Replace"	19
2.11. Adding New Resources from a New Release	19
2.12. Identifying and Removing Obsolete Resources	22
2.13. Saving a Localization Project File	23
2.14. Saving/Exporting Localized Resource Files	23
2.15. Reviewing the Resource Editor Log	26
2.16. Using Generated Localization Files	26
2.17. Command-Line Arguments	27
2.18. Error Message	28
3. Localizing Resources	29

1. Overview

The ADMS Resource Editor (see the following image) helps localize the client and server components of the Distribution Management System (DMS) and the Outage Management System (OMS) applications that are intended to be run by operators. Also, localization of the `ViewerConfig.xml` and `CodedTranslationConfig.xml` files is currently supported.

The goal is to localize all observed text to the operator's own language. This includes text in dialog boxes, tabular displays, and log messages.

The Resource Editor is also designed to easily update localized resources when ADMS is upgraded to a newer version.

Client-side "analyst" applications can also be localized with the Resource Editor, but some applications may not be localizable at this time.

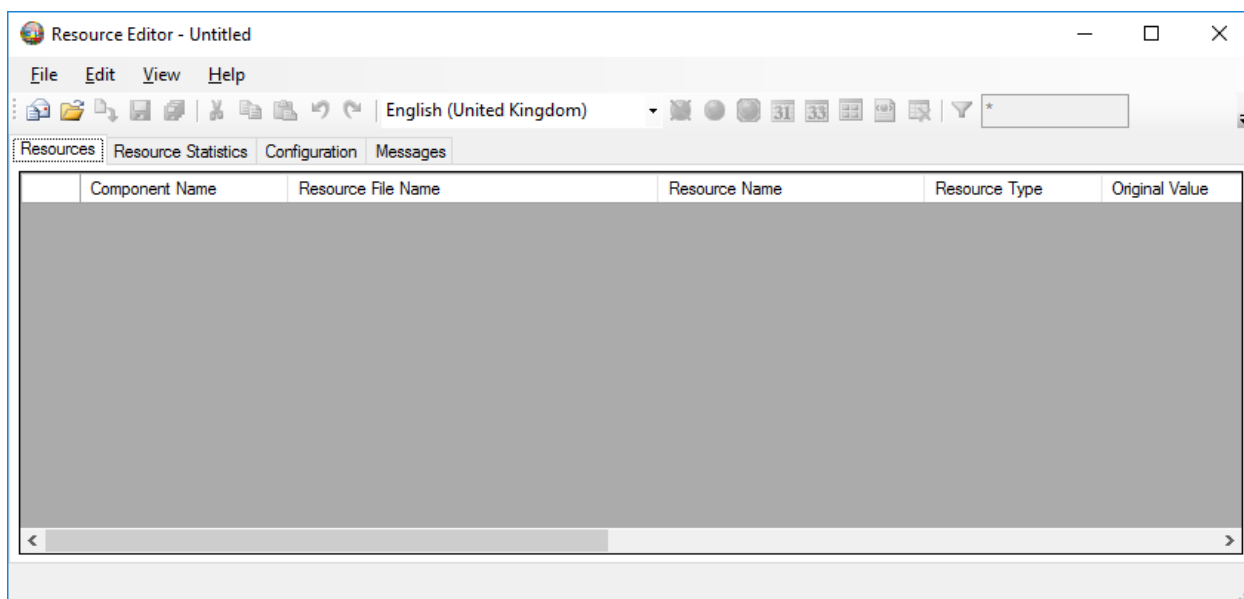


Figure 1. Resource Editor Application

1.1. About the Resource Editor

The Resource Editor only localizes resource values saved in XML "project" files.

In order to generate new resource files, the latest versions of the original resource files are imported into the Resource Editor. For each imported resource, a lookup is performed to determine if a localized value exists. If so, this value is substituted in place of the original value before the new localized resource files are generated.

This design ensures that generated files are based on the latest resource files delivered in a given release.

1.2. About the Toolbar

Toolbar buttons are available to perform all menu functions.

The following sections provide an overview of the Resource Editor's toolbar items.

1.2.1. File and Edit Operations



1. **New Localization Project:** Create a new localization project.
2. **Open Localization Project:** Open an existing localization project.
3. **Import Resources:** Import application resources.
4. **Save Localization Project:** Save the current localization project file.
5. **Save/Export All:** Save the current localization project file and export all localized resources. After the export is complete, all localizable applications can use the localized resources.
6. **Cut:** Cut the selected resource value.
7. **Copy:** Copy the selected value to the clipboard.
8. **Paste:** Paste a value from the clipboard.
9. **Undo:** Undo the last change (no limit).
10. **Redo:** Redo the last change.

1.2.2. Views



1. **Select Culture:** Select the culture to localize to.
2. **Only View Resources Not Yet Localized:** Filter out all resources that are already localized. Used to quickly view all resources that have not been localized.
3. **Only View Resources Already Localized:** Filter out all resources that have not been localized, showing only resources that have been localized.
4. **Only View Resources Where Original Value Has Been Changed:** Filter out all resources where the original values are the same. Quickly shows if the original resource has changed from a previous release.
5. **View Common String Resources:** Only view string resources that have multiple occurrences. The localized value is set for all occurrences with the same resource name.


6. **View All String Resources:** View each string resource individually. This can be used to overwrite exceptions to "common" values.
7. **View Other Type Resources:** View size and position resources. This can be used to move elements in dialog boxes, if needed.
8. **View All Resources:** View the entire list of resources.
9. **View Obsolete Resources:** A special view to let you see which resources are no longer used. This can be helpful after an upgrade.

1.2.3. Filters



1. **Filter:** Turn the filter functionality on or off. By default, the filter is off.
2. **Filter Text:** Filter resources in the Original Value column as you type the value. The filter is case-sensitive, and multiple wildcards can be specified with the asterisk ("*") character.
3. **Filter Component:** View resources for all components, or select a component from the list.
4. **Filter Resource File:** View resource files for a given component. Selecting All displays resources from all resource files. You can select a specific resource file to view only resources defined in that resource file.

1.2.4. Search



1. **Find Next:** Find the next occurrence of the value you specify in the Find text box. The search is performed in the column that has a value currently selected.
2. **Find:** Find by using the Search and Replace dialog box.
3. **Find Resource Value:** Type a value to search for. You can press Enter to search for that value, or click the Find Next button. The search is performed in the column that has a value currently selected.

i Note

The search is case-sensitive.

1.3. View Descriptions

The View menu and toolbar contain a set of view options, to let you reduce the number of displayed

resources.

1.3.1. View Common String Resources

When you open an existing localization project file or perform an import, the Resource Editor automatically selects the View Common String Resources view by default, as shown in the following image.

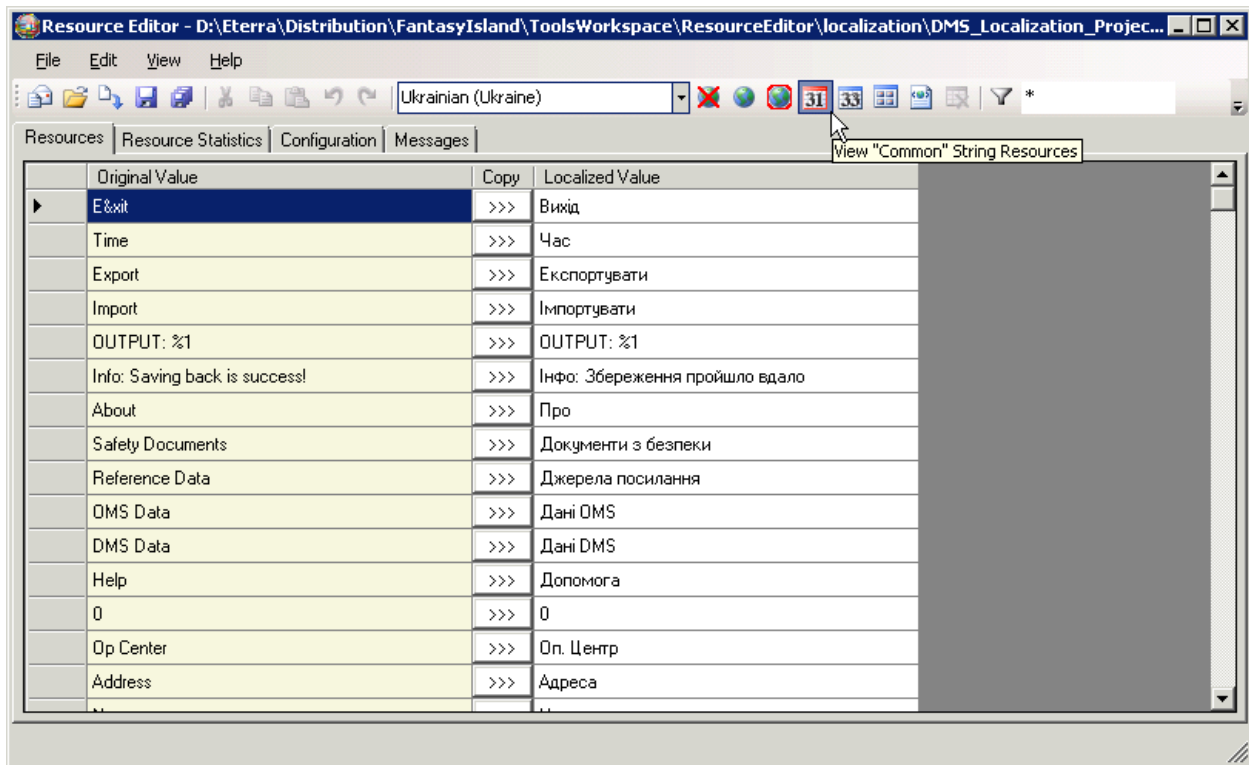


Figure 2. View "Common" String Resources

When this option is active, all string resources sharing a common value are displayed as one value. By localizing these resources first, you localize all resources that share the same string value, and all common resources are filled in.

This view allows you to quickly identify all "common" strings that are not yet localized. Non-localized strings are indicated with a yellow background color.

You can override any of the common property values by switching to the View All String Resources view and entering each value individually.

Clicking the Only View Resources Not Yet Localized button on the toolbar narrows the resource list by removing all translated values, allowing you to quickly see which remaining resources need to be worked on.

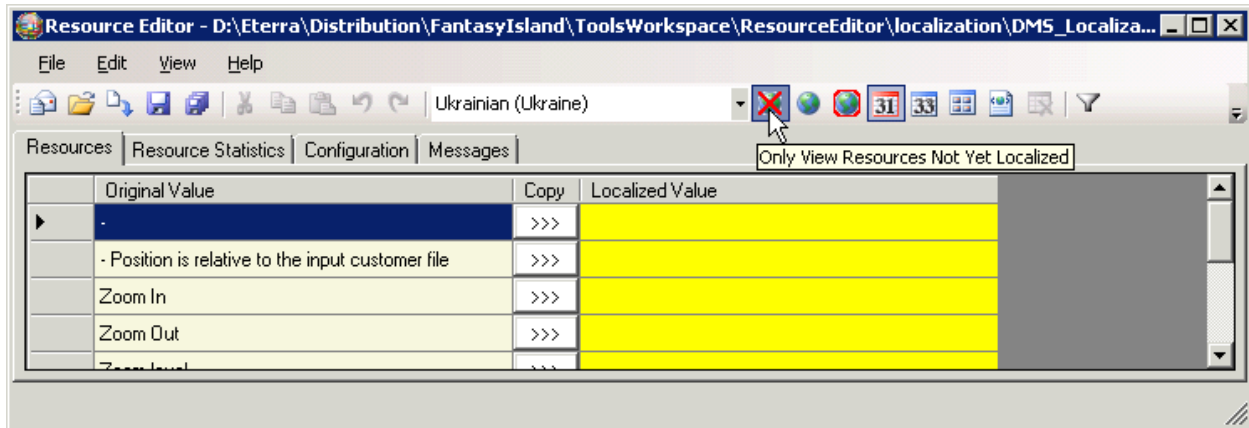


Figure 3. "Only View Resources Not Yet Localized" Enabled

1.3.2. View All String Resources

The View All String Resources view can be used to see all of the string resources.

The example in the following image shows that there are eight resources with the original value "Clear".

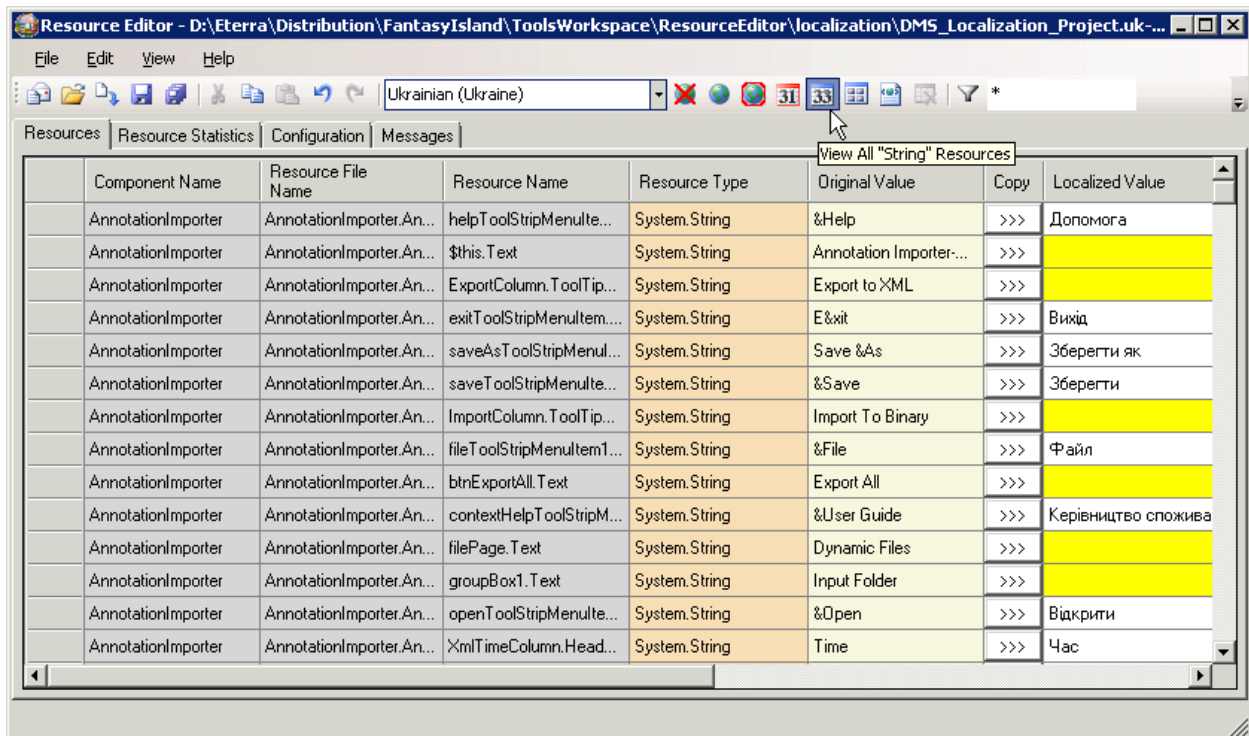


Figure 4. View All String Resources

This view contains additional columns to help you identify where each individual resource belongs. The Component Name, Resource File Name, Resource Name, and Resource Type are all listed.

1.3.3. View Other Type Resources

The View Other Type Resources view is used to show size and to position resources.

This view helps you move or resize individual controls when needed.

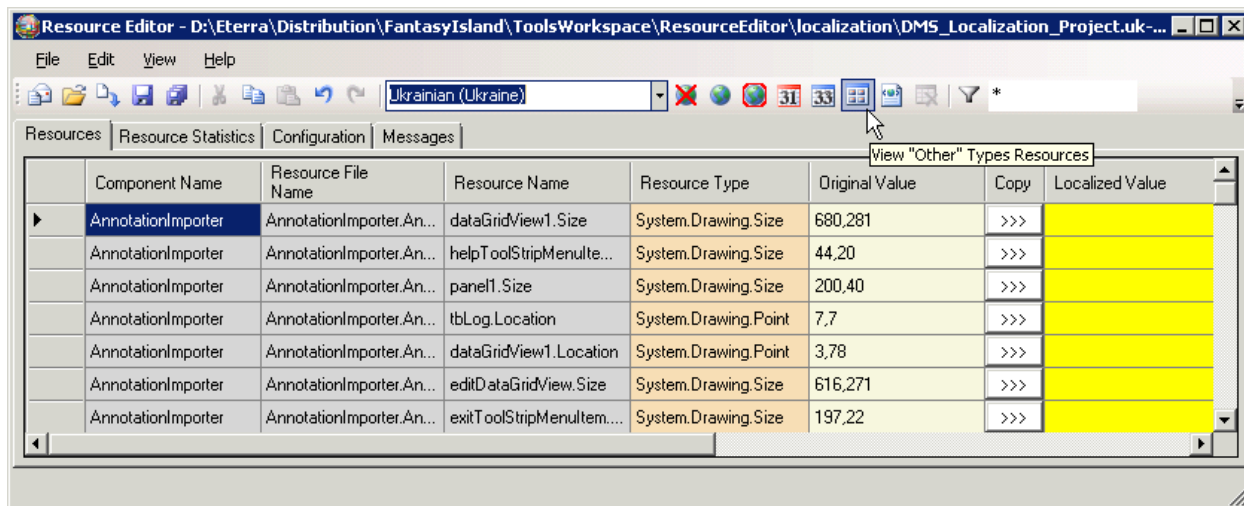


Figure 5. View Other Type Resources

1.3.4. View All Resources

The View All Resources view shows all imported resources regardless of their type.

This view is not normally used, but it has been made available to help you sort and search for related resources.

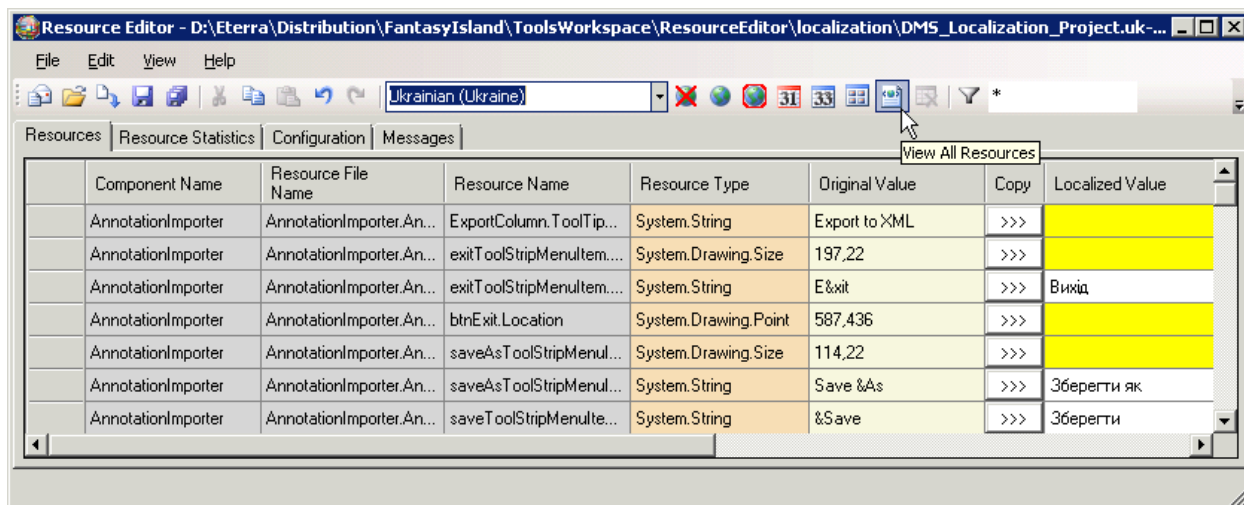


Figure 6. View All Resources

2. Using the Resource Editor

This chapter describes how to perform localization tasks within the ADMS Resource Editor.

2.1. Starting the Resource Editor


To start the Resource Editor, from the Start menu, point to All Programs > Eterra > Distribution > Tools > Configuration Tools, and then click Resource Editor.

When the Resource Editor starts, all menu and toolbar items are unavailable, except for the options to create a new localization project or to open an existing project.

2.2. Creating a New Localization Project


To create a new localization project:

1. From the Select Culture drop-down list on the toolbar, select the intended culture/locale to localize to.

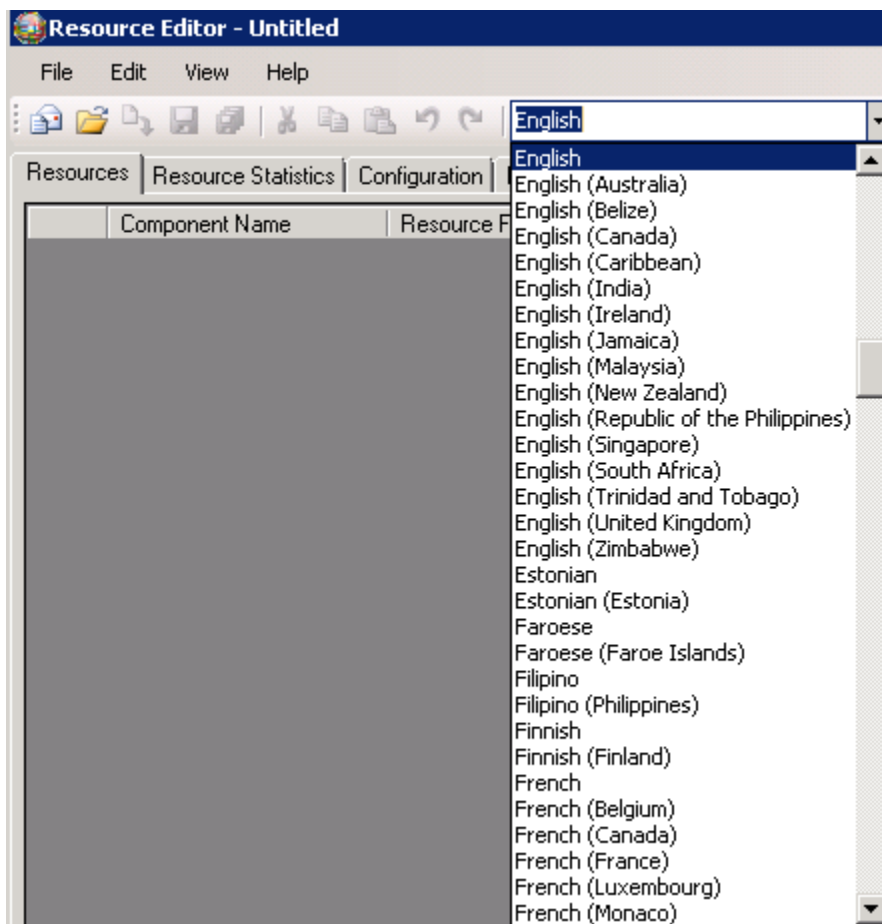

2. From the File menu, select New Localization Project, or click the New Localization Project icon on the toolbar.

The title bar now displays the default project file name, which includes the abbreviated form of the selected culture (for example, `DMS_Localization_Project.en.xml`).

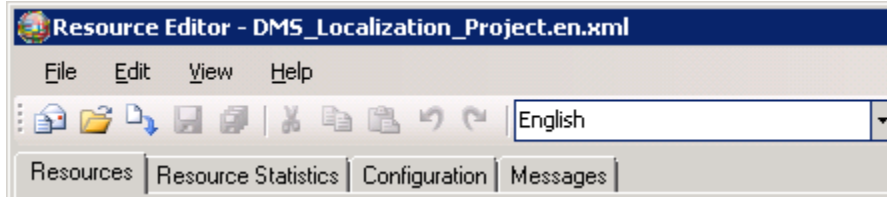

For information about importing resources for translation, refer to [Importing Resources](#).

2.3. Opening an Existing Localization Project

You can open an existing localization project at any time. Original resource DLLs are not needed to perform localization work, so XML files can be outsourced to staff who can perform translations.

1. From the File menu, select Open Localization Project, or click the Open Localization Project icon on the toolbar.
2. In the Open dialog box, select the localization project to open, and then click Open.

2.4. Configuration


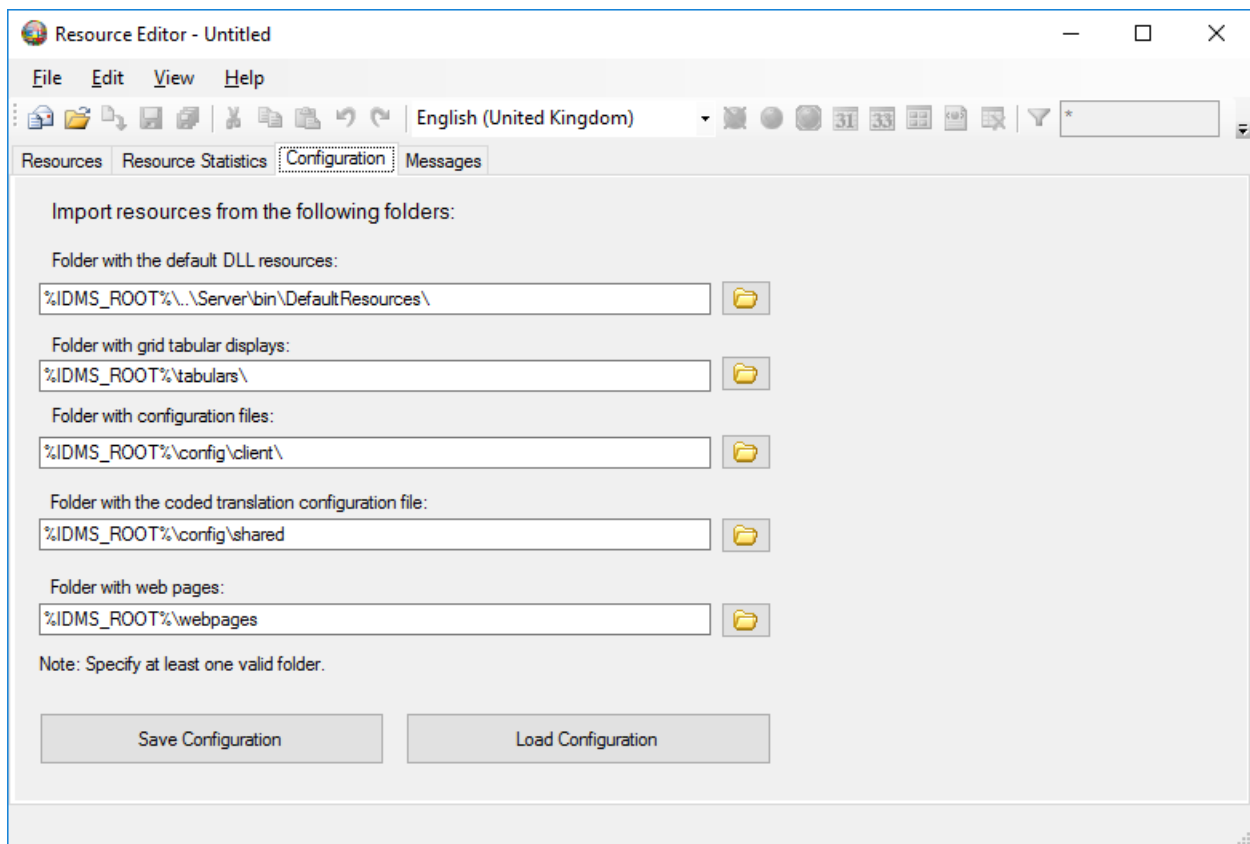



Figure 7. Configuration

On the Configuration tab, you can define the paths to the resource files to be localized:


- **Folder with the default DLL resources:** Sets the path to the folder with the client, server, or tools resource files.

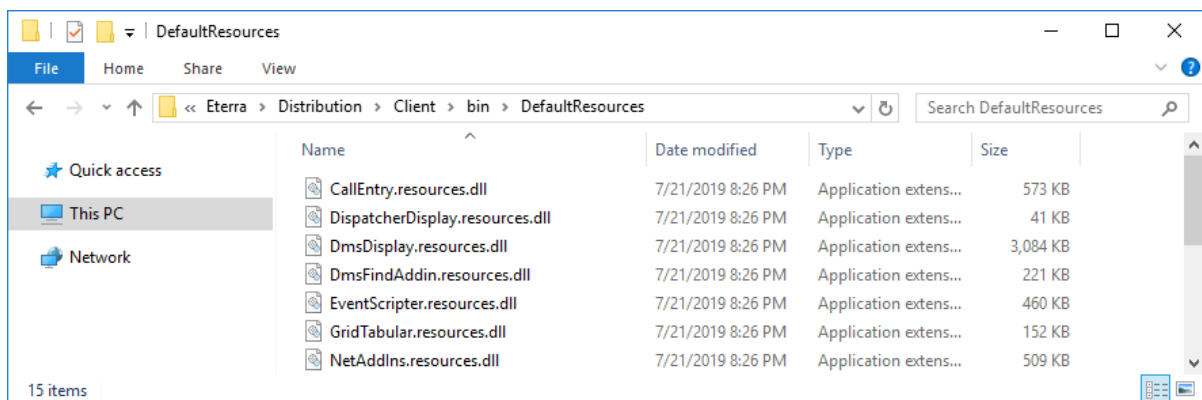


- **Folder with grid tabular displays:** Sets the path to the folder with grid tabular display files.

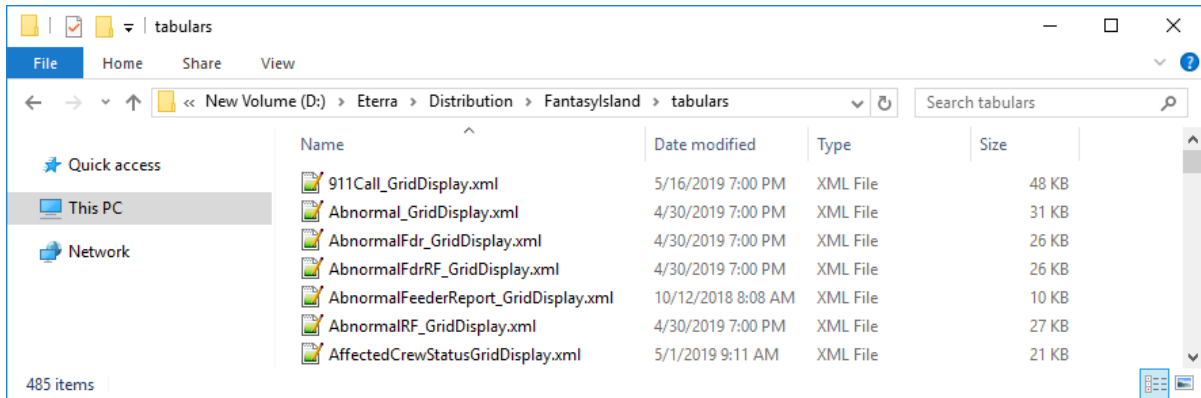

- **Folder with configuration files:** Sets the path to the folder with client configuration files.

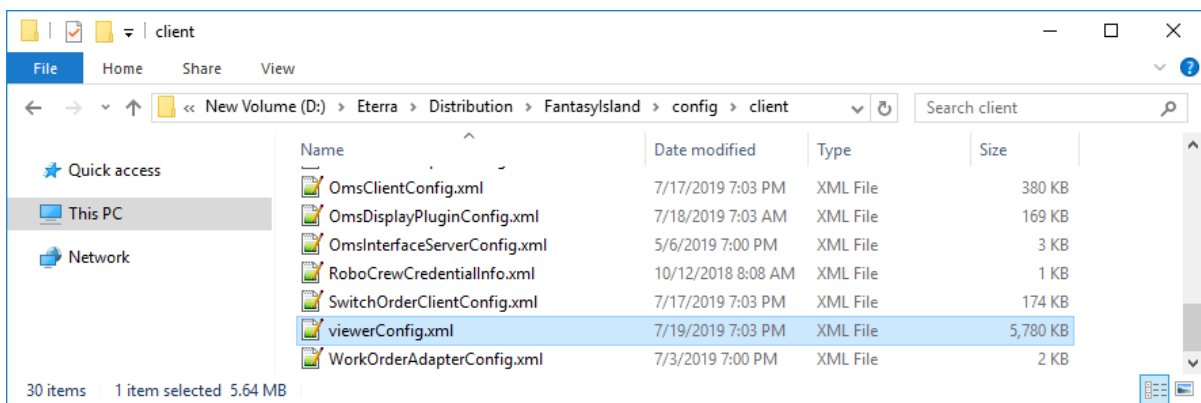


- **Folder with the coded translation configuration file:** Sets the path to the folder with the CodedTranslationConfig.xml file.

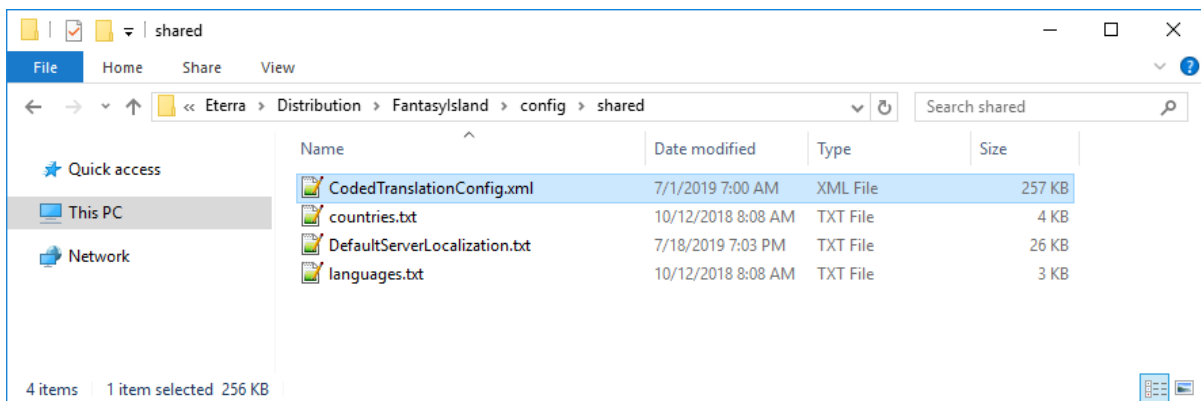

The Resource Editor tool supports localizing the following configuration files:

- viewerConfig.xml
- OmsDisplayPluginConfig.xml
- CodedTranslationConfig.xml
- **Folder with web pages:** Sets the path to the folder with client web pages.

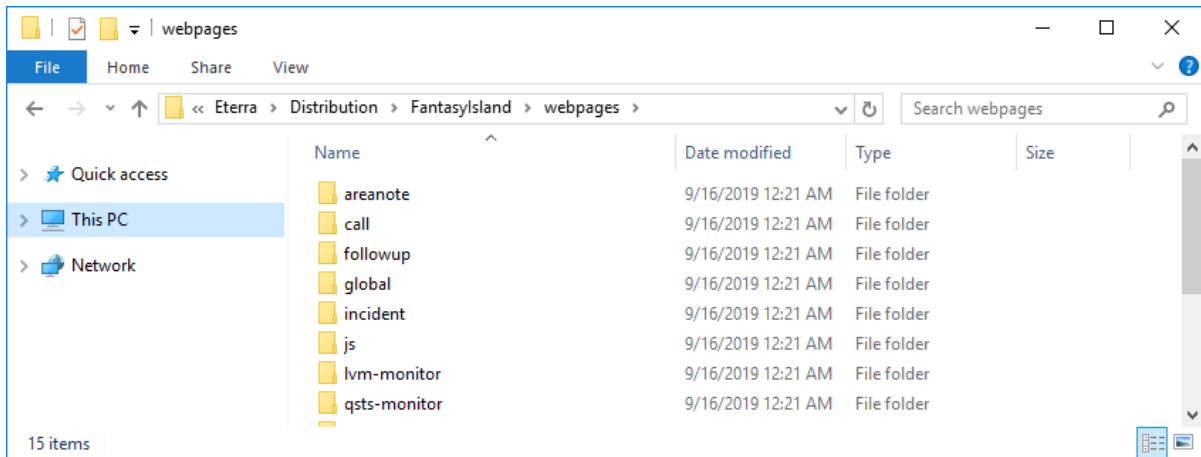

The resource, tabular, configuration, and web page files are stored in the specified folders and used as localization inputs when the Import Resources option is selected (refer to [Importing Resources](#)).

To import resources, it is required that you specify at least one existing path. If a specified folder does not exist, the corresponding field is colored red.

To save and load Resource Editor configurations:

- **Save Configuration:** Click this button to save the configuration information into a file.

You can also save configuration data via the File menu. By default, the configuration file is saved to: D:\Eterra\Distribution\FantasyIsland\ToolsWorkspace\ResourceEditor.

- **Load Configuration:** Click this button to load the configuration information from a file.

You can also load the configuration data via the File menu.

2.5. Importing Resources

After you create a new localization project or open an existing project, the Import Resources toolbar button and menu item are activated.

To import resources, select Import Resources from the File menu, or click the Import Resources button on the toolbar.

The resources are imported from the directories specified on the Configuration tab (refer to [Configuration](#)).

Note


If there are no valid resource paths specified on the Configuration tab, resources are not imported and the Configuration tab opens, allowing you to specify a valid folder.

If you change the selected culture, the title bar updates to reflect the change.

2.6. Estimating the Level of Effort to Localize

The Resource Editor provides statistics on resources that are localizable by a translator. These statistics can be used to estimate the level of effort needed to translate the imported resources into another language.

To show localization statistics for the imported resources, select the Resource Statistics tab, as shown in the following image.

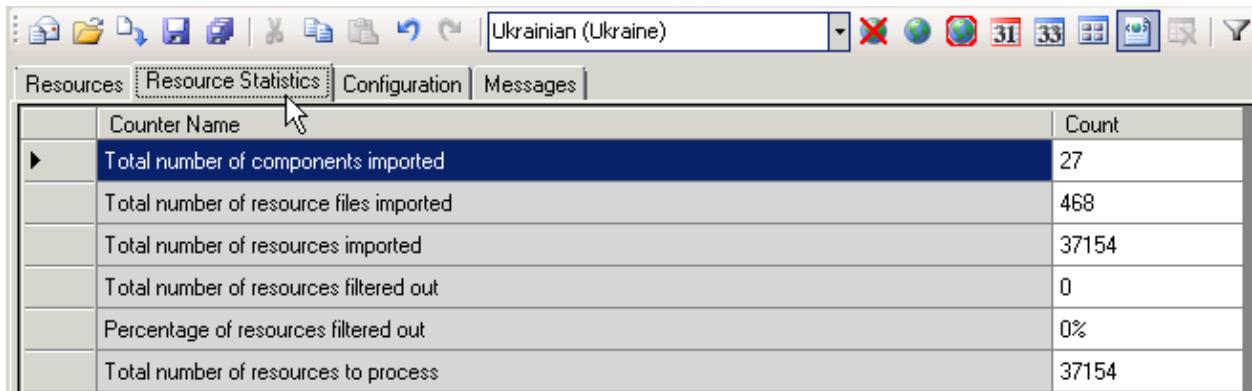

Counter Name	Count
Total number of components imported	27
Total number of resource files imported	468
Total number of resources imported	37154
Total number of resources filtered out	0
Percentage of resources filtered out	0%
Total number of resources to process	37154

Figure 8. Resource Statistics View

2.7. Translating Resources to Other Languages

To begin translating resources, start the Resource Editor and load a localization project file or import resources.


To translate a resource's original value:

1. Look at the value in the Original Value column, and type the translated version in the Localized Value column.
2. Press Enter to accept the new value.

Already localized strings are shown with a white background.


Non-localized strings are shown with a yellow background.

New, unsaved entries in the Localized Value column are highlighted with a khaki color, as shown with the Cancel value below.

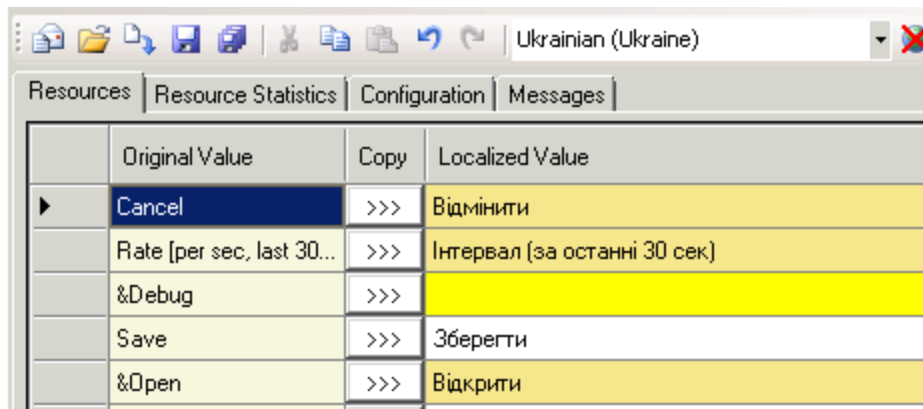


- From the File menu, select Save, or click the Save button on the toolbar.

When the localization project is saved, the khaki background color changes to white, as shown below.

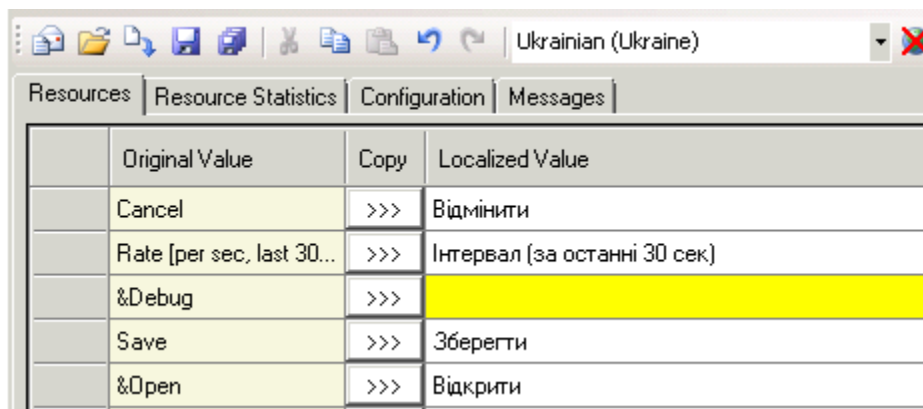

To copy values from the Original Value column into the Localized Value column, do one of the following:

- On the Edit menu, select the Initialize Localized Value from Original Value option, to copy all values from the Original Value column and fill in the Localized Value column if the value is empty.
- From the Copy column, click the Copy (>>>) button in all views, to copy a value from the Original Value column into the Localized Value column.

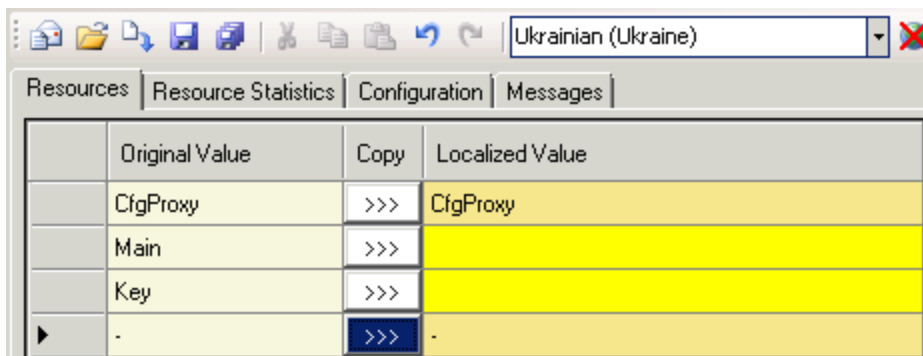

These options are useful when values in the original and localized languages are identical (for example, British English and U.S. English).

2.8. Filtering Resources

To filter resources, click the Filter button on the toolbar, and type a value in the Filter text box. The filter narrows the resources list by filtering the Original Value column, as shown in the following image.

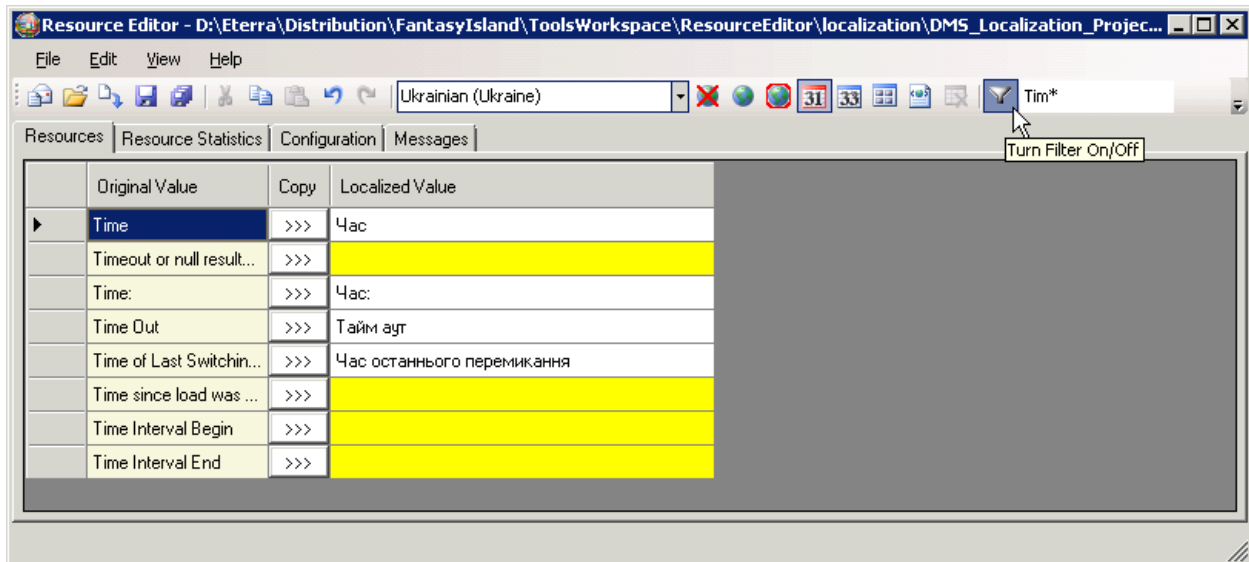


Figure 9. Filter Enabled

Note

Filters are case-sensitive, and multiple wildcards can be specified with the asterisk ("*") character, which can be placed at the beginning or at the end.

In views other than View Common String Resources, the Filter on Component and Filter on Resource File Name list boxes are enabled, as shown in the following image.



Figure 10. Additional Filter Restrictions Available

The Filter on Component and Filter on Resource File Name list boxes further narrow the resources list by filtering particular values in the Component Name and Resource File Name columns, respectively. To restrict a column to that value, select a value in the drop-down list. The following image shows an example.

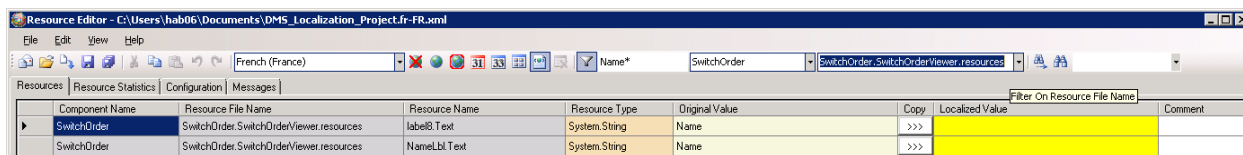


Figure 11. Filter Enabled with Additional Restrictions

To disable the filter at any time, deselect the Filter button on the toolbar.


2.9. Searching for Resources

Note

Search is case-sensitive.

To quickly search for a value in a given column:

1. Click any value in the column where you want to search.
2. Type all or part of a resource name in the Find text box, as shown below.




3. To search for the value, press Enter, or click the Find Next button on the toolbar.

To perform a more in-depth search in any column:

1. Click the Find button on the toolbar.

The Search and Replace dialog box appears, as shown below.

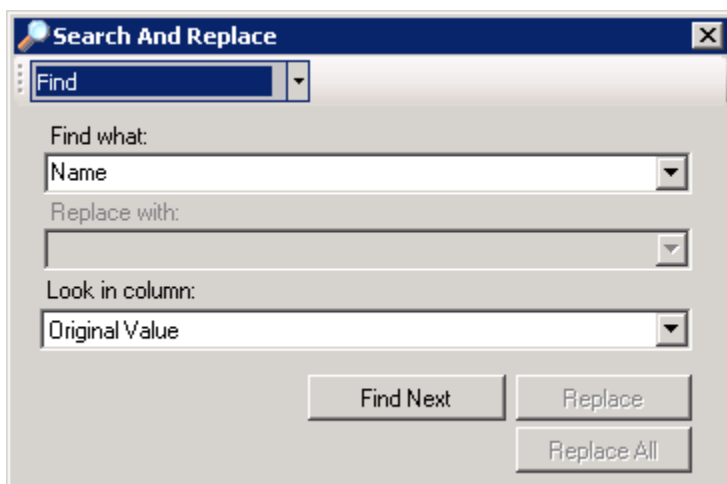

2. In the Search and Replace dialog box, select Find from the Find Options drop-down list.
3. Under Find What, type all or part of a value to search for.
4. Under Look in Column, select the column to search in.

5. Click Find Next.


The Search and Replace dialog box remains open and highlights a match in the Resource Editor.

2.10. Using "Find and Replace"

To search for and replace a value with another value using the Search and Replace dialog box:

1. Click the Find  button on the toolbar.

The Search and Replace dialog box appears, as shown below.

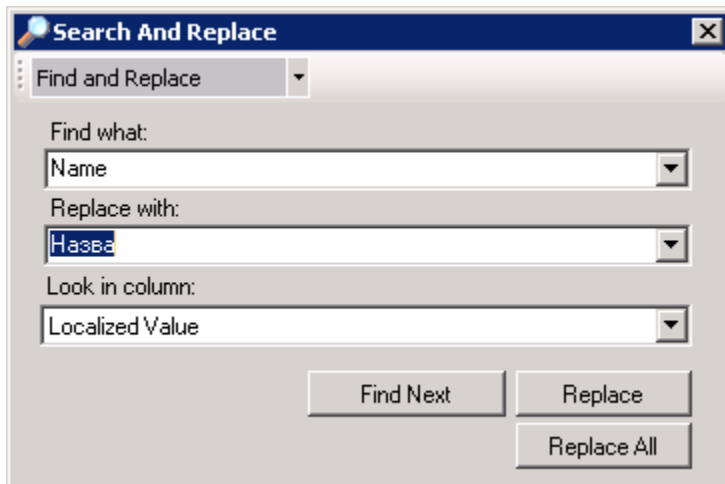

2. In the Search and Replace dialog box, select Find and Replace from the Find Options drop-down list.
3. Under Find What, type all or part of a value to search for.
4. Under Replace With, type the value to replace your search value.
5. Under Look in Column, select the column to search in.
6. Click Find Next.

The first instance of your search term is highlighted in the Resource Editor, and the Replace and Replace All buttons become available in the Search and Replace dialog box.

7. To replace only the highlighted instance, click Replace. To replace all instances of your search term in the specified column, click Replace All.

2.11. Adding New Resources from a New Release


In a given software release, new resources can be introduced.

To preserve the previously localized resources and to localize new resources:

1. Install the new software release.

2. Open the old localization project.


In the example below, all resources were previously localized using an earlier software release.

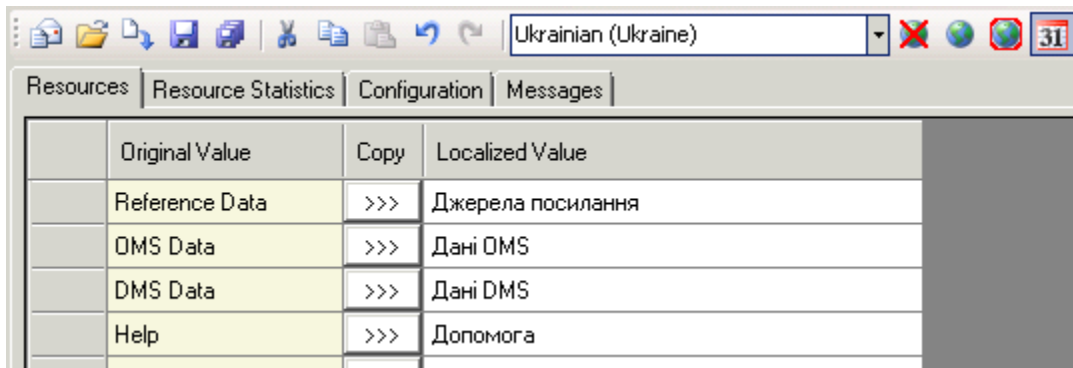

Original Value	Copy	Localized Value
Reference Data	>>>	Джерела посилання
OMS Data	>>>	Дані OMS
DMS Data	>>>	Дані DMS
Help	>>>	Допомога

3. To re-import all resources from the new release, from the File menu, select Import Resources, or click the Import Resources button on the toolbar.

The figure below shows two new yellow rows, indicating that they are new resources introduced in the new software release.

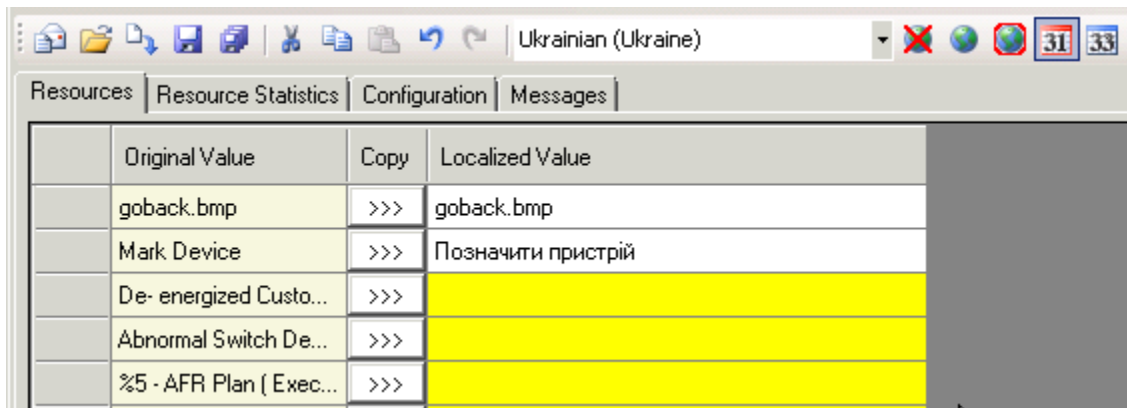

Original Value	Copy	Localized Value
goback.bmp	>>>	goback.bmp
Mark Device	>>>	Позначити пристрій
De-energized Custo...	>>>	
Abnormal Switch De...	>>>	
%5 - AFR Plan (Exec...	>>>	

4. Localize the new resources.
5. Save and generate new resource files by clicking the Save/Export All button on the toolbar.

In cases where the original resource has been modified, the ADMS Resource Editor helps you quickly identify changed resource strings, which might require previously localized strings to be re-evaluated.

After re-importing the new version of the resources, a red background color is displayed in each cell where the original value has changed.

Component Name	Resource File Name	Resource Name	Resource Type	Original Value	Copy	Localized Value	Comment
		Tooltip: Earliest Outage...	System.String	Earliest Outage Time	>>>	Найраніший час відключення	
GRID_DISPLAY	OpCenterSummaryFor...	Cnfm Out	System.String	Cnfm Out	>>>		
GRID_DISPLAY	OpCenterSummaryFor...	Tooltip: Number of Cust...	System.String	Number of Customers...	>>>	Підтверджена кількість відключених споживачів	
GRID_DISPLAY	OpCenterSummaryFor...	Prctd Out	System.String	Prctd Out	>>>	#Prctd Out	
GRID_DISPLAY	OpCenterSummaryFor...	Tooltip: Number of Cust...	System.String	Number of Customers...	>>>	Передбачена кількість відключених споживачів	
GRID_DISPLAY	OpCenterSummaryFor...	Cust	System.String	#Cust	>>>	#Cust	

Figure 12. Original Values that Changed Are Highlighted in Red

You can choose to select the Only View Resources Where Original Value Has Been Changed view (shown in the following image) from the View menu, or by clicking the toolbar button, to filter out all other resources where the original value has not changed.

Component Name	Resource File Name	Resource Name	Resource Type	Original Value	Copy	Localized Value
CallServer	CallServer.CallServerF...	tabPage2.Text	System.String	Itron	>>>	
CallServer	CallServer.CallServerF...	label5.Text	System.String	Data Subscription	>>>	
GRID_DISPLAY	DivisionSummaryGrid...	Cnfm Out	System.String	Cnfm Out	>>>	
GRID_DISPLAY	DivisionSummaryGrid...	Prctd Out	System.String	Prctd Out	>>>	#Prctd Out
GRID_DISPLAY	OpCenterSummaryFor...	Cnfm Out	System.String	Cnfm Out	>>>	
GRID_DISPLAY	OpCenterSummaryFor...	Prctd Out	System.String	Prctd Out	>>>	#Prctd Out
GRID_DISPLAY	OpCenterSummaryGri...	Cnfm Out	System.String	Cnfm Out	>>>	
GRID_DISPLAY	OpCenterSummaryGri...	Prctd Out	System.String	Prctd Out	>>>	#Prctd Out
GRID_DISPLAY	StationSummaryGridDi...	Momnty	System.String	#Momnty	>>>	Momnty

Figure 13. Only View Resources Where Original Value Has Been Changed

After you translate the original values and click the Save button, the Original Value and Localized Value cells' background colors change as shown in the following image.

Component Name	Resource File Name	Resource Name	Resource Type	Original Value	Copy	Localized Value
CallServer	CallServer.CallServerF...	tabPage2.Text	System.String	Itron	>>>	Itron
CallServer	CallServer.CallServerF...	label5.Text	System.String	Data Subscription	>>>	
GRID_DISPLAY	DivisionSummaryGrid...	Cnfm Out	System.String	Cnfm Out	>>>	Підтв. відкл.
GRID_DISPLAY	DivisionSummaryGrid...	Prctd Out	System.String	Prctd Out	>>>	Передб. відкл.
GRID_DISPLAY	OpCenterSummaryFor...	Cnfm Out	System.String	Cnfm Out	>>>	Підтв. відкл.
GRID_DISPLAY	OpCenterSummaryFor...	Prctd Out	System.String	Prctd Out	>>>	Передб. відкл.
GRID_DISPLAY	OpCenterSummaryGri...	Cnfm Out	System.String	Cnfm Out	>>>	Підтв. відкл.
GRID_DISPLAY	OpCenterSummaryGri...	Prctd Out	System.String	Prctd Out	>>>	Передб. відкл.
GRID_DISPLAY	StationSummaryGridDi...	Momnty	System.String	#Momnty	>>>	Momnty

Figure 14. Original Value and Localized Value Background Colors

2.12. Identifying and Removing Obsolete Resources

In a new software release, unused resources might be removed. This means that there might be localized resources that are no longer needed.


Note that these "obsolete" resources are not used when generating localized resources and they do not cause any harm. However, it may be useful to remove obsolete resources, to keep the localization project file as clean as possible.

To identify obsolete resources:

1. Open the existing localization project.
2. On the Edit menu, select Identify Obsolete Resources.

The Resource Editor re-imports all resources from the new software release, and compares them with the resources in the original localization project file.

3. The Resource Editor presents all of the "obsolete" resources in a special Obsolete Resource view, as shown below.

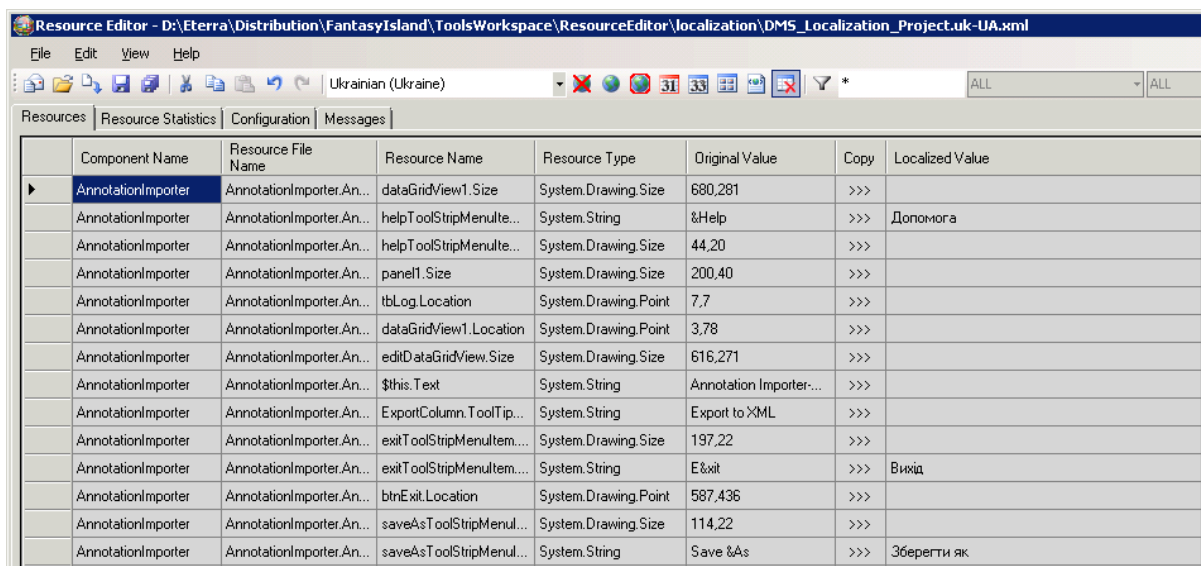


	Component Name	Resource File Name	Resource Name	Resource Type	Original Value	Copy	Localized Value
▶	AnnotationImporter	AnnotationImporter.An...	dataGridView1.Size	System.Drawing.Size	680,281	>>>	
	AnnotationImporter	AnnotationImporter.An...	helpToolStripMenuulte...	System.String	%Help	>>>	Допомога
	AnnotationImporter	AnnotationImporter.An...	helpToolStripMenuulte...	System.Drawing.Size	44,20	>>>	
	AnnotationImporter	AnnotationImporter.An...	panel1.Size	System.Drawing.Size	200,40	>>>	
	AnnotationImporter	AnnotationImporter.An...	tblLog.Location	System.Drawing.Point	7,7	>>>	
	AnnotationImporter	AnnotationImporter.An...	dataGridView1.Location	System.Drawing.Point	3,78	>>>	
	AnnotationImporter	AnnotationImporter.An...	editDataGridView.Size	System.Drawing.Size	616,271	>>>	
	AnnotationImporter	AnnotationImporter.An...	\$this.Text	System.String	Annotation Importer...	>>>	
	AnnotationImporter	AnnotationImporter.An...	ExportColumn.ToolTip...	System.String	Export to XML	>>>	
	AnnotationImporter	AnnotationImporter.An...	exitToolStripMenuultem...	System.Drawing.Size	197,22	>>>	
	AnnotationImporter	AnnotationImporter.An...	exitToolStripMenuultem...	System.String	E&xit	>>>	Вихід
	AnnotationImporter	AnnotationImporter.An...	btnExit.Location	System.Drawing.Point	587,436	>>>	
	AnnotationImporter	AnnotationImporter.An...	saveAsToolStripMenul...	System.Drawing.Size	114,22	>>>	
	AnnotationImporter	AnnotationImporter.An...	saveAsToolStripMenul...	System.String	Save &As	>>>	Зберегти як

The Obsolete Resource view is read-only and is used for carefully comparing values.

4. When you are ready to remove the obsolete resources, from the Edit menu, select Remove Obsolete Resources.

The obsolete resources are removed, and the Resource Editor displays the View Common String Resources view again, as shown below.

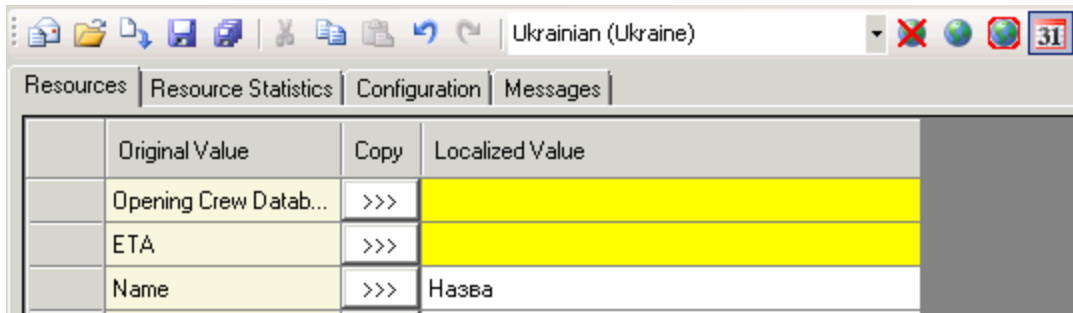

5. Save the new localization project file.

2.13. Saving a Localization Project File

Saving a localization project captures all variables that should be translated into another language into a single file. This file can then be used independently from the Resource Editor.

To save a localization project:

1. From the File menu, select Save Localization Project, or click the Save Localization Project button on the toolbar.
2. In the Save As dialog box, navigate to the folder where you would like to save the project, enter the name of the localization project, and click Save.


It might be useful to include software release version information in the project file name.

3. An XML file containing the original and localized values is saved.

2.14. Saving/Exporting Localized Resource Files

After translating the localizable resources, you can generate the localized resources' output files.

From the File menu, select Save/Export All, or click the Save/Export All button on the toolbar, to generate the localized resource files, tabulars, and configuration files.

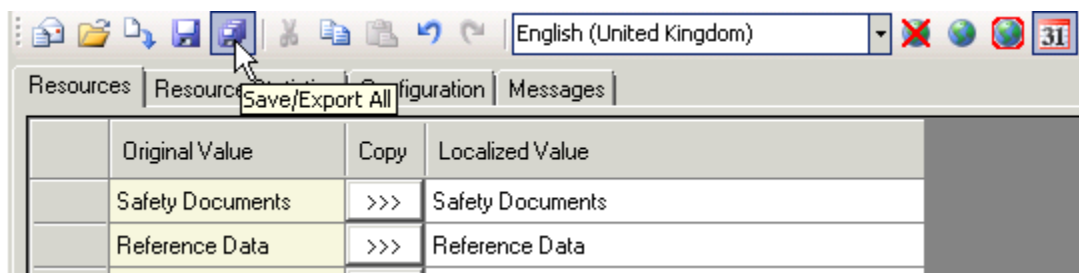


All generated localization files are saved to folders named with the target culture/locale's abbreviation. These folders are located as follows:

- Folders with client/server localization files are saved to the client/server DefaultResources folder


(refer to [Configuration](#)).

An example showing folders for English (United States), English (United Kingdom), and French (France) localized client files is shown in the figure below.

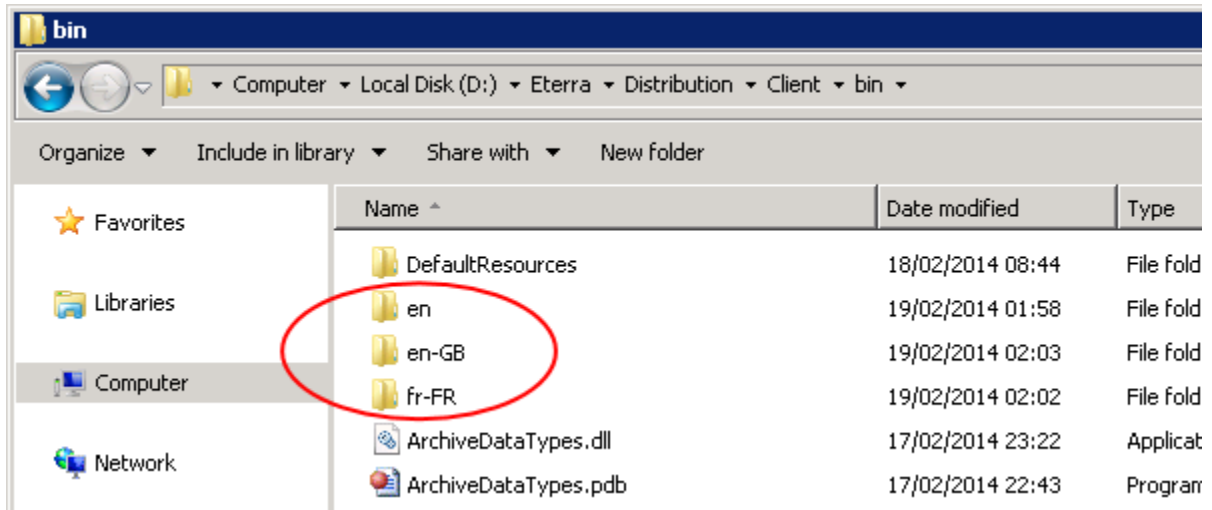


- Folders with localized tabulars are saved to the folder that contains default tabulars (refer to [Configuration](#)).

An example showing folders with English (United States), English (United Kingdom), and French (France) localized tabulars is shown in the figure below.

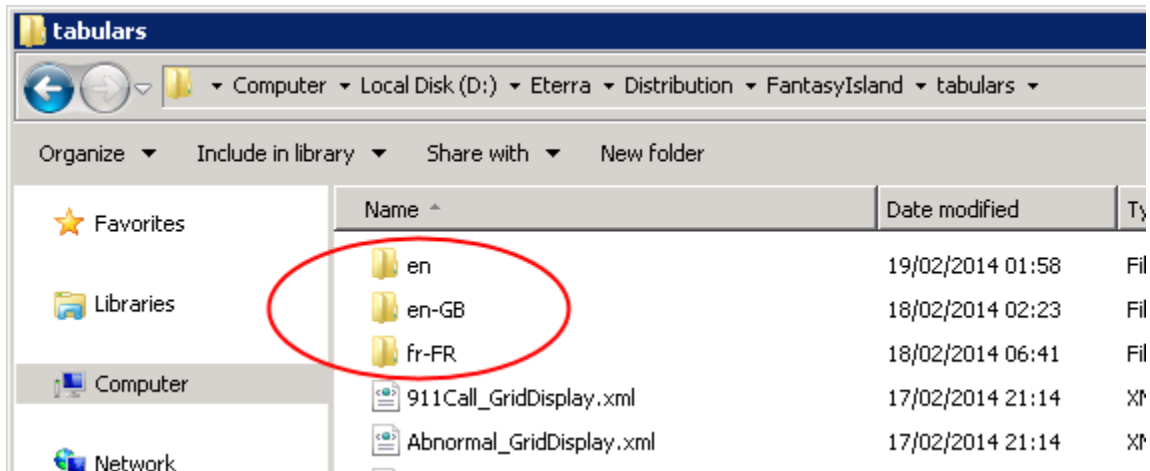


- Folders with localized configuration files are saved to the folder that contains default configuration files (refer to [Configuration](#)).

An example showing folders with English (United States), English (United Kingdom), and French (France) localized configuration files is shown in the figure below.

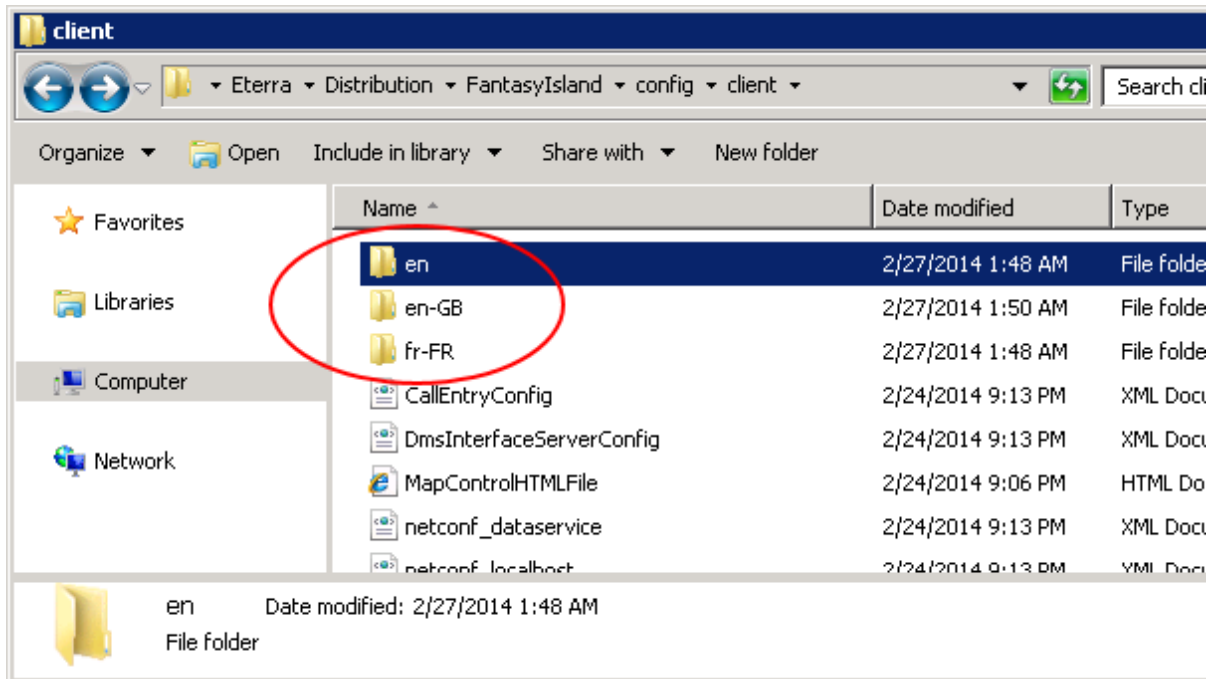

- Folders with localized web page files are saved to the subfolders that contain default web page files in the root web page folder (refer to [Configuration](#)).

An example showing a subfolder with English (United Kingdom) localized incident web page files is shown below.

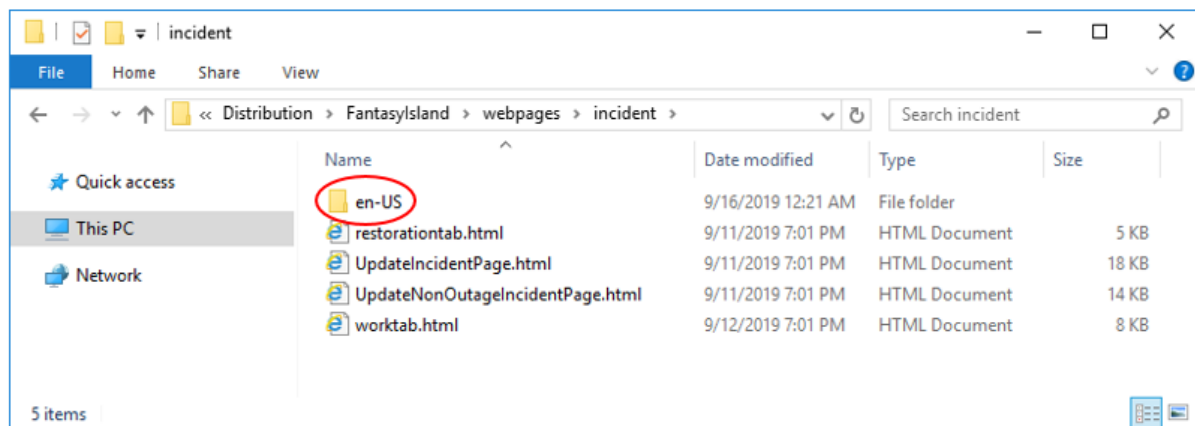

Note

Exporting with empty resources may result in visualization errors. Before exporting make sure to localize all values and/or initialize them from their original value either individually or from the Edit menu item, Initialize Localized Value From Original Value option.

2.15. Reviewing the Resource Editor Log

The Messages tab contains log entries generated during the Resource Editor's operation. It is recommended to review the log for error, warning, and info messages after exporting localized resource files.

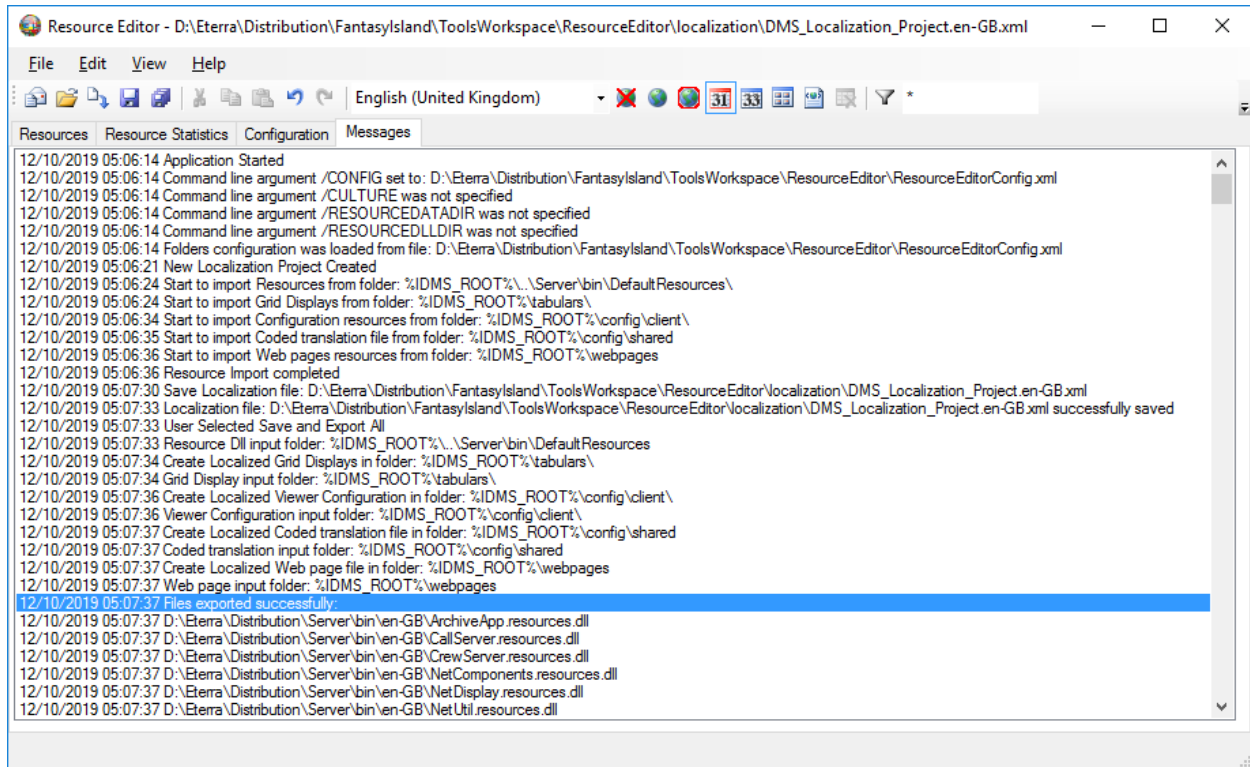


Figure 15. Resource Editor Log

2.16. Using Generated Localization Files


To use the localization files, the following conditions should be met:

- Generated localization files should be saved in folders, located in the parent folders of the relevant default resource files (as described in [Saving/Exporting Localized Resource Files](#)).
- The folders with the generated localization files must be named with the system's culture/locale's abbreviation.

When started, the ADMS client checks the system's culture/locale and looks for localization resource files in the appropriate folders. If the appropriate folders are absent or do not contain the necessary files, the client uses the resources from the default folders.

To localize resources, perform the following steps:

1. Check the system's Format and Current Location by navigating to Start > Control Panel > Region and Language.

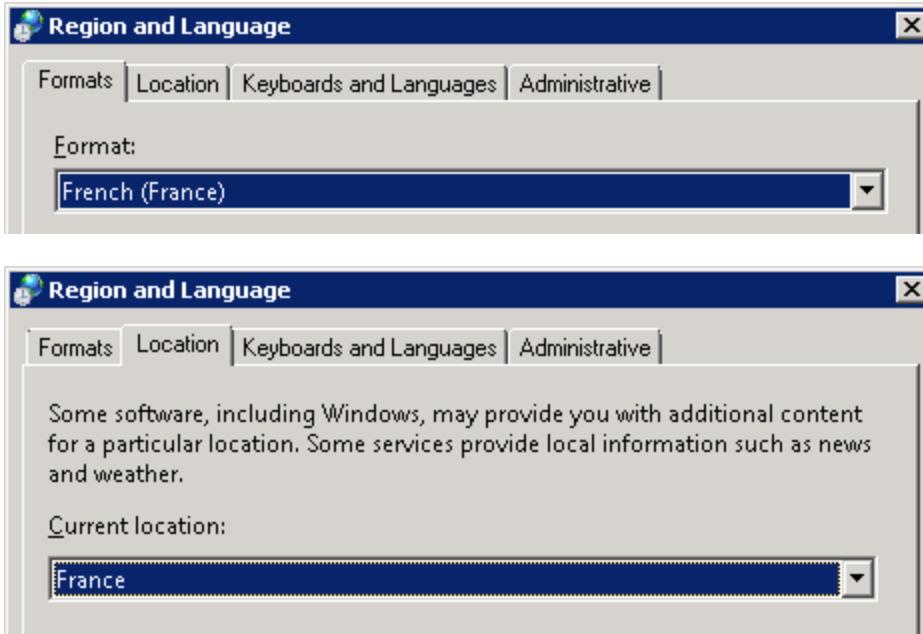

2. Generate the localized resources' output files as described in [Saving/Exporting Localized Resource Files](#).

Check that the generated folders are named with the target culture/locale abbreviation (refer to [Table of Language Culture Names^{\[1\]}](#)). For example, the abbreviation for French (France)/France culture/locale is "fr-FR".

Note

The abbreviation for English (United States)/United States culture/locale is "en".

3. Restart the ADMS client.

2.17. Command-Line Arguments

The Resource Editor supports the following command-line arguments:

Command-Line Argument	Description
-CONFIGFILE <file>	Load specified configuration file at startup.
-CULTURE <culture>	Define default culture.
-RESOURCEDLLDIR <path>	Define path to DLL resources. If the -CONFIGFILE argument is specified, this argument is omitted.
-RESOURCEDATADIR <path>	Define path to the configuration files and display resources. Configuration files are searched under <path>\netview\config, displays - <path>\netview\pictures If the -CONFIGFILE argument is specified, this argument is omitted.

Values specified with triangle brackets (<>) should be replaced with "real" values (without brackets).

2.18. Error Message

Error: Error while creating resources.

Message: The process cannot access the file because it is being used by another process.

Cause: Selecting the culture for the localization project that is the same as the culture that the user is currently working in.

The user can translate for the current locale for the first time (i.e., the Resource Editor has loaded the default resources). On any subsequent startup, the Resource Editor uses the locale to load the resources.

For example:

1. Open a localization project for us-en, or a project for your corresponding locale.
2. Make a change, and click the Save or Export All buttons to create all the resources.
3. Open another Resource Editor.
4. Make a change, and attempt to dump out the resources.

On the Messages tab, an error message similar to the one shown above is displayed.

Recommendation: Do not create resources for the current locale.

[1] <http://msdn.microsoft.com/en-us/library/ee825488%28v=cs.20%29.aspx>

3. Localizing Resources

The Resource Editor application can be used to localize ADMS server, client, tools, grid tabular displays, and configuration files.

Note

Localization of ADMS servers is not recommended. Servers must run in the default invariant locale (en-US).

Note

Localization of ADMS tools is not fully supported. When localizing ADMS tools, display layouts might become inconsistent.

Servers and server applications

- Archive Application
- Call Server
- Crew Server
- Net Components
- Net Display
- Net Util
- OMS Utilities
- RoboCrew

Client displays and applications

- Call Entry
- DMS Display
- DMS Find Add-In (Tabbed Find Pop-Up)
- Event Scripter
- Grid Tabular Displays (Controls, Print Preview, Properties)
- ADMS Plug-ins
- Net Add-ins
- Net Client
- Net Components
- Net Display
- Net Util
- OMS Display

- OMS Display Plug-In
- OMS Utilities
- Switch Order (Switching Order Application)

Tools

- Annotation Importer-Exporter
- Batch Postage Stamps (Substation Editor feature)
- Bulk Edit Common (Substation Editor feature)
- Bulk Extract (Substation Editor feature)
- Bulk Merge (Substation Editor feature)
- Coded Translation Editor
- Customer Compiler
- Editor Controls
- Geographic Background Compiler
- Grid Tabular Builder
- Net Dynamics Configuration Editor
- OMS Utilities
- Prep BPS Include List
- Purge Placements
- Resource Editor
- SSE Tools Common (Substation Editor feature)
- Substation Editor
- Switch Order Configuration
- Viewer Configuration Editor

Configuration files

- ViewerConfig.xml
- CodedTranslationConfig.xml
- OmsDisplayPluginConfig.xml

Grid tabular displays

- The Resource Editor supports localization of all grid tabular displays. However, only header names and tooltips can be localized.

Web pages

- The Resource Editor supports localization of all web pages, such as `UpdateIncidentPage.html`

and `callPopup.html`.