

1. Designing the database


a. Relevant tables related to my client-site are the following:

- i. Accounts, announcements, services, hours, orders, order_items.
- ii. Each store:
 1. Accounts: Will hold things like USER_ID, name, email, and password.
 2. Announcements: Will store announcement_id, announcement header, announcement message, and announcement date.
 3. Hours: Will store day (mo-sunday), if my client works those days, and open and close times.
 4. Services: Will store the service ID, category (such as coloring, treating, etc), name, price.
 5. Orders: Will store the order ID, user ID that made the order, the order status, the total, and date created.
 6. Order Items: This stores the item_id, order_id, service_id, price charged.

2. Database Documentation

a. Accounts Table

- i. The purpose of this table is to store the data of all the users that sign up on the site. It gives a way to relate someone to purchases made.
- ii. Includes: USER_ID (PRIMARY KEY, INT), NAME (VARCHAR), EMAIL(VARCHAR), PASSWORD(VARCHAR), RANK(INT)
- iii. This table relates to other tables like orders and order_items as it relates the account that made the purchase to the purchase itself.

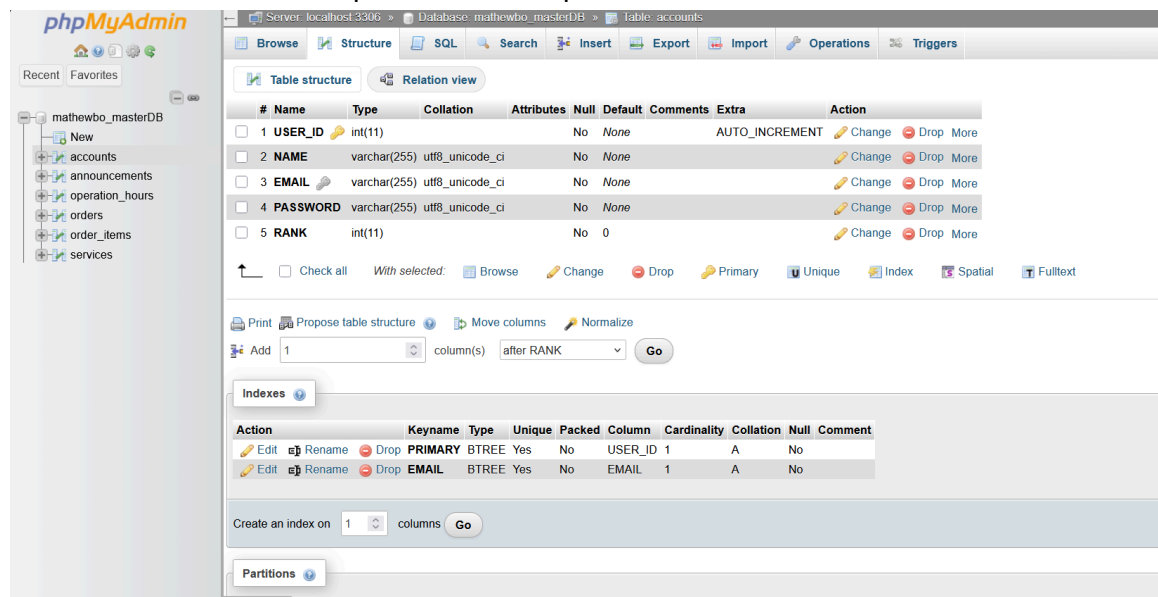

iv.

b. Announcements Table

- i. The purpose of this table is to store all of the announcements visible on the website. It allows a way for my client to edit announcements, make new ones, and for it to be easily viewed and changed with a simple refresh.

- ii. Includes: ANNOUNCEMENT_ID (integer, primary key), HEADER (text), MESSAGE (text), DATE (date object)
- iii. The table does not relate to other tables.

#	Name	Type	Collation	Attributes	Null	Default	Comments	Extra	Action
☐	1 ANNOUNCEMENT_ID	int(11)			No	None		AUTO_INCREMENT	Change Drop More
☐	2 HEADER	text	utf8_unicode_ci		No	None			Change Drop More
☐	3 MESSAGE	text	utf8_unicode_ci		No	None			Change Drop More
☐	4 DATE	date			No	None			Change Drop More

iv.

	ANNOUNCEMENT_ID	HEADER	MESSAGE	DATE
☐	1	Spring Sale	All items 20% off, now until 4/20/2026!	2026-04-05
☐	5	Happy Easter	Happy Easter!!!	2026-04-05

v.

c. Hours of Operation Table

- i. The purpose of this table is to store the hours that my client operates her business. It allows a way for my client to edit her hours of operations, when she's opened/closed, etc., so that it is easily accessed to other users without having to change html directly.
- ii. Includes: DAY (ENUM, monday-sunday), OPEN? (int), OPEN_TIME (text), CLOSE_TIME (text)
- iii. The table does not relate to other tables.

#	Name	Type	Collation	Attributes	Null	Default	Comments	Extra	Action
☐	1 DAY	enum('Monday', 'Tuesday', 'Wednesday', 'Thursday', 'Friday', 'Saturday', 'Sunday')	utf8_unicode_ci		No	None			Change Drop More
☐	2 OPEN?	tinyint(1)			No	None			Change Drop More
☐	3 OPEN_TIME	text	utf8_unicode_ci		No	None			Change Drop More
☐	4 CLOSE_TIME	text	utf8_unicode_ci		No	None			Change Drop More

iv.

mathewbo_masterDB - New - accounts - announcements - operation_hours - orders - order_items - services		Showing rows 0 - 6 (7 total, Query took 0.0001 seconds.) SELECT * FROM `operation_hours` Profiling Edit inline Edit Explain SQL Create PHP code Refresh																																	
		☐ Show all Number of rows: 25 Filter rows: Search this table																																	
		Extra options																																	
		<table> <tr> <th>DAY</th><th>OPEN?</th><th>OPEN_TIME</th><th>CLOSE_TIME</th></tr> <tr> <td>Tuesday</td><td>1</td><td>9:00 am</td><td>5:00 pm</td></tr> <tr> <td>Wednesday</td><td>1</td><td>9:00 am</td><td>5:00 pm</td></tr> <tr> <td>Thursday</td><td>1</td><td>9:00 am</td><td>5:00 pm</td></tr> <tr> <td>Friday</td><td>1</td><td>9:00 am</td><td>5:00 pm</td></tr> <tr> <td>Saturday</td><td>1</td><td>9:00 am</td><td>5:00 pm</td></tr> <tr> <td>Sunday</td><td>0</td><td>9:00 am</td><td>5:00 pm</td></tr> <tr> <td>Monday</td><td>1</td><td>10:00 am</td><td>5:00 pm</td></tr> </table>		DAY	OPEN?	OPEN_TIME	CLOSE_TIME	Tuesday	1	9:00 am	5:00 pm	Wednesday	1	9:00 am	5:00 pm	Thursday	1	9:00 am	5:00 pm	Friday	1	9:00 am	5:00 pm	Saturday	1	9:00 am	5:00 pm	Sunday	0	9:00 am	5:00 pm	Monday	1	10:00 am	5:00 pm
DAY	OPEN?	OPEN_TIME	CLOSE_TIME																																
Tuesday	1	9:00 am	5:00 pm																																
Wednesday	1	9:00 am	5:00 pm																																
Thursday	1	9:00 am	5:00 pm																																
Friday	1	9:00 am	5:00 pm																																
Saturday	1	9:00 am	5:00 pm																																
Sunday	0	9:00 am	5:00 pm																																
Monday	1	10:00 am	5:00 pm																																

v.

d. Orders

- i. This table is to store all the orders that have been made by users. It allows us to view and change orders with ease.
- ii. Includes: ORDER_ID (Primary key, int), USER_ID (Foreign key,int), ORDER_STATUS (Enum), TOTAL (decimal), CREATED_AT (timestamp)
- iii. The table does relate to users. IT allows us to relate our order to a user who made the order.

iv.

#	Name	Type	Collation	Attributes	Null	Default	Comments	Extra	Action
1	ORDER_ID	int(11)			No	None		AUTO_INCREMENT	Change Drop More
2	USER_ID	int(11)			No	None			Change Drop More
3	ORDER_STATUS	enum('pending', 'confirmed', 'completed', 'cancelled', 'utf8_unicode_ci')			Yes	pending			Change Drop More
4	TOTAL	decimal(10,2)			No	None			Change Drop More
5	CREATED_AT	timestamp			No	CURRENT_TIMESTAMP			Change Drop More

	ORDER_ID	USER_ID	ORDER_STATUS	TOTAL	CREATED_AT
☐ Edit Copy Delete	1	3	pending	150.00	2026-04-05 18:25:34
☐ Edit Copy Delete	2	3	pending	585.00	2026-04-05 18:27:58

v.

e. Order items

- This table stores the items that made up an order. It allows us to list out all of the components of an order very easily.
- INCLUDES: item_id (PRIMARY KEY, INT), ORDER_ID (FOREIGN KEY), SERVICE_ID (foreign key), PRICE_CHARGED (decimal)
- This table does relate to users and orders. It allows us to look at what user ordered what, and what order this item is a part of.

iv.

#	Name	Type	Collation	Attributes	Null	Default	Comments	Extra	Action
1	ITEM_ID	int(11)			No	None		AUTO_INCREMENT	Change Drop More
2	ORDER_ID	int(11)			No	None			Change Drop More
3	SERVICE_ID	int(11)			No	None			Change Drop More
4	PRICE_CHARGED	decimal(10,2)			No	None			Change Drop More

	ITEM_ID	ORDER_ID	SERVICE_ID	PRICE_CHARGED
☐ Edit Copy Delete	1	1	10	150.00
☐ Edit Copy Delete	2	2	10	150.00
☐ Edit Copy Delete	3	2	6	135.00
☐ Edit Copy Delete	4	2	20	300.00

v.