



COMP1140: Database and Information Management

Lecture Note – Week 4

Dr Suhuai Luo

School of EEC

University of Newcastle



Notice

- Assignment 1 due next Tue (Aug 22) at 10am
 - In completing EER in Assignment 1, consider the practical operation
 - Submit both soft & hard copy
 - Soft copy –
Blackboard -> Assessment -> AssignmentsSubmission-> Assignment1
 - Hardcopy with signed cover page
 - In your submission, make sure to put your lab session/time on the cover sheet.
 - Make sure your EER has big enough fonts and doesnot spread too many pages in print.




Last lecture


- Conceptual DB Design with EER
- Any questions?

Sometimes, it's necessary to re-arrange entities


- Where a model represents a relationship between entity types, but pathway between certain entity occurrences is ambiguous - fan trap .

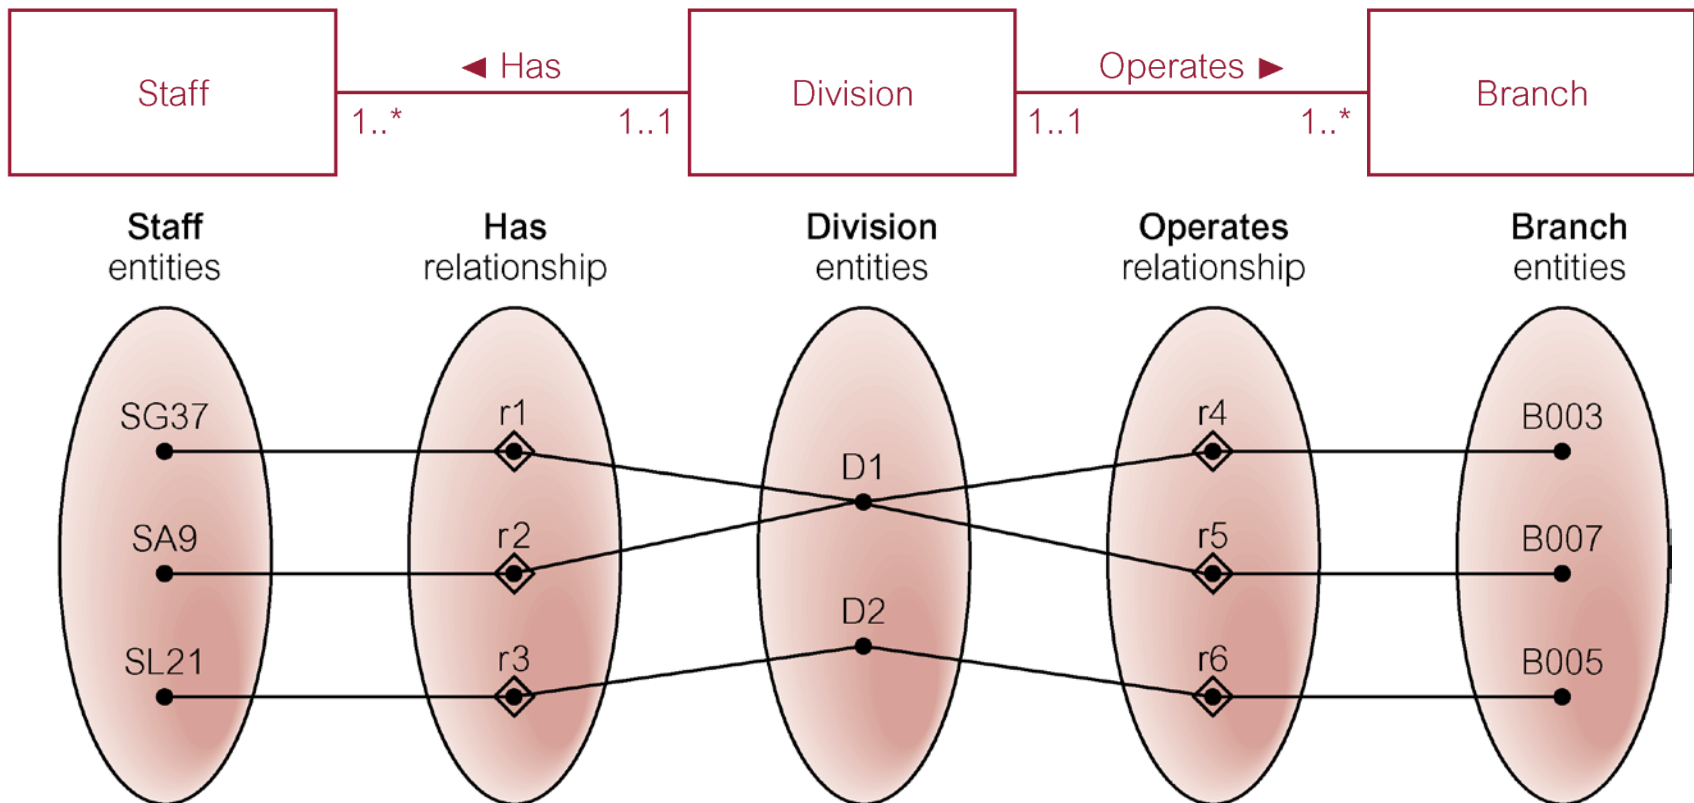

Q: At which branch office does staff number SG37 work?

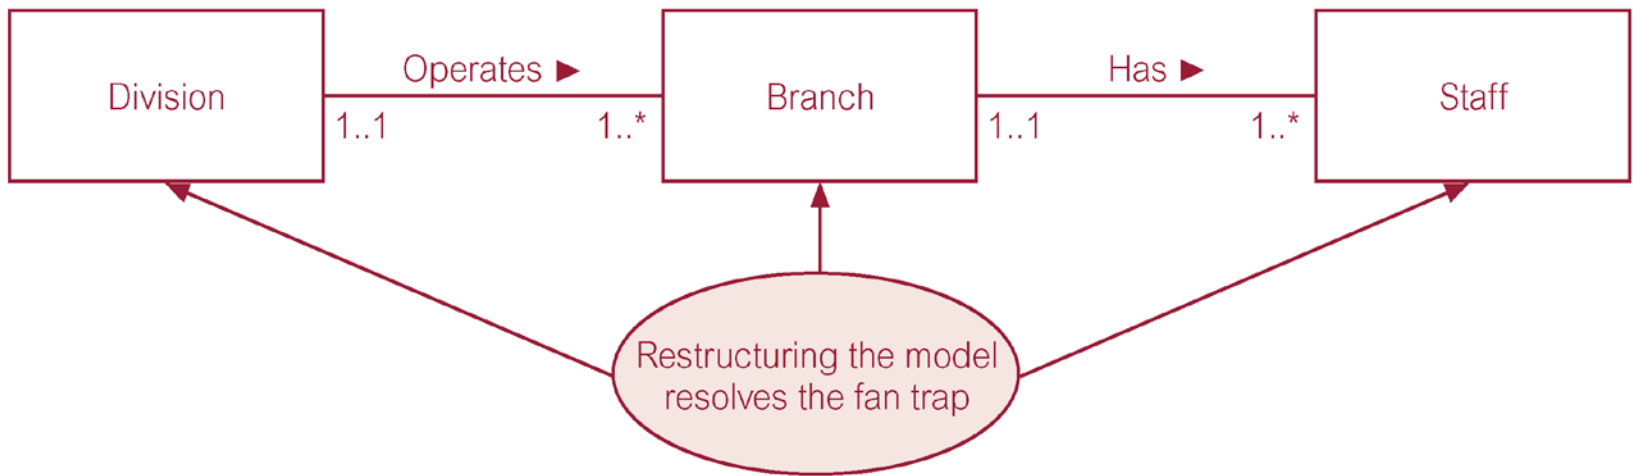


S

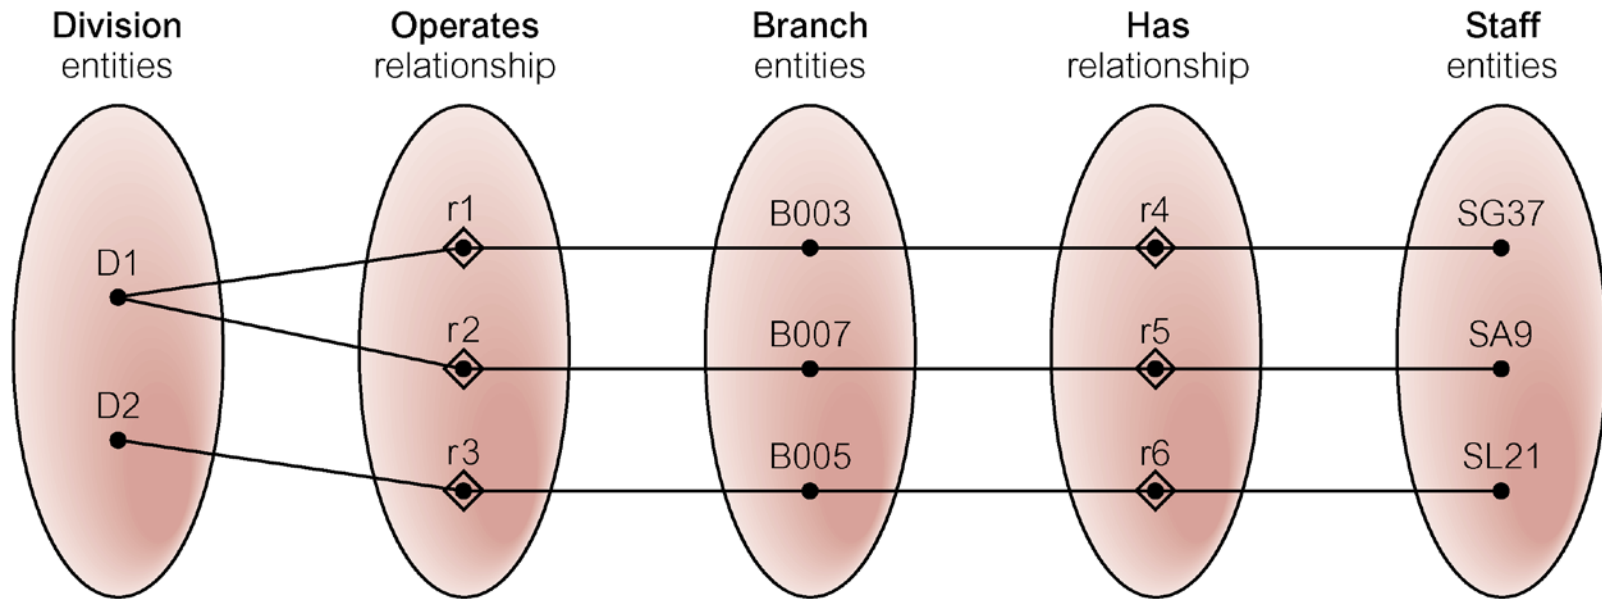


A: SG37 works at branch B003

Sometimes, it's necessary to add another link


- Where a model suggests the existence of a relationship between entity types, but pathway does not exist between certain entity occurrences - chasm trap.

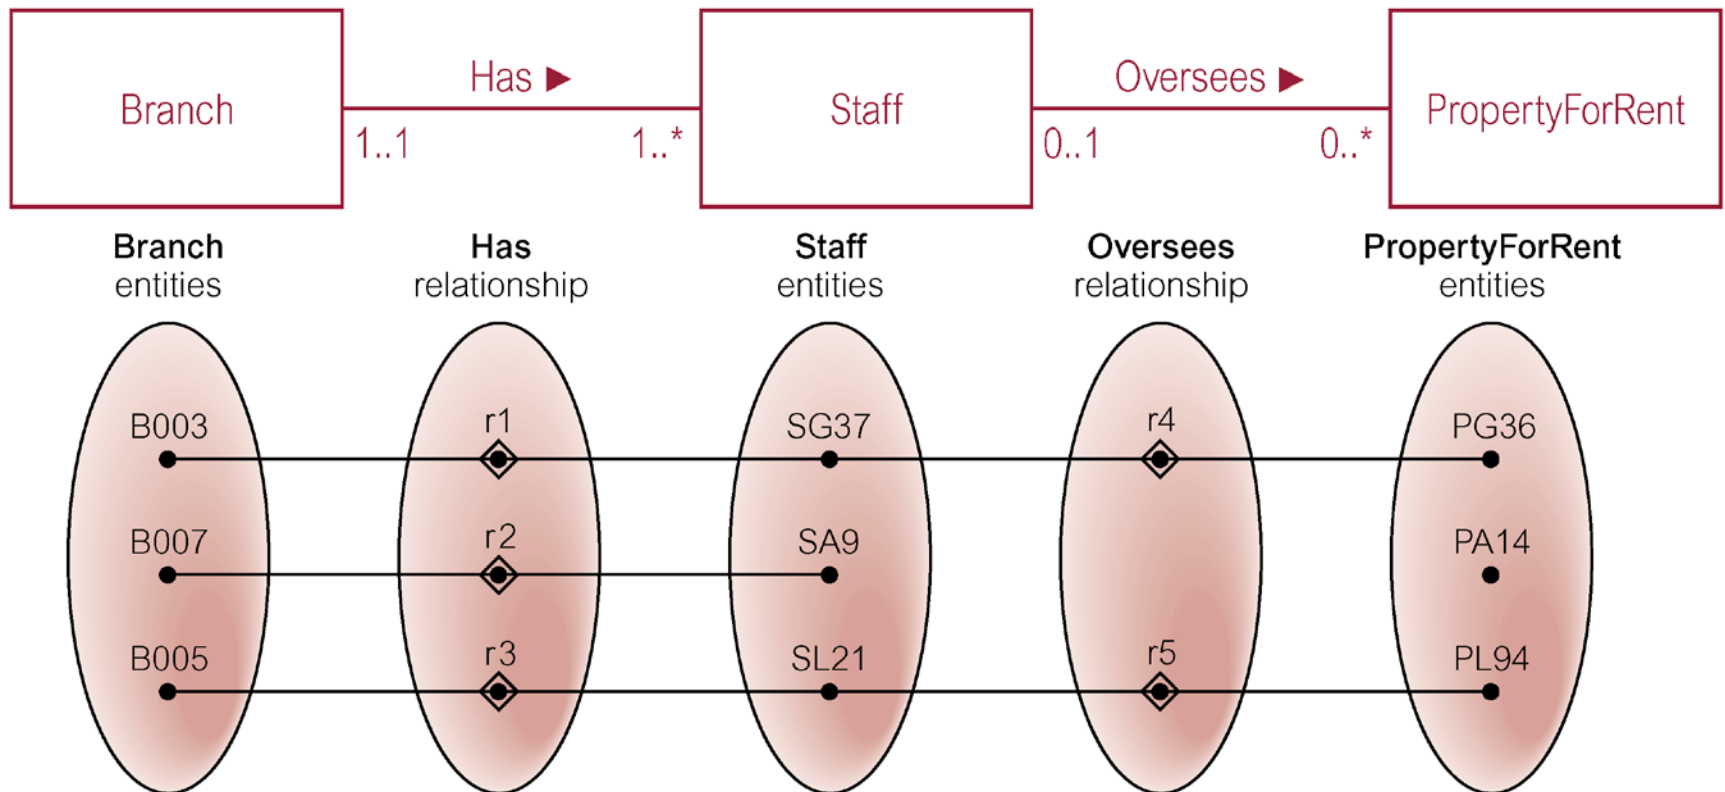

Q: At which branch office is property PA14 available?

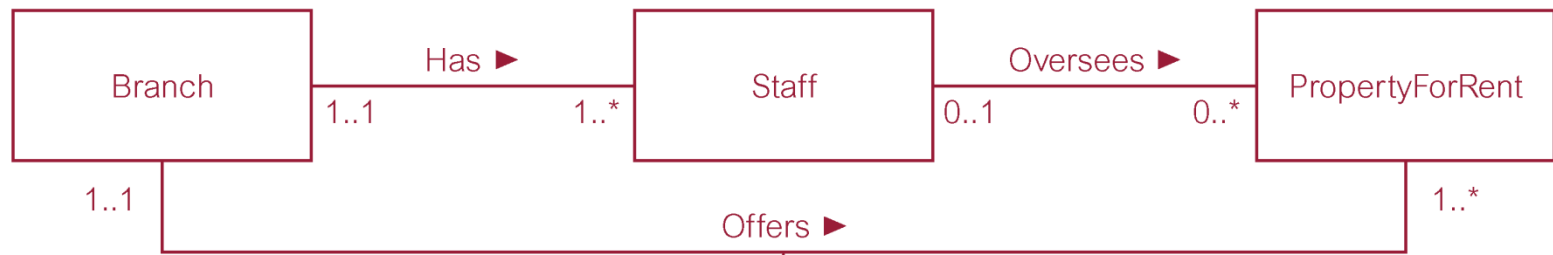

Adding the *Offers* relationship resolves the chasm trap

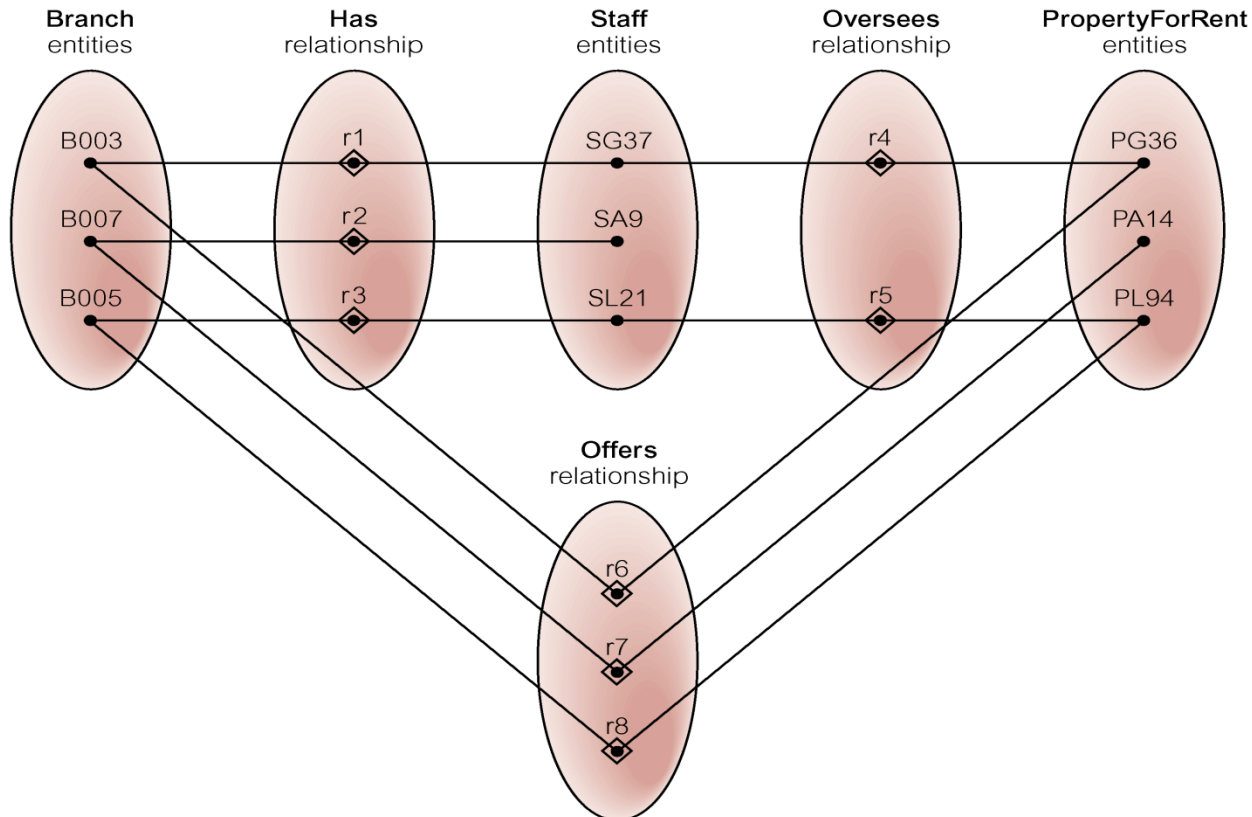

A: B007 offers PA14
COMP1140_S2_2017



This lecture

- Relational Model
- Mapping from EER model to relational model (i.e. first step of Logical Database Design)
- Discussion on A1
 - References: chapters 4 & 17



Logical Database Design

- Process of constructing a model of the data used in an enterprise based on a specific data model, but independent of a particular DBMS and other physical considerations.



Logical Database Design – 7 processes

- *Get relations from EER*
- Relation normalisation
- Validate relations against user transaction
- *Check integrity constraints*
- Review logical data model with user
- Merge logical models into global model
- Check for future growth



Relational Model

- Initially proposed by E.F. Codd in 1970 in a paper titled “A relational model of data for large shared data banks”
- Major advantages over previous approaches
 - **Data independence** (Application programs not affected by internal representation of data)
 - **Sound theoretical foundation** for semantics, redundancy and consistency problems (based on set theory)
 - Set-oriented **data manipulation languages**



Relational Model (contd.)

- In the 70s many research prototypes of DBMSs were implemented to prove its feasibility and power
- A notable one is IBM's System R project which led to the development of "Structured English Query Language (SEQUEL)"
- SEQUEL was later standardized by ISO/ANSI as Structured Query Language (SQL)



Relational Model (contd.)

- Today, a majority of databases used are relational or extensions of it!
- Over US\$ 25 billion/year in sales in software licenses for DBMSs and tools
- Codd won the Turing Award for his work



Relational Model Terminology

- A relation is a table with columns and rows.
 - Only applies to logical structure of the database, not the physical structure.

- Example: Branch

Relation {

branchNo	street	city	postcode
B005	22 Deer Rd	London	SW1 4EH
B007	16 Argyll St	Aberdeen	AB2 3SU
B003	163 Main St	Glasgow	G11 9QX
B004	32 Manse Rd	Bristol	BS99 1NZ
B002	56 Clover Dr	London	NW10 6EU

Relational Model Terminology (contd.)

- **Attribute** is a named column of a relation.
- **Domain** is the set of allowable values for one or more attributes.
- Example:

Attribute	Domain Name	Meaning	Domain Definition
branchNo	BranchNumbers	The set of all possible branch numbers	character: size 4, range B001–B999
street	StreetNames	The set of all street names in Britain	character: size 25
city	CityNames	The set of all city names in Britain	character: size 15
postcode	Postcodes	The set of all postcodes in Britain	character: size 8
sex	Sex	The sex of a person	character: size 1, value M or F
DOB	DatesOfBirth	Possible values of staff birth dates	date, range from 1-Jan-20, format dd-mmm-yy
salary	Salaries	Possible values of staff salaries	monetary: 7 digits, range 6000.00–40000.00

Relational Model Terminology (contd.)

- **Tuple** is a row of a relation.
- **Degree** is the number of attributes in a relation.
- **Cardinality** is the number of tuples in a relation.
- E.g.

Relation name → **STUDENT**

Attributes

StdNo	Sname	Suburb
S001	John Ellis	Newcastle
S010	Mary Connor	Jesmond

Tuples

Degree = ?, Cardinality = ?



Relational Model Terminology (contd.)

- **Relational database** is a collection of relations with distinct names
- Alternative terminology:

Formal terms	Alternative 1	Alternative 2
Relation	Table	File
Tuple	Row	Record
Attribute	Column	Field



Database Relations

- Formally, *a relation R with attributes A_1, \dots, A_n* is a **set** of tuples such that each tuple is a collection of values

$$\langle d_1, d_2, \dots, d_n \rangle$$

where $d_i \in \{D_i \text{ or } \text{NULL}\},$

$i = 1, \dots, n$ and

D_i is the domain of attribute A_i .

*NULL is a special value (meaning unknown, unspecified, undefined, etc.)



Database Relations (contd.)

- Relation schema:
 - **relation name**
 - {**name** of each field & **domain** of each field}

Example

STUDENT

(*StdNo*: {characters of S001-S999},

sName: {set of all student names},

suburb: {set of all suburbs of students})



Database Relations (contd.)

- Relation instance:
 - Set of tuples that belong to the relation at a particular point in time
- Example

STUDENT

StdNo	Sname	Suburb
S001	John Ellis	Newcastle
S010	Mary Connor	Jesmond



Database Relations (contd.)

- Relational database schema:
 - A set of relation schemas with distinct names



Keys

- **Superkey:** A set of one or more attributes that uniquely identify a tuple
- **Candidate key:** A superkey such that no proper subset is a superkey
- E.g. Student(StdNo, name, suburb)



Keys (contd.)

- **Primary key:** A candidate key selected by the database designer to uniquely identify a tuple
- Only one primary key exists for a relation
- Representing database schema:

Student(StdNo, name, suburb)

Course(courseNo, name, credits)

*relations with primary keys underlined



Integrity Constraints

- **Integrity constraint** is a rule (or check) that is enforced to ensure that correct data exists in the database
- There are different kinds of integrity constraints:
 - **Domain constraints**
 - **Entity Integrity Constraints**
 - **Referential Integrity Constraints**
 - **General Constraints**



Domain constraints

- Domain constraints specify that each value for an attribute (say *A*) must be an *atomic* value from the *domain* of *A* or the special *null* value
- Atomic value: That is, the value is non divisible into components
 - Therefore, relational model doesn't allow multi-valued attributes or composite attributes!
- Relational database provides data types to specify valid domains (e.g. characters, integers, etc.)



Entity Integrity Constraint

- Entity integrity constraint specifies that no attribute in a primary key can be null

STUDENT

<u>StdNo</u>	Sname	Suburb
S001	John Ellis	Newcastle
NULL	Mark Anthony	Belmont
S010	Mary Connor	Jesmond

→
NULLs are not
allowed as
primary key values



Foreign keys and referential integrity

- Foreign Key: an attribute in a relation, serving as PK or matching a candidate key of another relation in the same DB.
- Foreign Key Constraints
 - We can designate an attribute(s) as a **foreign key(s)**
 - Foreign key(s) attribute(s) always refer to PK attribute(s) of another entity
 - Foreign keys enforce referential integrity constraints
- Referential Integrity Constraints: a rule stating that either each FK value must match a PK value in another relation, or the FK value be NULL



Foreign keys ... (contd.)

Foreign key (FK) attributes in R_1 referring to R_2 have the following rules:

- The FK attributes in R_1 have the same domain(s) as the candidate key attributes of R_2
- The value of FK in tuple t_1 in R_1 must reference an existing candidate key value in tuple t_2 of R_2

Foreign keys ... (contd.)

STUDENT

Primary Key

<u>StdNo</u>	Sname	Suburb
S001	John Ellis	Newcastle
S020	Mark Anthony	Belmont

REGISTER

Foreign Key

<u>StdNo</u>	<u>Course</u>	Grade
S001	INFT2040	A
S012	INFT2009	B
S001	INFT2031	A-

NOT ALLOWED:

Foreign key value must refer to an existing primary key value



General Constraints

- Additional constraints that exists in the enterprise.

E.g. "A student can register to at most 7 courses per semester"



Summary – Relational Model

- Relation – schema, instance, cardinality, degree
- Attribute
- Domain
- Tuple
- Superkey, candidate key and primary key
- Relational database, relational database schema
- Integrity constraints
 - Domain constraints
 - Entity integrity constraints
 - Referential Integrity constraints (foreign keys)
 - General constraints



EER – Relational Mapping

- Mapping guidelines overview
 - Note: the relational schema is presented using Database Definition Language (DBDL) notation




EER to Relational Mapping

EER Model

Strong Entity


For example,

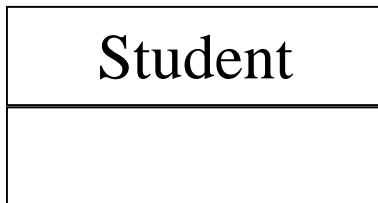

Relational Model



relation




Student()

EER to Relational Mapping (contd.)

EER Model

Simple Attributes

For example,



Relational Model

attributes

Student(name, suburb)



EER to Relational Mapping (contd.)

EER Model



Primary Key



Relational Model

Primary Key

For example,

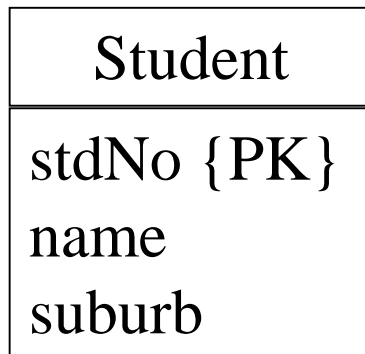

Student(stdNo, name, suburb)
Primary Key stdNo





EER to Relational Mapping (contd.)

EER Model

Composite attributes →

For example,

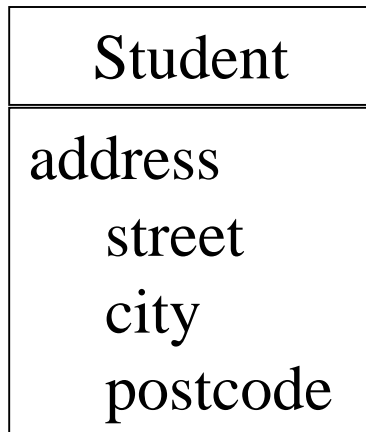

Relational Model

Set of simple attributes

Student(street, city, postcode)

EER to Relational Mapping (contd.)


EER Model

1:*

For example,

Relational Model

Foreign key relationship

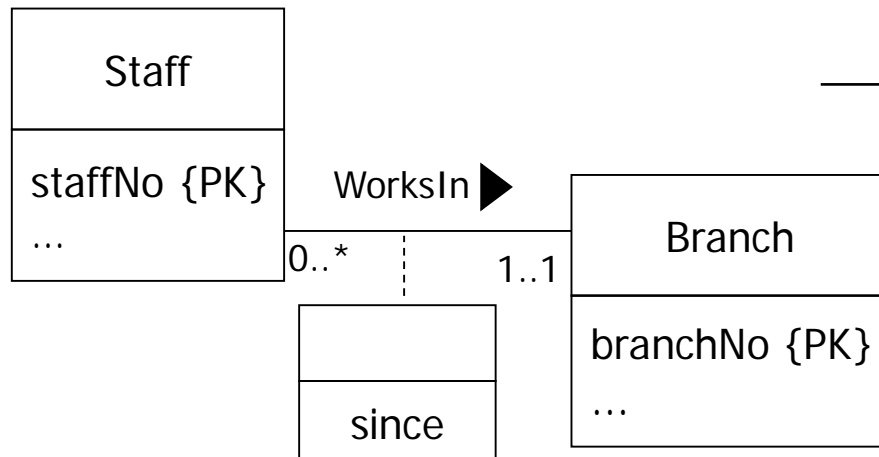

→ **Staff**(staffNo,..., worksIn, since, branchNo)
Primary Key staffNo
Foreign Key branchNo **references** Branch(branchNo)

Branch(branchNo, ...)
Primary Key branchNo

EER to Relational Mapping (contd.)


EER Model

1:1 relationship →

Relational Model

Foreign key relationship

For example,

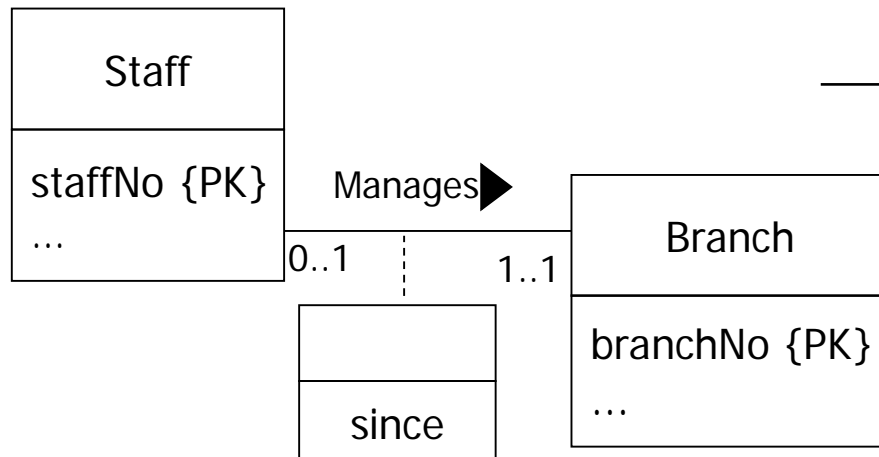

→ **Staff**(staffNo,...)
Primary Key staffNo

Branch(branchNo,..., manager, since)
Primary Key branchNo
Foreign Key staffNo **references** Staff(staffNo)



EER to Relational Mapping (contd.)

- In a 1:1 relationship R from entity A to B and
 - Mandatory participation on one side:
 - If only B is in mandatory participation with A on R then the foreign key is placed in B
 - Mandatory participation on both sides:
 - If both A and B are in mandatory participation with R then A & B are represented as a single relation (containing attributes of both A and B)
 - Optional participation on both sides:
 - Otherwise, foreign key can be placed on either relation A or B

EER to Relational Mapping (contd.)


EER Model

..

For example,

Relational Model

→ “Relationship” relation and
two foreign keys

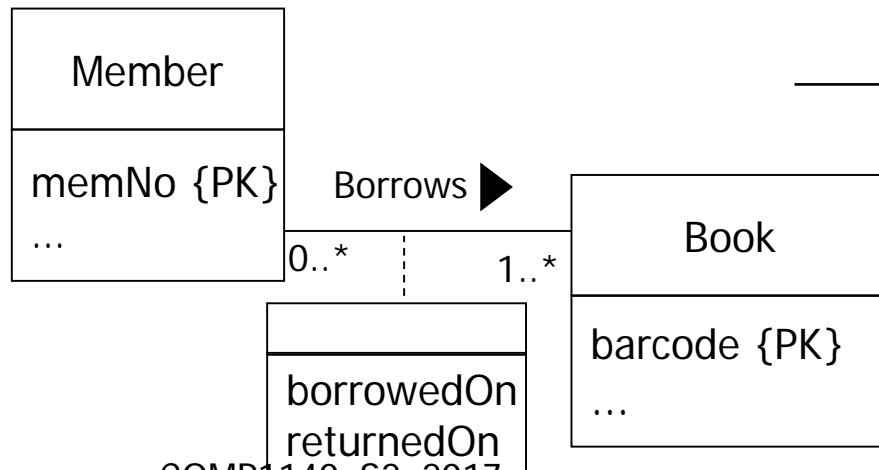

Member(memNo,...)
Primary Key memNo

Book(barCode, ...)
Primary Key barCode

Borrows(memNo, barCode, borrowedOn, returnedOn)
Primary Key memNo, barCode, borrowedOn
Foreign Key memNo **references** Member(memNo)
Foreign Key barCode **references** Book(barCode)

EER to Relational Mapping (contd.)



EER Model

Multivalued attribute →

Relational Model

Relation & Foreign Key

For example,

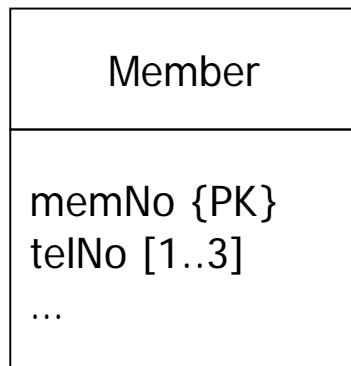


Member(memNo,...)
Primary Key memNo

Telephone (memNo, telNo)
Primary Key memNo, telNo
Foreign Key memNo **references** Member(memNo)

EER to Relational Mapping (contd.)

EER Model

N-ary relationship
For example,

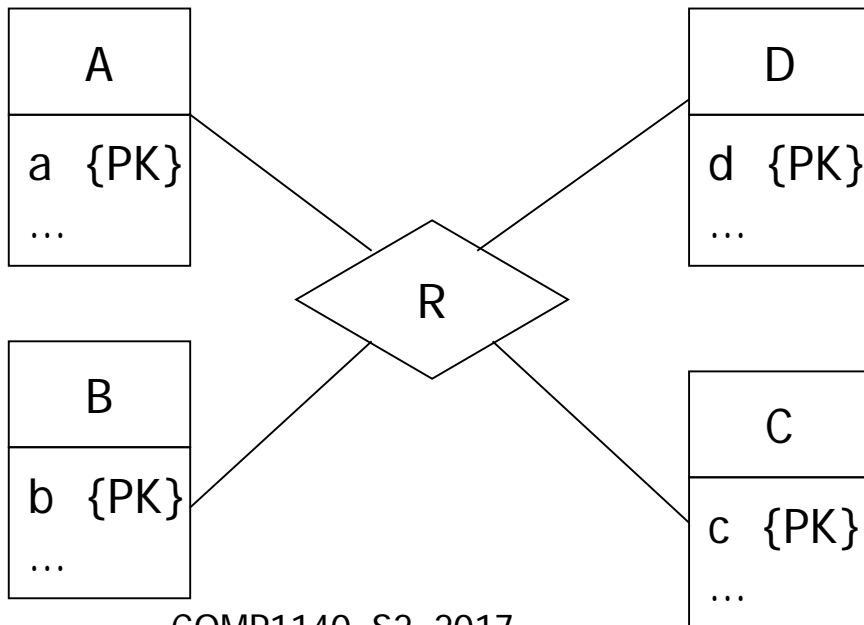

Relational Model

“Relationship” relation and
n foreign keys

A(a,...)
Primary Key a

B(b,...)
Primary Key b

C(c,...)
Primary Key c

D(d,...)
Primary Key d

R(a, b, c, d)
Primary Key a, b, c, d
Foreign Key a references A(a)
Foreign Key b references B(b)
Foreign Key c references C(c)
Foreign Key d references D(d)

EER to Relational Mapping (contd.)


EER Model

Weak entity

Relational Model

Relation with foreign key.

For example

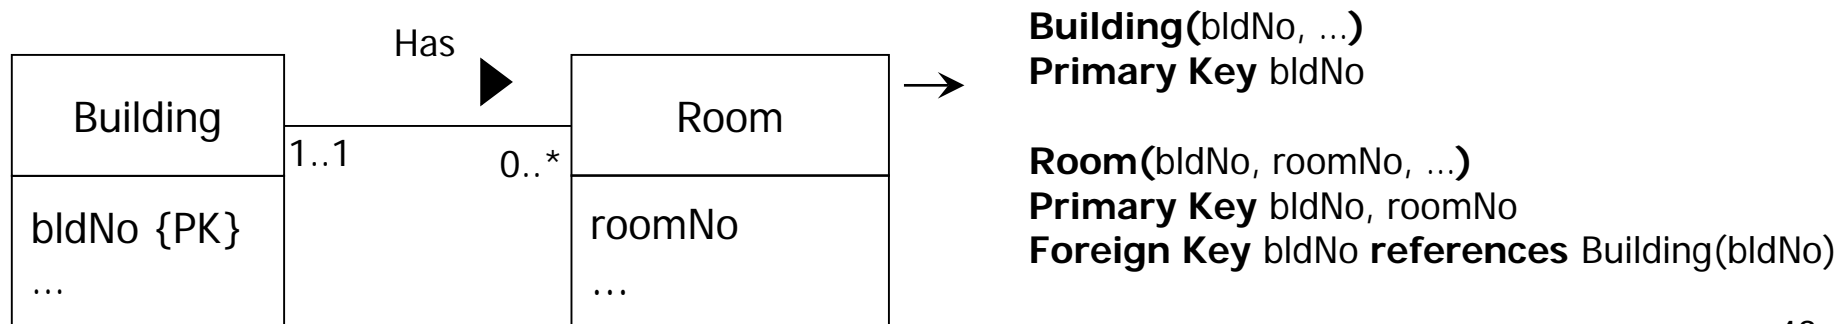




EER to Relational Mapping (contd.)

- Mapping superclass/subclass relationships have many options

Participation constraint	Disjoint constraint	Relations required
Mandatory	Nondisjoint {And}	Single relation (with one or more discriminators to distinguish the type of each tuple)
Optional	Nondisjoint {And}	Two relations: one relation for superclass and one relation for all subclasses (with one or more discriminators to distinguish the type of each tuple)
Mandatory	Disjoint {Or}	Many relations: one relation for each combined superclass/subclass
Optional	Disjoint {Or}	Many relations: one relation for superclass and one for each subclass

EER to Relational Mapping (contd.)

- Example

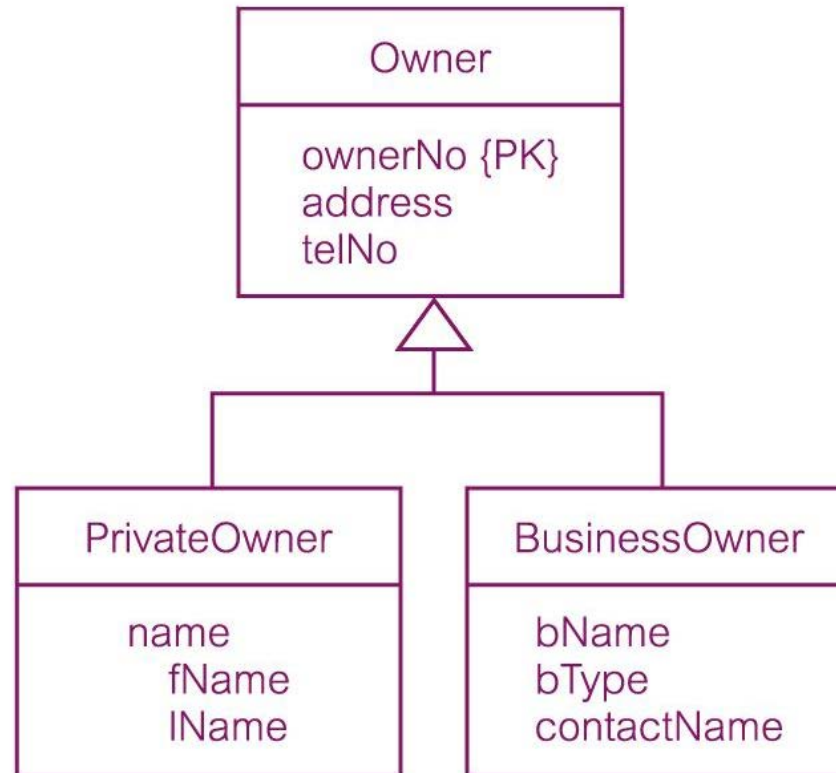

EER to Relational Mapping (contd.)

Participation constraint	Disjoint constraint	Relations required
Mandatory	Nondisjoint {And}	Single relation (with one or more discriminators to distinguish the type of each tuple)
Optional	Nondisjoint {And}	Two relations: one relation for superclass and one relation for all subclasses (with one or more discriminators to distinguish the type of each tuple)
Mandatory	Disjoint {Or}	Many relations: one relation for each combined superclass/subclass
Optional	Disjoint {Or}	Many relations: one relation for superclass and one for each subclass

EER to Relational Mapping (contd.)

Option 1 – Mandatory, nondisjoint

AllOwner (ownerNo, address, telNo, fName, lName, bName, bType, contactName, pOwnerFlag, bOwnerFlag)

Primary Key ownerNo

Option 2 – Optional, nondisjoint

Owner (ownerNo, address, telNo)

Primary Key ownerNo

OwnerDetails (ownerNo, fName, lName, bName, bType, contactName, pOwnerFlag, bOwnerFlag)

Primary Key ownerNo

Foreign Key ownerNo references Owner(ownerNo)

Option 3 – Mandatory, disjoint

PrivateOwner (ownerNo, fName, Name, address, telNo)

Primary Key ownerNo

BusinessOwner (ownerNo, bName, bType, contactName, address, telNo)

Primary Key ownerNo

Option 4 – Optional, disjoint

Owner (ownerNo, address, telNo)

Primary Key ownerNo

PrivateOwner (ownerNo, fName, Name)

Primary Key ownerNo

Foreign Key ownerNo references Owner(ownerNo)

BusinessOwner (ownerNo, bName, bType, contactName)

Primary Key ownerNo

Foreign Key ownerNo references Owner(ownerNo)

© Pearson Education Limited
1995, 2005

EER – Relational Mapping (contd.)

Example of a relational schema in DBDL

Staff (staffNo, fName, lName, position, sex, DOB, supervisorStaffNo) Primary Key staffNo Foreign Key supervisorStaffNo references Staff(staffNo)	PrivateOwner (ownerNo, fName, lName, address, telNo) Primary Key ownerNo
BusinessOwner (ownerNo, bName, bType, contactName, address, telNo) Primary Key ownerNo Alternate Key bName Alternate Key telNo	Client (clientNo, fName, lName, telNo, prefType, maxRent, staffNo) Primary Key clientNo Foreign Key staffNo references Staff(staffNo)
PropertyForRent (propertyNo, street, city, postcode, type, rooms, rent, ownerNo, staffNo) Primary Key propertyNo Foreign Key ownerNo references PrivateOwner(ownerNo) and BusinessOwner(ownerNo) Foreign Key staffNo references Staff(staffNo)	Viewing (clientNo, propertyNo, dateView, comment) Primary Key clientNo, propertyNo Foreign Key clientNo references Client(clientNo) Foreign Key propertyNo references PropertyForRent(propertyNo)
Lease (leaseNo, paymentMethod, depositPaid, rentStart, rentFinish, clientNo, propertyNo) Primary Key leaseNo Alternate Key propertyNo, rentStart Alternate Key clientNo, rentStart Foreign Key clientNo references Client(clientNo) Foreign Key propertyNo references PropertyForRent(propertyNo) Derived deposit (PropertyForRent.rent*2) Derived duration (rentFinish – rentStart)	



Summary – EER to Relational Mapping

- Strong entity types
- Attributes – Simple, composite, multi-valued
- Primary keys
- Relationships (1:1, 1:*, *:*, n-ary)
- Weak entity types
- Superclass/subclass relationships



Assignment 2 – part 1

- Map EER to relational model



Assignment 1 Discussion

- Note: way of submission:
 - **zip** all required files into one zip file (basically 2 files - one is your word-format report, the other is Visio or other-format EER). The file name **MUST** be identified by 4 sections: A1, your first name, your surname, and your student number, e.g., *A1SimonLee1234567.zip*
 - The specification
 - Sample requirements
 - Sample EER
 - Marking Scheme
 - Q?
 - (SQL Server installation, Visio usage...)



Lab This Week

- Map EER models to relational models
- SQL exercises on creating relational database schema, considering domain, default value, referential integrity constraints



Summary Qs

- What are the processes of logical DB design?
- Understand relation model – terminology & mapping from EER