



OLD

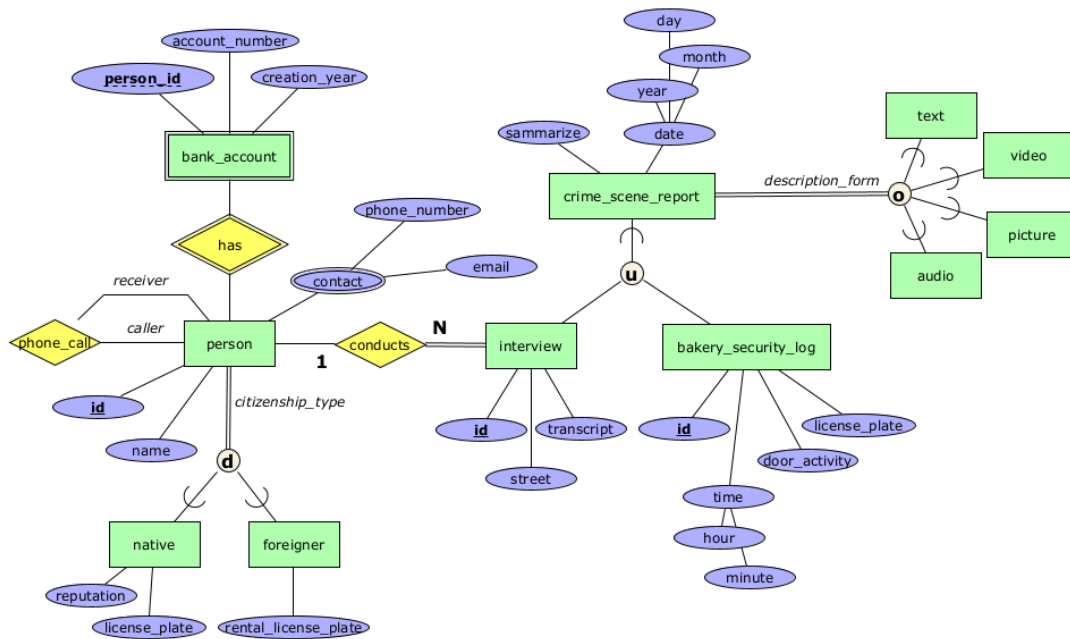

NEW

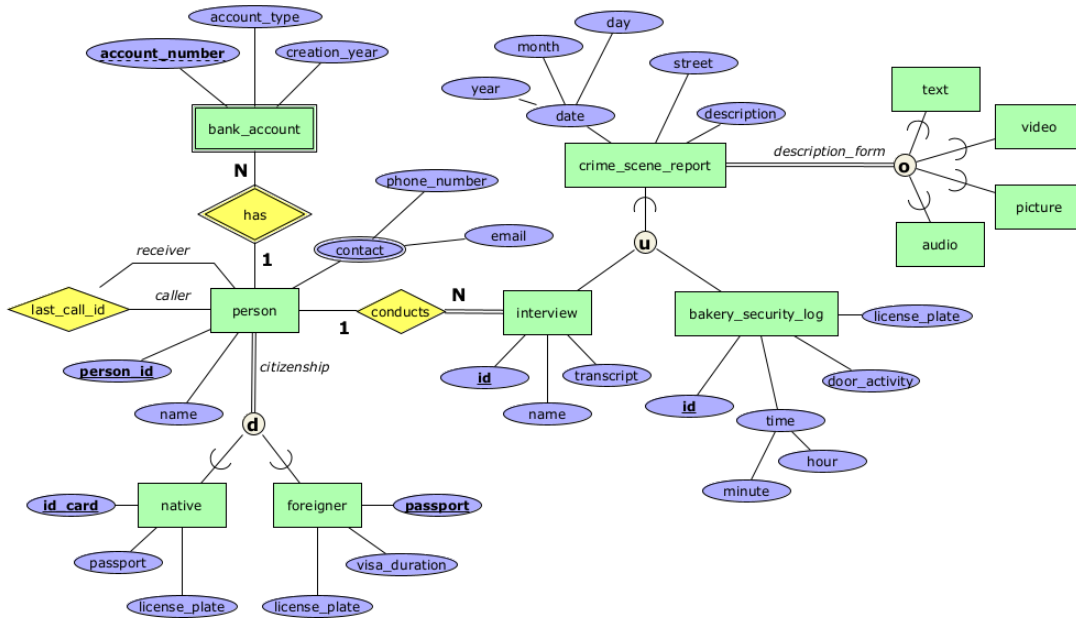

Change attribute names:

- person
 - a. id → person_id
 - b. citizenship_type → citizenship
- crime_scene_report
 - a. sammarize → description
- foreigner
 - a. Rental_licence_plate → licence_plate
- interview
 - a. street → name

(Simplified naming, easier to understand and read)

Change attribute:

- person
 - a. phone_call → last_call_id (Rethink Recursive and change it to a relationship that can be implemented in RDB)
- bank_account
 - a. person_id → account_number (Account_number is the PK of the weak entity, so it can be found in the person)
- crime_scene_report
 - a. + street (Increased to 3 attributes)
- native (Increased to 3 attributes)
 - a. + id_card
 - b. + passport
 - c. – reputation
- foreigner (Increased to 3 attributes)
 - a. + passport
 - b. + visa_duration