

`ccg-latex.sty` neither loads nor requires packages or fonts. Kerning control for typesetting CCG slashes, LF's colon, and for rule decorations in CCG derivations is in the pt unit, without the `\!` command. If you feel like changing it, just look for the `\kern` command. (This is because the eye-pleasing slash distance seems to be independent of font size, at least to my eyes.) All math is introduced by `\ensuremath` in `ccg-latex.sty`; there is no `$. . $` unless you introduce it manually.

To use, please include the following line somewhere in the  $\LaTeX$  preamble:

```
\usepackage{ccg-latex}
```

I demonstrate examples with increasingly high-level `ccg-latex` code, from lowest level `\cgex` to `\begin{ccg}` and `\begin{ccgg}`.

An Example with the `\cgex{n}{derivations}` command. The `\lf{}` is already in math mode. Lexical assumption lines are drawn by one command.

John	likes	Mary
$\overline{S/(S\backslash NP)}$	$\overline{(S\backslash NP_{3s})/NP}$	$\overline{(S\backslash NP)\backslash((S\backslash NP)/NP)}$
$\lambda p.p\text{john}'$	$\lambda x\lambda y.like'xy$	$\lambda p.p\text{mary}'$
$\xrightarrow{\hspace{10em}} S\backslash NP:\lambda y.like'mary'y$		
$\xrightarrow{\hspace{10em}} S:like'mary'john'$		

The `ccg-latex` code is:

```
\cgex{3}{John & likes & Mary\\
\cglines{3}\\
\cgf{S\fs(S\bs NP)} & \cgf{(S\bs\cgs{NP}{3s})\fs NP}
& \cgf{(S\bs NP)\bs((S\bs NP)\fs NP)}\\
\lf{\lambda p.p\,\,\so{john}}
& \lf{\lambda x\lambda y.\so{like}xy} & \lf{\lambda p.p\,\,\so{mary}}\\
& \cgline{2}{\cgba}\\
& \cgres{2}{S\bs NP \lf{\lambda y.\so{like}\so{mary}y}}\\
% note that \cgres is by default in \cgf font
\cgline{3}{\cgfa}\\
\cgres{3}{S \lf{\so{like}\so{mary}\so{john}}}
}
```

Same example with lower-level ccg-latex commands for lexical assumption lines, and with shorthanded type-raising notation using subscript and superscript. NB. they are typeset in math mode without needing  $\$$ .  $\$$ .

$$\begin{array}{c}
 \text{John} \qquad \text{likes} \qquad \text{Mary} \\
 \hline
 NP_{3s}^{\uparrow} \quad (S \backslash NP_{3s}) / NP \quad S \backslash (S / NP) \\
 : \lambda p.p \text{john}' \quad : \lambda x \lambda y. \text{like}' xy \quad : \lambda p.p \text{mary}' \\
 \hline
 S / NP : \lambda x. \text{like}' x \text{john}' \xrightarrow{\text{B}} \\
 \hline
 S : \text{like}' \text{mary}' \text{john}' \longrightarrow
 \end{array}$$

The ccg-latex code is:

```

\cgex{3}{John & likes & Mary\\
% uses the alias \cat rather than \cgf above--same result
\cgul & \cgul & \cgul\\
% manually repeats the columns for comparison with \cglines above
\cat{\cgss{NP}{3s}{\uparrow}}
& \cat{(S\bs\cgs{NP}{3s})\fs NP} & \cat{S\bs(S\fs NP)}\\
\lf{\lambda p.p\,\so{john}}
& \lf{\lambda x \lambda y.\so{like}xy} & \lf{\lambda p.p\,\so{mary}}\\
\cgline{2}{\cgfc}\\
\cgres{2}{S\fs NP \lf{\lambda x.\so{like}x\so{john}}}\
% note that \cgres is by default in \cgf font
\cgline{3}{\cgfa}\\
\cgres{3}{\cat{S} \lf{\so{like}\so{mary}\so{john}}}\
% using \cat inside \cgres is nae problem
}

```

An example with double slashes (for morphology, etc.)


$$\frac{\text{dismiss} \qquad \text{-ed}}{VP_{\text{inf}}/NP : \lambda x \lambda y. \text{dismiss}' xy \ ((S \backslash NP_{\text{agr}})/NP) \backslash \backslash (VP_{\text{inf}}/NP) : \lambda p \lambda x \lambda y. \text{past}'(Pxy)} \\ \frac{\qquad \qquad \qquad (S \backslash NP_{\text{agr}})/NP : \lambda x \lambda y. \text{past}'(\text{dismiss}' xy)}{<}$$

The ccc-latex code is below (using \cgf instead of \cat, which do the same, and native latex math for LF, which does the same as \lf{..}). NB. empty subscripts with no effect, if you keep changing the categories as I do).

The last \cgres is a painful reminder that if you put inline math in it using \$..\$, you will get a warning from L<sup>A</sup>T<sub>E</sub>X. Use \lf{..} or \bm{..} (for ‘bare math’) instead.

```
\cgex{3}{dismiss& -ed\\
\cglines{2}\\
\cgf{\cgs{VP}{inf}\fs\cgs{NP}{}}
$: \lambda x \lambda y. \so{dismiss}\,x\,y$&
\cgf{((\cgs{S}{})\bs\cgs{NP}{agr})\fs NP)\bss(\cgs{VP}{inf}\fs NP)}
$: \lambda p \lambda x \lambda y. \so{past}(P\,xy)$\\
\cglines{2}{\cgba}\\
\cgres{2}{\cgf{(\cgs{S}{})\bs\cgs{NP}{agr})\fs\cgs{NP}{}}
\lf{\lambda x \lambda y. \so{past}(\so{dismiss}\,x\,y)}}
}
```


Here is one example with features galore, from Emmon Bach:

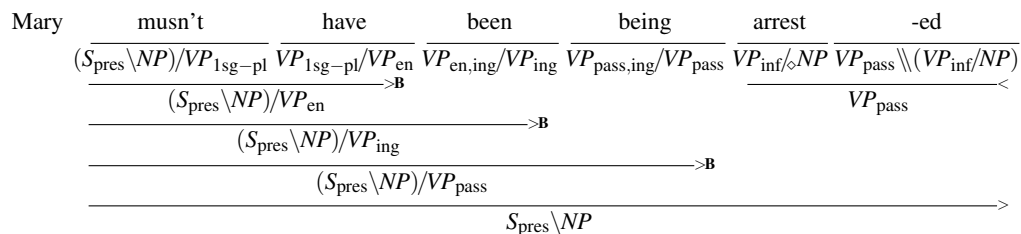

cgc-latex code:

```
{\footnotesize
Mary \cgex{6}{musn't & have & been & being & arrest & -ed\\
\cglines{6}\\
\cgf{(\cgs{S}{pres}\bs NP)\fs\cgs{VP}{1sg-pl}}
& \cgf{\cgs{VP}{1sg-pl}\fs\cgs{VP}{en}}
& \cgf{\cgs{VP}{en,ing}\fs\cgs{VP}{ing}}
& \cgf{\cgs{VP}{pass,ing}\fs\cgs{VP}{pass}}
& \cgf{\cgs{VP}{inf}\fds NP}
& \cgf{\cgs{VP}{pass}\lds(\cgs{VP}{inf}\fs NP)}\\
\cglines{2}{\cgfc} &&& \cglines{2}{\cgba}\\
\cgres{2}{(\cgs{S}{pres}\bs NP)\fs\cgs{VP}{en}}
&&& \cgres{2}{\cgs{VP}{pass}}\\
\cglines{3}{\cgfc}\\
\cgres{3}{(\cgs{S}{pres}\bs NP)\fs\cgs{VP}{ing}}\\
\cglines{4}{\cgfc}\\
\cgres{4}{(\cgs{S}{pres}\bs NP)\fs\cgs{VP}{pass}}\\
\cglines{6}{\cgfa}\\
\cgres{6}{\cgs{S}{pres}\bs NP}
}}
```

Same example with `\begin{ccg}{n}{data}{derivations}\end{ccg}`.  
No gloss line on top, and lexical assumption lines are drawn by default.

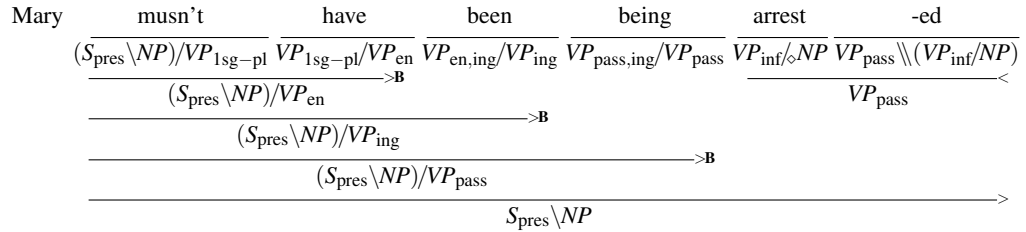

ccg-latex code:

```
{\footnotesize
Mary
\begin{ccg}{6}{musn't & have & been & being & arrest & -ed}
{
  \cgf{(\cgs{S}{pres}\bs NP)\fs\cgs{VP}{1sg-pl}}
  & \cgf{\cgs{VP}{1sg-pl}\fs\cgs{VP}{en}}
  & \cgf{\cgs{VP}{en,ing}\fs\cgs{VP}{ing}}
  & \cgf{\cgs{VP}{pass,ing}\fs\cgs{VP}{pass}}
  & \cgf{\cgs{VP}{inf}\fds NP}
  & \cgf{\cgs{VP}{pass}\lds(\cgs{VP}{inf}\fs NP)}\
  \cglines{2}{\cgfc} &&& \cglines{2}{\cgba}\
  \cgres{2}{(\cgs{S}{pres}\bs NP)\fs\cgs{VP}{en}}
  &&& \cgres{2}{\cgs{VP}{pass}}\
  \cglines{3}{\cgfc}\
  \cgres{3}{(\cgs{S}{pres}\bs NP)\fs\cgs{VP}{ing}}\
  \cglines{4}{\cgfc}\
  \cgres{4}{(\cgs{S}{pres}\bs NP)\fs\cgs{VP}{pass}}\
  \cglines{6}{\cgfa}\
  \cgres{6}{\cgs{S}{pres}\bs NP}
}
\end{ccg}
}
```

Another example, to show glossing in the beginning. The end gloss is typeset by `\mc`, for multi-column, centered.

It uses `\begin{ccgg}[n]{data}{gloss}{derivations}\end{ccgg}`.

ver-dir give-caus	-t -caus	-ti. -past
$\frac{VP_{\text{inf}} \backslash NP_{\text{dat}} \backslash NP_{\text{dat}} \backslash NP_{\text{acc}}}{:\lambda x \lambda y \lambda z. \text{give}'_{yxz}}$	$\frac{(S \backslash NP_{\text{nom}} \backslash NP_{\text{case}}) \backslash VP_{\text{inf}}}{:\lambda p \lambda x \lambda y. \text{cause}'(px)y}$	
$\frac{S \backslash NP_{\text{nom}} \backslash NP_{\text{dat}} \backslash NP_{\text{dat}} \backslash NP_{\text{acc}}}{:\lambda x_1 \lambda x_2 \lambda x_3 \lambda x_4 \lambda x_5. \text{cause}'(\text{cause}'(\text{give}' x_1 x_2 x_3) x_4) x_5}$		
‘made to let give’, from Turkish		

ccg-latex code:

```
\begin{ccgg}[3]{ver-dir & -t & -ti.}{give{-caus} & {-caus} & {-past}}
{
\cgf{\cgs{VP}{inf}\bs\cgs{NP}{dat}\bs\cgs{NP}{dat}\bs\cgs{NP}{acc}}
& \cgf{(S\bs\cgs{NP}{nom}\bs\cgs{NP}{case})\bs\cgs{VP}{inf}}\
\lf{\lambda x\lambda y\lambda z.\so{give}_{yxz}}
& \lf{\lambda p\lambda x\lambda y.\so{cause}(px)y}\
\cglines{2}{\cgb{3}}\
\cgres{2}{S\bs\cgs{NP}{nom}\bs\cgs{NP}{dat}\bs\cgs{NP}{dat}
\bs\cgs{NP}{dat}\bs\cgs{NP}{acc}}\
\cgres{2}{\lf{\lambda x_1\lambda x_2\lambda x_3\lambda x_4\lambda x_5.
\so{cause}(\so{cause}(\so{give}_{x_1x_2x_3})x_4)x_5}}\[1ex]
\mc{3}{‘made to let give’, from Turkish}
}
\end{ccgg}
```

An example with slash modalities and centered non-derivability indicator (\*):

\*I will give flowers my very heavy friends.

$$\frac{\frac{\frac{\text{I}}{VP/NP} \text{ will}}{\diamond NP} \text{ give} \frac{\text{flowers}}{VP \setminus (VP/NP)}}{\ast < \mathbf{B}_\times} \frac{\text{my very heavy friends.}}{VP \setminus (VP/NP)}$$

Code:

```
\begin{ccg}{4}{*I~will& give& flowers& my~very~heavy~friends.}
{
&\cat{(VP\fs NP)\fds NP}&\cat{VP\bs(VP\fs NP)}&\cat{VP\bs(VP\fs NP)}\\
&\badline{2}{\cgbx}
}
\end{ccg}
```

Some examples to show slash distancing by pt unit for categories in subscript:

John [should]<sub>(S\NP)//IV</sub> walk the dog.

John [wants]<sub>(S\NP)/VP</sub> to walk the dog.

Mary [believes]<sub>(S\NP)/S</sub> that John walked the dog.

And some big ones:

$(S\backslash_{\times}NP)/_{\diamond}IV$

$(S\backslash\backslash NP)/VP$

$(S\backslash NP)//S$

and bigger ones:

$(S\backslash_{\times}NP)/_{\diamond}IV$

$(S\backslash\backslash NP)/VP$

$(S\backslash NP)//S$

Here is the native L<sup>A</sup>T<sub>E</sub>X math rendering of CCG categories to compare spacing in various sizes:

$(S\backslash_{\times}NP)/_{\diamond}IV$

$(S\backslash\backslash NP)/VP$

$(S\backslash NP)//S$

John [should]<sub>(S\NP)//IV</sub> walk the dog.

John [wants]<sub>(S\NP)/VP</sub> to walk the dog.

Mary [believes]<sub>(S\NP)/S</sub> that John walked the dog.



Here's the native math code avoiding all `cgg-latex.sty`, which generated the typesetting:

```
{\Large
$(S\backslash\_times NP)/\_{\diamond}IV$\medskip

$(S\backslash\backslash NP)/VP$\medskip

$(S\backslash NP)// S$\bigskip
```

John [should] $_{(S\backslash NP)//IV}$  walk the dog.

John [wants] $_{(S\backslash\backslash NP)/VP}$  to walk the dog.

Mary [believes] $_{(S\backslash NP)/\_{\diamond}S}$  that John walked the dog.

$$(S\backslash_{\times}NP)/_{\diamond}IV$$

$$(S\backslash\backslash NP)/VP$$

$$(S\backslash NP)//S$$

John [should] $_{(S\backslash NP)//IV}$  walk the dog.

John [wants] $_{(S\backslash\backslash NP)/VP}$  to walk the dog.

Mary [believes] $_{(S\backslash NP)/_{\diamond}S}$  that John walked the dog.