

# Rails 4.2 Quickly

Bala Paranj

## About the Author

Bala Paranj has a masters degree in Electrical Engineering from The Wichita State University. He has been working in the IT industry since 1996. He started his career as Technical Support Engineer and became a Web Developer using Perl, Java and Ruby. He has consulted for companies in USA, Australia and Jamaica in telecommunication, financial, electronic design automation and other domain.

He has professionally worked as a developer using TDD and pair programming for startups. He is the founder of Silicon Valley Ruby Meetup. He has been organizing Ruby, Rails and TDD related events since 2007. He has taught TDD Bootcamps and TDD tutorials for Silicon Valley Ruby Meetup members for more than 3 years. He has spoken at Silicon Valley Ruby Meetup, San Francisco Ruby Meetup and Silicon Valley Code Camp.

He published an article in JavaWorld in 1999 on Command Pattern. Java Tip 68: Learn how to implement the Command pattern in Java. He is also the content creator for the Whizlabs OOAD test simulator. This is the exam simulator for students preparing for IBM 486 Object-Oriented Analysis and Design with UML. He is the author of self-published book Rails 4 Quickly and Test Driven Development in Ruby - A Gentle Introduction for Beginners Amazon Kindle book.

You can reach him at [bala.paranj@zephro.com](mailto:bala.paranj@zephro.com) with any feedback.

## About Reader

This book assumes that you have already installed Ruby 2.2, Rails 4.2 and your favorite IDE such as Sublime, RubyMine, Textmate etc. The reader must already have a basic understanding of Ruby language. This is a short book. The objective is to bring you up to speed in Rails 4.2 quickly. Hence the title Rails 4.2 Quickly. This book is written for beginners who want to learn the fundamentals. It will give you a solid foundation for you to build upon.

The book's main focus is on Rails. You will not find any discussion of Cucumber, Git, Heroku, RSpec, FactoryGirl or any other irrelevant topics. It provides a practical and hands-on approach to learning Rails. You learn by doing so you will benefit the most by following the instructions as you read each chapter.

## Acknowledgments

This book is the result of teaching Rails tutorials at the Silicon Valley Ruby meetup. The members of Silicon Valley Ruby meetup provided me early feedback on every chapter. This book is also an experiment in applying ‘Lean Startup’ principles to self publishing. The advice that was very powerful to me was ‘Do not develop a product in a vacuum.’

I owe debts to the creator of Ruby, Matz for creating such a beautiful language; as well as the Ruby community for creating useful frameworks and gems to make a developer’s life easy. I hope this book makes your learning process a little easier.

## How to Read this Book

This step-by-step tutorial was written as a hands-on guide to Rails. You must read and follow the instructions to work through the application we will be developing. It is written to be read sequentially. Learning by doing is the best way to understand something new. So, make an attempt to do the exercises. This will make your brain more receptive to absorbing the concepts.

## Software Versions Used

Ruby Gems : 2.4.5 Ruby : 2.2 Rails : 4.2

## Source Code

Source code is available from bitbucket Git repo : <https://bitbucket.org/bparanj/rails42blog>

## Table of Contents

1. Running the Server
2. Hello Rails
3. Model
4. Model View Controller
5. View to Model
6. Update Article
7. Show Article
8. Delete Article
9. View Duplication
10. Relationships
11. Delete Comment
12. Restricting Operations

## Appendix

- A. Self Learning

# CHAPTER 1

## Running the Server

### Objective

- To run your rails application on your machine and check your application's environment.

### Steps

#### Step 1

Check the versions of installed ruby, rails and ruby gems by running the following commands in the terminal:

```
$ ruby -v
ruby 2.2.0p0 (2014-12-25 revision 49005) [x86_64-darwin11.0]
```

```
$ rails -v
Rails 4.2.0
```

```
$ gem env
RUBYGEMS VERSION: 2.4.5
```

#### Step 2

Change directory to where you want to work on new projects.

```
$ cd projects
```

#### Step 3

Create a new Rails project called blog by running the following command.

```
$ rails new blog
```

#### Step 4

Open a terminal and change directory to the blog project.

```
$ cd blog
```

#### Step 5


Open the blog project in your favorite IDE. For textmate :

```
$ mate .
```

#### Step 6

Run the rails server:

```
$ rails s
```

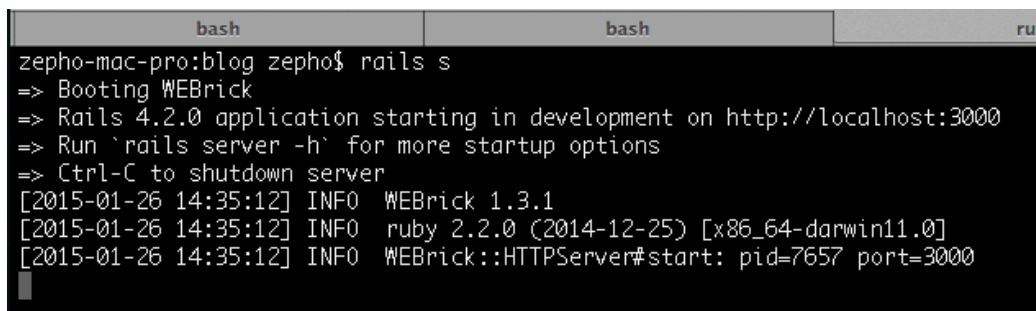A screenshot of a terminal window with a dark background and light text. The window has three tabs at the top labeled 'bash', 'bash', and 'rub'. The terminal content shows the command 'rails s' being executed in a directory named 'zephho-mac-pro:blog'. The output includes several informational messages: 'Bootling WEBrick', 'Rails 4.2.0 application starting in development on http://localhost:3000', 'Run `rails server -h` for more startup options', 'Ctrl-C to shutdown server', and three log entries from WEBrick 1.3.1 indicating the start of the HTTP server on pid=7657 and port=3000.

```
zephho-mac-pro:blog zephho$ rails s
=> Bootling WEBrick
=> Rails 4.2.0 application starting in development on http://localhost:3000
=> Run `rails server -h` for more startup options
=> Ctrl-C to shutdown server
[2015-01-26 14:35:12] INFO  WEBrick 1.3.1
[2015-01-26 14:35:12] INFO  ruby 2.2.0 (2014-12-25) [x86_64-darwin11.0]
[2015-01-26 14:35:12] INFO  WEBrick::HTTPServer#start: pid=7657 port=3000
```

Figure 1: Rails Server



## Step 7

Open a browser window and enter `http://localhost:3000`

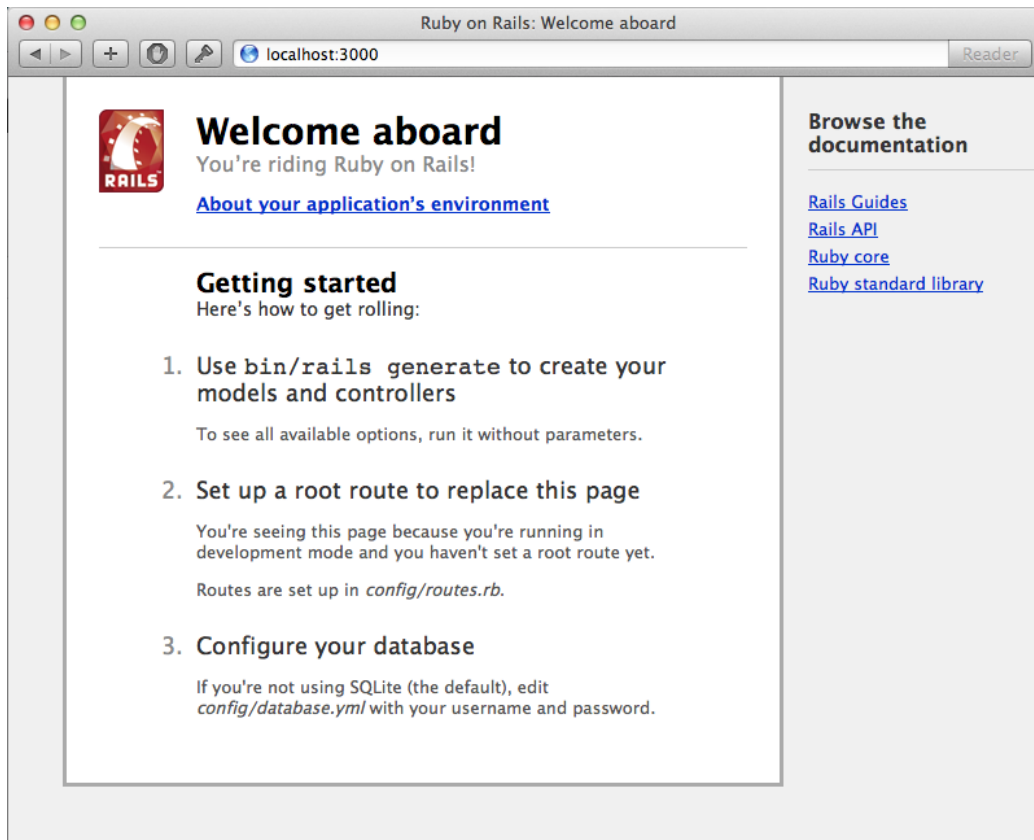


Figure 2: Welcome Aboard

Welcome page displayed as the home page.

## Step 8

You can shutdown your server by pressing Control+C.

## Step 9

Click on the ‘About’ link and check the versions of software installed. If the background of the about section is yellow, installation is fine. If it is red then something is wrong with the installation.


Details about your environment displayed in the browser.

## Explanation

The rails generator automatically runs the Bundler command `bundle` to install your application dependencies by reading the Gemfile. The Gemfile contains all the gems that your application needs. `rails s` (s is a short-cut for server) runs your server on your machine on port 3000.

## Summary

In this lesson you learned how to run the server locally. We also saw how to check if everything is installed properly on our machine. In the next lesson you will learn how to create a home page for your web application.

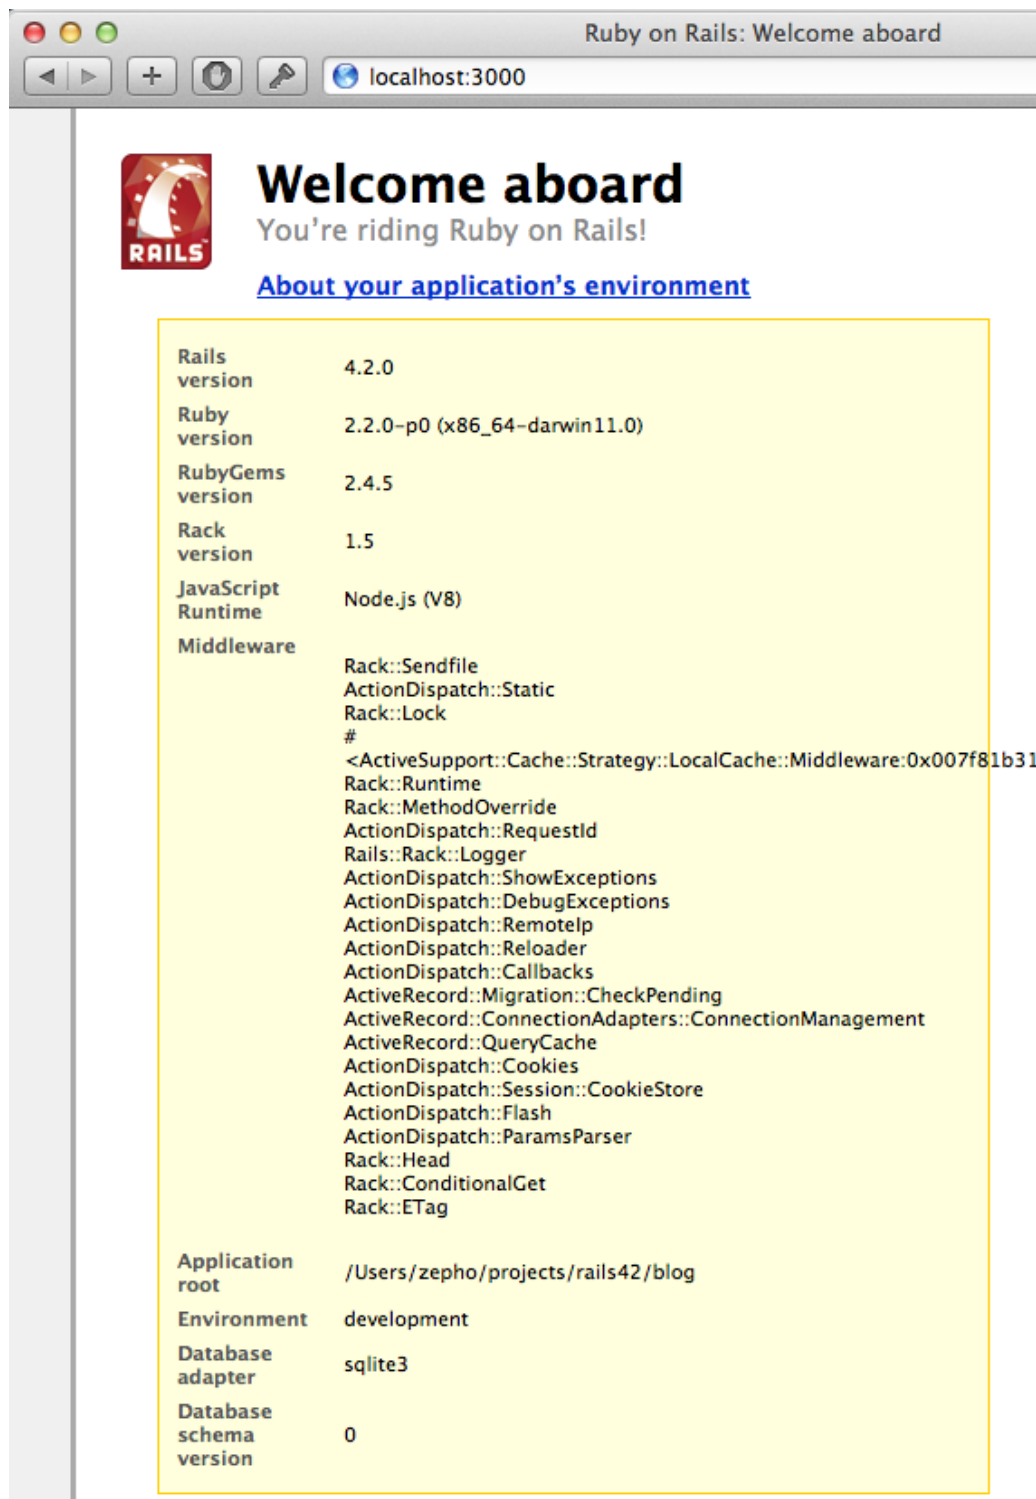

12  
Figure 3: About Environment

## CHAPTER 2

### Hello Rails

#### Objective

- To create a home page for your web application.

#### Steps

##### Step 1

Open the config/routes.rb file in your IDE, routes.rb defines the routes that is installed on your web application. Rails will recognize the routes you define in this configuration file.

##### Step 2

Look for the line :

```
# root 'welcome#index'
```

##### Step 3

Uncomment that line by removing # (the pound sign).

```
root 'welcome#index'
```

The method root() takes a string parameter. In this case it maps the home page of your site to welcome controller (class), index action (method).

## Step 4

Go to the terminal and change directory to the blog project and run:

```
rake routes
```



```
bash
zepho-mac-pro:blog zepho$ rake routes
Prefix Verb URI Pattern Controller#Action
root GET / welcome#index
zepho-mac-pro:blog zepho$
```

Figure 4: Rake Output

The output of this command shows you the installed routes. Rails will be able to recognize the GET request for welcome page.

The output has four columns, namely Prefix, Verb, URI Pattern and Controller#Action.

Prefix is the name of the helper that you can use in your view and controller to take the user to a given view or controller. In this case it is `root_path` or `root_url` that is mapped to your home page.

Verb is the Http Verb such as GET, POST, PUT, DELETE etc.

URI Pattern is what you see in the browser URL. In this case, it is `http://localhost:3000`

## Step 5

Go to the browser and reload the page : `http://localhost:3000`

We see the uninitialized constant `WelcomeController` error. This happens because we don't have a welcome controller to handle the incoming GET request for the home page.

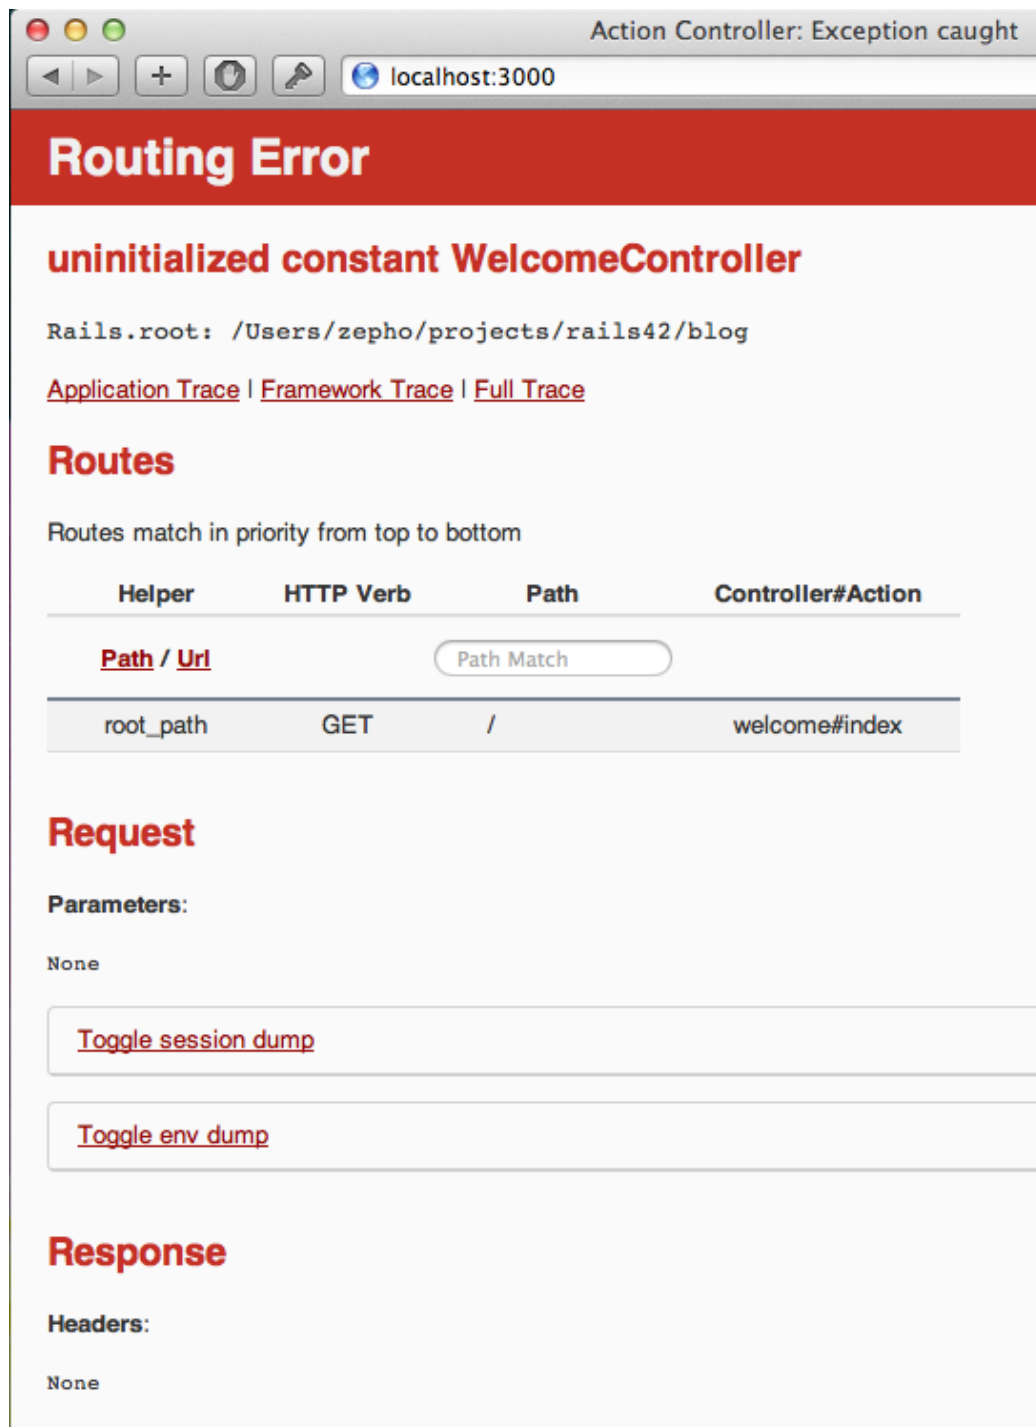


Figure 5: Create Controller




## Step 6

You can either open a new terminal and go to the blog project directory or open a new tab in your terminal and go to the blog project directory.

## Step 7

In this new tab or the terminal, go the blog project directory and type:

```
$ rails g controller welcome index
```

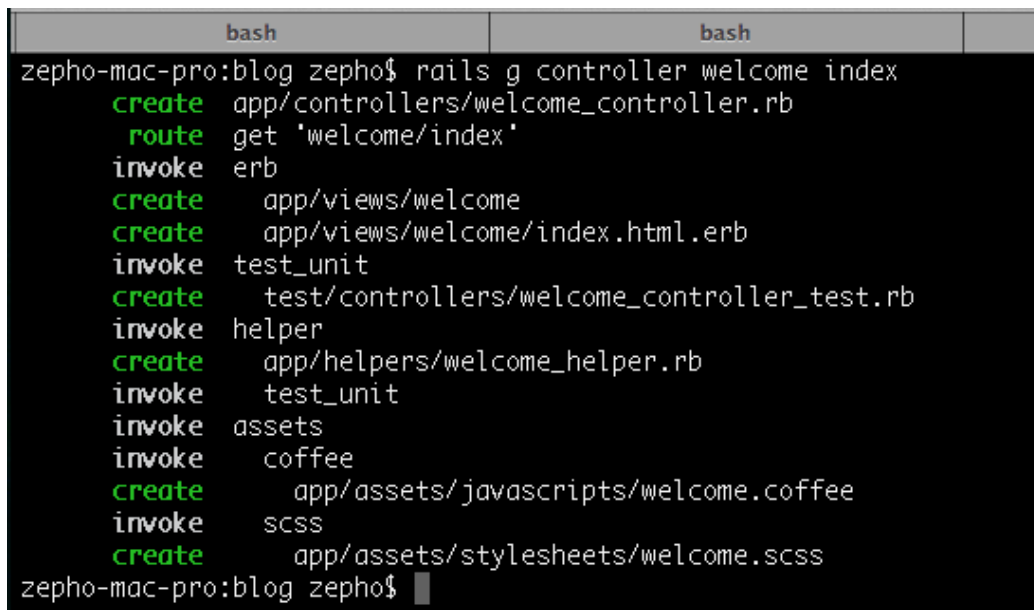A terminal window with a dark background and light text. The prompt is 'zepho-mac-pro:blog zepho\$'. The command 'rails g controller welcome index' has been entered. The output shows a series of actions performed by Rails: 'create' for 'app/controllers/welcome\_controller.rb', 'route' for 'get \'welcome/index\'', 'invoke' for 'erb', 'create' for 'app/views/welcome', 'create' for 'app/views/welcome/index.html.erb', 'invoke' for 'test\_unit', 'create' for 'test/controllers/welcome\_controller\_test.rb', 'invoke' for 'helper', 'create' for 'app/helpers/welcome\_helper.rb', 'invoke' for 'test\_unit', 'invoke' for 'assets', 'invoke' for 'coffee', 'create' for 'app/assets/javascripts/welcome.coffee', 'invoke' for 'scss', and 'create' for 'app/assets/stylesheets/welcome.scss'. The prompt returns to 'zepho-mac-pro:blog zepho\$' with a cursor.

```
zepho-mac-pro:blog zepho$ rails g controller welcome index
create  app/controllers/welcome_controller.rb
route   get 'welcome/index'
invoke  erb
create  app/views/welcome
create  app/views/welcome/index.html.erb
invoke  test_unit
create  test/controllers/welcome_controller_test.rb
invoke  helper
create  app/helpers/welcome_helper.rb
invoke  test_unit
invoke  assets
invoke  coffee
create  app/assets/javascripts/welcome.coffee
invoke  scss
create  app/assets/stylesheets/welcome.scss
zepho-mac-pro:blog zepho$
```

Figure 6: Create Controller

rails command takes the arguments g for generate, then the controller name and the action. In this case the controller name is welcome and the action name is index.

## Step 8

Reload the web browser again.



Figure 7: Welcome Page

You will now see the above page.

## Step 9

Go to `app/views/welcome/index.html.erb` and change it to 'Hello Rails' like this:

```
<h1>Hello Rails</h1>
```

Save the file.

You can embed ruby in `.html.erb` files. The `.erb` stands for embedded Ruby. In this case we have html only. We will see how to embed ruby in views in the next lesson.

## Step 10

Reload the browser.

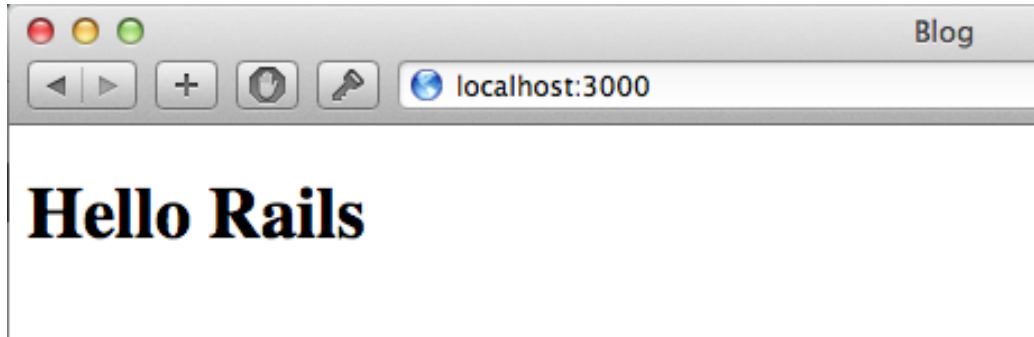


Figure 8: Hello Rails

Now you will see 'Hello Rails' as the home page content.

## Step 11

Open the `welcome_controller.rb` in `app/controllers` directory and look at the `index` action.

## Step 12

Look at the terminal where you have the rails server running, you will see the request shown in the following image:

```
Started GET "/" for ::1 at 2015-01-26 15:04:07 -0800
Processing by WelcomeController#index as HTML
  Rendered welcome/index.html.erb within layouts/application (0.5ms)
Completed 200 OK in 71ms (Views: 69.7ms | ActiveRecord: 0.0ms)
```

Figure 9: Server Output

You can see that the browser made a GET request for the resource `/` which is the home page of your site. The request was processed by the server

where Rails recognized the request and it routed the request to the welcome controller, index action. Since we did not do anything in the index action, Rails looks for the view that has the same name as the action and renders that view. In this case, the view that corresponds to the index action is `app/views/welcome/index.html.erb`.

### **Step 13**

Open a new terminal or a new tab and go to Rails console by running:

```
$ rails c
```

from the blog project directory.

## Step 14

In Rails console run:

```
app.get '/'
```

Here we are simulating the browser GET request for the resource '/', which is your home page.

" data-bbox="178 336 785 512"/>

```
Last login: Mon Jan 26 14:58:22 on ttys004
zepho-mac-pro:blog zepho$ rails c
Loading development environment (Rails 4.2.0)
2.2.0 :001 > app.get '/'

Started GET "/" for 127.0.0.1 at 2015-01-26 15:09:16 -0800
Processing by WelcomeController#index as HTML
  Rendered welcome/index.html.erb within layouts/application (1.7ms)
Completed 200 OK in 153ms (Views: 129.2ms | ActiveRecord: 0.0ms)
=> 200
2.2.0 :002 > █
```

Figure 10: Simulating Browser GET Request

You can see the http status code is 200. You can also see which view was rendered for this request.

## Exercise

Can you go to <http://localhost:3000/welcome/index> and explain why you see the contents shown in the page?

Before you go to the next page and read the answer, make an attempt to answer this question.

## Answer

You will see the same ‘Hello Rails’ page. Because if you check the rails server log you can see it made a request : GET ‘/welcome/index’ and if you look at the config/routes.rb file, you see :

```
get "welcome/index"
```

This definition is used by the Rails router to handle this request. It knows the URI pattern of the format ‘welcome/index’ with http verb GET must be handled by the welcome controller, index action.

```
Started GET "/welcome/index" for ::1 at 2015-01-26 15:11:47 -0800
Processing by WelcomeController#index as HTML
  Rendered welcome/index.html.erb within layouts/application (0.1ms)
Completed 200 OK in 60ms (Views: 59.5ms | ActiveRecord: 0.0ms)
```

Figure 11: GET Request for Home Page

## Step 15

Delete the get “welcome/index” line in the config/routes.rb file. Reload the page, by entering this URL in the browser : `http://localhost:3000/welcome/index`



Figure 12: Welcome Index

You will now see the error page. Since we no longer need this route, we can ignore this error message because the home page will be accessed by typing just the domain name of your site like this: `www.mysite.com`



## Summary

In this lesson we wrote a simple *Hello Rails* program. We saw how the router recognizes the browser request and how the view and controller work in Rails to handle it. We have seen just the View and Controller part of MVC framework. We will see how the model fits in the MVC framework in the next lesson.

## CHAPTER 3

### Model

#### Objective

- To learn the model part M of the MVC framework

#### Context

We are going to create an web application that will have articles to read, create, list, update and delete.

#### Steps

##### Step 1

In Rails, model is a persistent object that can also contain business logic. Model is the Object Relational Mapping (ORM) layer that uses ActiveRecord design pattern. Open config/routes.rb file and add :

```
resources :articles
```

Save the file. Your file should like this :

```
Blog::Application.routes.draw do
  resources :articles

  root 'welcome#index'
end
```

What is a resource? Resource can represent any concept. For instance if you read the documentation for [Twitter API](#), you will see that Timeline is a resource. It is defined in the documentation as collections of Tweets, ordered with the most recent first.

There may not be a one-to-one correspondence between a resource and a database table. In our case we have one-to-one correspondence between the database table articles and the article resource.

We have a plural resource, so we will have index page that displays a list of all the articles in our case. Singular resource can be used when you don't need index action, for instance if a customer has a billing profile then from the perspective of a customer you can use a singular resource for billing\_profile. From an admin perspective you could have a plural resource to manage billing profiles of customers (most likely using admin namespace in the routes).

## Step 2

Go to the blog directory in the terminal and run:

```
$ rake routes
```

bash				bash	
zepho-mac-pro:blog zepho\$ rake routes					
	Prefix	Verb	URI Pattern	Controller#Action	
	articles	GET	/articles(.:format)	articles#index	
		POST	/articles(.:format)	articles#create	
	new_article	GET	/articles/new(.:format)	articles#new	
	edit_article	GET	/articles/:id/edit(.:format)	articles#edit	
	article	GET	/articles/:id(.:format)	articles#show	
		PATCH	/articles/:id(.:format)	articles#update	
		PUT	/articles/:id(.:format)	articles#update	
		DELETE	/articles/:id(.:format)	articles#destroy	
	root	GET	/	welcome#index	

Figure 13: Installed Routes

The output shows that defining the articles resource in the routes.rb gives us routing for :

Action	Purpose
create	creating a new article
update	updating a given article
delete	deleting a given article
show	displaying a given article
index	displaying a list of articles

Since we have plural resources in the routes.rb, we get the index action. If you had used a singular resource :

```
resource :article
```

then you will not have a routing for index action. Based on the requirements you will choose a singular or plural resources for your application.

### Step 3

In the previous lesson we saw how the controller and view work together. Now let's look at the model. Create an `active_record` object by running the following command:

```
$ rails g model article title:string description:text
```



```

bash      bash      rub
zepho-mac-pro:blog zepho$ rails g model article title:string description:text
  invoke  active_record
  create  db/migrate/20150127005343_create_articles.rb
  create  app/models/article.rb
  invoke  test_unit
  create  test/models/article_test.rb
  create  test/fixtures/articles.yml

```

Figure 14: Article Model

In this command the rails generator generates a model by the name of article. The `active_record` class name is in the singular form, the database will be plural form called as articles. The articles table will have a title column of type string and description column of type text.

## Step 4

Open the file `db/migrate/xyz_create_articles.rb` file. The `xyz` will be a timestamp and it will differ based on when you ran the command. The class `CreateArticles` is a subclass of `ActiveRecord::Migration` class.


There is a `change()` method in the migration file. Inside the `change()` method there is `create_table()` method that takes the name of the table to create and also the columns and its data type.

In our case we are creating the `articles` table, `t.timestamps` gives `created_at` and `updated_at` timestamps that tracks when a given record was created and updated respectively. By convention the primary key of the table is `id`. So you don't see it explicitly in the migration file.

## Step 5

Go to the `blog` directory in the terminal and run :

```
$ rake db:migrate
```

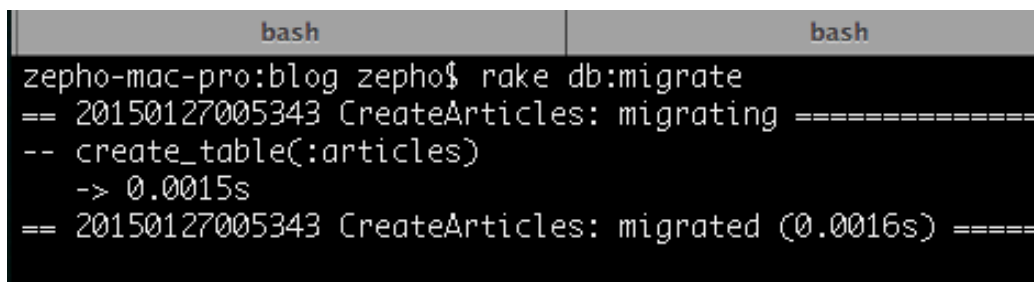

```
bash bash
zepho-mac-pro:blog zepho$ rake db:migrate
== 20150127005343 CreateArticles: migrating =====
-- create_table(:articles)
   -> 0.0015s
== 20150127005343 CreateArticles: migrated (0.0016s) =====
```

Figure 15: Create Table

This will create the `articles` table.

## Step 6

In the blog directory run:


```
$ rails db
```

This will drop you into the database console. You can run SQL commands to query the development database.

## Step 7

In the database console run:

```
select count(*) from articles;
```

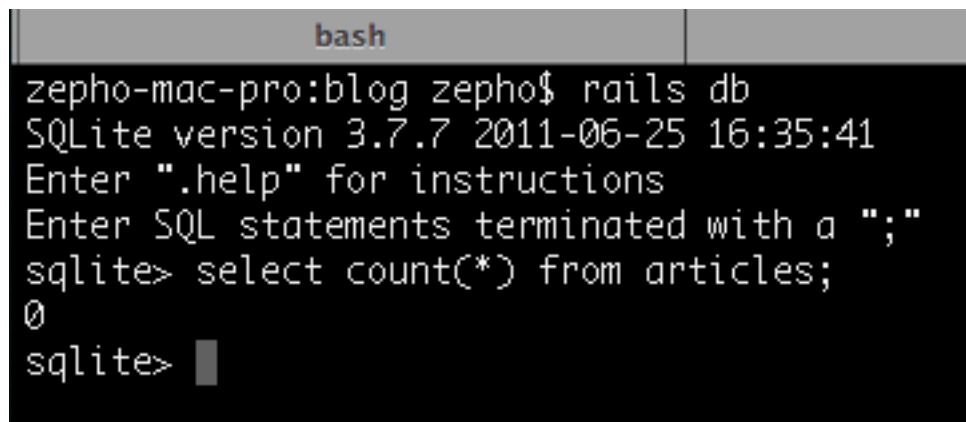

```
bash
zepho-mac-pro:blog zepho$ rails db
SQLite version 3.7.7 2011-06-25 16:35:41
Enter ".help" for instructions
Enter SQL statements terminated with a ";"
sqlite> select count(*) from articles;
0
sqlite> █
```

Figure 16: Rails Db Console

You can see from the output there are no records in the database.

## Step 8

Open another tab in the terminal and go to the blog directory. Run the following command:

```
$ rails c
```


c is the alias for console. This will take you to rails console where you can execute Ruby code and experiment to learn Rails.

## Step 9

Type :

```
Article.count
```

in the rails console.

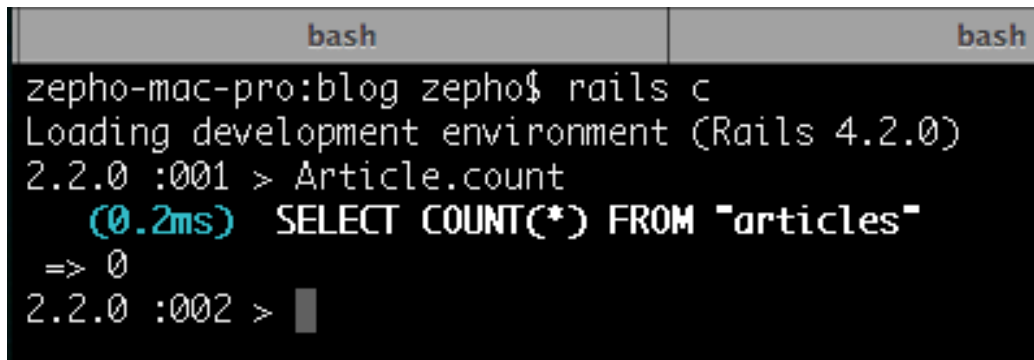

```
bash
zepho-mac-pro:blog zepho$ rails c
Loading development environment (Rails 4.2.0)
2.2.0 :001 > Article.count
(0.2ms) SELECT COUNT(*) FROM "articles"
=> 0
2.2.0 :002 > █
```

Figure 17: Rails Console

You can see that ActiveRecord generated the SQL query we used in Step 7. The count is 0. Let's create a new record in the articles table.

## Step 10

Type :

```
Article.create(title: 'test', description: 'first row')
```



```
2.2.0 :002 > Article.create(title: 'test', description: 'first row')
(0.2ms) begin transaction
SQL (0.5ms) INSERT INTO "articles" ("title", "description", "created_at", "updated_at") VALUES (?, ?, ?, ?) [["title", "test"], ["description", "first row"], ["created_at", "2015-01-27 01:10:35.836769"], ["updated_at", "2015-01-27 01:10:35.836769"]]
(35.2ms) commit transaction
=> #<Article id: 1, title: "test", description: "first row", created_at: "2015-01-27 01:10:35", updated_at: "2015-01-27 01:10:35">
2.2.0 :003 >
```

Figure 18: Create a Record

The create class method inherited from ActiveRecord by Article creates a row in the database. You can see the ActiveRecord generated insert SQL query in the output.

## Exercise 1

Check the number of articles count by using the database console or the rails console.

## Step 11

Let's create another record by running the following command in the rails console:

```
$ article = Article.new(title: 'record two', description: 'second row')
```

Now it's time for the second exercise.

## Exercise 2

Check the number of articles count by using the database console or the rails console. How many rows do you see in the articles table? Why?



```
2.2.0 :003 > article = Article.new(title: 'record two', description: 'second row')
=> #<Article id: nil, title: "record two", description: "second row", created_at: nil,
updated_at: nil>
2.2.0 :004 > █
```

Figure 19: Article Instance

The reason you see only one record in the database is that creating an instance of Article does not create a record in the database. The article instance in this case is still in memory.

ruby	sqlite3	ruby
<pre>2.0.0p247 :007 &gt; article = Article.new(title: 'another record', description: 'different way to create row') =&gt; #&lt;Article id: nil, title: "another record", description: "different way to create row", created_at: nil, updated_at: nil&gt; 2.0.0p247 :008 &gt; Article.count (0.6ms) SELECT COUNT(*) FROM "articles" =&gt; 1 2.0.0p247 :009 &gt; █</pre>		

Figure 20: Article Count

In order to save this instance to the articles table, you need to call the save method like this:

```
$ article.save
```

```
2.2.0 :005 > article.save
(0.2ms) begin transaction
SQL (0.4ms) INSERT INTO "articles" ("title", "description", "created_at", "updated_at")
VALUES (?, ?, ?, ?) [["title", "record two"], ["description", "second row"], ["creat
ed_at", "2015-01-27 01:14:20.102718"], ["updated_at", "2015-01-27 01:14:20.102718"]]
(39.1ms) commit transaction
=> true
```

Figure 21: Saving a Record

Now query the articles table to get the number of records.

## Summary

In this chapter we focused on learning the model part M of the MVC framework. We experimented in the rails console and database console to create

records in the database. In the next lesson we will display all the records in articles table on the browser. We will also see how the different parts of the MVC interact to create database driven dynamic web application.

# CHAPTER 4

## Model View Controller

### Objectives

- Learn how the View communicates with the Controller
- Learn how Controller interacts with the Model and how Controller picks the next View to show to the user.

### Context

Router knows which controller can handle the incoming request. Controller is like a traffic cop who controls the flow of traffic on busy streets. Controller has the knowledge of which model can get the job done, so it delegates the work to the appropriate model object. Controller also knows which view to display to the user after the incoming request has been processed.

Views can be in any format such as XML, CSV, Html, JSON etc. Html is displayed on the browser, JSON and other formats can be consumed by any client such as mobile devices, WebService client etc.

Why MVC architecture? The advantage of MVC is the clean separation of View from the Model and Controller. It allows you to allocate work to teams according to their strengths. The View layer can be developed in parallel by the front-end developers without waiting for the Model and Controller parts to be completed by the back-end developers.

If we agree on the contract between the front-end and back-end by defining the data representation exchanged between the client and server then we can develop in parallel.

### Steps

#### Step 1

Let's modify the existing static page in `app/views/welcome/index.html.erb` to use a view helper for hyperlink:

`<%= link_to 'My Blog', ? %>`

The tag `<%=` should be used whenever you want the generated output to be shown in the browser. If it is not to be shown to the browser and it is only for dynamic embedding of Ruby code then you should use `<% %>` tags.

The `link_to(text, url)` method is a view helper that will generate an html hyperlink that users can click to navigate to a web page. In this case we want the user to go to articles controller, index page. Because we want to get all the articles from the database and display them in the `app/views/articles/index.html.erb` page.

So the question is what should replace the `?` in the second parameter to the `link_to` view helper? Since we know we need to go to articles controller, index action, let's use the output of `rake routes` to find the name of the view\_helper we can use.

bash	bash	ruby	bash
zepho-mac-pro:blog	zepho\$ rake routes		
Prefix Verb	URI Pattern	Controller#Action	
articles GET	/articles(:format)	articles#index	
	POST /articles(:format)	articles#create	
new_article GET	/articles/new(:format)	articles#new	
edit_article GET	/articles/:id/edit(:format)	articles#edit	
article GET	/articles/:id(:format)	articles#show	
	PATCH /articles/:id(:format)	articles#update	
	PUT /articles/:id(:format)	articles#update	
	DELETE /articles/:id(:format)	articles#destroy	
root GET	/	welcome#index	

Figure 22: Rake Routes

As you can see from the output, for `articles#index` the Prefix value is `articles`. So we can use either `articles_path` (relative url, which would be `/articles`) or `articles_url` (absolute url, which would be `www.example.com/articles`).

## Step 2

Change the link as follows :

```
<%= link_to 'My Blog', articles_path %>
```

## Step 3

Go to the home page by going to the `http://localhost:3000` in the browser.



Figure 23: My Blog

What do you see in the home page?

You will see the hyper link in the home page.

#### Step 4

Right click and do 'View Page Source' in Chrome or 'Show Page Source' in Safari.



```
1 <!DOCTYPE html>
2 <html>
3 <head>
4   <title>Blog</title>
5   <link data-turbolinks-track="true" href="/assets/application.css?body=1" media="all"
6     rel="stylesheet" />
7   <link data-turbolinks-track="true" href="/assets/welcome.css?body=1" media="all"
8     rel="stylesheet" />
9   <script data-turbolinks-track="true" src="/assets/jquery.js?body=1"></script>
10  <script data-turbolinks-track="true" src="/assets/jquery_ujs.js?body=1"></script>
11  <script data-turbolinks-track="true" src="/assets/turbolinks.js?body=1"></script>
12  <script data-turbolinks-track="true" src="/assets/welcome.js?body=1"></script>
13  <script data-turbolinks-track="true" src="/assets/application.js?body=1"></script>
14  <meta content="authenticity_token" name="csrf-param" />
15  <meta content="6gubQ3YqRqyORqwhYYyMiy+NEDkNmGbYcJOPXQg8TBg=" name="csrf-token" />
16 </head>
17 <body>
18   <h1>Hello Rails</h1>
19   <a href="/articles">My Blog</a>
20 </body>
21 </html>
22
23
```

Figure 24: View Page Source in Chrome

You will see the hyperlink which is a relative url.

Page Source - Relative URL image should go here. TODO

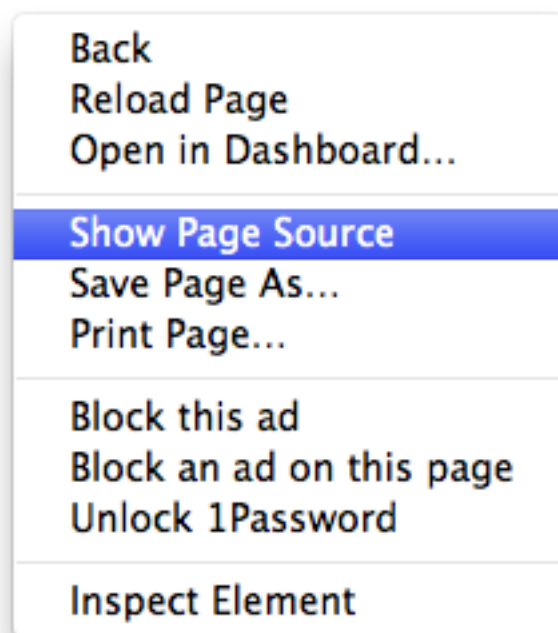


Figure 25: Show Page Source in Safari

## Step 5

Change the `articles_path` to `articles_url` in the `welcome/index.html.erb`.

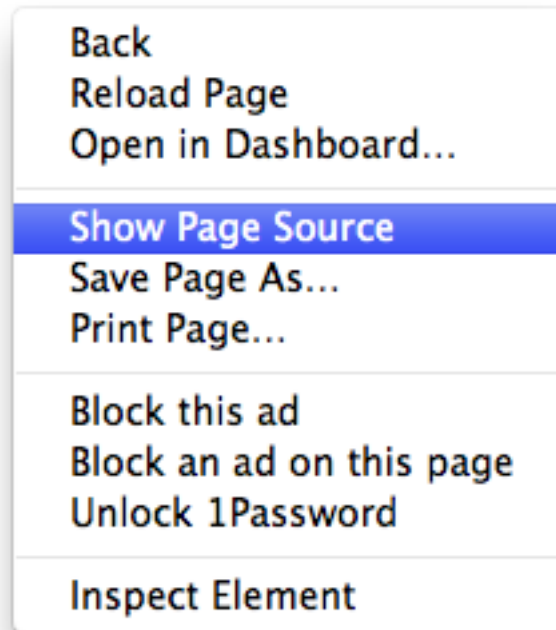


Figure 26: Absolute URL

Reload the page. View page source to see the absolute URL.

Absolute URL (`./figures/absolute_url.png`)



## Step 6

Click on the ‘My Blog’ link.

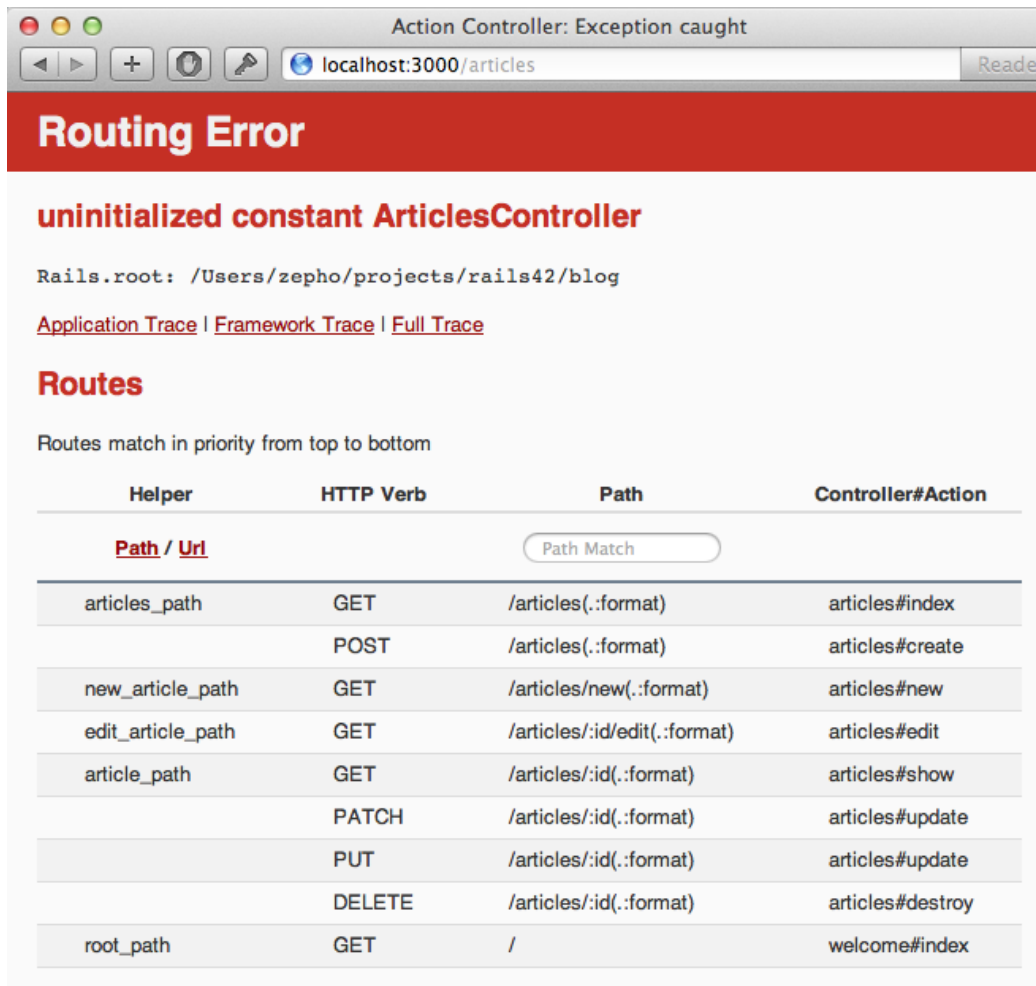


Figure 27: Missing Articles Controller

You will see the above error page with ‘unitialized constant ArticlesController’ error.

### Step 7

When you click on that link, you can see from rails server log that the client made a request:

```
Started GET "/articles" for ::1 at 2015-01-26 17:40:14 -0800
ActionController::RoutingError (uninitialized constant ArticlesController):
activerecord (4.2.0) lib/active_record/connection_adapters/abstract_adapter.rb:261:in `const_get'
activerecord (4.2.0) lib/active_record/connection_adapters/abstract_adapter.rb:261:in `block in const_get'
activerecord (4.2.0) lib/active_record/connection_adapters/abstract_adapter.rb:261:in `rescue in const_get'
```

Figure 28: Articles Http Request

GET `/articles` that was recognized by the Rails router and it looked for `articles controller`. Since we don't have the `articles controller`, we get the error message for the uninitialized constant. In Ruby, class names are constant.

Live HTTP Headers			
<div><div>Capture</div><div>Raw</div><div>Clear</div><div>Settings</div></div>			
#	Method	Status	Url
2	GET	200	http://localhost:3000/favicon.ico
1	GET	200	http://localhost:3000/articles

Figure 29: Live HTTP Headers Client Server Interaction

You can also use HTTP Live Headers Chrome plugin to see the client and server interactions.

```
Headers
GET /articles HTTP/1.1
Host: localhost:3000
Accept: text/html,application/xhtml+xml,application/xml;q=0.9,image/webp,*/*;q=0.8
Accept-Encoding: gzip,deflate,sdch
Accept-Language: en-US,en;q=0.8
Cookie: request_method=GET; _blog_session=L0dna0EvcGgrUTJabXhucUMvZ3o3MzBzVEZNdWJFZk
Referer: http://localhost:3000/
User-Agent: Mozilla/5.0 (Macintosh; Intel Mac OS X 10_7_5) AppleWebKit/537.36 (KHTML
HTTP/1.1 200 OK
Cache-Control: max-age=0, private, must-revalidate
Content-Length: 1129
Content-Type: text/html; charset=utf-8
Date: Sun, 27 Oct 2013 05:41:56 GMT
Etag: "ff6a5901a468bde7fb289673dc7a7dd6"
Server: WEBrick/1.3.1 (Ruby/2.0.0/2013-06-27)
Set-Cookie: _blog_session=QVFTQ2Nm2gvN0dXRnI0MnpJc2QvbmZXTmFEVmVzcDVCWUVteFRWeDAvRk
X-Content-Type-Options: nosniff
X-Frame-Options: SAMEORIGIN
X-Request-Id: 7f5038d4-790c-413e-9224-10ec973bedfe
X-Runtime: 0.016024
X-Ua-Compatible: chrome=1
X-Xss-Protection: 1; mode=block
```

Figure 30: Live HTTP Headers Showing Client Server Interaction

Here you see the client-server interaction details.

As you see in the figure 32, you can learn a lot by looking at the Live HTTP Header details such as Etag which is used for caching by Rails.

Headers	
<b>GET</b> http://localhost:3000/articles <b>Status:</b> HTTP/1.1 200 OK	
Request Headers	
<b>Accept</b>	text/html,application/xhtml+xml,application/xml;q=0.9,image/webp,*/*;q=0.8
<b>Accept-Encoding</b>	gzip, deflate, sdch
<b>Accept-Language</b>	en-US,en;q=0.8
<b>Cookie</b>	request_method=GET; _blog_session=L0dna0EvoGgrUTJabXhucUMvZ3o3MzBzVEZNdWJFZk9hYIFS-05c21ea3d19f3949a467deb04d54301841302ff1
<b>Referer</b>	http://localhost:3000/
<b>User-Agent</b>	Mozilla/5.0 (Macintosh; Intel Mac OS X 10_7_5) AppleWebKit/537.36 (KHTML,
Response Headers	
<b>Cache-Control</b>	max-age=0, private, must-revalidate
<b>Content-Length</b>	1129
<b>Content-Type</b>	text/html; charset=utf-8
<b>Date</b>	Sun, 27 Oct 2013 05:41:56 GMT
<b>Etag</b>	"ff6a5901a468bde7fb289673dc7a7dd6"
<b>Server</b>	WEBrick/1.3.1 (Ruby/2.0.0/2013-06-27)
<b>Set-Cookie</b>	_blog_session=QVFTQ2NiM2gvN0dXRnl0MnpJc2QvbmZXTmFEVmVzcDVCW-4903104c2800dfcd11eeba144af0c6cbc9bb4f53; path=/; HttpOnly
<b>X-Content-Type-Options</b>	nosniff
<b>X-Frame-Options</b>	SAMEORIGIN
<b>X-Request-Id</b>	7f5038d4-790c-413e-9224-10ec973bedfe
<b>X-Runtime</b>	0.016024
<b>X-Ua-Compatible</b>	chrome=1
<b>X-Xss-Protection</b>	1; mode=block

Figure 31: Live HTTP Headers Gives Ton of Information

## Step 8

Create the articles controller by running the following command in the blog directory:

bash	bash	ruby	bash
zepho-mac-pro:blog zepho\$ rails g controller articles index			
create	app/controllers/articles_controller.rb		
route	get 'articles/index'		
invoke	erb		
create	app/views/articles		
create	app/views/articles/index.html.erb		
invoke	test_unit		
create	test/controllers/articles_controller_test.rb		
invoke	helper		
create	app/helpers/articles_helper.rb		
invoke	test_unit		
invoke	assets		
invoke	coffee		
create	app/assets/javascripts/articles.coffee		
invoke	scss		
create	app/assets/stylesheets/articles.scss		

Figure 32: Generate Controller

```
$ rails g controller articles index
```

## Step 9

Go back to the home page and click on My Blog link.



Figure 33: Articles Page

You will see a static page.

## Step 10

We need to replace the static page with the list of articles from the database. Open the `articles_controller.rb` in the `app/controllers` directory and change the `index` method as follows :

```
def index
  @articles = Article.all
end
```

Here the `@articles` is an instance variable of the `articles` controller class. It is made available to the corresponding view class by Rails. In this case the view is `app/views/articles/index.html.erb`

The class method `'all'` retrieves all the records from the `articles` table.

## Step 11

Open the `app/views/articles/index.html.erb` in your code editor and add the following code:

```
<h1>Listing Articles</h1>

<% @articles.each do |article| %>

  <%= article.title %>

  <%= article.description %>
<br/>
<% end %>
```

Here we are using the Ruby scriptlet tag `<% %>` for looping through all the records in the `articles` collection and the values of each record is displayed in the browser using `<%= %>` tags.



If you make a mistake and use `<%= %>` tags instead of Ruby scriptlet tag in `app/views/index.html.erb` like this:

```
<%= @articles.each do |article| %>
```

You will see the objects in the array displayed on the browser.



Figure 34: Using the Wrong Tags

Articles are displayed as objects inside an array.


Why does model, view and controller all have to be named Article? The view does more than just display articles in complicated web apps.

In our simple blog application we are dealing with only one concept, namely article. In complicated web apps you could have a view that displays data from different tables.

If you use the Ruby scriptlet tag :

**Title :**      <% article.title %>

instead of the tags used to evaluate expressions and display to the browser then you will not see it in the browser.



# Listing Articles

**Title :**

**Description :** duplication

[Edit](#) [Show](#) [Delete](#)

[New Article](#)

Figure 35: No Title Value in Browser

## Step 12

Go to the browser and reload the page for `http://localhost:3000/articles`



Figure 36: List of Articles

You should see the list of articles now displayed in the browser.

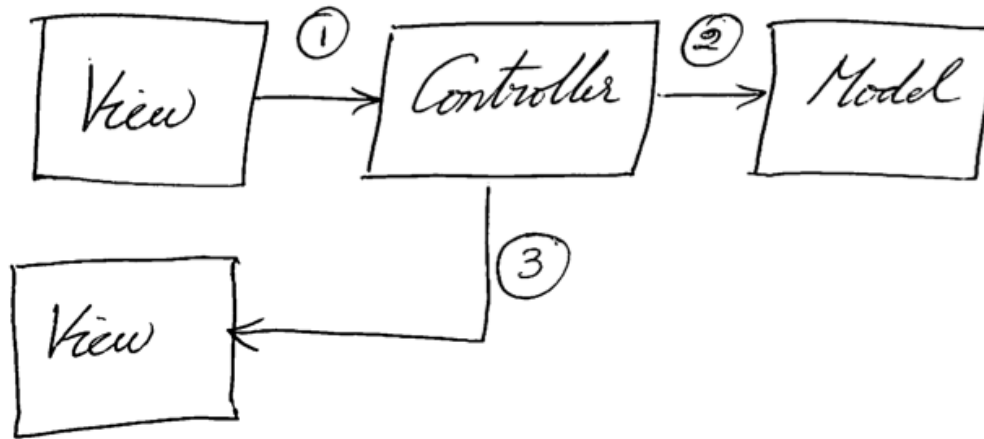


Figure 37: Model View Controller

As you can see from the diagram Controller controls the flow of data into and out of the database and also decides which View should be rendered next.

## Exercise

Go to the rails server log terminal, what is the http verb used to make the request for displaying all the articles? What is the resource that was requested?

## Summary

In this lesson we went from the view (home page) to the controller for articles and to the article model and back to the view (index page for articles). So the MVC components interaction as shown in the diagram:

1. View to Controller
2. Controller to Model
3. Controller to View.

The data flow was from the database to the user.

In real world the user data comes from the user so we cannot create them in the rails console or in the database directly. In the next lesson we will see how we can capture data from the view provided by the user and save it in the database.

## CHAPTER 5

### View to Model

#### Objective

- Learn how to get data from the user and save it in the database

#### Steps

##### Step 1


We need to display a form for the user to fill out the text field for the article title and text area for the description. In order for the user to go to this form, let's create a 'New Article' link to load an empty form in the articles index page.

Add the following code to the bottom of the `app/views/articles/index.html` file:

```
<%= link_to 'New Article', ? %>
```

## Step 2

What is the url helper we should use? We know we need to display the `articles/new.html.erb` page. We also know that the action that is executed is 'new' before `new.html.erb` is displayed. Take a look at the rake routes output:

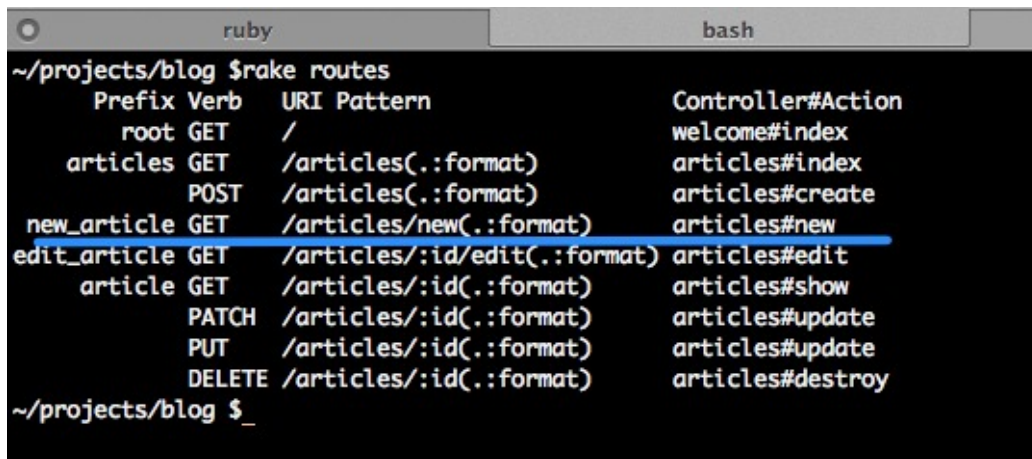

```
~/projects/blog $rake routes
  Prefix Verb   URI Pattern               Controller#Action
  root   GET    /                       welcome#index
  articles GET    /articles(.:format)      articles#index
         POST   /articles(.:format)      articles#create
  new_article GET    /articles/new(.:format)  articles#new
  edit_article GET    /articles/:id/edit(.:format) articles#edit
  article GET    /articles/:id(.:format)  articles#show
         PATCH  /articles/:id(.:format)  articles#update
         PUT    /articles/:id(.:format)  articles#update
         DELETE /articles/:id(.:format)  articles#destroy
~/projects/blog $
```

Figure 38: New Article URL Helper

The first column named Prefix gives us the URL helper we can use. We can either append 'url' or 'path' to the prefix. Let's fill in the url helper to load the new page as follows:

```
<%= link_to 'New Article', new_article_path %>
```

### Step 3

Reload the page `http://localhost:3000/articles` in the browser.



Figure 39: New Article Link

The hyperlink for creating a new article will now be displayed.



#### Step 4

Right click on the browser and click 'View Page Source'.

```
<h1>Listing Articles</h1>

test
first row
<br/>
record two
second row
<br/>
<a href="/articles/new">New Article</a>
.. .
```

Figure 40: View Page Source

You will see 'New Article' link pointing to the resource “/articles/new”.

## Step 5

Click the 'New Article' link. Go to the terminal and look at the server output.

```
Started GET "/articles/new" for ::1 at 2015-01-26 18:10:03 -0800
```

Figure 41: HTTP Verb Get

You can see that the browser made a http GET request for the resource “/articles/new”.



Figure 42: Action New Not Found

You will see the above error page.

## Step 6

Let's create the new action in articles controller. Add the following code to articles controller:

```
def new  
  
end
```

## Step 7

Reload the browser <http://localhost:3000/articles/new> page. You will see the missing template page.

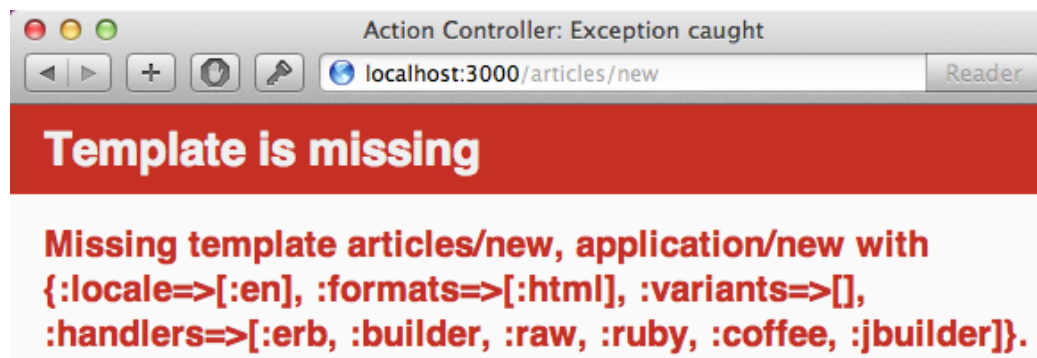


Figure 43: Missing Template

After the new action is executed Rails looks for view whose name is the same as the action, in this case `app/views/articles/new.html.erb`

## Step 8

So lets create new.html.erb under app/views/articles directory with the following content:

```
<%= form_for @article do |f| %>
  <p>
    <%= f.label :title %><br>
    <%= f.text_field :title %>
  </p>

  <p>
    <%= f.label :description %><br>
    <%= f.text_area :description %>
  </p>

  <p>
    <%= f.submit %>
  </p>
<% end %>
```

## Step 9

Reload the browser <http://localhost:3000/articles/new> page.

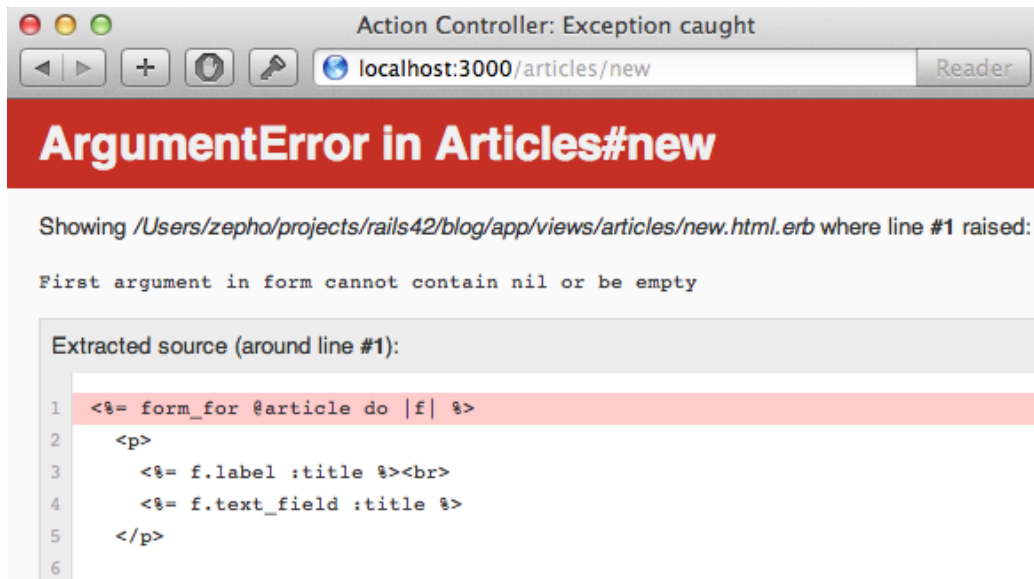


Figure 44: Argument Error

You will now see the above error.

## Step 10


Change the new method in articles controller as follows:

```
def new
  @article = Article.new
end
```

Here we are instantiating an instance of Article class, this gives Rails a clue that the form fields is for Article model.

## Step 11

Reload the browser <http://localhost:3000/articles/new> page.



The screenshot shows a web browser window with the title 'Blog'. The address bar displays 'localhost:3000/articles/new'. The main content area contains a form with two input fields: 'Title' and 'Description'. The 'Title' field is a single-line text input, and the 'Description' field is a multi-line text area. Below these fields is a button labeled 'Create Article'.

Figure 45: New Article Form

You will now see an empty form to create a new article.

## Step 12

Right click and select 'View Page Source' on the new article form page.




```
17 <body>
18
19 <form accept-charset="UTF-8" action="/articles" class="new_article"
id="new_article" method="post"><div style="margin:0;padding:0;display:inline">
<input name="utf8" type="hidden" value="&#x2713;" /><input
name="authenticity_token" type="hidden"
value="6gubQ3YqRqyORqwhYyMiy+NEDkNmGbYcjOPXQg8TBg=" /></div>
20   <p>
21     <label for="article_title">Title</label><br>
22     <input id="article_title" name="article[title]" type="text" />
23   </p>
24
25   <p>
26     <label for="article_description">Description</label><br>
27     <textarea id="article_description" name="article[description]">
28   </textarea>
29   </p>
30
31   <p>
32     <input name="commit" type="submit" value="Create Article" />
33   </p>
34 </form>
35
36 </body>
```

Figure 46: New Article Page Source

As you can see, form will be submitted to the url '/articles' and the http verb used is POST. When the user submits the form, which controller and which action will be executed?

### Step 13

Look at the output of rake routes, the combination of the http verb and the URL uniquely identifies the resource end point.

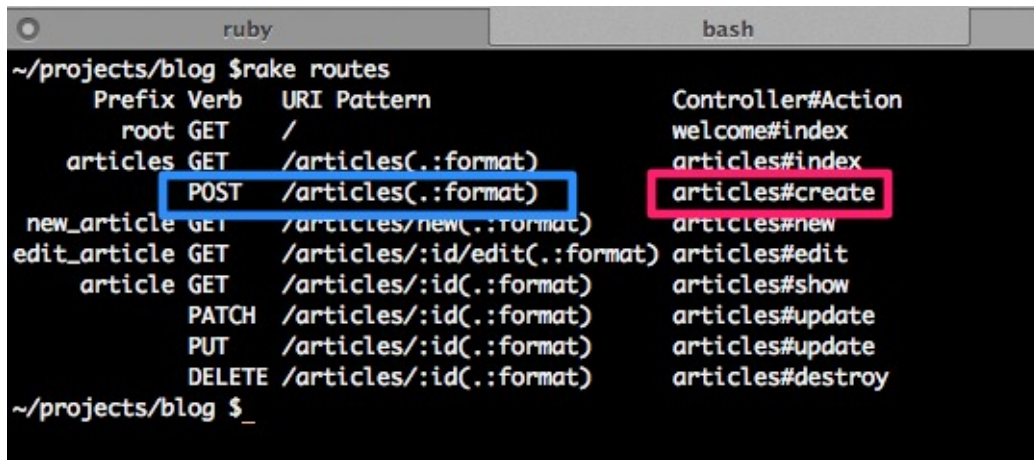

```
~/projects/blog $rake routes
  Prefix Verb  URI Pattern                      Controller#Action
  root   GET    /                               welcome#index
  articles GET    /articles(.:format)             articles#index
        POST   /articles(.:format)             articles#create
  new_article GET    /articles/new(.:format)         articles#new
  edit_article GET    /articles/:id/edit(.:format)    articles#edit
  article GET    /articles/:id(.:format)         articles#show
        PATCH  /articles/:id(.:format)         articles#update
        PUT    /articles/:id(.:format)         articles#update
        DELETE /articles/:id(.:format)         articles#destroy
~/projects/blog $
```


Figure 47: Identifying Resource Endpoint

In this case we see that it maps to the articles controller and create action.



## Step 14

Fill out the form and click 'Create Article'. Check the server log output.

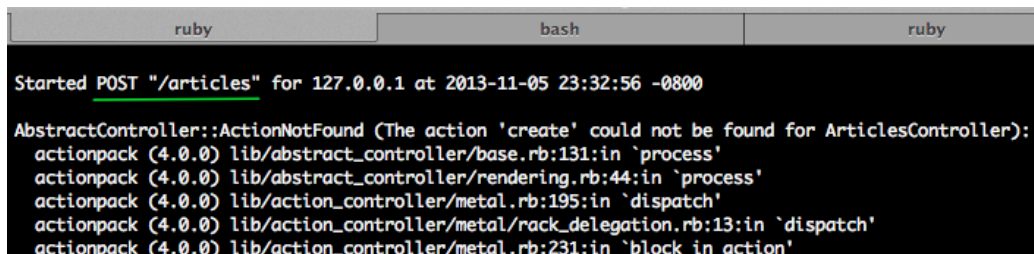

```
Started POST "/articles" for 127.0.0.1 at 2013-11-05 23:32:56 -0800
AbstractController::ActionNotFound (The action 'create' could not be found for ArticlesController):
  actionpack (4.0.0) lib/abstract_controller/base.rb:131:in `process'
  actionpack (4.0.0) lib/abstract_controller/rendering.rb:44:in `process'
  actionpack (4.0.0) lib/action_controller/metal.rb:195:in `dispatch'
  actionpack (4.0.0) lib/action_controller/metal/rack_delegation.rb:13:in `dispatch'
  actionpack (4.0.0) lib/action_controller/metal.rb:231:in `block in action'
```

Figure 48: Post Article Server Log

You can see that the browser made a post to the URL '/articles'.



Figure 49: Unknown Action Create

This error is due to absence of create action in the articles controller.

## Step 15

Define the create method in the articles controller as follows:

```
def create  
  
end
```

## Step 16

Fill out the form and click ‘Create Article’.

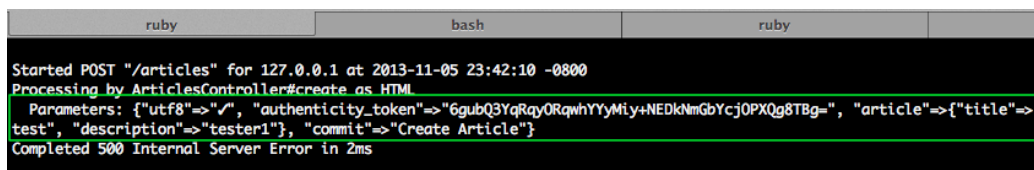


Figure 50: Article Form Values

You can see that the form values submitted by the user is sent to the server. Rails automatically populates a hash called params which contains a key whose name is the article symbol and the values are the different database columns and its values for creating a new article record.

You will see missing template error.

## Step 17

Before we fix the missing template issue, we need to save the data submitted by the user in the database. You already know how to use the ActiveRecord class method ‘create’ to save a record. You also know how Rails populates the params hash, this hash is made available to you in the controller. So we can access it like this :

```
def create  
  Article.create(params[:article])  
end
```

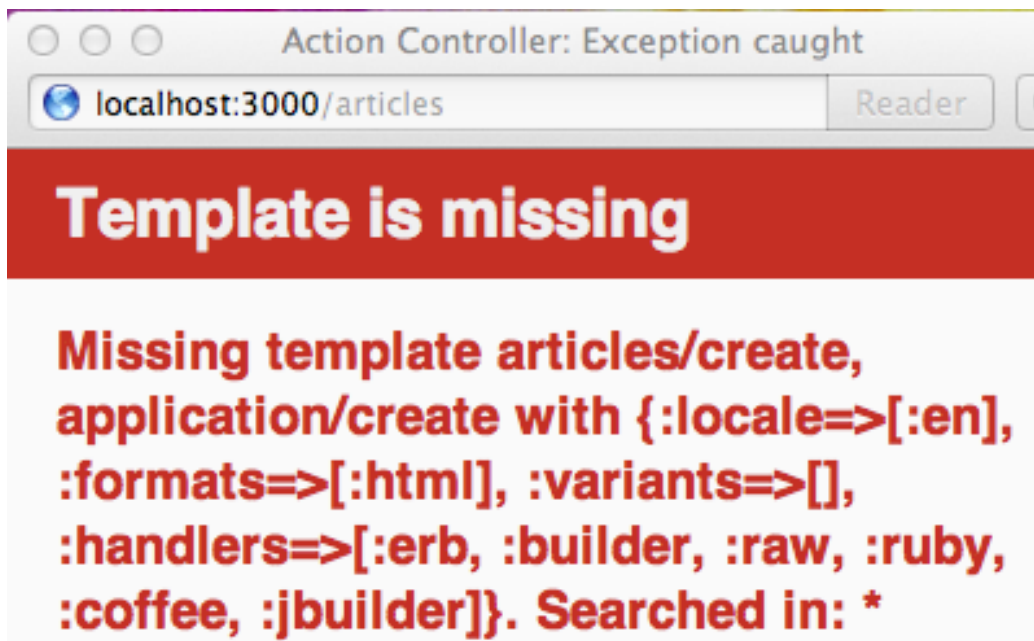


Figure 51: Article Create Missing Template

In Figure 49, you see that the hash key `article` is a string, but I am using the symbol `:article` in the `create` method. How does this work?

As you can see from the rails console, `params` hash is not a regular Ruby hash, it is a special hash called `HashWithIndifferentAccess`. It allows you to set the value of the hash with either a symbol or string and retrieve the value using either string or symbol.

ruby	...	bash
<pre>2.0.0p247 :004 &gt; x = ActiveSupport::HashWithIndifferentAccess.new =&gt; {} 2.0.0p247 :005 &gt; x['score'] = 10 =&gt; 10 2.0.0p247 :006 &gt; x[:score] =&gt; 10 2.0.0p247 :007 &gt; y = {} =&gt; {} 2.0.0p247 :008 &gt; y['score'] = 5 =&gt; 5 2.0.0p247 :009 &gt; y[:score] =&gt; nil 2.0.0p247 :010 &gt;</pre>		

Figure 52: HashWithIndifferentAccess

### Step 18

Fill out the form and submit again.

Now we get a forbidden attributes error.

### Step 19

Due to security reasons we need to specify which fields must be permitted as part of the form submission. Modify the create method as follows:

```
def create
  Article.create(params.require(:article).permit(:title, :description))
end
```

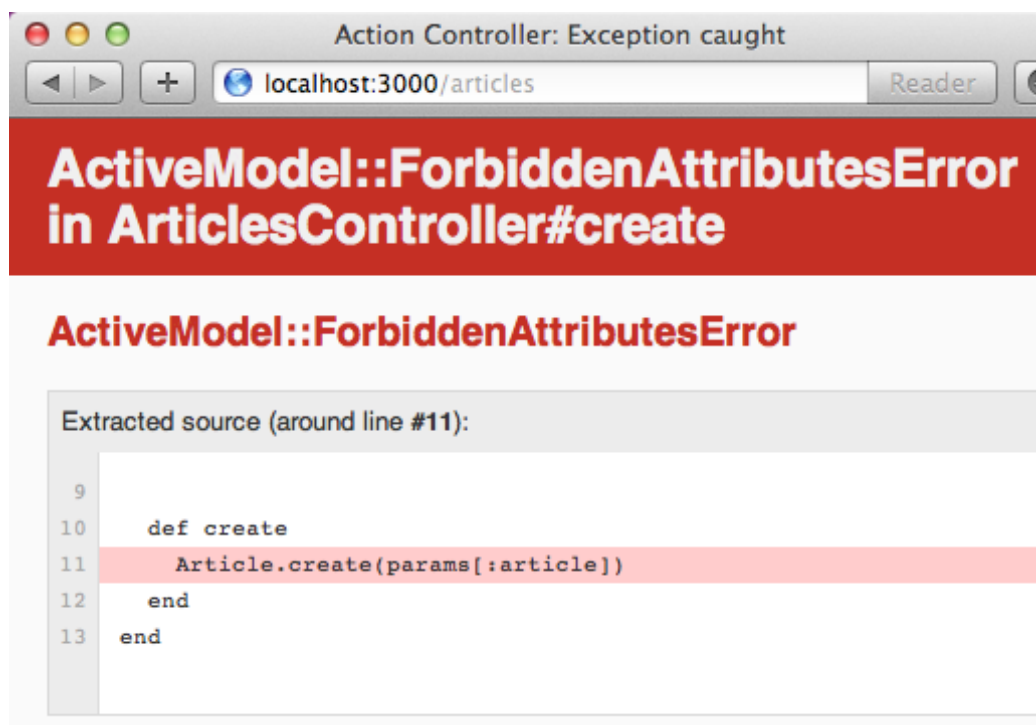


Figure 53: Forbidden Attributes Error

## Step 20

Fill out the form and submit again. You will get the template missing error but you will now see that the user submitted data has been saved to the database.



```
2.0.0p247 :013 > a = Article.last
Article Load (2.8ms) SELECT "articles".* FROM "articles" ORDER BY "articles"."id" DESC LIMIT 1
=> #<Article id: 3, title: "test", description: "tester", created_at: "2013-11-06 08:06:23", updated_at: "2013-11-06 08:06:23">
2.0.0p247 :014 > _
```

Figure 54: Save User Data

The ActiveRecord class method ‘last’ method retrieves the last row in the articles table.

## Step 21

Let’s now address the template is missing error. Once the data is saved in the database we can either display the index page or the show page for the article. Let’s redirect the user to the index page. We will be able to see all the records including the new record that we created. Modify the create method as follows:

```
def create
  Article.create(params.require(:article).permit(:title, :description))

  redirect_to articles_index_path
end
```

How do we know that we need to use `articles_index_path` url helper? We already saw how to find the URL helper to use in the view, we can do the same. If you see the output of `rake routes` command, we know the resource end point, to find the URL helper we look at the Prefix column.


## Step 22

Fill out the form and submit again.



Figure 55: Displaying All Articles

You will now see all the articles displayed in the index page.

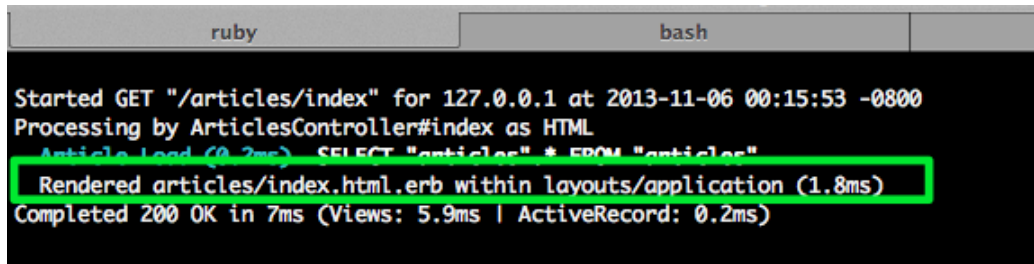

```
ruby bash
Started GET "/articles/index" for 127.0.0.1 at 2013-11-06 00:15:53 -0800
Processing by ArticlesController#index as HTML
Article Load (0.2ms) SELECT "articles" * FROM "articles"
Rendered articles/index.html.erb within layouts/application (1.8ms)
Completed 200 OK in 7ms (Views: 5.9ms | ActiveRecord: 0.2ms)
```

Figure 56: Redirect to Articles Index Page

Redirecting user to the articles index page.

## Summary

We saw how we can save the user submitted data in the database. We went from the View to the Controller to the Model. We also saw how the controller decides which view to render next. We learned about the http verb and identifying resource endpoint in our application. Now we know how the new and create action works. In the next lesson we will see how edit and update action works to make changes to an existing record in the database.



## CHAPTER 6

### Update Article

#### Objective

- Learn how to update an existing record in the database

#### Steps

##### Step 1


Let's add 'Edit' link to each record that is displayed in the index page. Open the `app/views/index.html.erb` and add the edit link:

```
<%= link_to 'Edit', ? %>
```

What should be the url helper to use in the second parameter to the `link_to` method?

## Step 2

We know that when someone clicks the 'Edit' link we need to load a form for that particular row with the existing values for that record. So we know the resource endpoint is `articles#edit`, if you look at the rake routes output, the Prefix column gives us the url helper to use.

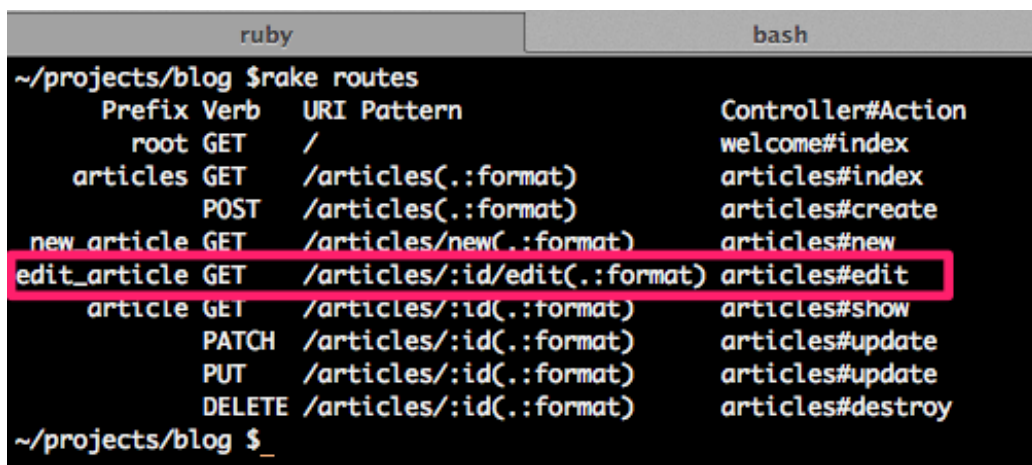

```
~ /projects/blog $ rake routes
Prefix Verb  URI Pattern                      Controller#Action
root   GET    /                               welcome#index
articles GET    /articles(.:format)             articles#index
      POST /articles(.:format)             articles#create
new_article GET    /articles/new(.:format)         articles#new
edit_article GET    /articles/:id/edit(.:format)    articles#edit
article GET    /articles/:id(.:format)         articles#show
      PATCH /articles/:id(.:format)         articles#update
      PUT    /articles/:id(.:format)         articles#update
      DELETE /articles/:id(.:format)         articles#destroy
~ /projects/blog $
```

Figure 57: Edit Article URL Helper

So we now have:

```
<%= link_to 'Edit', edit_article_path() %>
```

### Step 3

Go to Rails console and type:

`app.edit_article_path`

```
2.0.0p247 :004 > app.edit_article_path
ActionController::UrlGenerationError: No route matches {:action=>"edit", :controller=>"articles"} missing required keys: [:id]
    from /Users/bparanj/.rvm/gems/ruby-2.0.0-p247@blog/gems/actionpack-4.0.0/lib/action_dispatch/journey/formatter.rb:35:in `generate'
    from /Users/bparanj/.rvm/gems/ruby-2.0.0-p247@blog/gems/actionpack-4.0.0/lib/action_dispatch/routing/route_set.rb:576:in `generate'
    from /Users/bparanj/.rvm/gems/ruby-2.0.0-p247@blog/gems/actionpack-4.0.0/lib/action_dispatch/routing/route_set.rb:606:in `generate'
    from /Users/bparanj/.rvm/gems/ruby-2.0.0-p247@blog/gems/actionpack-4.0.0/lib/action_dispatch/routing/route_set.rb:642:in `url_for'
    from /Users/bparanj/.rvm/gems/ruby-2.0.0-p247@blog/gems/actionpack-4.0.0/lib/action_dispatch/routing/url_for.rb:155:in `url_for'
    from /Users/bparanj/.rvm/gems/ruby-2.0.0-p247@blog/gems/actionpack-4.0.0/lib/action_dispatch/routing/route_set.rb:209:in `call'
    from /Users/bparanj/.rvm/gems/ruby-2.0.0-p247@blog/gems/actionpack-4.0.0/lib/action_dispatch/routing/route_set.rb:178:in `call'
    from /Users/bparanj/.rvm/gems/ruby-2.0.0-p247@blog/gems/actionpack-4.0.0/lib/action_dispatch/routing/route_set.rb:249:in `block (2 levels) in define_url_helper'
    from (irb):4
    from /Users/bparanj/.rvm/gems/ruby-2.0.0-p247@blog/gems/railties-4.0.0/lib/rails/commands/console.rb:90:in `start'
    from /Users/bparanj/.rvm/gems/ruby-2.0.0-p247@blog/gems/railties-4.0.0/lib/rails/commands/console.rb:9:in `start'
    from /Users/bparanj/.rvm/gems/ruby-2.0.0-p247@blog/gems/railties-4.0.0/lib/rails/commands.rb:64:in `<top (required)>'
    from bin/rails:4:in `require'
    from bin/rails:4:in `<main>'
2.0.0p247 :005 >
```

Figure 58: Edit Article URL Helper Error


Rails does not recognize `edit_article_path` helper method.

## Step 4

Examine the output of rake routes command. In the URI Pattern column you see the pattern for edit as : /articles/:id/edit

URI Pattern can consist of symbols which represent variable. You can think of it as a place holder. The symbol :id in this case represents the primary key of the record we want to update. So we pass an instance of an article to url helper. We could call the id method on article, since Rails automatically calls id on this instance, we will just let Rails do its magic. Modify the link\_to method as follows:

```
<%= link_to 'Edit', edit_article_path(article) %>
```

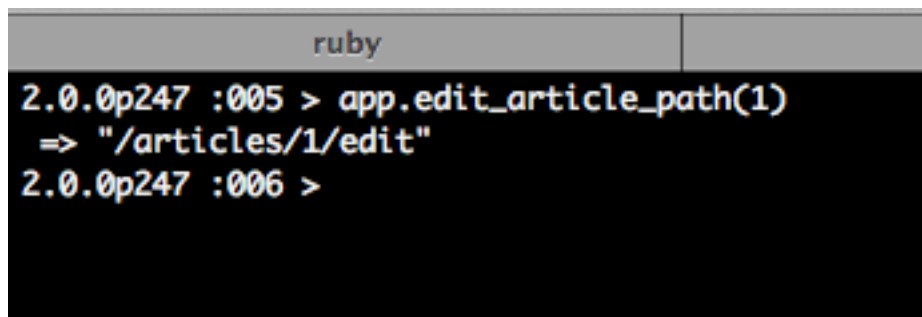A screenshot of a terminal window with a dark background. The title bar at the top is light gray and contains the word "ruby". The terminal shows a prompt "2.0.0p247 :005 >" followed by the command "app.edit\_article\_path(1)". The output is "=> \"/articles/1/edit\"", which is displayed in red. The prompt then changes to "2.0.0p247 :006 >".

```
ruby
2.0.0p247 :005 > app.edit_article_path(1)
=> "/articles/1/edit"
2.0.0p247 :006 >
```

Figure 59: Edit Article URL Helper

Rails recognizes edit\_article\_path when the primary key :id value is passed as the argument.

## Step 5

The app/views/articles/index.html.erb will look like this :

```
<h1>Listing Articles</h1>

<% @articles.each do |article| %>

  <%= article.title %> :

  <%= article.description %>

  <%= link_to 'Edit', edit_article_path(article) %>

  <br/>

<% end %>
<br/>
<%= link_to 'New Article', new_article_path %>
```

## Step 6

Reload the `http://localhost:3000/articles` page.



Figure 60: Edit Article Link

You will now see the 'Edit' link for each article in the database.

## Step 7

Right click on the browser and select 'View Page Source'.



```
18
19 <h1>Listing Articles</h1>
20
21
22     test :
23
24     first row
25
26     <a href="/articles/1/edit">Edit</a>
27
28     <br/>
29
30
31     another record :
32
33     different way to create row
34
35     <a href="/articles/2/edit">Edit</a>
36
37     <br/>
38
```

Figure 61: Edit Article Page Source

You will see the primary keys of the corresponding row for the :id variable.

## Step 8

Click on the 'Edit' link.



Figure 62: Unknown Action Edit

You will see unknown action edit error page.

## Step 9

Let's define the edit action in the articles controller :

```
def edit  
  
end
```



## Step 10

Click on the 'Edit' link. You now get template is missing error. Let's create app/views/articles/edit.html.erb with the following contents:

```
<%= form_for @article do |f| %>
  <p>
    <%= f.label :title %><br>
    <%= f.text_field :title %>
  </p>

  <p>
    <%= f.label :description %><br>
    <%= f.text_area :description %>
  </p>

  <p>
    <%= f.submit %>
  </p>
<% end %>
```

## Step 11

Click on the 'Edit' link. You now get the following error page:



Figure 63: Argument Error in Articles Edit

We are getting this error because the first argument to form\_for helper method cannot be nil or empty.

## Step 12

Look at the server log:

bash	bash	ruby	bash
<pre>Started GET "/articles/4/edit" for :::1 at 2015-01-26 20:13:14 -0800 Processing by ArticlesController#edit as HTML   Parameters: {"id"=&gt;"4"}   Rendered articles/edit.html.erb within layouts/application (5.2ms) Completed 500 Internal Server Error in 15ms</pre>			

Figure 64: Edit Article Server Log

You can see that the primary key of the selected article id and it's value.

```
Started GET "/articles/1/edit" for 127.0.0.1 at 2013-11-06 20:13:41 -0800
Processing by ArticlesController#edit as HTML
Parameters: {"id"=>"1"}
Rendered articles/edit.html.erb within layouts/application (1.4ms)
Completed 500 Internal Server Error in 4ms
```

*Note: In the original image, a green arrow points from the text 'params = { id: 1 }' to the 'id' key in the Parameters hash, and a red box highlights the entire Parameters line.*

Figure 65: Params Hash Populated by Rails

Rails automatically populates params hash and makes it available to the controllers.

### Step 13


In the edit action we need to load the selected record from the database so that we can display it with the existing values for its columns. You already know that Rails populates params hash with the values submitted in the GET request for resource `‘/articles/1/edit’`. We can now define the edit method as follows:

```
def edit
  @article = Article.find(params[:id])
end
```

Here we find the record for the given primary key and save it in the instance variable `@article`. Since this variable is available in the view, we can now display the record with its existing values.

## Step 14

Click on the 'Edit' link.

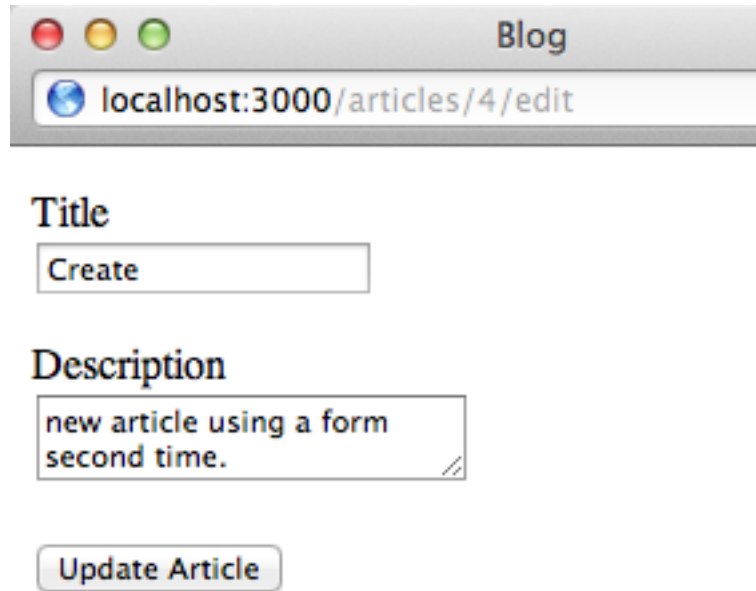

The screenshot shows a web browser window titled "Blog". The address bar displays "localhost:3000/articles/4/edit". Below the address bar, there is a form with two sections: "Title" and "Description". The "Title" section has a text input field containing the word "Create". The "Description" section has a text area containing the text "new article using a form second time.". Below these sections is a button labeled "Update Article".

Figure 66: Edit Article Form

You will now see the form with values populated.

## Step 15

Right click on the browser and click ‘View Page Source’.

```
19 <form accept-charset="UTF-8" action="/articles/1" class="edit_article" id="edit_article_1"
method="post"><div style="margin:0;padding:0;display:inline"><input name="utf8" type="hidden"
value="&#x2713;" /><input name="method" type="hidden" value="patch" /><input
name="authenticity_token" type="hidden" value="6gubQ3YqRqyORqwhYYyMly+NEDkNmGbYcjOPXQg8TBg=" />
</div>
20 <p>
21 <label for="article_title">Title</label><br>
22 <input id="article_title" name="article[title]" type="text" value="test" />
23 </p>
24 <p>
25 <label for="article_description">Description</label><br>
26 <textarea id="article_description" name="article[description]">
27 first row</textarea>
28 </p>
29 <p>
30 <input name="commit" type="submit" value="Update Article" />
31 </p>
32 </form>
```

Figure 67: Edit Article Source


We see that the URI pattern is ‘/articles/1’ and the http verb is POST. If you look at the output of rake routes you will see that POST is used only once for create. The browser knows only GET and POST, it does not know how to use any other http verbs.

ruby			bash
~/projects/blog \$rake routes			
Prefix	Verb	URI Pattern	Controller#Action
root	GET	/	welcome#index
articles	GET	/articles(.:format)	articles#index
	POST	/articles(.:format)	articles#create
new_article	GET	/articles/new(.:format)	articles#new
edit_article	GET	/articles/:id/edit(.:format)	articles#edit
article	GET	/articles/:id(.:format)	articles#show
	PATCH	/articles/:id(.:format)	articles#update
	PUT	/articles/:id(.:format)	articles#update
	DELETE	/articles/:id(.:format)	articles#destroy
~/projects/blog \$ _			

Figure 68: HTTP Verb POST

The question is how to overcome the inability of browsers to speak the entire RESTful vocabulary of using the appropriate http verb for a given operation?

The answer lies in the hidden field called `_method` that has the value `PATCH`. Rails piggybacks on the `POST` http verb to actually sneak in a hidden variable that tells the server it is actually a `PATCH` http verb. If you look at the output of `rake routes`, for the combination of `PATCH` and `‘/articles/1’` you will see that it maps to `update` action in the `articles` controller.

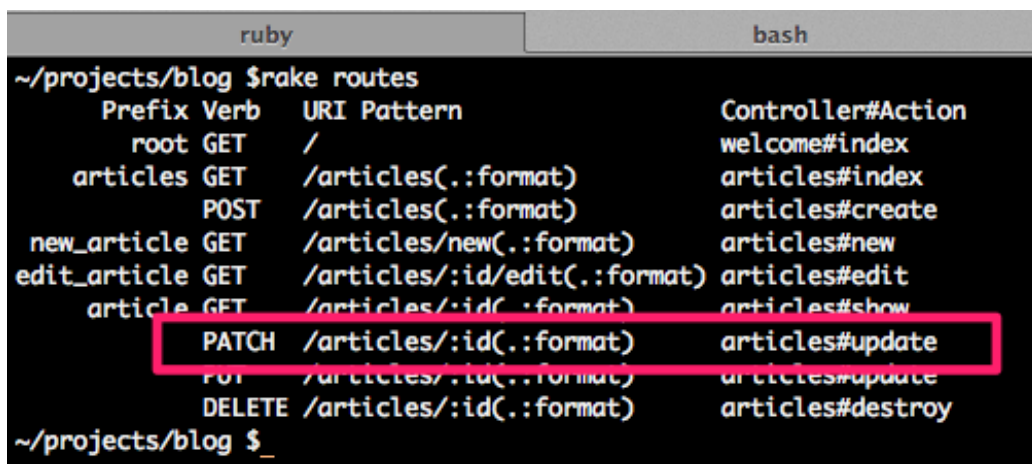

```
~/projects/blog $rake routes
      Prefix Verb   URI Pattern                      Controller#Action
    root GET      /                               welcome#index
  articles GET      /articles(.:format)             articles#index
          POST     /articles(.:format)             articles#create
 new_article GET      /articles/new(.:format)          articles#new
edit_article GET      /articles/:id/edit(.:format)     articles#edit
  article GET      /articles/:id(.:format)          articles#show
          PATCH    /articles/:id(.:format)          articles#update
          PUT      /articles/:id(.:format)          articles#update
          DELETE   /articles/:id(.:format)          articles#destroy
~/projects/blog $
```

Figure 69: HTTP Verb PATCH

Rails 4.2 uses `PATCH` instead of `PUT` that it used in previous versions. This is because `PUT` is an idempotent operation so for any request that needs to modify the state on the server `PATCH` is used.

## Step 16

Let's implement the `update` method that will take the new values provided by user for the existing record and update it in the database.

```
def update
  @article = Article.find(params[:id])
  @article.update_attributes(params[:article])
end
```

Before we update the record we need to load the existing record from the database. Why? Because the instance variable in the controller will only exist for one request-response cycle. Since http is stateless we need to retrieve it again before we can update it.

## Step 17


Go to articles index page by going to <http://localhost:3000/articles>. Click on the 'Edit' link. In the edit form, you can change the value of either the title or description and click 'Update Article'.

## Step 18

To fix the forbidden attributes error, we can do the same thing we did for create action. Change the update method as follows:

```
def update
  @article = Article.find(params[:id])
  permitted_columns = params.require(:article).permit(:title, :description)
  @article.update_attributes(permitted_columns)
end
```

Change the title and click 'Update Article'. We see the template is missing but the record has been successfully updated.

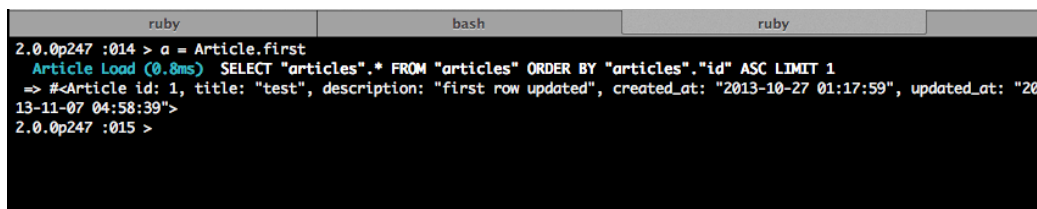

```
2.0.0p247 :014 > a = Article.first
Article Load (0.8ms) SELECT "articles".* FROM "articles" ORDER BY "articles"."id" ASC LIMIT 1
=> #<Article id: 1, title: "test", description: "first row updated", created_at: "2013-10-27 01:17:59", updated_at: "2013-11-07 04:58:39">
2.0.0p247 :015 >
```

Figure 70: First Article

The ActiveRecord class method first retrieves the first record in the table. In this case we got the first row in the articles table.



## Step 19

Let's address the template is missing error. We don't need `update.html.erb`, we can redirect the user to the index page where all the records are displayed. Change the update method as follows:

```
def update
  @article = Article.find(params[:id])
  permitted_columns = params.require(:article).permit(:title, :description)
  @article.update_attributes(permitted_columns)

  redirect_to articles_path
end
```

## Step 20

Edit the article and click 'Update Article'. You should see that it now updates the article and redirects the user to the articles index page.

## Step 21

An annoying thing about Rails 4.2 is that when you run the rails generator to create a controller with a given action it also creates an entry in the `routes.rb` which is not required for a RESTful route. Let's delete the following line:

```
get "articles/index"
```

in the `config/routes.rb` file. Update the create method to use the `articles_path` as follows:

```
def create
  Article.create(params.require(:article).permit(:title, :description))

  redirect_to articles_path
end
```

## Summary

In this lesson you learned how to update an existing record by displaying a form for an existing article and saving the new values in the database. In the next lesson we will see how to display a given article.

## CHAPTER 7

### Show Article

#### Objective

- Learn how to display a selected article in the article show page.

#### Steps

##### Step 1


Add the ‘Show’ link to each article in the index page. The hyperlink text will be ‘Show’.

```
<%= link_to 'Show', ? %>
```

When the user clicks the ‘Show’ link we need to go the articles controller, show action. We will retrieve the record from the database and display it in the view.

What should be the url helper?

You can view the output of rake routes to find the url helper to use in the view. In this case we know the resource end point. We go from the right most column to the left most column and find the url helper under the Prefix column.

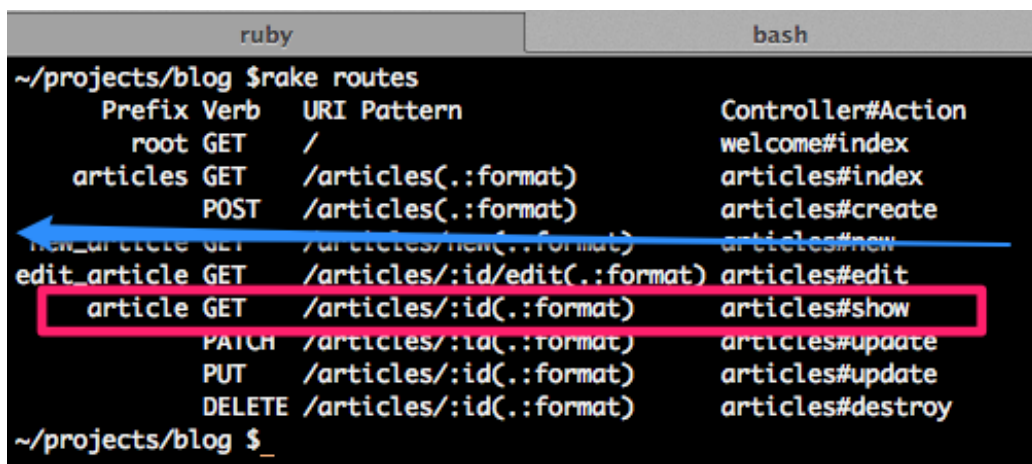

The image shows a terminal window with two tabs: 'ruby' and 'bash'. The 'ruby' tab is active, and the command `$rake routes` has been executed. The output is a table with columns: Prefix, Verb, URI Pattern, and Controller#Action. A blue arrow points from the 'articles#index' entry to the 'articles' prefix. A red box highlights the 'article GET /articles/:id(format) articles#show' entry.

Prefix	Verb	URI Pattern	Controller#Action
root	GET	/	welcome#index
articles	GET	/articles(format)	articles#index
	POST	/articles(format)	articles#create
new_article	GET	/articles/new(format)	articles#new
edit_article	GET	/articles/:id/edit(format)	articles#edit
article	GET	/articles/:id(format)	articles#show
	PATCH	/articles/:id(format)	articles#update
	PUT	/articles/:id(format)	articles#update
	DELETE	/articles/:id(format)	articles#destroy

Figure 71: URL Helper For Show


So, we now have :

```
<%= link_to 'Show', article_path %>
```

## Step 2

Go to Rails console and type:

```
app.article_path
```

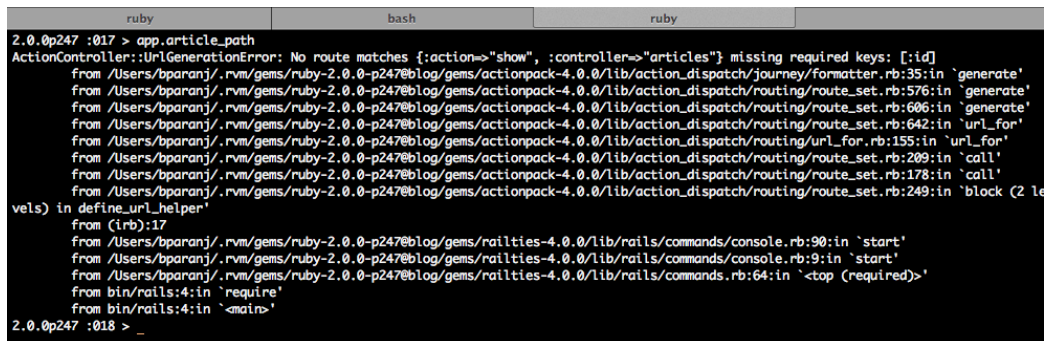


```
2.0.0p247 :017 > app.article_path
ActionController::UrlGenerationError: No route matches {:action=>"show", :controller=>"articles"} missing required keys: [:id]
    from /Users/bparanj/.rvm/gems/ruby-2.0.0-p247/blog/gems/actionpack-4.0.0/lib/action_dispatch/journey/formatter.rb:35:in `generate'
    from /Users/bparanj/.rvm/gems/ruby-2.0.0-p247/blog/gems/actionpack-4.0.0/lib/action_dispatch/routing/route_set.rb:576:in `generate'
    from /Users/bparanj/.rvm/gems/ruby-2.0.0-p247/blog/gems/actionpack-4.0.0/lib/action_dispatch/routing/route_set.rb:606:in `generate'
    from /Users/bparanj/.rvm/gems/ruby-2.0.0-p247/blog/gems/actionpack-4.0.0/lib/action_dispatch/routing/route_set.rb:642:in `url_for'
    from /Users/bparanj/.rvm/gems/ruby-2.0.0-p247/blog/gems/actionpack-4.0.0/lib/action_dispatch/routing/route_set.rb:155:in `url_for'
    from /Users/bparanj/.rvm/gems/ruby-2.0.0-p247/blog/gems/actionpack-4.0.0/lib/action_dispatch/routing/route_set.rb:209:in `call'
    from /Users/bparanj/.rvm/gems/ruby-2.0.0-p247/blog/gems/actionpack-4.0.0/lib/action_dispatch/routing/route_set.rb:178:in `call'
    from /Users/bparanj/.rvm/gems/ruby-2.0.0-p247/blog/gems/actionpack-4.0.0/lib/action_dispatch/routing/route_set.rb:249:in `block (2 levels) in define_url_helper'
    from (irb):17
    from /Users/bparanj/.rvm/gems/ruby-2.0.0-p247/blog/gems/railties-4.0.0/lib/rails/commands/console.rb:90:in `start'
    from /Users/bparanj/.rvm/gems/ruby-2.0.0-p247/blog/gems/railties-4.0.0/lib/rails/commands/console.rb:9:in `start'
    from /Users/bparanj/.rvm/gems/ruby-2.0.0-p247/blog/gems/railties-4.0.0/lib/rails/commands.rb:64:in `'
    from bin/rails:4:in `require'
    from bin/rails:4:in `'
2.0.0p247 :018 > _
```

Figure 72: Article Path Error

Rails does not recognize the `article_path`.

### Step 3

Look at the output of rake routes command. You can see in the URI pattern column the :id variable for primary key.

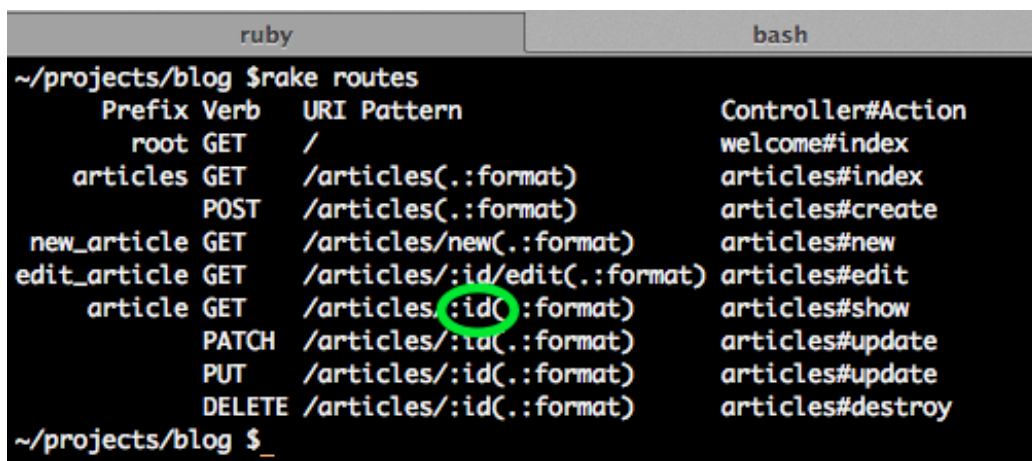


```
~/projects/blog $rake routes
      Prefix Verb   URI Pattern   Controller#Action
    root GET    /             welcome#index
  articles GET    /articles(.:format)  articles#index
          POST   /articles(.:format)  articles#create
 new_article GET    /articles/new(.:format) articles#new
edit_article GET    /articles/:id/edit(.:format) articles#edit
  article GET    /articles/:id(.:format) articles#show
          PATCH  /articles/:id(.:format) articles#update
          PUT    /articles/:id(.:format) articles#update
          DELETE /articles/:id(.:format) articles#destroy
~/projects/blog $ _
```

Figure 73: Show Article Path Primary Key

So we need to pass the id as the parameter as shown below:

```
<%= link_to 'Show', article_path(article.id) %>
```

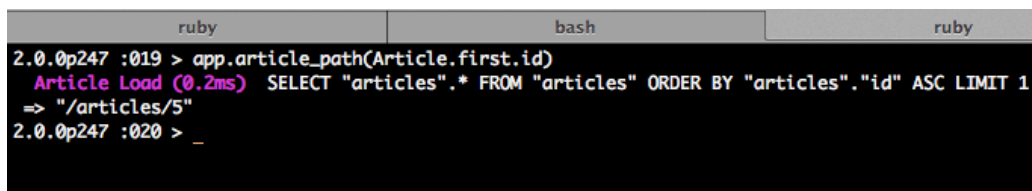

```
2.0.0p247 :019 > app.article_path(Article.first.id)
Article Load (0.2ms) SELECT "articles".* FROM "articles" ORDER BY "articles"."id" ASC LIMIT 1
=> "/articles/5"
2.0.0p247 :020 > _
```

Figure 74: Show Article Path

Rails recognizes article path when an id is passed in as the parameter to the url helper method.

You can see the generated string is the same as the URI pattern in the output of the rake routes command.

We can simplify it even further by letting Rails call the id method for us by just passing the article object.

ruby	bash	ruby
<pre>2.0.0p247 :018 &gt; app.article_path(Article.first) Article Load (0.3ms) SELECT "articles".* FROM "articles" ORDER BY "articles"."id" ASC LIMIT 1 =&gt; "/articles/5" 2.0.0p247 :019 &gt;</pre>		

Figure 75: Show Article Path

#### Step 4

Since Rails automatically calls the `id` method of the ActiveRecord we can simplify it as follows:

```
<%= link_to 'Show', article_path(article) %>
```

## Step 5

Rails has optimized this even further so you can do :

```
<%= link_to 'Show', article %>
```

Let's now see how Rails makes this magic happen.

ruby	bash	ruby
<pre>2.0.0p247 :013 &gt; article = Article.first Article Load (1.1ms) SELECT "articles".* FROM "articles" ORDER BY "articles"."id" ASC LIMIT 1 =&gt; #&lt;Article id: 5, title: "not", description: "duplication", created_at: "2013-11-09 19:17:12", updated_at: "2013-11-09 19:17:23"&gt; 2.0.0p247 :014 &gt; _</pre>		

Figure 76: Loading First Article from Database

Retrieving first article from database in Rails console.

ruby	ba
<pre>2.0.0p247 :014 &gt; app.polymorphic_path(article) =&gt; "/articles/5" 2.0.0p247 :015 &gt;</pre>	

Figure 77: Show Article Path

Experimenting in Rails console to check the generated URI for a given article resource.

Rails internally uses the `polymorphic_path` method that takes an argument to generate the url.



## Step 6

The app/views/articles/index.html.erb looks as shown below:

```
<h1>Listing Articles</h1>

<% @articles.each do |article| %>

  <%= article.title %> :

  <%= article.description %>

  <%= link_to 'Edit', edit_article_path(article) %>
  <%= link_to 'Show', article_path(article) %>

  <br/>

<% end %>
<br/>
<%= link_to 'New Article', new_article_path %>
```

## Step 7

Reload the articles index page <http://localhost:3000/articles>



Figure 78: Show Link

You will see the show link.

## Step 8

If you view the page source for articles index page, you will see the hyperlink for 'Show' with the URI pattern '/articles/1'. Since this is a hyperlink the browser will use the http verb GET when the user clicks on show.



```
19 <h1>Listing Articles</h1>
20
21
22     test :
23
24     first row updated 2
25
26     <a href="/articles/1/edit">Edit</a>
27     <a href="/articles/1">Show</a>
28
29     <br/>
```

Figure 79: Show Link Source

In the rails server log you will see the GET request for the resource `‘/articles/1’`. In this case the value of `:id` is 1. Rails will automatically populate the `params` hash with `:id` as the key and the value as the primary key of the record which in this case is 1. We can retrieve the value of the primary key from the `params` hash and load the record from the database.

ruby	bash	ruby
<pre>Started GET "/articles/1" for 127.0.0.1 at 2013-11-07 23:03:49 -0800 AbstractController::ActionNotFound (The action 'show' could not be found for ArticlesController):   actionpack (4.0.0) lib/abstract_controller/base.rb:131:in `process'   actionpack (4.0.0) lib/abstract_controller/rendering.rb:44:in `process'   actionpack (4.0.0) lib/action_controller/metal.rb:195:in `dispatch'</pre>		

Figure 80: Http GET Request

Server log is another friend.

## Step 9

If you click on the ‘Show’ link you will get the ‘Unknown action’ error.



Figure 81: Unknown Action Show

As we saw in the previous step, we can get the primary key from the `params` hash. So, define the `show` action in the `articles controller` as follows:

```
def show
  @article = Article.find(params[:id])
end
```

We already know the instance variable @article will be made available in the view.

## Step 10

If you click the ‘Show’ link, you will get the ‘Template is missing’ error.



Figure 82: Template Missing Error

We need a view to display the selected article. Let’s define app/views/show.html.erb with the following content:

```
<p>
  <%= @article.title %><br>
</p>

<p>
  <%= @article.description %><br>
</p>
```

Since the @article variable was initialized in the show action, we can retrieve the values of the columns for this particular record and display it in the view. Now the ‘Show’ link will work.

## Summary

In this lesson we saw how to display a selected article in the show page. In the next lesson we will see how to delete a given record from the database.

## CHAPTER 8

### Delete Article

#### Objectives

- Learn how to delete a given article.
- Learn how to use flash messages.

#### Steps

##### Step 1

Let's add 'Delete' link to each record displayed in the articles index page. Look at the output of rake routes.

ruby				bash
~/projects/blog \$rake routes				
	Prefix	Verb	URI Pattern	Controller#Action
	root	GET	/	welcome#index
articles		GET	/articles(.:format)	articles#index
		POST	/articles(.:format)	articles#create
new_article		GET	/articles/new(.:format)	articles#new
edit_article		GET	/articles/:id/edit(.:format)	articles#edit
article		GET	/articles/:id(.:format)	articles#show
		PATCH	/articles/:id(.:format)	articles#update
		PUT	/articles/:id(.:format)	articles#update
		DELETE	/articles/:id(.:format)	articles#destroy
~/projects/blog \$_				

Figure 83: URL Helper For Delete

The last row is the route for destroy. The Prefix column is empty in this case. It means whatever is above that column that is not empty carries over to that row. So we can create our hyperlink as:

```
<%= link_to 'Delete', article_path(article) %>
```

This will create an hyperlink, when a user clicks on the link the browser will make a http GET request, which means it will end up in show action instead of destroy. Look the Verb column, you see we need to use DELETE http verb to hit the destroy action in the articles controller. So now we have:

```
<%= link_to 'Delete', article_path(article), method: :delete %>
```

The third parameter specifies that the http verb to be used is DELETE. Since this is an destructive action we want to avoid accidental deletion of records, so let's popup a javascript confirmation for delete like this:

```
<%= link_to 'Delete',  
          article_path(article),  
          method: :delete,  
          data: { confirm: 'Are you sure?' } %>
```


The fourth parameter will popup a window that confirms the delete action. The app/views/articles/index.html.erb now looks like this:

```
<h1>Listing Articles</h1>  
  
<% @articles.each do |article| %>  
  
  <%= article.title %> :  
  
  <%= article.description %>  
  
  <%= link_to 'Edit', edit_article_path(article) %>  
  <%= link_to 'Show', article %>  
  <%= link_to 'Delete',  
            article_path(article),  
            method: :delete,  
            data: { confirm: 'Are you sure?' } %>  
  
  <br/>  
  
<% end %>  
<br/>  
<%= link_to 'New Article', new_article_path %>
```



## Step 2

Reload the articles index page <http://localhost:3000/articles>



# Listing Articles

test : first row updated 2 [Edit](#) [Show](#) [Delete](#)

another record : different way to create row [Edit](#) [Show](#) [Delete](#)

test : tester [Edit](#) [Show](#) [Delete](#)

testing : again. [Edit](#) [Show](#) [Delete](#)


[New Article](#)

Figure 84: Delete Link

The delete link in the browser.

### Step 3

In the articles index page, do a ‘View Page Source’.

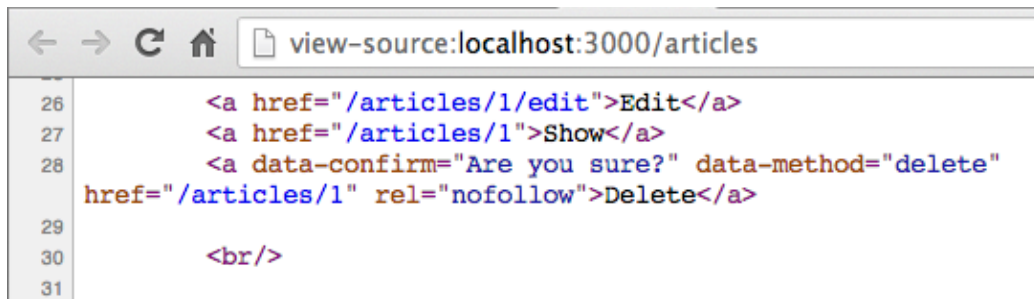

```
26      <a href="/articles/1/edit">Edit</a>
27      <a href="/articles/1">Show</a>
28      <a data-confirm="Are you sure?" data-method="delete"
href="/articles/1" rel="nofollow">Delete</a>
29
30      <br/>
31
```

Figure 85: Delete Link Page Source

You see the html 5 data attribute data-confirm with the value ‘Are you sure?’. This is the text displayed in the confirmation popup window. The data-method attribute value is delete. This is the http verb to be used for this link. The rel=nofollow tells spiders not to crawl these links because it will delete records in the database.

The combination of the URI pattern and the http verb DELETE uniquely identifies a resource endpoint on the server.

## Step 4

Right click on the `http://localhost:3000/articles` page. Click on the `jquery_ujs.js` link.

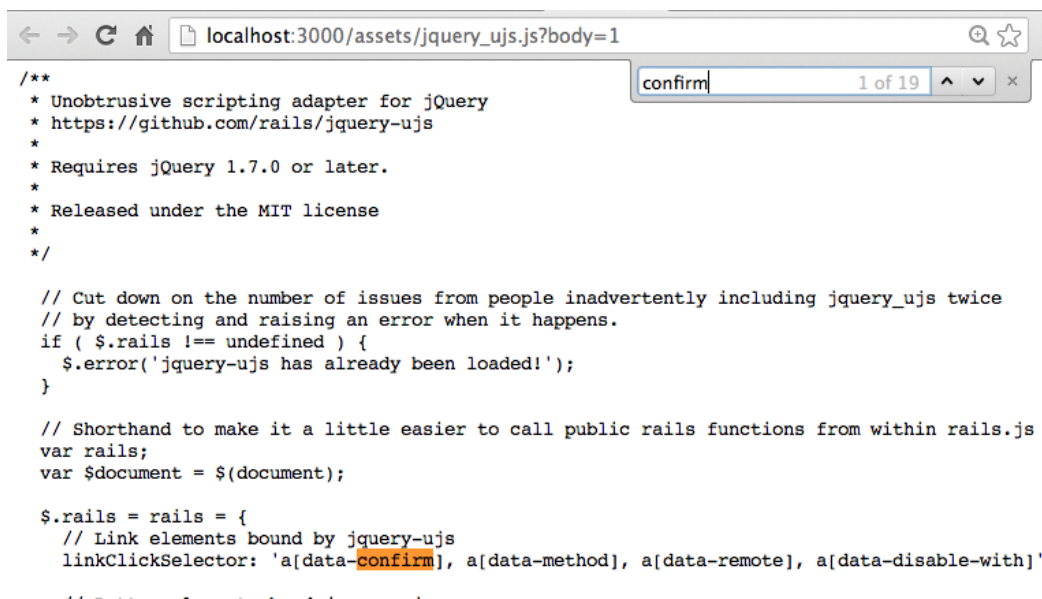


Figure 86: Data Confirm Link Element

Search for ‘confirm’. The first occurrence shows you the link element bound by jquery-ujs. UJS stands for Unobtrusive Javascript. It is unobtrusive because you don’t see any javascript code in the html page.

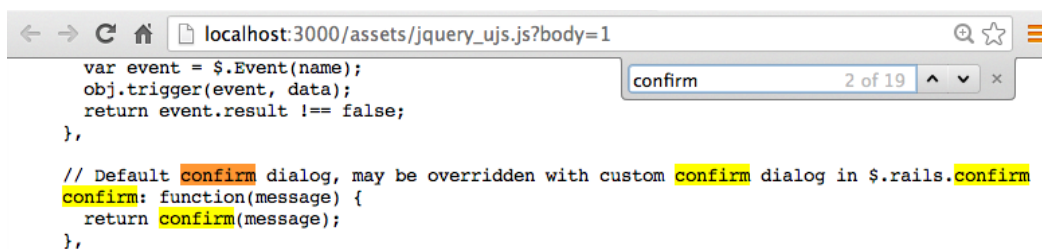


Figure 87: Data Confirm Popup

The second occurrence of the ‘confirm’ shows you the default confirm dialog.

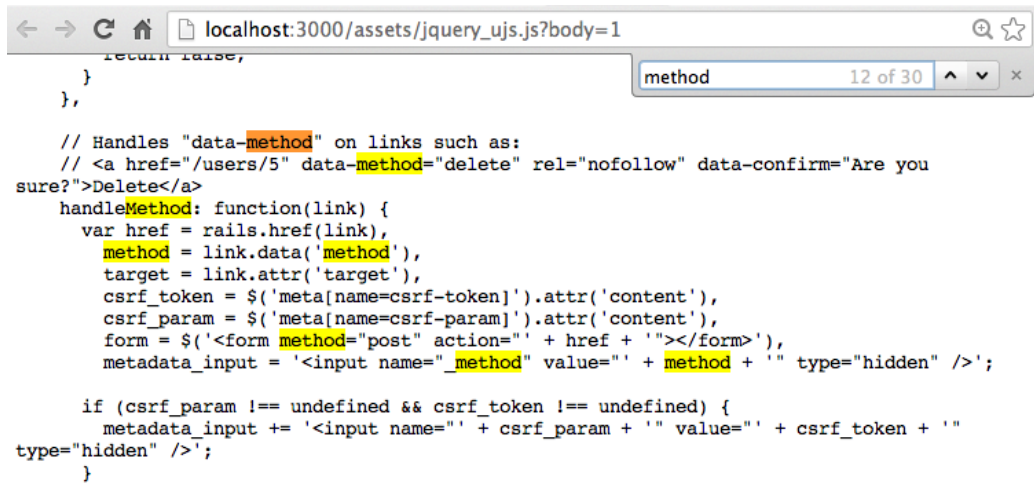


Figure 88: Data Method Delete

You can search for ‘method’. You can see handler method that handles ‘data-method’ on links.

## Step 5

In the articles index page, click on the 'Delete' link.

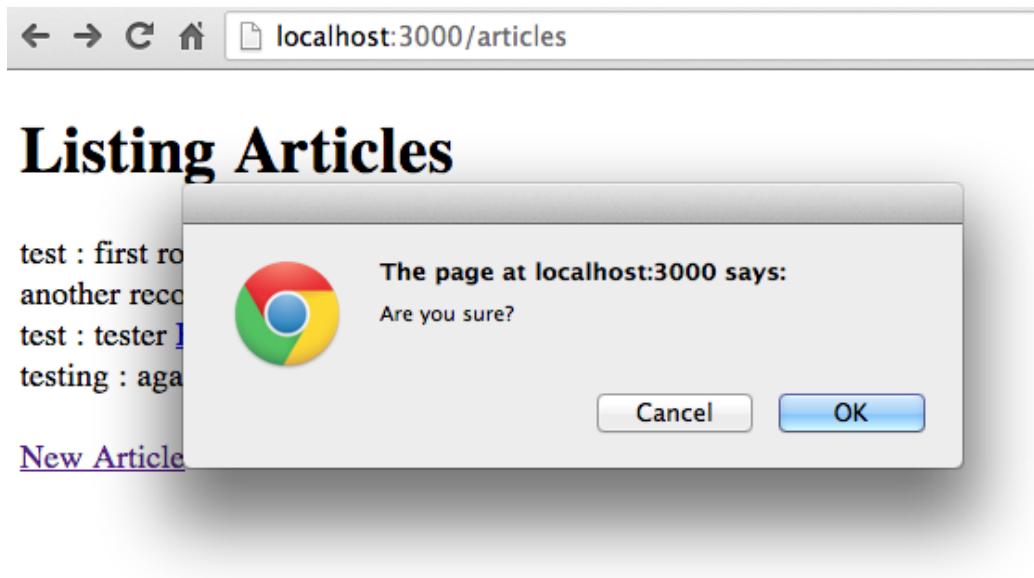


Figure 89: Confirmation Popup

Click 'Cancel'.

## Step 6

Define the destroy method in articles controller as follows:


```
def destroy
  @article = Article.find(params[:id])
  @article.destroy

  redirect_to articles_path
end
```

This method is very similar to update method. Instead of updating the record we are deleting it. You already know by this time how to look at the values sent by the browser to the server by looking at the server log output. You also know that params hash will contain the data sent to the server and Rails automatically populates the params hash.

## Step 7

In the articles index page, click on the ‘Delete’ link. Click ‘Ok’ in the confirmation popup. The record will now be deleted from the database and you will be redirected back to the articles index page.

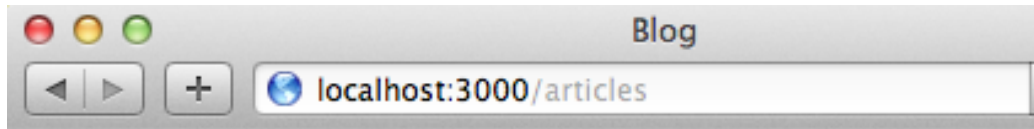

# Listing Articles

record two second row [Edit](#) [Show](#) [Delete](#)  
Create new article using a form [Edit](#) [Show](#) [Delete](#)  
Create new article using a form second time. [Edit](#) [Show](#) [Delete](#)  
[New Article](#)

Figure 90: First Record Deleted

Did we really delete the record?

## Step 8

The record was deleted but there is no feedback to the user. Let’s modify the destroy action as follows:

```
def destroy
  @article = Article.find(params[:id])
  @article.destroy

  redirect_to articles_path, notice: "Delete success"
end
```

Add the following code after the body tag in the application layout file, app/views/layouts/application.html.erb

```
<% flash.each do |name, msg| -%>
  <%= content_tag :div, msg, class: name %>
<% end -%>
```

Your updated layout file will now look like this:

```
<!DOCTYPE html>
<html>
<head>
<title>Blog</title>
<%= stylesheet_link_tag "application",
media: "all",
"data-turbolinks-track" => true %>
<%= javascript_include_tag "application",
"data-turbolinks-track" => true %>
<%= csrf_meta_tags %>
</head>
<body>

  <% flash.each do |name, msg| -%>
    <%= content_tag :div, msg, class: name %>
  <% end -%>


<%= yield %>

</body>
</html>
```



## Step 9

In the articles index page, click on the 'Delete' link.

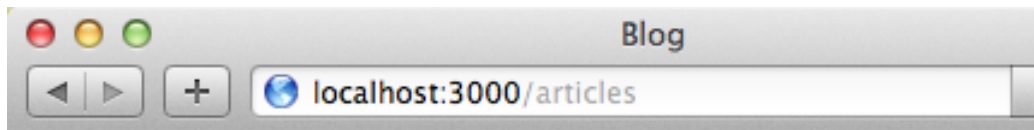

Delete success

## Listing Articles

Create new article using a form [Edit](#) [Show](#) [Delete](#)

Create new article using a form second time. [Edit](#) [Show](#) [Delete](#)

[New Article](#)

Figure 91: Delete Success

Now you see the feedback that is displayed to the user after delete operation.

## Step 10

In the articles index page, do a ‘View Page Source’.

```
<body>  
    <div class="notice">Delete success</div>  
    <h1>Listing Articles</h1>
```

Figure 92: Delete Success Page Source

You can see the `content_tag` helper generated html for the notice section.

## Summary

In this lesson we learned how to delete a given article. We also learned about flash notice to provide user feedback. In the next lesson we will learn about eliminating duplication in views.

# CHAPTER 9

## View Duplication

### Objective

- Learn how to eliminate duplication in views by using partials

### Steps

#### Step 1

Look at the `app/views/new.html.erb` and `app/views/edit.html.erb`. There is duplication.

#### Step 2

Create a file called `_form.html.erb` under `app/views/articles` directory with the following contents:

```
<%= form_for @article do |f| %>
  <p>
    <%= f.label :title %><br>
    <%= f.text_field :title %>
  </p>

  <p>
    <%= f.label :description %><br>
    <%= f.text_area :description %>
  </p>

  <p>
    <%= f.submit %>
  </p>
<% end %>
```

### Step 3

Edit the app/views/articles/new.html.erb and change the content as follows:

```
<h1>New Article</h1>  
  
<%= render 'form' %>
```

### Step 4

Edit the app/views/articles/edit.html.erb and change the content as follows:

```
<h1>Edit Article</h1>  
  
<%= render 'form' %>
```

## Step 5

Go to `http://localhost:3000/articles` and create new article and edit existing article. The name of the partial begins with an underscore, when you include the partial by using the render helper you don't include the underscore. This is the Rails convention for using partials.

If you get the following error:



Figure 93: Missing Partial Error

It means you did not create the `app/views/articles/_form.html.erb` file. Make sure you followed the instruction in step 2.

## Summary

In this lesson we saw how to eliminate duplication in views by using partials. In the next lesson we will learn about relationships between models.

## CHAPTER 10

### Relationships


#### Objective

- To learn relationships between models.

#### Steps

##### Step 1

Let's create a comment model by using the Rails generator command:

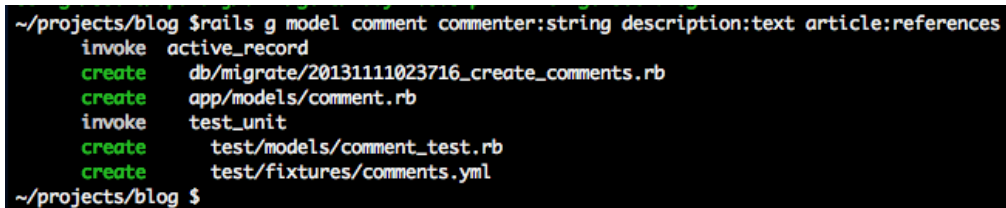

```
~/projects/blog $ rails g model comment commenter:string description:text article:references
  invoke  active_record
  create  db/migrate/20131111023716_create_comments.rb
  create  app/models/comment.rb
  invoke  test_unit
  create  test/models/comment_test.rb
  create  test/fixtures/comments.yml
~/projects/blog $
```

Figure 94: Generate Comment Model

```
$ rails g model comment commenter:string description:text article:references
```

##### Step 2


Open the `db/migrate/xyz_create_comments.rb` file in your IDE. You will see the `create_table()` method that takes comments symbol `:comments` as the argument and the description of the columns for the comments table.

What does `references` do? It creates the foreign key `article_id` in the comments table. We also create an index for this foreign key in order to make the SQL joins faster.

### Step 3

Run :

```
$ rake db:migrate
```

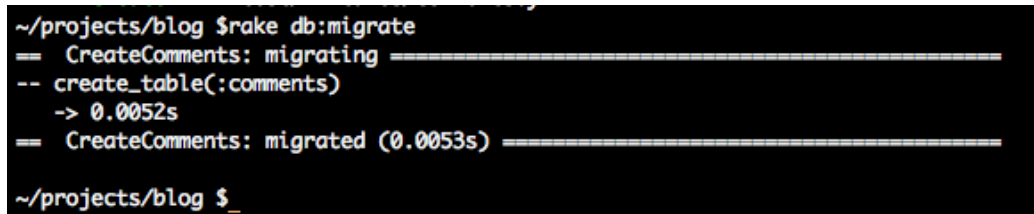

```
~/projects/blog $rake db:migrate
== CreateComments: migrating =====
-- create_table(:comments)
   -> 0.0052s
== CreateComments: migrated (0.0053s) =====

~/projects/blog $
```

Figure 95: Create Comments Table

Let's install SQLiteManager Firefox plugin that we can use to open the SQLite database, query, view table structure etc.

### Step 4

Install SQLiteManager Firefox plugin [SQLiteManager Firefox plugin](#)

## Step 5

Let's now see the structure of the comments table. In Firefox go to : Tools  
-> SQLiteManager

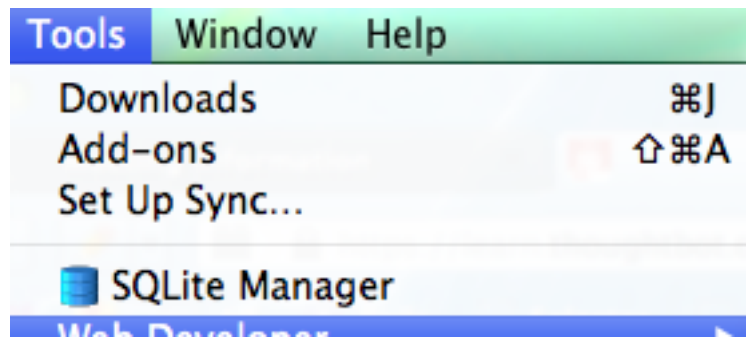


Figure 96: SQLite Manager Firefox Plugin



## Step 6

Click on 'Database' in the navigation and select 'Connect Database', browse to blog/db folder.

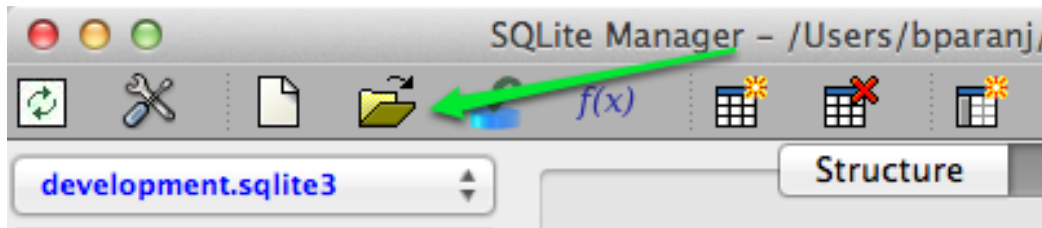


Figure 97: Folder Icon

You can also click on the folder icon as shown in the screenshot.

## Step 7

Change the file extensions to all files.

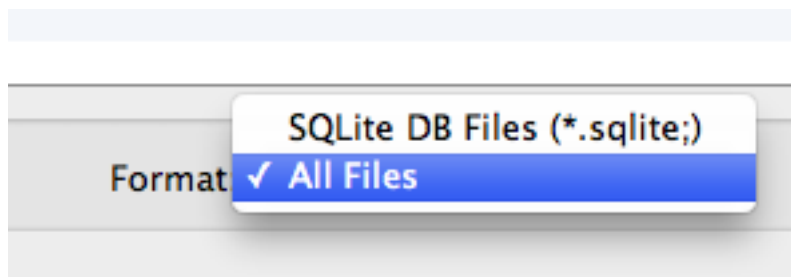


Figure 98: SQLite Manager All Files

## Step 8

Open the development.sqlite3 file. Select the comments table.

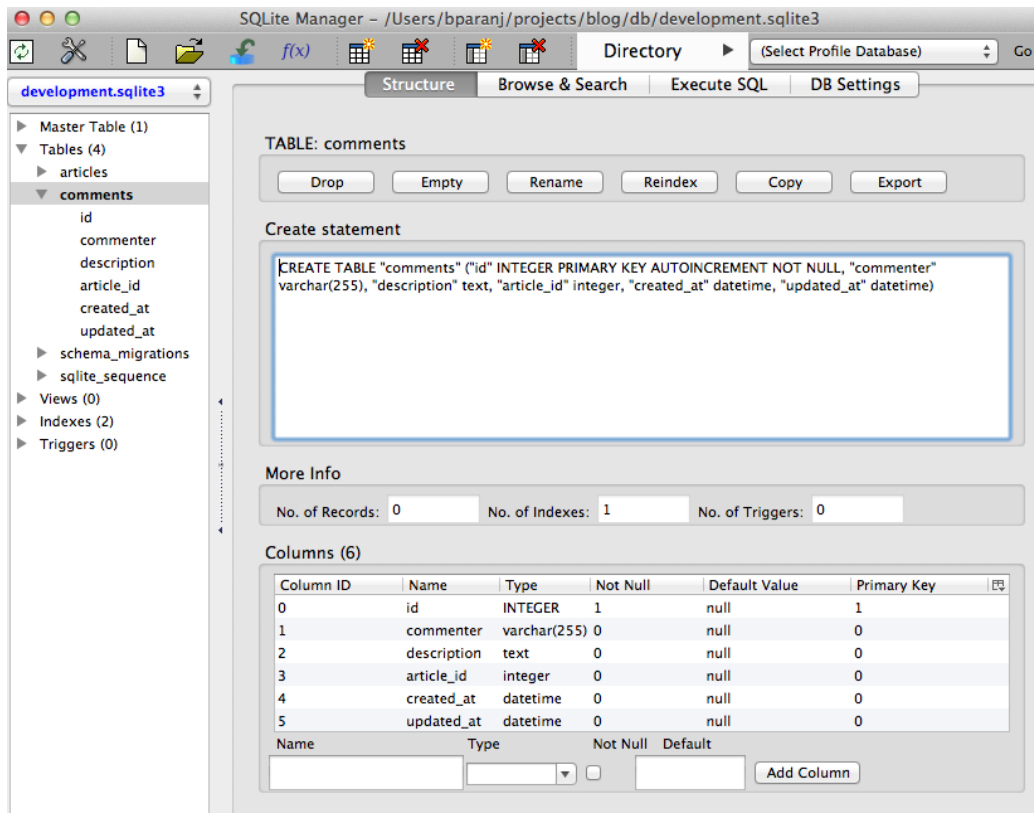


Figure 99: Comments Table Structure

You can see the foreign key `article_id` in the comments table.

## Step 9

Open the `app/models/comment.rb` file. You will see the

```
belongs_to :article
```

declaration. This means you have a foreign key `article_id` in the comments table.

The `belongs_to` declaration in the model will not create or manipulate database tables. The `belongs_to` or `references` in the migration will manipulate the database tables. Since your models are not aware of the database relationships, you need to declare them.

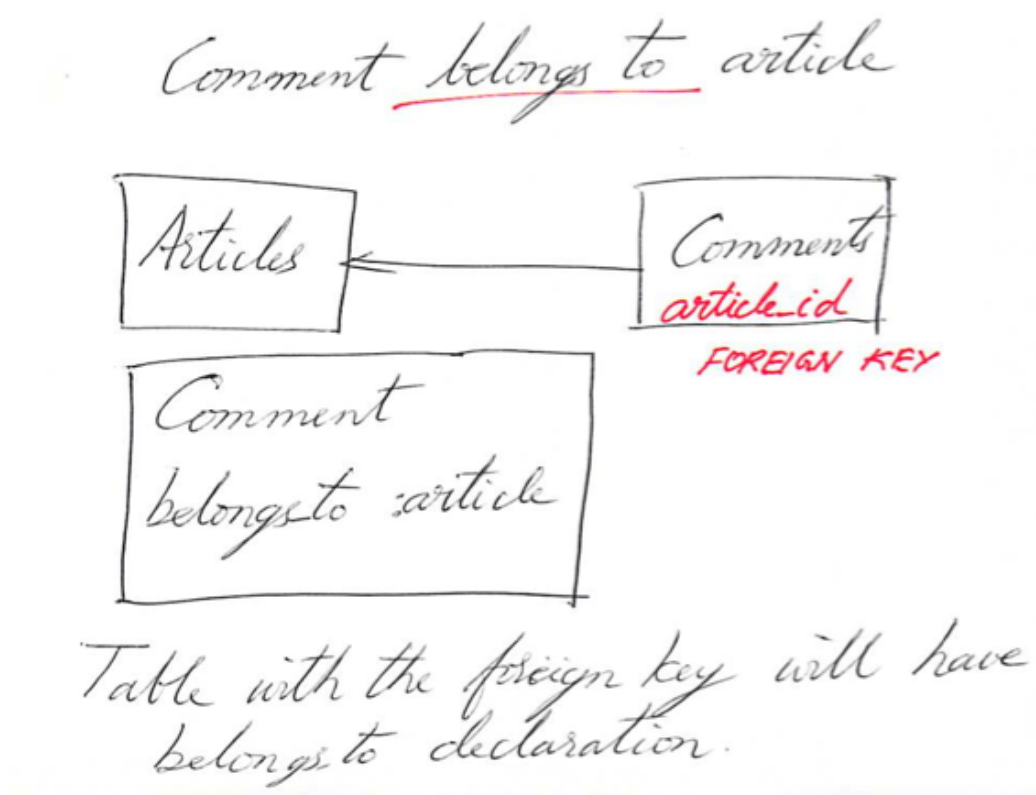


Figure 100: Belongs To Declaration

## Step 10

Open the app/models/article.rb file. Add the following declaration:

```
has_many :comments
```

This means each article can have many comments. Each comment points to its corresponding article.

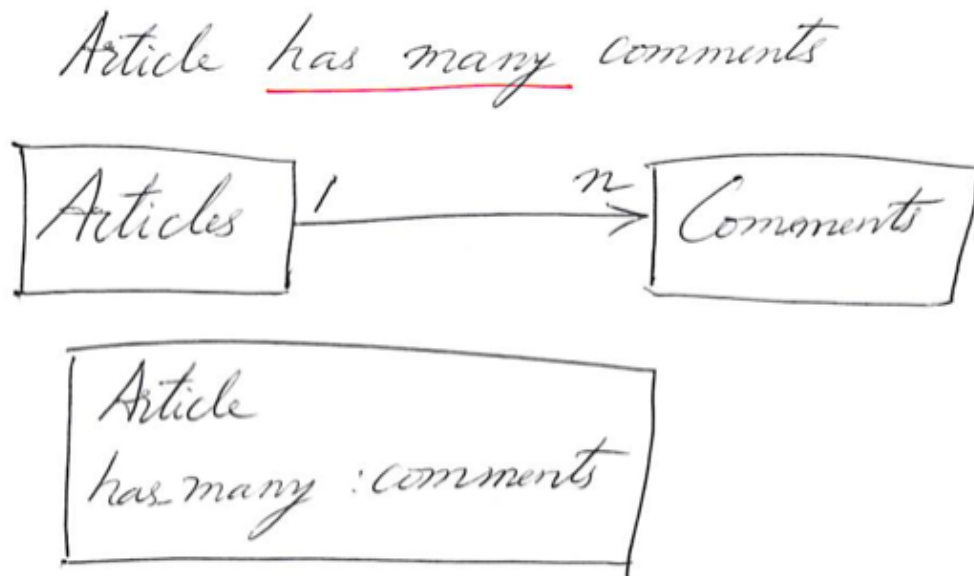


Figure 101: Has Many Declaration

## Step 11

Open the config/routes.rb and define the route for comments:


```
resources :articles do
  resources :comments
end
```

Since we have parent-children relationship between articles and comments we have nested routes for comments.

## Step 12

Let's create the controller for comments.

```
$ rails g controller comments
```

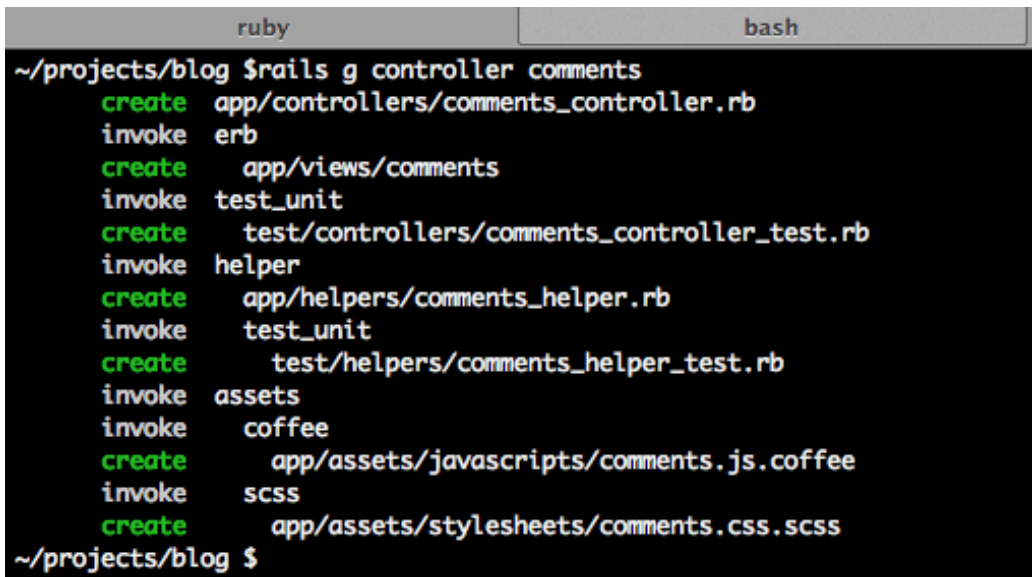A terminal window with a dark background and light-colored text. The window has two tabs at the top: 'ruby' and 'bash'. The prompt is '~/projects/blog \$'. The command entered is 'rails g controller comments'. The output shows a series of 'create' and 'invoke' actions for various files and directories related to the 'comments' controller, including controller, views, tests, helpers, assets (coffee, scss), and stylesheets. The prompt at the end is '~/projects/blog \$'.

```
~/projects/blog $ rails g controller comments
create  app/controllers/comments_controller.rb
invoke  erb
create  app/views/comments
invoke  test_unit
create  test/controllers/comments_controller_test.rb
invoke  helper
create  app/helpers/comments_helper.rb
invoke  test_unit
create  test/helpers/comments_helper_test.rb
invoke  assets
invoke  coffee
create  app/assets/javascripts/comments.js.coffee
invoke  scss
create  app/assets/stylesheets/comments.css.scss
~/projects/blog $
```

Figure 102: Generate Comments Controller

Readers can comment on any article. When someone comments we will display the comments for that article on the article's show page.

## Step 13

Let's modify the app/views/articles/show.html.erb to let us make a new comment:

```
<h2>Add a comment:</h2>
<%= form_for([@article, @article.comments.build]) do |f| %>
  <p>
    <%= f.label :commenter %><br />
    <%= f.text_field :commenter %>
  </p>
  <p>
    <%= f.label :description %><br />
    <%= f.text_area :description %>
  </p>
  <p>
    <%= f.submit %>
  </p>
<% end %>
```

The app/views/show.html.erb file will now look like this:

```
<p>
  <%= @article.title %><br>
</p>

<p>
  <%= @article.description %><br>
</p>

<h2>Add a comment:</h2>
<%= form_for([@article, @article.comments.build]) do |f| %>
  <p>
    <%= f.label :commenter %><br />
    <%= f.text_field :commenter %>
  </p>
  <p>
    <%= f.label :description %><br />
    <%= f.text_area :description %>
  </p>
  <p>
    <%= f.submit %>
  </p>
<% end %>
```

## Step 14

Go to <http://localhost:3000/articles> page and click on 'Show' for one of the article.



The screenshot shows a web browser window with the address bar displaying `localhost:3000/articles/3`. The page content includes the text "test" and "tester". Below this is a section titled "Add a comment:" in a large, bold, black serif font. Underneath the title are two form fields: "Commenter" with a single-line text input box, and "Description" with a larger multi-line text input box. At the bottom of the form is a button labeled "Create Comment".

Figure 103: Add Comment Form

You will now see the form for filling out the comment for this specific article.



## Step 15

View the page source for the article show page by clicking any of the ‘Show’ link in the articles index page.

```
30
31 <h2>Add a comment:</h2>
32 <form accept-charset="UTF-8" action="/articles/3/comments" class="new_comment"
  id="new_comment" method="post"><div style="margin:0;padding:0;display:inline"><input
  name="utf8" type="hidden" value="&#x2713;" /><input name="authenticity_token" type="hidden"
  value="6gubQ3YqRqyORqwhYYyMiy+NEDkNmGbYcjOPXQg8TBg=" /></div>
33   <p>
34     <label for="comment_commenter">Commenter</label><br />
35     <input id="comment_commenter" name="comment[commenter]" type="text" />
36   </p>
37   <p>
38     <label for="comment_description">Description</label><br />
39     <textarea id="comment_description" name="comment[description]">
40   </textarea>
41   </p>
42   <p>
43     <input name="commit" type="submit" value="Create Comment" />
44   </p>
45 </form>
```

Figure 104: Add Comment Page Source


You can see the URI pattern and the http method used when someone submits a comment by clicking the ‘Create Comment’ button.

## Exercise 1

Take a look at the output of rake routes and find out the resource endpoint for the URI pattern and http method combination found in step 12.

### Step 16

Run rake routes in the blog directory.

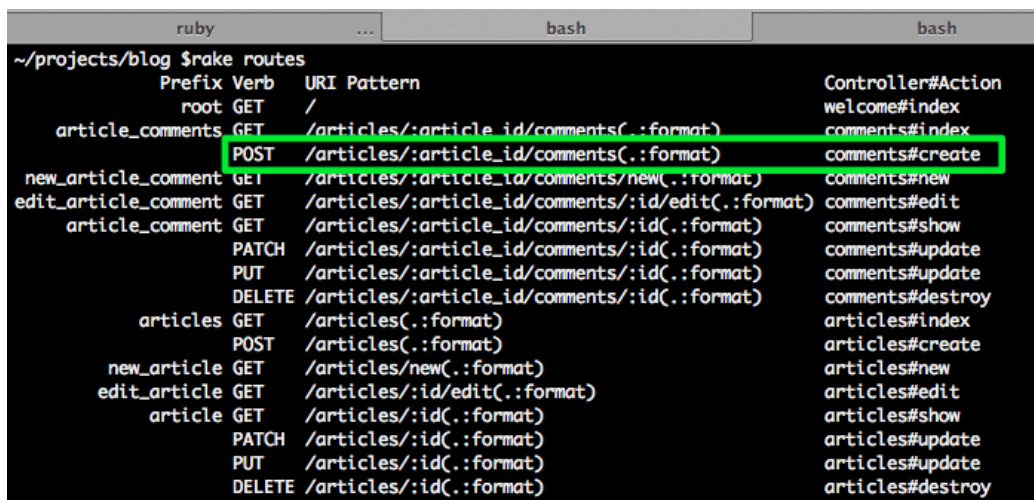

```
~/projects/blog $rake routes
      Prefix Verb   URI Pattern
root GET    /
article_comments GET    /articles/:article_id/comments(.:format)
               POST   /articles/:article_id/comments(.:format)
new_article_comment GET    /articles/:article_id/comments/new(.:format)
edit_article_comment GET    /articles/:article_id/comments/:id/edit(.:format)
article_comment GET    /articles/:article_id/comments/:id(.:format)
               PATCH  /articles/:article_id/comments/:id(.:format)
               PUT    /articles/:article_id/comments/:id(.:format)
               DELETE /articles/:article_id/comments/:id(.:format)
articles GET    /articles(.:format)
               POST   /articles(.:format)
new_article GET    /articles/new(.:format)
edit_article GET    /articles/:id/edit(.:format)
article GET    /articles/:id(.:format)
               PATCH  /articles/:id(.:format)
               PUT    /articles/:id(.:format)
               DELETE /articles/:id(.:format)
Controller#Action
welcome#index
comments#index
comments#create
comments#new
comments#edit
comments#show
comments#update
comments#update
comments#destroy
articles#index
articles#create
articles#new
articles#edit
articles#show
articles#update
articles#update
articles#destroy
```

Figure 105: Comments Resource Endpoint

You can see how the rails router takes the comment submit form to the comments controller, create action.

### Step 17

Fill out the comment form and click on ‘Create Comment’. You will get a unknown action create error page.

## Step 18

Define the create method in `comments_controller.rb` as follows:

```
def create

end
```

## Step 19

Fill out the comment form and submit it again.

ruby	bash	bash
<pre>Started POST "/articles/3/comments" for 127.0.0.1 at 2013-11-10 19:54:38 -0800 Processing by CommentsController#create as HTML Parameters: {"utf8"=&gt;"✓", "authenticity_token"=&gt;"6gubQ3YqRqyORqwhYYyMiy+NEDkNmGbYcjOPXQg8TBg=", "comment"=&gt;{"commenter"=&gt;"bugs", "description"=&gt;"bunny calling earth"}, "commit"=&gt;"Create Comment", "article_id"=&gt;"3"} Completed 500 Internal Server Error in 2ms</pre>		


Figure 106: Comment Values in Server Log

You can see the comment values in the server log.

## Step 20

Copy the entire Parameters hash you see from the server log. Go to Rails console and paste it like this:


```
params = {"comment"=>{"commenter"=>"test", "description"=>"tester"},  
"commit"=>"Create Comment", "article_id"=>"5"}
```

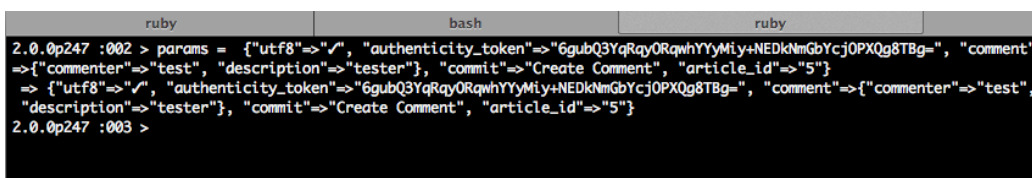

```
2.0.0p247 :002 > params = {"utf8"=>"✓", "authenticity_token"=>"6gubQ3YqRqyORqwhYYyMiy+NEDkNmGbYcjOPXQg8TBg=", "comment"  
=>{"commenter"=>"test", "description"=>"tester"}, "commit"=>"Create Comment", "article_id"=>"5"}  
=> {"utf8"=>"✓", "authenticity_token"=>"6gubQ3YqRqyORqwhYYyMiy+NEDkNmGbYcjOPXQg8TBg=", "comment"=>{"commenter"=>"test",  
"description"=>"tester"}, "commit"=>"Create Comment", "article_id"=>"5"}  
2.0.0p247 :003 >
```

Figure 107: Parameters for Comment

Here you initialize the params variable with the hash you copied in the rails server log.

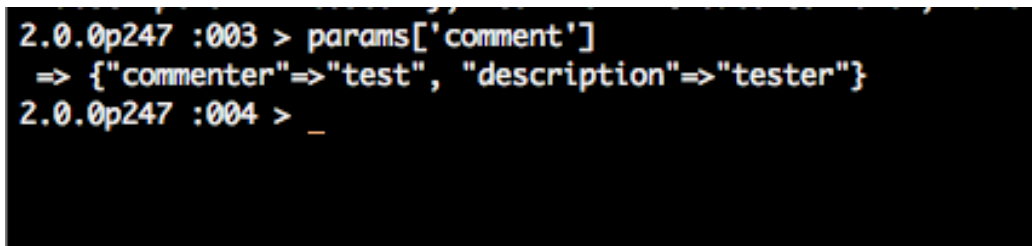

```
2.0.0p247 :003 > params['comment']  
=> {"commenter"=>"test", "description"=>"tester"}  
2.0.0p247 :004 > _
```

Figure 108: Retrieving Comment

You can find the value for comment model by doing: `params['comment']` in the Rails console

## Step 21

Let's create a comment for a given article by changing the create action as follows:

```
def create
  @article = Article.find(params[:article_id])
  permitted_columns = params[:comment].permit(:commenter, :description)
  @comment = @article.comments.create(permitted_columns)

  redirect_to article_path(@article)
end
```

The only new thing in the above code is the

```
@article.comments.create
```

Since we have the declaration

```
has_many :comments
```

in the article model. We can navigate from an instance of article to a collection of comments:

```
@article.comments
```

We call the method create on the comments collection like this:

```
@article.comments.create
```

This will automatically populate the foreign key article\_\_id in the comments table for us.

The params[:comment] will retrieve the comment column values.

## Step 22

Fill out the comment form and submit it.

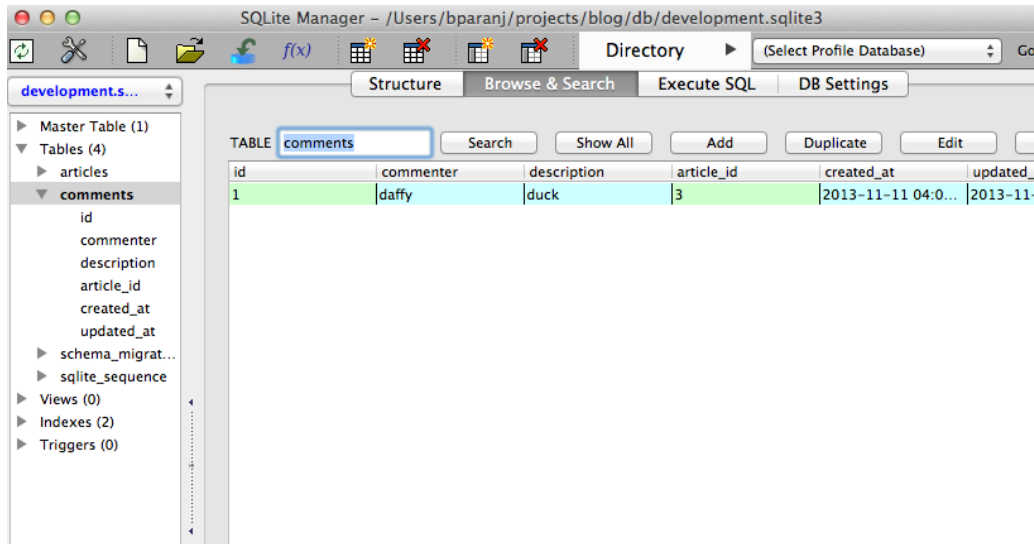


Figure 109: Comment Record in Database

You can now view the record in the MySQLite Manager or Rails dbconsole. Let's now display the comments made for a article in the articles show page.

## Step 23

Add the following code to the app/views/articles/show.html.erb

```
<h2>Comments</h2>
<% @article.comments.each do |comment| %>
  <p>
    <strong>Commenter:</strong>
    <%= comment.commenter %>
  </p>

  <p>
    <strong>Comment:</strong>
    <%= comment.description %>
  </p>
<% end %>
```

Your app/views/articles/show.html.erb will now look like this:

```
<p>
  <%= @article.title %><br>
</p>

<p>
  <%= @article.description %><br>
</p>

<h2>Comments</h2>
<% @article.comments.each do |comment| %>
  <p>
    <strong>Commenter:</strong>
    <%= comment.commenter %>
  </p>

  <p>
    <strong>Comment:</strong>
    <%= comment.description %>
  </p>
<% end %>

<h2>Add a comment:</h2>
<%= form_for([@article, @article.comments.build]) do |f| %>
  <p>
    <%= f.label :commenter %><br />
    <%= f.text_field :commenter %>
  </p>
  <p>
    <%= f.label :description %><br />
    <%= f.text_area :description %>
  </p>
  <p>
    <%= f.submit %>
  </p>
<% end %>
```



## **Step 24**

Reload the article show page or click on the 'Show' link for the article with comments by going to the articles index page.

You will now see the existing comments for an article.

←

→

↻

🏠

📄 localhost:3000/articles/3

test

tester

## Comments

**Commenter:**

daffy

**Comment:**

duck

**Commenter:**

bugs

**Comment:**

bunny

## Add a comment:

Commenter

Description

Create Comment

Figure 110: Comments For an Article

## Summary

We saw how to create parent-child relationship in the database and how to use ActiveRecord declarations in models to handle one to many relationship. We learned about nested routes and how to make forms work in the parent-child relationship. In the next lesson we will implement the feature to delete comments to keep our blog clean from spam.

# CHAPTER 11

## Delete Comment

### Objective

- Learn how to work with nested resources

### Steps

#### Step 1

Let's add 'Delete' link for the comment in `app/views/articles/show.html.erb`. We know the hyperlink text will be 'Delete Comment', so:


```
<%= link_to 'Delete Comment', ? %>
```

What should be URL helper to use in the second parameter?

## Step 2

From the blog directory run:

```
$ rake routes | grep comments
```

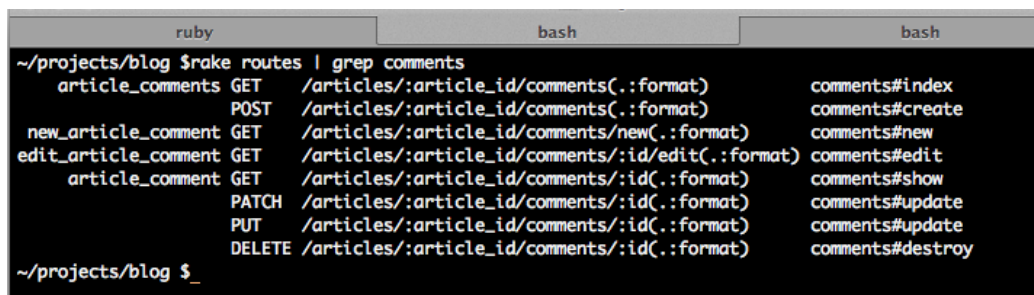

The image shows a terminal window with three tabs: 'ruby', 'bash', and 'bash'. The 'ruby' tab is active, and the command `~/projects/blog $ rake routes | grep comments` has been executed. The output is a table of routes related to comments.

Controller	HTTP Method	Path	Action
article_comments	GET	/articles/:article_id/comments(.:format)	comments#index
	POST	/articles/:article_id/comments(.:format)	comments#create
new_article_comment	GET	/articles/:article_id/comments/new(.:format)	comments#new
edit_article_comment	GET	/articles/:article_id/comments/:id/edit(.:format)	comments#edit
article_comment	GET	/articles/:article_id/comments/:id(.:format)	comments#show
	PATCH	/articles/:article_id/comments/:id(.:format)	comments#update
	PUT	/articles/:article_id/comments/:id(.:format)	comments#update
	DELETE	/articles/:article_id/comments/:id(.:format)	comments#destroy

The terminal prompt is `~/projects/blog $`.

Figure 111: Filtered Routes

We are filtering the routes only to the nested routes for comments so that it is easier to read the output in the terminal.

### Step 3

The Prefix column here is blank for the comments controller destroy action. So we go up and look for the very first non blank value in the Prefix column and find the URL helper for delete comment feature.



```
~/projects/blog $rake routes | grep comments
  article_comments GET    /articles/:article_id/comments(:format) comments#index
                  POST   /articles/:article_id/comments(:format) comments#create
  new_article_comment GET    /articles/:article_id/comments/new(:format) comments#new
  edit_article_comment GET    /articles/:article_id/comments/:id/edit(:format) comments#edit
  article_comment GET    /articles/:article_id/comments/:id(:format) comments#show
                  PATCH  /articles/:article_id/comments/:id(:format) comments#update
                  PUT    /articles/:article_id/comments/:id(:format) comments#update
                  DELETE /articles/:article_id/comments/:id(:format) comments#destroy
~/projects/blog $
```

Figure 112: Delete URL Helper for Nested Routes

So, we now have:

```
<%= link_to 'Delete Comment', article_comment(article, comment) %>
```



```
~/projects/blog $rake routes | grep comments
  article_comments GET    /articles/:article_id/comments(:format) comments#index
                  POST   /articles/:article_id/comments(:format) comments#create
  new_article_comment GET    /articles/:article_id/comments/new(:format) comments#new
  edit_article_comment GET    /articles/:article_id/comments/:id/edit(:format) comments#edit
  article_comment GET    /articles/:article_id/comments/:id(:format) comments#show
                  PATCH  /articles/:article_id/comments/:id(:format) comments#update
                  PUT    /articles/:article_id/comments/:id(:format) comments#update
                  DELETE /articles/:article_id/comments/:id(:format) comments#destroy
~/projects/blog $
```

Figure 113: Nested Routes Foreign and Primary Keys

We need to pass two parameters to the URL helper because in the URI pattern column you can see the `:article_id` as well as the primary key for comment `:id`. You already know that Rails is intelligent enough to call the `id` method on the passed in objects. The order in which you pass the objects is the same order in which it appears in the URI pattern.

## Step 4

There are other URI patterns which are similar to the comments controller destroy action. So we need to do the same thing we did for articles resource. So the `link_to` now becomes:

```
<%= link_to 'Delete Comment',  
           article_comment(article, comment),  
           method: :delete %>
```

## Step 5

The 'Delete Comment' is a destructive operation so let's add the confirmation popup to the `link_to` helper.

```
<%= link_to 'Delete Comment',  
           article_comment(article, comment),  
           method: :delete,  
           data: { confirm: 'Are you sure?' } %>
```

The `app/views/articles/show.html.erb` now looks as follows:

```
<p>  
  <%= @article.title %><br>  
</p>  
  
<p>  
  <%= @article.description %><br>  
</p>  
  
<h2>Comments</h2>  
<% @article.comments.each do |comment| %>  
  <p>  
    <strong>Commenter:</strong>  
    <%= comment.commenter %>  
  </p>
```

```

<p>
  <strong>Comment:</strong>
  <%= comment.description %>
</p>

  <%= link_to 'Delete Comment',
              article_comment_path(@article, comment),
              method: :delete,
              data: { confirm: 'Are you sure?' } %>

<% end %>

<h2>Add a comment:</h2>
<%= form_for([@article, @article.comments.build]) do |f| %>
  <p>
    <%= f.label :commenter %><br />
    <%= f.text_field :commenter %>
  </p>
  <p>
    <%= f.label :description %><br />
    <%= f.text_area :description %>
  </p>
  <p>
    <%= f.submit %>
  </p>
<% end %>

```



## Step 6

Lets implement the destroy action in the comments\_controller.rb as follows:

```
def destroy
  @article = Article.find(params[:article_id])
  @comment = @article.comments.find(params[:id])
  @comment.destroy

  redirect_to article_path(@article)
end
```

We first find the parent record which in this case is the article. The next step scopes the find for that particular article record due to security. Then we delete the comment by calling the destroy method. Finally we redirect the user to the articles index page similar to the create action.

## Step 7

Go to the articles index page by reloading the `http://localhost:3000/articles`  
Click on the ‘Show’ link for any article that has comments.

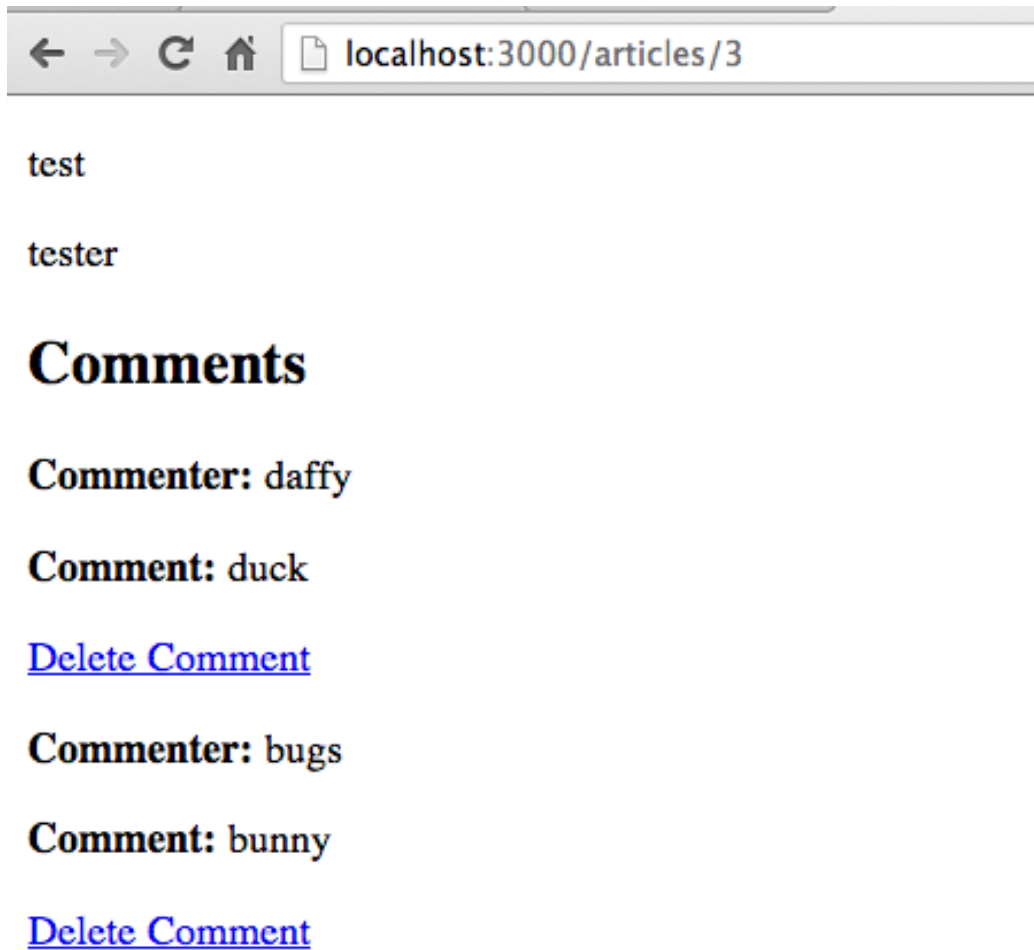


Figure 114: Delete Comment Links

You will see the ‘Delete Comment’ link for every comment of the article.



Figure 115: URL Error

You will get the url error page if you forget to append the `__path` or `__url` to the `article_comment` Prefix.



Figure 116: Article Instance Variable Error

If you forget to use the instance variable `@article`, then you will get the above error message.

## Step 8

Click the 'Delete Comment' link in the articles show page. The confirmation popup will appear and if you click 'Ok' the record will be deleted from the database and you will be redirected back to the articles show page.

## Exercise 1

Change the destroy action `redirect_to` method to use notice that says ‘Comment deleted’. If you are using MySQLite Manager you can click on the ‘Refresh’ icon which is the first icon in the top navigation bar to see the comments gets deleted.



Figure 117: Refresh Icon

Refresh icon of Firefox Plugin MySQLite Manager.

## Exercise 2

Go to articles index page and delete an article that has comments. Now go to either rails dbconsole or use MySQLite Manager to see if the comments associated with that articles is still in the database.

### Step 9

When you delete the parent the children do not get deleted automatically. The comment records in our application become useless because they are specific to a given article. In order to delete them when the parent gets deleted we need to change the Article ActiveRecord sub-class like this :

```
class Article < ActiveRecord::Base
  has_many :comments, dependent: :destroy
end
```

Now if you delete the parent that has comments, all the comments associated with it will also be deleted. So you will not waste space in the database by retaining records that are no longer needed.

## Step 10

```
2.0.0p247 :029 > app.polymorphic_path(article, article.comments.first)
NoMethodError: undefined method `merge' for #<Comment:0x00000103b30ca0>
    from /Users/bparanj/.rvm/gems/ruby-2.0.0-p247@blog/gems/activemodel-4.0.0/lib/active_model.rb:100:in `merge'
    from /Users/bparanj/.rvm/gems/ruby-2.0.0-p247@blog/gems/activerecord-4.0.0/lib/active_record/core.rb:100:in `merge'
    from /Users/bparanj/.rvm/gems/ruby-2.0.0-p247@blog/gems/actionpack-4.0.0/lib/action_controller/metal/request_forgery_protection.rb:100:in `merge'
    from (irb):29
    from /Users/bparanj/.rvm/gems/ruby-2.0.0-p247@blog/gems/railties-4.0.0/lib/rails/console.rb:100:in `merge'
    from /Users/bparanj/.rvm/gems/ruby-2.0.0-p247@blog/gems/railties-4.0.0/lib/rails/console.rb:100:in `merge'
    from /Users/bparanj/.rvm/gems/ruby-2.0.0-p247@blog/gems/railties-4.0.0/lib/rails/console.rb:100:in `merge'
    from bin/rails:4:in `require'
    from bin/rails:4:in `<main>'
2.0.0p247 :030 > _
```

Figure 118: Polymorphic Path Method Error

The `polymorphic_path` method will throw an error when two arguments are passed.

```
2.0.0p247 :030 > app.polymorphic_path([article, article.comments.first])
=> "/articles/5/comments/5"
2.0.0p247 :031 >
```

Figure 119: Polymorphic Path Method

Rails internally uses `polymorphic_path` method with an array containing the parent and child objects to generate the url helper.

Change the second parameter, url helper to :

```
[@article, comment]
```

The `link_to` will now look like this:

```
<%= link_to 'Delete Comment',  
           [@article, comment],  
           method: :delete,  
           data: { confirm: 'Are you sure?' } %>
```

The delete functionality will still work. Since Rails allows passing the parent and child instances in an array instead of using the Prefix.

## Summary

In this lesson we learned about nested routes and how to deal with deleting records which has children. The current implementation allows anyone to delete records. In the next lesson we will restrict the delete functionality only to blog owner.

## CHAPTER 12

### Restricting Operations

#### Objective

- To learn how to use simple HTTP authentication to restrict access to actions

#### Steps

##### Step 1

Add the following code to the top of the `articles_controller.rb`:

```
class ArticlesController < ApplicationController

  http_basic_authenticate_with name: 'welcome',
    password: 'secret',
    except: [:index, :show]

  <!-- actions such as index, new etc omitted here -->
end
```

This declaration protects the creating, editing and deleting functionality. Read only operations such as show and index are not protected.

##### Step 2

Reload the articles index page : `http://localhost:3000/articles`



### Step 3

Click 'Delete' for any of the article.

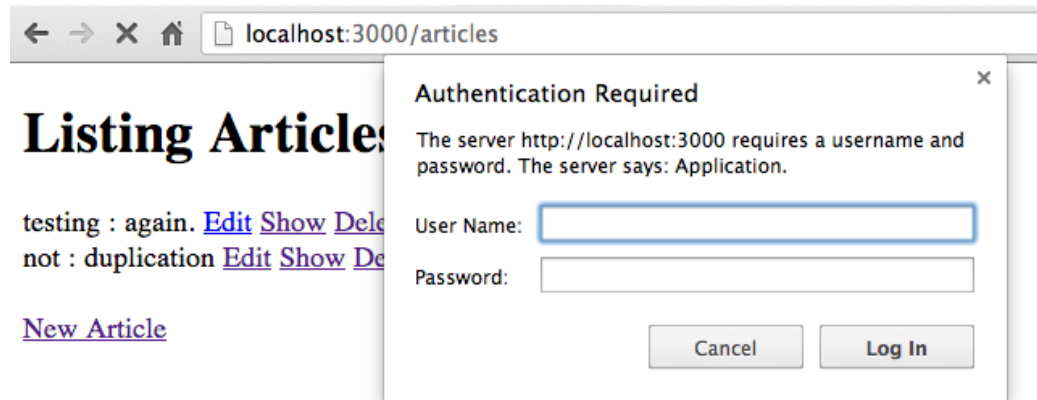


Figure 120: URL Error

You will see popup for authentication.

### Step 4

For user name, enter welcome and for password enter secret. Click 'Login'. Now the record will be deleted.

## Exercise 1

Use http basic authentication to protect deleting comments in the articles show page.

## Summary

This completes our quick tour of Rails 4.2. If you have developed the blog application following the 12 lessons you will now have a strong foundation to build upon by reading other Rails books to continue your journey to master the Rails framework. Good luck.

## 1. Filters

### Objective

- To learn how to use `before_action` filter

### Steps

#### Step 1

Add a `find_article` method to `articles_controller.rb`:

```
def find_article
  Article.find(params[:id])
end
```

#### Step 2

Add the `before_action` filter to `articles_controller.rb`:

```
before_action :find_article, except: [:new, :create, :index]
```

We are excluding the new, create and index actions because we don't need to find an article for a given id for those methods.

### Step 3

Remove the duplication in edit, updated, show and destroy by using the `find_article` method. The `articles_controller.rb` now looks like this:

```
class ArticlesController < ApplicationController
  before_action :find_article, except: [:new, :create, :index]

  http_basic_authenticate_with name: 'welcome',
    password: 'secret',
    except: [:index, :show]

  def index
    @articles = Article.all
  end

  def new
    @article = Article.new
  end

  def create
    Article.create(params.require(:article).permit(:title, :description))

    redirect_to articles_path
  end

  def edit
  end

  def update
    allowed_params = params.require(:article).permit(:title, :description)
    @article.update_attributes(allowed_params)

    redirect_to articles_path
  end

  def show
  end
end
```

```

def destroy
  @article.destroy

  redirect_to articles_path, notice: "Delete success"
end

def find_article
  @article = Article.find(params[:id])
end
end

```

#### Step 4

We don't want the `find_article` method to be exposed as an action that can be called. So let's make it private like this:

```

private

def find_article
  Article.find(params[:id])
end

```

Now this method can only be used within the articles controller class. Edit, delete and show features will work.

## Summary

In this lesson we learned how to use `before_action` filter. It takes the name of the method as a symbol and calls that method before an action is executed. We customized the filter by excluding some of the actions that does not require loading the article from the database. To learn more about filters check out the <http://guides.rubyonrails.org/> site.

## 2. Validations

### Objectives

- To learn about validating user input
- To learn about render and redirect

### Steps

#### Step 1

Go to <http://localhost:3000/articles> page in the browser. Click on ‘New Article’ link and click submit without filling out the form. You will see that the title and description of the article is blank in the database. Let’s fix this problem.

#### Step 2

Add the validation declarations to `article.rb` as follows:

```
validates :title, presence: true
validates :description, presence: true
```

The `article.rb` file now looks like this:

```
class Article < ActiveRecord::Base
  has_many :comments, dependent: :destroy

  validates :title, presence: true
  validates :description, presence: true
end
```

### Step 3

Submit the new article form without values for title and description. No new record is created but there is no feedback to the user explaining why new record was not created.



Figure 121: Blank Values Inserted in the Database

Let's provide user feedback.

## Step 4

Add the code to display validation error messages to the app/views/articles/\_form.html.erb file:

```
<% if @article.errors.any? %>
  <h2><%= pluralize(@article.errors.count, "error") %> prohibited
    this article from being saved:</h2>

  <ul>
    <% @article.errors.full_messages.each do |m| %>
      <li><%= m %></li>
    <% end %>
  </ul>
<% end %>
```

Now the form partial looks like this:

```
<%= form_for @article do |f| %>

  <% if @article.errors.any? %>
    <h2>
      <%= pluralize(@article.errors.count, "error") %>
      prohibited this article from being saved:
    </h2>

    <ul>
      <% @article.errors.full_messages.each do |m| %>
        <li><%= m %></li>
      <% end %>
    </ul>
  <% end %>

  <p>
    <%= f.label :title %><br>
    <%= f.text_field :title %>
  </p>
```

```


<p>
  <%= f.label :description %><br>
  <%= f.text_area :description %>
</p>

<p>
  <%= f.submit %>
</p>
<% end %>

```

The pluralize view helper method pluralizes the string argument depending on the number of the first parameter. In our case if there are more than one error than the output of pluralize will be 'errors' otherwise it will be 'error'.

The any? method returns true if there are any elements in a given array, otherwise it returns false.

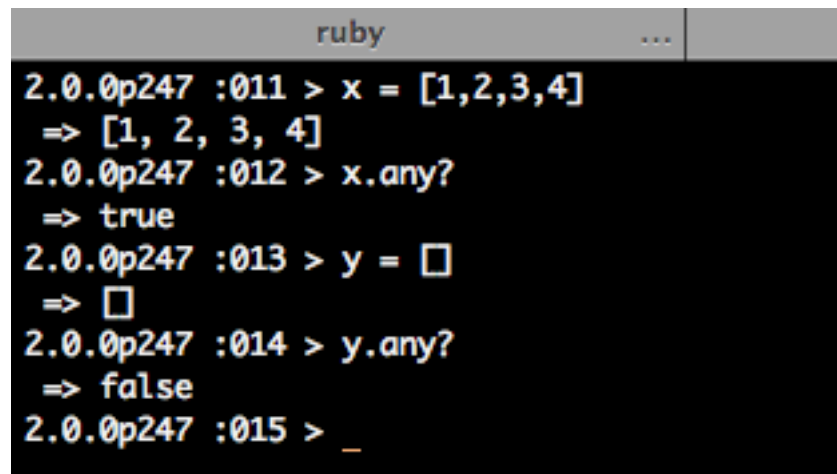

```

ruby
2.0.0p247 :011 > x = [1,2,3,4]
=> [1, 2, 3, 4]
2.0.0p247 :012 > x.any?
=> true
2.0.0p247 :013 > y = []
=> []
2.0.0p247 :014 > y.any?
=> false
2.0.0p247 :015 > _

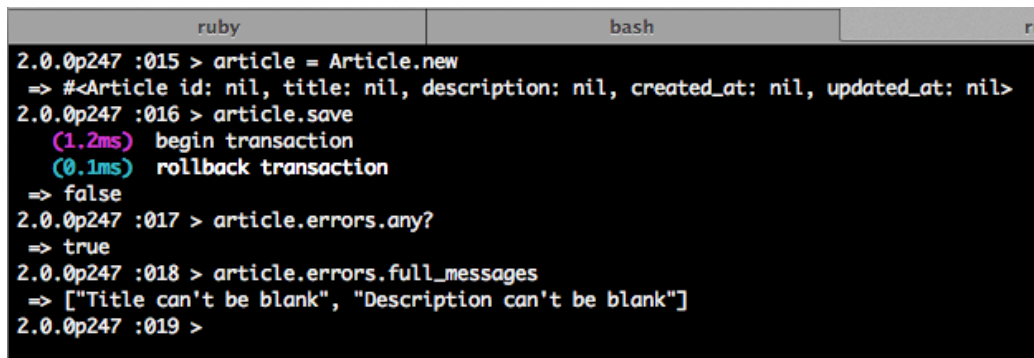
```

Figure 122: The Array any? Method in Action

Experimenting in the Rails console to learn about any? method.



We iterate through all the error messages for the article object and display it in a list.

A screenshot of a terminal window with a dark background and light-colored text. The window has three tabs at the top: 'ruby', 'bash', and 'ru'. The 'ruby' tab is active. The terminal shows a series of commands and their outputs in a Rails console. The commands are: 1. 'article = Article.new' which returns '#<Article id: nil, title: nil, description: nil, created\_at: nil, updated\_at: nil>'. 2. 'article.save' which returns 'false'. Above this return value, there are two lines of output in parentheses: '(1.2ms) begin transaction' and '(0.1ms) rollback transaction'. 3. 'article.errors.any?' which returns 'true'. 4. 'article.errors.full\_messages' which returns '["Title can't be blank", "Description can't be blank"]'. The prompt '2.0.0p247 :019 >' is visible at the bottom.

```
2.0.0p247 :015 > article = Article.new
=> #<Article id: nil, title: nil, description: nil, created_at: nil, updated_at: nil>
2.0.0p247 :016 > article.save
(1.2ms) begin transaction
(0.1ms) rollback transaction
=> false
2.0.0p247 :017 > article.errors.any?
=> true
2.0.0p247 :018 > article.errors.full_messages
=> ["Title can't be blank", "Description can't be blank"]
2.0.0p247 :019 >
```

Figure 123: Experimenting in the Rails Console

## Step 5

Change the create action in the articles controller as follows:

```
def create
  allowed_params = params.require(:article).permit(:title, :description)
  article = Article.create(allowed_params)

  if article.errors.any?
    render :new
  else
    redirect_to articles_path
  end
end
```

## Step 6

Submit an empty new article form.


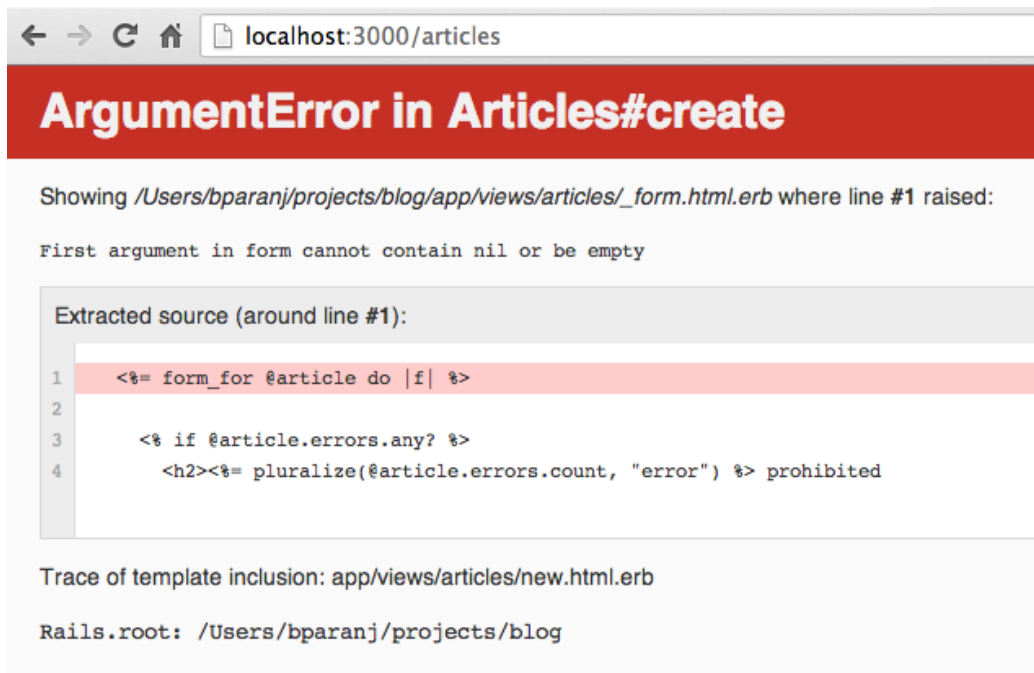


Figure 124: Article Instance Variable is Nil

We get an error because when the render call renders the `app/views/new.html.erb` but does not execute the new action in the articles controller.

Since we need the instance variable that has errors we cannot use the article instance variable in the new action.

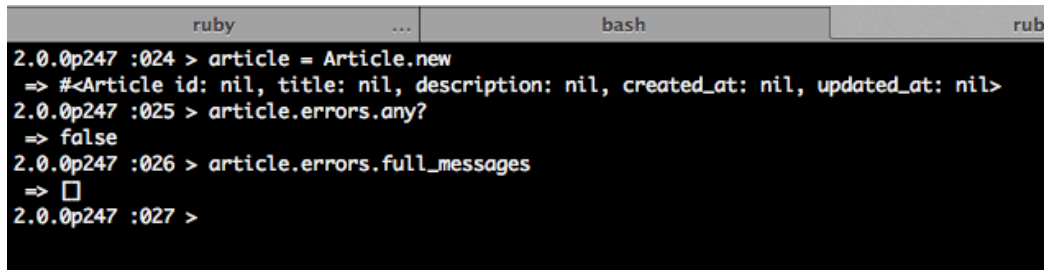

```
ruby ... bash rub
2.0.0p247 :024 > article = Article.new
=> #<Article id: nil, title: nil, description: nil, created_at: nil, updated_at: nil>
2.0.0p247 :025 > article.errors.any?
=> false
2.0.0p247 :026 > article.errors.full_messages
=> []
2.0.0p247 :027 >
```

Figure 125: Article Instance in Memory


Let's change the local variable to an instance variable.

## Step 7

Change the article to @article in the create action of the articles\_controller.rb.

```
def create
  allowed_params = params.require(:article).permit(:title, :description)
  @article = Article.create(allowed_params)

  if @article.errors.any?
    render :new
  else
    redirect_to articles_path
  end
end
```

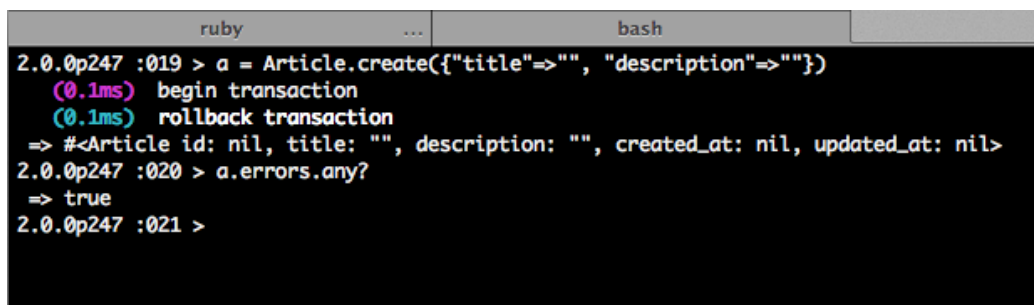

```
ruby ... bash
2.0.0p247 :019 > a = Article.create({"title"=>"", "description"=>""})
(0.1ms) begin transaction
(0.1ms) rollback transaction
=> #<Article id: nil, title: "", description: "", created_at: nil, updated_at: nil>
2.0.0p247 :020 > a.errors.any?
=> true
2.0.0p247 :021 >
```

Figure 126: Experimenting in the Rails Console

Learning the Rails API by experimenting in the Rails console.

Here we have changed the local variable article to an instance variable @article. This change allows the app/views/new.html.erb to render the form partial which uses @article variable. The render call will directly render the app/views/new.html.erb and will not execute any code in the new action in articles controller. This is different from redirect, which sends a 302 status code to the browser and it will execute the action before the view is rendered.

## Step 8

Submit an empty form for creating a new article.

---

# New Article

## 2 errors prohibited this article from being saved:

- Title can't be blank
- Description can't be blank

Title

Description

Create Article

Figure 127: Validation Error Messages

You will now see error messages displayed to the user.

## Exercises

1. Read the Rails documentation and add the validation check for the title so that the minimum length of title is 2.
2. Why does `Article.new` with no values for title and description have no errors whereas `Article.create` with no values for title and description have errors?

## Summary

In this lesson we learned how to display validation error messages to the user when the user does not provide required fields. We also learned the difference between the `render` and `redirect` calls.

## 3. Using Twitter Bootstrap 3.3

### Objective

- Learn how to integrate Twitter Bootstrap 3.3 with Rails 4.2 and style your web application.

### Steps

#### Step 1

Add the following line to Gemfile:

```
gem 'bootstrap-sass', '~> 3.3.1'
```

If you skip this step, you will get the error: `File to import not found or unreadable: bootstrap-sprockets`. Rails 4.2 automatically adds the `sass-rails` gem to the Gemfile. You can open the Gemfile to verify it.

#### Step 2

It is also recommended to use [Autoprefixer](#) with Bootstrap to add browser vendor prefixes automatically. Simply add the gem:

```
gem 'autoprefixer-rails'
```

to Gemfile.

#### Step 3

Run :

```
bundle install
```

from the blog directory. Restart your server to make the files available through the asset pipeline.

## Step 4

Open the file `app/assets/stylesheets/application.css.scss` and import Bootstrap styles:

```
// "bootstrap-sprockets" must be imported before "bootstrap" and "bootstrap/variables"
@import "bootstrap-sprockets";
@import "bootstrap";
```

`bootstrap-sprockets` must be imported before `bootstrap` for the icon fonts to work.

## Step 5

Make sure the file has `.css.scss` extension for Sass syntax. If you have just generated a new Rails app, it may come with a `.css` file instead. If this file exists, it will be served instead of Sass, so rename the `app/assets/stylesheets/application.css` to `app/assets/stylesheets/application.css.scss`.

## Step 6

Require Bootstrap Javascripts in `app/assets/javascripts/application.js`:

```
//= require jquery
//= require bootstrap-sprockets
//= require jquery_ujs
//= require turbolinks
//= require_tree .
```

## Step 7

Bootstrap makes use of certain HTML elements and CSS properties that require the use of the HTML5 doctype. Include it at the beginning of all the layout files and any views that has `html` tag.



```
<!DOCTYPE html>
<html lang='en'>

</html>
```

Update the application.html.erb with the minimal Bootstrap document.

```
<!DOCTYPE html>
<html lang="en">
  <head>
    <meta charset="utf-8">
    <meta http-equiv="X-UA-Compatible" content="IE=edge">
    <meta name="viewport" content="width=device-width, initial-scale=1">
    <title>Blog</title>
    <%= stylesheet_link_tag 'application', media: 'all', 'data-turbolinks-track'
    <%= javascript_include_tag 'application', 'data-turbolinks-track' => true %>
    <%= csrf_meta_tags %>
    <!-- HTML5 shim and Respond.js for IE8 support of HTML5 elements and media queries -->
    <!-- WARNING: Respond.js doesn't work if you view the page via file:// -->
    <!--[if lt IE 9]>
      <script src="https://oss.maxcdn.com/html5shiv/3.7.2/html5shiv.min.js"></script>
      <script src="https://oss.maxcdn.com/respond/1.4.2/respond.min.js"></script>
    <![endif]-->
  </head>
  <body>
    <p class="notice"><%= notice %></p>
    <p class="alert"><%= alert %></p>

    <ul class="hmenu">

    </ul>

    <%= yield %>

  </body>
</html>
```

## Step 8

Start the rails server and go to the home page. You should see ‘Hello, Rails’.

## Step 9

Create `app/views/shared/_navigation_bar.html.erb`.

```
<nav class="navbar navbar-default" role="navigation">
  <div class="container-fluid">
    <!-- Brand and toggle get grouped for better mobile display -->
    <div class="navbar-header">
      <button type="button" class="navbar-toggle collapsed" data-toggle="collapse">
        <span class="sr-only">Toggle navigation</span>
        <span class="icon-bar"></span>
        <span class="icon-bar"></span>
        <span class="icon-bar"></span>
      </button>
      <a class="navbar-brand" href="#">Brand</a>
    </div>

    <!-- Collect the nav links, forms, and other content for toggling -->
    <div class="collapse navbar-collapse" id="bs-example-navbar-collapse-1">
      <ul class="nav navbar-nav">
        <li class="active"><a href="#">Link <span class="sr-only">(current)</span></a></li>
        <li><a href="#">Link</a></li>
        <li class="dropdown">
          <a href="#" class="dropdown-toggle" data-toggle="dropdown" role="button">
            <ul class="dropdown-menu" role="menu">
              <li><a href="#">Action</a></li>
              <li><a href="#">Another action</a></li>
              <li><a href="#">Something else here</a></li>
              <li class="divider"></li>
              <li><a href="#">Separated link</a></li>
              <li class="divider"></li>
              <li><a href="#">One more separated link</a></li>
            </ul>
          </a>
        </li>
      </ul>
    </div>
  </div>
</nav>
```

```

        </li>
    </ul>
    <form class="navbar-form navbar-left" role="search">
        <div class="form-group">
            <input type="text" class="form-control" placeholder="Search">
        </div>
        <button type="submit" class="btn btn-default">Submit</button>
    </form>
    <ul class="nav navbar-nav navbar-right">
        <li><a href="#">Link</a></li>
        <li class="dropdown">
            <a href="#" class="dropdown-toggle" data-toggle="dropdown" role="button">
                <ul class="dropdown-menu" role="menu">
                    <li><a href="#">Action</a></li>
                    <li><a href="#">Another action</a></li>
                    <li><a href="#">Something else here</a></li>
                    <li class="divider"></li>
                    <li><a href="#">Separated link</a></li>
                </ul>
            </li>
        </ul>
    </div><!-- /.navbar-collapse -->
</div><!-- /.container-fluid -->
</nav>

```

This is copied from Twitter Bootstrap 3.3 Documentation.

## Step 10

Add `<%= render 'shared/navigation_bar' %>` to the `app/views/application.html.erb`. The layout file now looks like this:

```

<body>
  <p class="notice"><%= notice %></p>
  <p class="alert"><%= alert %></p>

  <%= render 'shared/navigation_bar' %>

```

```
<ul class="hmenu">

</ul>

<%= yield %>

</body>
```

Reload the home page.

## Step 11

The navigation bar has a gap at the top. Let's fix it now. Add `navbar-fixed-top` to the `nav` class in `app/views/shared/_navigation_bar.html.erb` file, the first line now becomes as follows:

```
<nav class="navbar navbar-default navbar-fixed-top" role="navigation">
```

Reload the page and the navigation bar will now stay at the top.

## Step 12

The main content for the page has no gap to the left. Let's fix it now. Edit the `application.html.erb` file to wrap the 'yield' with `div` tag with class `container`. This class is provided by the Twitter Bootstrap 3.3.

```
<div class='container'>
  <%= yield %>
</div>
```

Reload the page, now the main content will be displayed with a gap at the left of the browser.

## Step 13

Let's change the button to use Twitter Bootstrap button for create new article page. Edit the app/views/articles/new.html.erb.

```
<div class="actions">
  <%= f.submit "Submit", class: 'btn btn-primary' %>
</div>
```

Click on the 'New Article' link. You will now see a blue Submit button.

## Step 14

Click on 'My Blog' link, the list of blog posts is not styled. Let's make them look nice now. Replace the contents of app/views/articles/index.html.erb with the following code:

```
<h1>Articles</h1>
<table class="table table-striped">
  <thead>
    <tr>
      <th>ID</th>
      <th>Title</th>
      <th>Description</th>
      <th>Actions</th>
    </tr>
  </thead>
  <tbody>
    <% @articles.each do |article| %>
      <tr>
        <td><%= article.id %></td>
        <td><%= link_to article.title, article %></td>
        <td><%= article.description %></td>
        <td>
          <%= link_to 'Edit',
                                edit_article_path(article),
                                :class => 'btn btn-mini' %>
```

```

        <%= link_to 'Delete',
                    article_path(article),
                    :method => :delete,
                    :confirm => 'Are you sure?',
                    :class => 'btn btn-mini btn-danger' %>

      </td>
    </tr>
  <% end %>
</tbody>
</table>

<%= link_to 'New Article', new_article_path, :class => 'btn btn-primary' %>

```

## Step 15

Reload the <http://localhost:3000/articles> page.

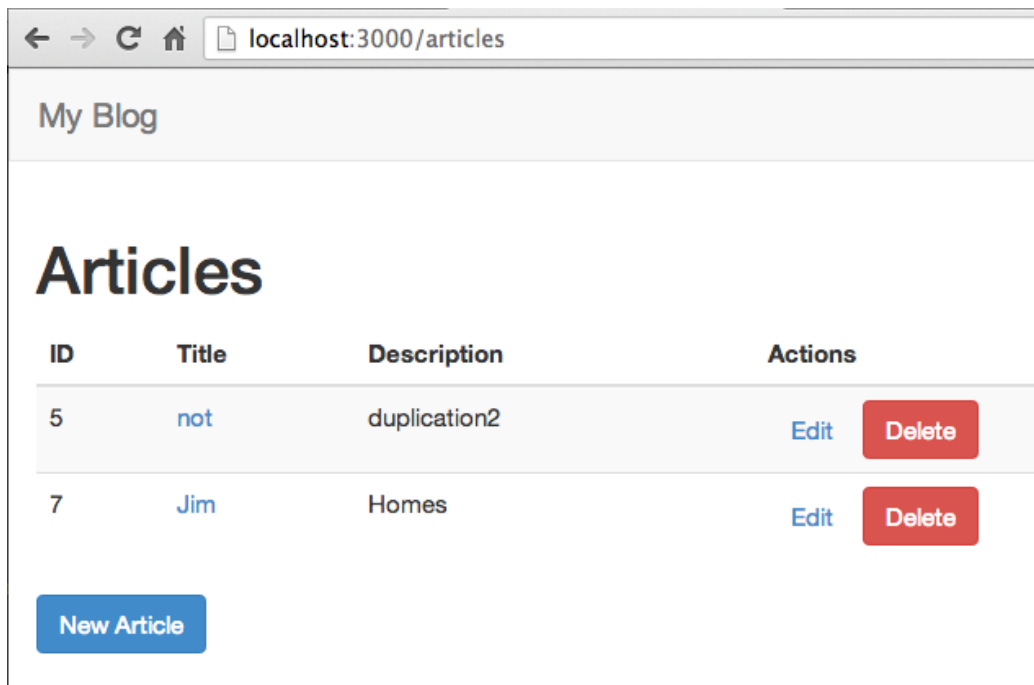


Figure 128: Twitter Bootstrap Styled Table

## Exercise

Implement the ‘About’ tab so that it displays the content of about page. Use `welcome_controller.rb` and define the appropriate routes.

## Summary

In this lesson you learned about application wide layout file and how to configure and use Twitter Bootstrap 3.3 with Rails 4.2 application.

## Resources

1. [Rails Installer for Windows and Mac OS](#)
2. [Sublime Text 2 IDE](#)
3. [RubyMine IDE](#) 30-day free trial.
4. [Learning Git](#)
5. [Install SQLite3 Manager Firefox Addon](#) or [Standalone tool for Mac](#)
6. [Visual representation of relationships in ActiveRecord](#)
7. [Live HTTP Headers Chrome Plugin](#)

## References

<https://github.com/ivanoats/store-rails4-boot3-sass>



## **A. Self Learning**

### **Solving Programming Problems**

1. Write down your question. This makes you think and clarify your thoughts.
2. Design an experiment to answer that question. Keep the variables to a minimum so that you can solve the problem easily.
3. Run the experiment to learn.

Use the IRB and Rails console to run your experiments.

### **Learning from Rails Documentation**

1. Go to <http://apidock.com/rails>
2. Type the method on the search box at the top.
3. Select the matching result
4. View the documentation, look for an example similar to what you want to accomplish
5. Experiment in the Rails console to learn how it works.
6. Copy it to your project and customize it for your project

### **Getting Help from Forums**

If you have followed the above two suggestions and you still have difficulties, post to forums that clearly explains the problem and what you have done to solve the problem on your own. During this process sometimes you will solve your own problem since explaining the problem to someone will clarify your thinking.

## **Form Study Group**

You can accelerate your learning by forming a study group that meets regularly. If you teach one concept that takes 10 minutes then having a group of 6 people, you can easily cover 6 concepts in one hour.

## **Practice Makes Perfect**

When learning anything new, you will make mistakes. You will go very slow. As you practice you will learn from your mistakes. Learning is a process. Setup 30 mins to an hour everyday for learning. You will get better and faster over time. Repetition is key to gaining development speed.

## B. Troubleshooting

1. Use rails console to experiment.
2. To inspect a variables in views you can use debug, to\_yaml and inspect.

```
<%= debug(@article) %>
```

will display the @article object in YAML format.

The to\_yaml can be used anywhere (not just views). You can do a query in Rails console and call to\_yaml on an article object.

```
article = Article.first  
article.to_yaml
```

The inspect method is handy to display values in arrays and hashes.

```
a = [1,2,3,4]  
  
p a.inspect
```

If you customize the to\_s method in your classes then the inspect method will use your to\_s method to create a human friendly representation of the object.

```
class Car  
  
  def to_s  
    "I am a car"  
  end  
end  
  
c = Car.new  
  
print c
```

3. You can use `logger.info` in the controller to log messages to the log file. In development log messages will go to `development.log` in log directory.

```
logger.info "You can log anything here #{@article.inspect}"
```

To use the logger in model, you have to do the following:

```
Rails.logger.info "My logging goes here"
```

4. Using `tail` to view development log file.

Open a new tab in the terminal (On Mac `Command+T` opens a new tab on an existing open terminal), go the rails project blog directory and type the following command:

```
$ tail -f log/development.log
```

5. View source in the browser. For example: Checking if path to images are correct.
6. Use rails `dbconsole`
7. Firebug Firefox plugin, Chrome Dev Tools or something equivalent
8. Debugger in Rubymine is simply the best debugger. JetBrains updates fixes any issues with Ruby debugging gems and provides a well integrated IDE for serious development.
9. Useful plugins:
  - [Rails Footnotes](#)
  - [Rails Panel - Chrome Extension for Rails Development](#)
10. Spring can cause headaches. If the changes you make is not getting picked up, exit all Rails console sessions and restart the server. This seems to fix problems.

## C. FAQ

1. Adding a new source to gem.

```
$ gem sources -a http://gems.github.com
```

2. Suppress installing rdoc for gems. For example to install passenger gem without any rdoc or ri type:

```
$ gem install passenger -d --no-rdoc --no-ri
```

3. How to upgrade gems on my system?

```
$ gem update -system
```

## Survey

Please take the time to answer the three questions below and email them to [support@zepho.com](mailto:support@zepho.com) . I will review your suggestions and make changes as necessary. Thank you for taking the time to contribute improvements.

1. What did you like about this book?
2. What would you like to see added?
3. What changes should be made and why?

[Take the Survey](#)