

# Architecture and Administration Basics

Workshop Day 1 - Labs



# 1

# Installation & Configuration



## Perform the following steps in order install Couchbase Server on CentOS 7.x

### ■ Disable Swappiness

```
# Set the value for the running system
sudo sh -c 'echo 0 > /proc/sys/vm/swappiness'

# Backup sysctl.conf
sudo cp -p /etc/sysctl.conf /etc/sysctl.conf.`date +%Y%m%d-%H:%M`

# This disables it permanently
# Set the value in /etc/sysctl.conf so it stays after reboot.
sudo sh -c 'echo "" >> /etc/sysctl.conf'
sudo sh -c 'echo "#Set swappiness to 0 to avoid swapping" >> /etc/sysctl.conf'
sudo sh -c 'echo "vm.swappiness = 0" >> /etc/sysctl.conf'reboot
```



- Disable the Linux Firewall

- May be configured in a production environment regarding <http://developer.couchbase.com/documentation/server/current/install/install-ports.html>


```
## Run as root or sudo
# Check the state
systemctl status firewalld

# Stop it
systemctl stop firewalld

# Disable it
systemctl disable firewalld
```




- Download the installation package from a browser or wget:
  - <https://www.couchbase.com/downloads>
  - [https://packages.couchbase.com/releases/5.0.0/couchbase-server-enterprise-5.0.0-centos7.x86\\_64.rpm](https://packages.couchbase.com/releases/5.0.0/couchbase-server-enterprise-5.0.0-centos7.x86_64.rpm)
- You may wish to download the .rpm to your local machine and then 'scp' the file to VMs.
  - `scp ${downloaded package}.rpm couchbase@://<public hostname of your VM>:/home/couchbase/Downloads/`
- Perform the installation by using RPM
  - `sudo rpm --install ${downloaded package}.rpm`
- Open the Web UI Wizard
  - `http://<public hostname of your VM>:8091`

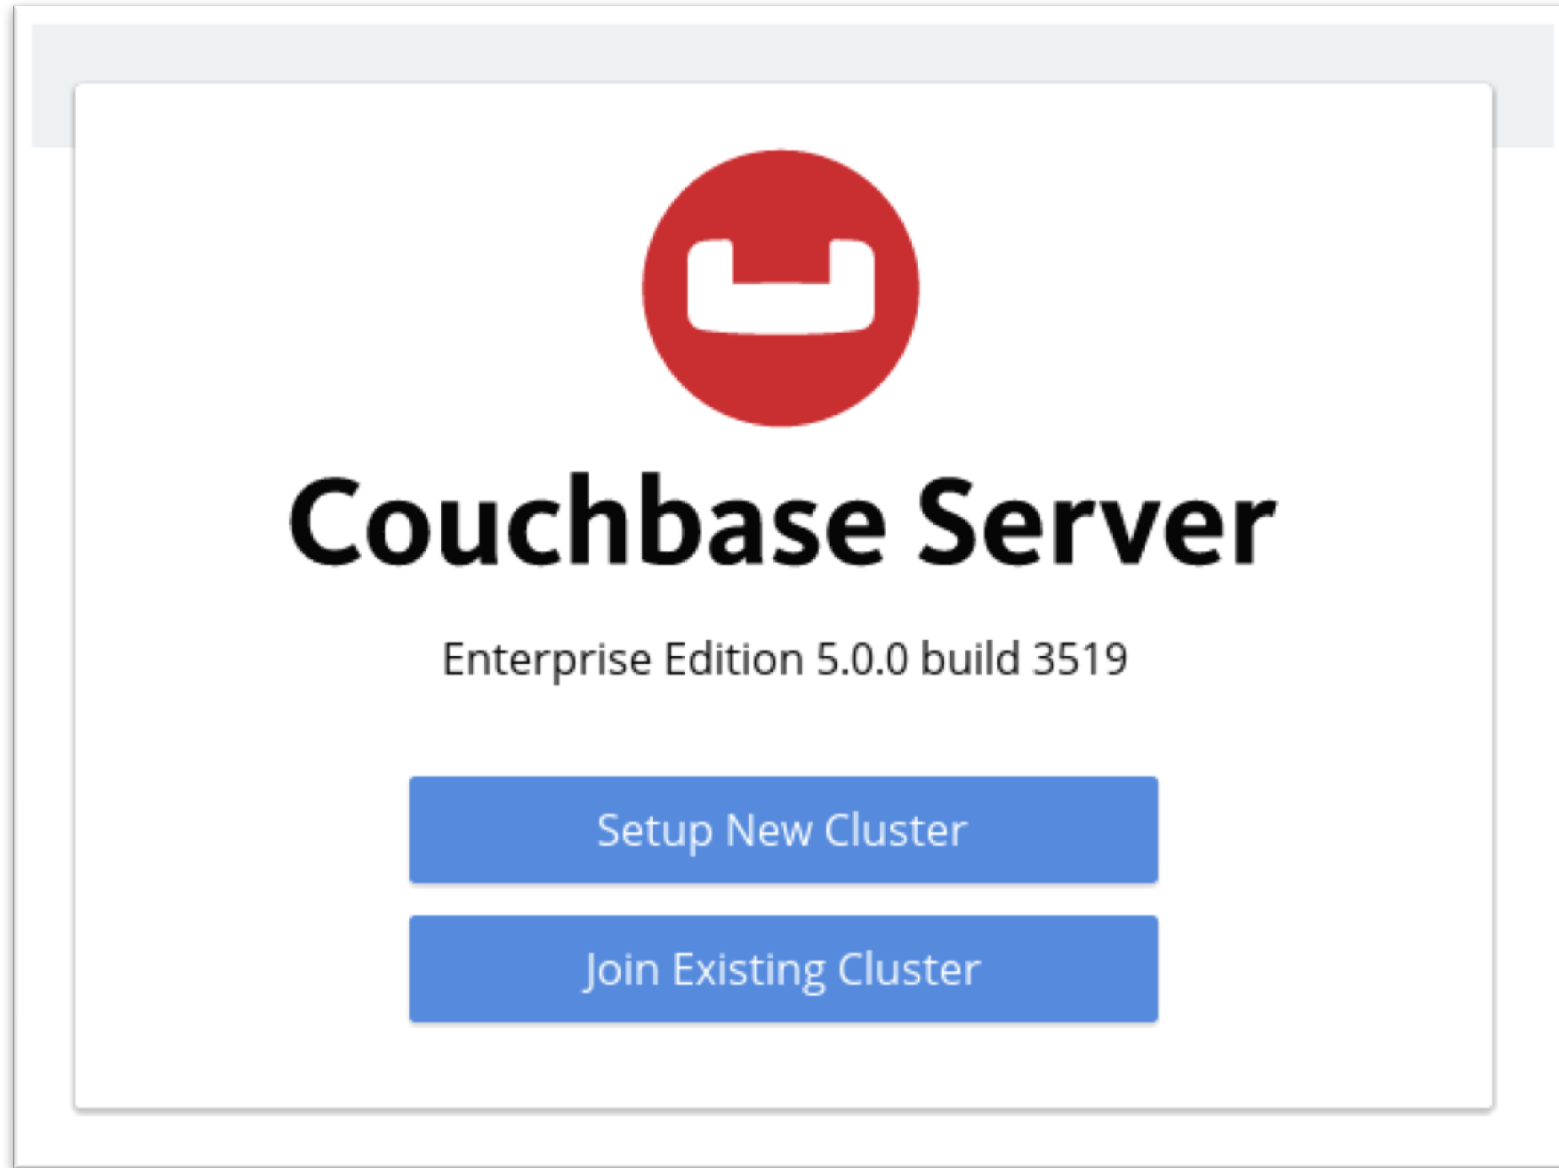

# Installation (password = couchbase)



 Couchbase > New Cluster

**Cluster Name**

**Create Admin Username**

**Create Password**

**Confirm Password**

[< Back](#) [Next: Accept Terms](#)

Couchbase > New Cluster / Configure

**Host Name / IP Address** Usually localhost or similar

**Data Disk Path** Path cannot be changed after setup  
  
Free: 14 GB

**Indexes Disk Path** Path cannot be changed after setup  
  
Free: 14 GB

**Couchbase Memory Quotas** Per service / per node

<input checked="" type="checkbox"/> Data Service	<input type="text" value="512"/>	MB
<input checked="" type="checkbox"/> Index Service	<input type="text" value="512"/>	MB
<input checked="" type="checkbox"/> Search Service	<input type="text" value="303"/>	MB
<input checked="" type="checkbox"/> Query Service	-----	

**TOTAL QUOTA** 1327MB

RAM Available 3790MB Max Allowed Quota 3032MB

**Index Storage Setting**

☒ Standard Global Secondary

☐ Memory-Optimized ⓘ

☒ Enable software update notifications in the web console

< Back Save & Finish


- **Hostname:** Your public IP or localhost.
- **Data Disk Path:** /opt/couchbase/var/lib/couchbase/data
- **Indexes Disk Path:** /opt/couchbase/var/lib/couchbase/index
- **Data Service:** 1024Mo
- **Index Service:** 512Mo
- **Search Service:** 256Mo
- **Index Storage Setting:** Standard Global Secondary (Plasma)



# Installation – Sample buckets



- Perform further steps in the Wizard
  - Add the travel-sample bucket
  - Edit the Travel-Sample configuration and remove the replicas.
  - Create an Administrator in Settings.  
User: couchbase  
Password: couchbase
  - Browse the UI and check Statistics. (while travel-sample is loading)

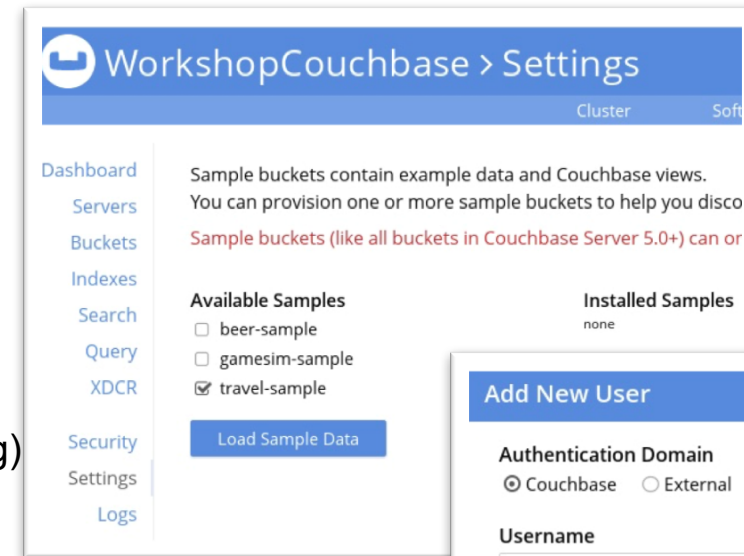

- Start and stop the Couchbase Server

```
sudo systemctl stop couchbase-server  
sudo systemctl start couchbase-server
```

#Wait by double checking the state via the 'status' command

```
sudo systemctl status couchbase-server
```

- Set up the command line environment in the Path.

```
export PATH=$PATH:$HOME/bin:/opt/couchbase/bin
```



# 2

## Testing Installation



## Perform the following steps with the REST API

### ■ Check some statistics

- Cluster Status:  
`http://<Your Public IP>:8091/nodeStatuses`  
`curl -u ${admin user}:${password} http://${Your Public IP}:8091/nodeStatuses | jq`
- System Statistics:  
`http://<Your Public IP>:8091/pools`
- Cluster Details:  
`http://<Your Public IP>:8091/pools/default`
- Bucket Monitoring:  
`http://<Your Public IP>:8091/pools/default/buckets/travel-sample`
- Tasks running:  
`http://<Your Public IP>:8091/pools/default/tasks`
- Performance on Queries:  
`http://<Your Public IP>:8093/admin/vitals`
- Statistics on Indexes (check storage mode):  
`http://<Your Public IP>:9102/stats`

- *Install a plug-in in Firefox to format JSON*  
Ex: Beautiful JSON {J}
- *Install a CLI plug-in to format JSON*  
Ex: `yum install jq`



## Perform the following steps in order to test your installation

- List the nodes & buckets of your current cluster
  - `couchbase-cli server-list --cluster=${ip}:8091 -u=${admin user} -p=${password}`
  - `couchbase-cli bucket-list --cluster=${ip}:8091 -u=${admin user} -p=${password}`
- Investigate the data and index directory

# You should see approximately 1030 files in this directory.

# So one file per vBucket + some extra files.

```
sudo ls -al /opt/couchbase/var/lib/couchbase/data/travel-sample
```

#List index files

```
sudo ls -al /opt/couchbase/var/lib/couchbase/index/@2i/...
```



- Get some data & info from a vBucket file (here vbucket = 0)
  - `couch_dbdump /opt/couchbase/var/lib/couchbase/data/travel-sample/0.couch.1`
  - `couch_dbinfo /opt/couchbase/var/lib/couchbase/data/travel-sample/0.couch.1`
- Create an ephemeral moxi bucket & check connectivity with Telnet.
  - `couchbase-cli bucket-create -c <IP>:8091 --username Administrator \`  
`--password couchbase --bucket test --bucket-type ephemeral \`  
`--bucket-port 11252 --bucket-ramsize 128`
  - `sudo yum install telnet`
  - `telnet <IP host> 11252`

```
[couchbase@localhost bin]$ telnet 192.168.56.102 11252
Trying 192.168.56.102...
Connected to 192.168.56.102.
Escape character is '^]'.
```



- Retrieve some statistics of the default bucket

stats

- Set a new key with value (set \$key \$flags \$exptime \$numbytes \$value)

```
set test_key 0 300 4  
<Enter>  
data
```

- Get the key.

```
get test_key
```

- Quit

```
quit
```



- Generate a workload on the bucket “test”

```
cd /opt/couchbase/bin
```

- Generate a workload with cbworkloadgen
  - 50% write & 50% read
  - Size = 100 bytes
  - Number of items = 500 000
  - Number of threads = 2
  - Json documents

```
cbworkloadgen -n <IP>:8091 -u Administrator -p couchbase -b test -i 500000 -r .5  
-s 100 -t 2 -j
```

- Observe the Metrics on the UI.

<https://developer.couchbase.com/documentation/server/current/cli/cbworkloadgen-tool.html>



# 3

## Buckets Operations




## Perform the following steps in order to edit a bucket

- Open the Web Admin UI and go to the 'Buckets' tab

<http://<public hostname of your VM>:8091>

- Edit the bucket 'test' and configure the following:
  - Update the Memory quota to 256 MB RAM
  - Enable one Replica (Why do you get a Warning?)
  - Enable Flush
- Insert a new document in the bucket & search for it.

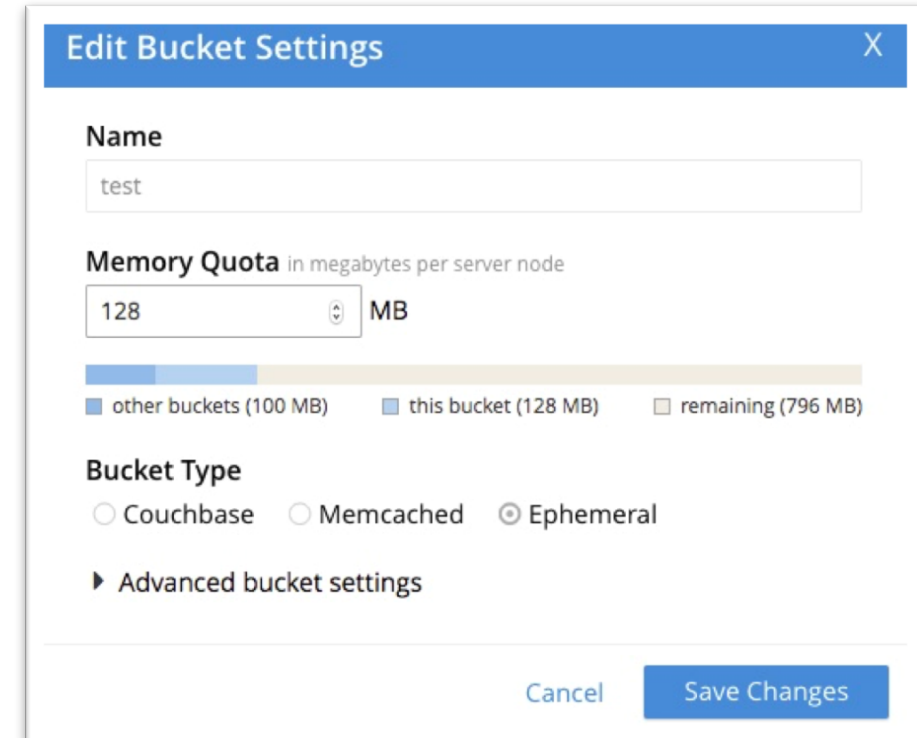

**Edit Bucket Settings** [X]

**Name**  
test

**Memory Quota** in megabytes per server node  
128 MB

other buckets (100 MB) this bucket (128 MB) remaining (796 MB)

**Bucket Type**  
☐ Couchbase ☐ Memcached ☒ Ephemeral

▶ Advanced bucket settings

Cancel Save Changes

# Create a document in the Bucket



## Perform the following steps in order to add a document

- Open the Web Admin UI and go to the Buckets.
- Insert a new document in the bucket (check the Metadata)

The screenshot shows the Couchbase Web Admin UI. The breadcrumb navigation at the top reads 'WorkshopCouchbase > Documents > Documents Editing'. On the left, a sidebar contains links for 'Dashboard', 'Servers', 'Buckets', 'Indexes', and 'Search'. The main content area is titled 'ludovic'. It features two code editors side-by-side. The left editor shows a document body: 

```
1 {  
2   "Name": "Ludovic Dufrenoy"  
3 }
```

. The right editor shows the document metadata: 

```
1 {  
2   "id": "ludovic",  
3   "rev": "3-14f57c56d14c00000000000002000006",  
4   "expiration": 0,  
5   "flags": 33554438  
6 }
```

. Above the right editor are three buttons: 'Delete', 'Save As...', and 'Save'.

- Search for it with the name of the key.

The screenshot shows the document lookup interface. At the top, there is a dropdown menu with 'test' selected. To the right, there is a text input field labeled 'Document ID' and a blue button labeled 'Look Up ID'. Below these is a table with two columns: 'ID' and 'content sample'. The table is currently empty. At the bottom, a message states: 'Documents are retrieved from ephemeral buckets by using the id lookup.'



# 4

## Cluster Operations

## Perform the following steps:

- Stop the local Couchbase instance again. (At each VM restart also)

```
sudo systemctl stop couchbase-server
```

- Start 3 Docker containers with Couchbase already installed.

```
sudo docker run -d --name couchbase-1 -p 8091-8094:8091-8094\  
-p 11210-11211:11210-11211 couchbase
```

```
sudo docker run -d --name couchbase-2 couchbase  
sudo docker run -d --name couchbase-3 couchbase
```

- Get the IP of your first node with Docker.

```
sudo docker inspect couchbase-$i | grep IPAddress
```



Couchbase Docker Repository:  
[https://hub.docker.com/\\_/couchbase/](https://hub.docker.com/_/couchbase/)

## Perform the following steps:

- Check you can access the Couchbase CLI

```
sudo docker exec -it couchbase-1 bin/bash
```

- Test if all nodes are reachable

```
curl http://<IP couchbase-1>:8091/pools  
curl http://<IP couchbase-2>:8091/pools  
curl http://<IP couchbase-3>:8091/pools
```

- You should get something like:

```
{"isAdminCreds":true,"isROAdminCreds":false,"isEnterprise":true,"pools":[],"settings":[],"uuid":  
], "implementationVersion":"5.0.0-3519-  
enterprise", "componentsVersion":{"lhttpc":"1.3.0", "os_mon":"2.2.14", "public_key":"0.21", "asn1":"2  
.0.4", "kernel":"2.16.4", "ale":"5.0.0-3519-enterprise", "inets":"5.9.8", "ns_server":"5.0.0-3519-  
enterprise", "crypto":"3.2", "ssl":"5.3.3", "sasl":"2.3.4", "stdlib":"1.19.4"}}
```



# Cluster Operations: Start a Cluster with Docker



## Perform the following steps:

- Setup a New Cluster via the UI
  - ClusterName = Cluster\_3\_Nodes
  - User: Administrator (password = couchbase)
  - HostName = IP couchbase-1
- Load the travel-sample bucket.
- Add the 2<sup>nd</sup> node via the UI with IP of couchbase-2
- Rebalance.

Add Server Node

Warning: Adding a server to this cluster means any previous Couchbase Server data on that server will be removed.

Hostname/IP Address

172.17.0.3

Username

an existing username with admin access to this server

Administrator

Password

an existing password with admin access to this server

\*\*\*\*\*

Services

☒ Data Service

☒ Index Service

☒ Search Service

☒ Query Service

Cancel

Add Server

name ▾		group	services	CPU	RAM	swap	disk used	items	Rebalance
172.17.0.2		Group 1	data full text index query	4.41%	70.7%	0%	77.6MB	15.7 K/15.8 K	Statistics
172.17.0.3		Group 1	data full text index query	4.9%	70.7%	0%	35.1MB	15.8 K/15.7 K	Statistics



- On the 3<sup>rd</sup> node execute the following command  
(you can log-in by using `docker exec -it couchbase-3 /bin/bash`)

```
/opt/couchbase/bin/couchbase-cli server-add --server-add=${node 3 name/ip}\  
--server-add-username=Administrator --server-add-password=couchbase\  
--group-name="Group 1" --cluster=${node1 name/ip}:8091\  
--user=Administrator --password=couchbase
```


- Don't forget to rebalance!
  - Perform the Rebalance again via the UI
  - BTW: The CLI command 'couchbase-cli rebalance' can be used to invoke it from the command line
  - Which Service role was enabled on the 3<sup>rd</sup> node?
- To remove a node from the cluster:

```
couchbase-cli rebalance -c ${another name/ip}:8091 --server-remove=${to remove  
name/ip} --user=${admin user} --password=${password}
```

## Perform the following steps:

- Enable Auto-Failover in the Cluster to 15s
- Stop couchbase service on Node 3.

```
sudo docker stop couchbase-3
```

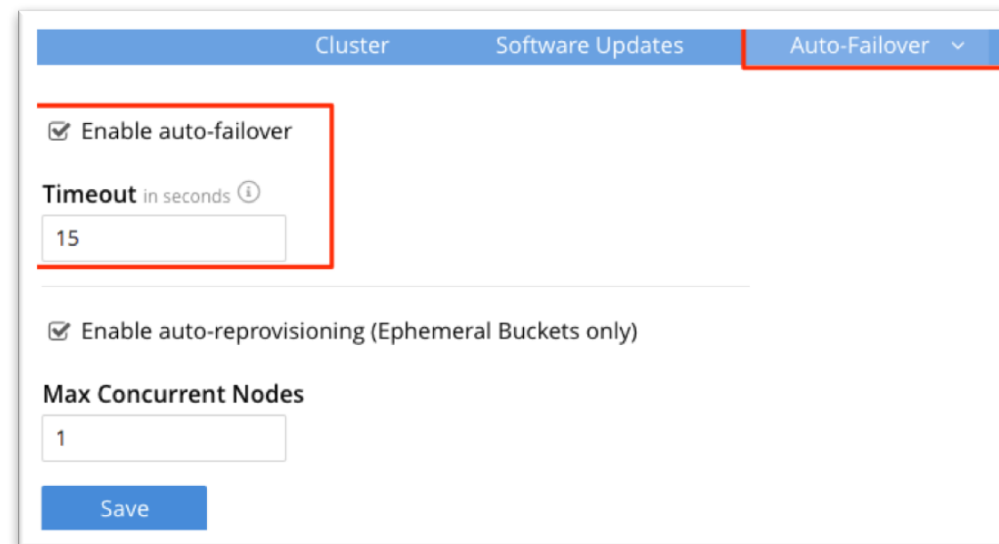

Cluster Software Updates Auto-Failover

☒ Enable auto-failover


Timeout in seconds ⓘ  
15

☒ Enable auto-reprovisioning (Ephemeral Buckets only)

Max Concurrent Nodes  
1

Save

- Monitor the console on the tab Servers. (Is the bucket 100% available?)

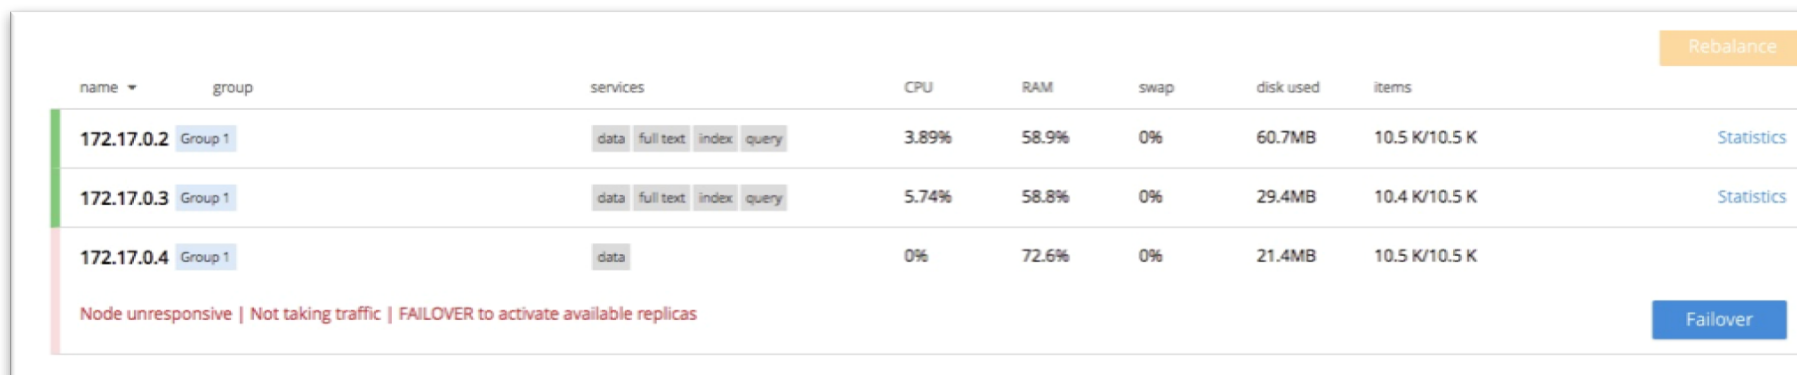

name	group	services	CPU	RAM	swap	disk used	items	
172.17.0.2	Group 1	data full text index query	3.89%	58.9%	0%	60.7MB	10.5 K/10.5 K	Statistics
172.17.0.3	Group 1	data full text index query	5.74%	58.8%	0%	29.4MB	10.4 K/10.5 K	Statistics
172.17.0.4	Group 1	data	0%	72.6%	0%	21.4MB	10.5 K/10.5 K	

Node unresponsive | Not taking traffic | FAILOVER to activate available replicas



## Perform the following steps:

- Stop Couchbase on the 3 containers

```
sudo docker stop couchbase-1  
sudo docker stop couchbase-2  
sudo docker stop couchbase-3
```

- Delete the containers

```
sudo rm couchbase-1  
sudo rm couchbase-2  
sudo rm couchbase-3
```

- Check the containers are not anymore running

```
sudo docker ps
```



Couchbase Docker Repository:  
[https://hub.docker.com/\\_/couchbase/](https://hub.docker.com/_/couchbase/)



# 5 | Security

# Security: Create a User with limited permissions




## Perform the following steps:

- Start Couchbase

```
sudo systemctl start couchbase-server
```

- Create a User with “Bucket Admin” role on travel-sample.
- Logout and Login with the new user.
  - Can you change the settings of test bucket?
- Log back as Administrator.
- Grant more permissions to your user.

```
GRANT Cluster_Admin TO `Ludo`  
SELECT * FROM system:user_info
```

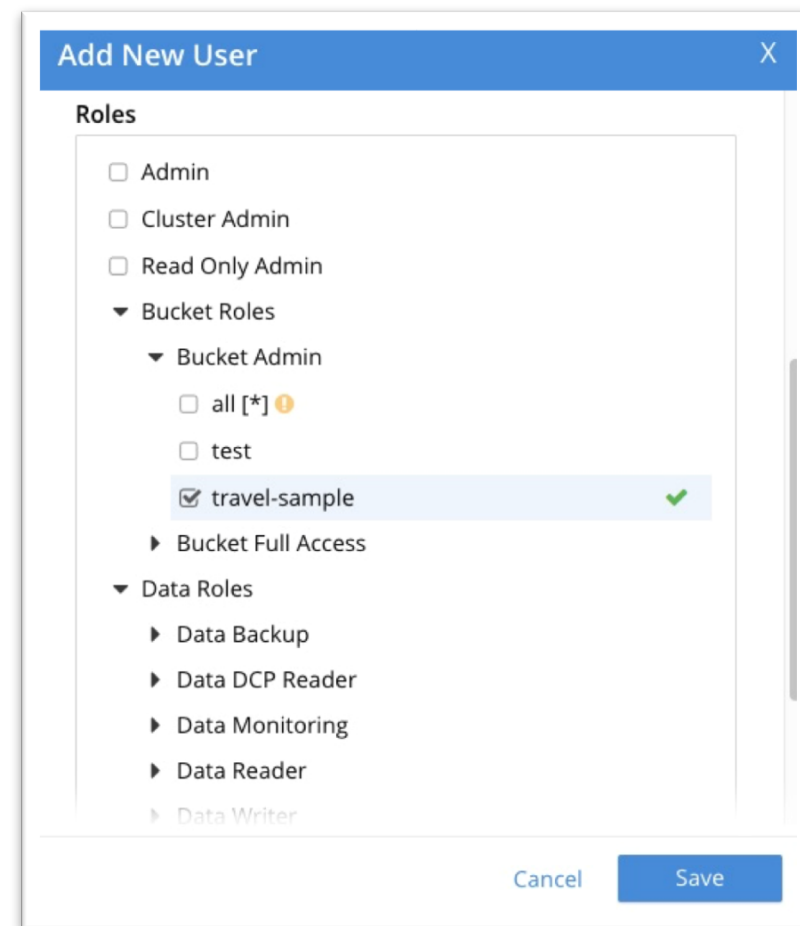


<https://developer.couchbase.com/documentation/server/current/security/concepts-rba-for-apps.html>

## Perform the following steps:

- Enable Auditing in the Security tab
- Perform some Administration tasks
  - Change Auto-Compaction to 20%.
- Check the Audit.log file.

```
{"timestamp":"2017-11-10T17:33:26.373190+01:00","real_userid":{"source":"internal","user":"couchbase"},"auditd_enabled":true,"descriptors_path":"/opt/couchbase/etc/security","hostname":"localhost.localdomain","log_path":"/opt/couchbase/var/lib/couchbase/logs","rotate_interval":86400,"version":1,"id":4096,"name":"configured audit daemon","description":"loaded configuration file for audit daemon"}
```

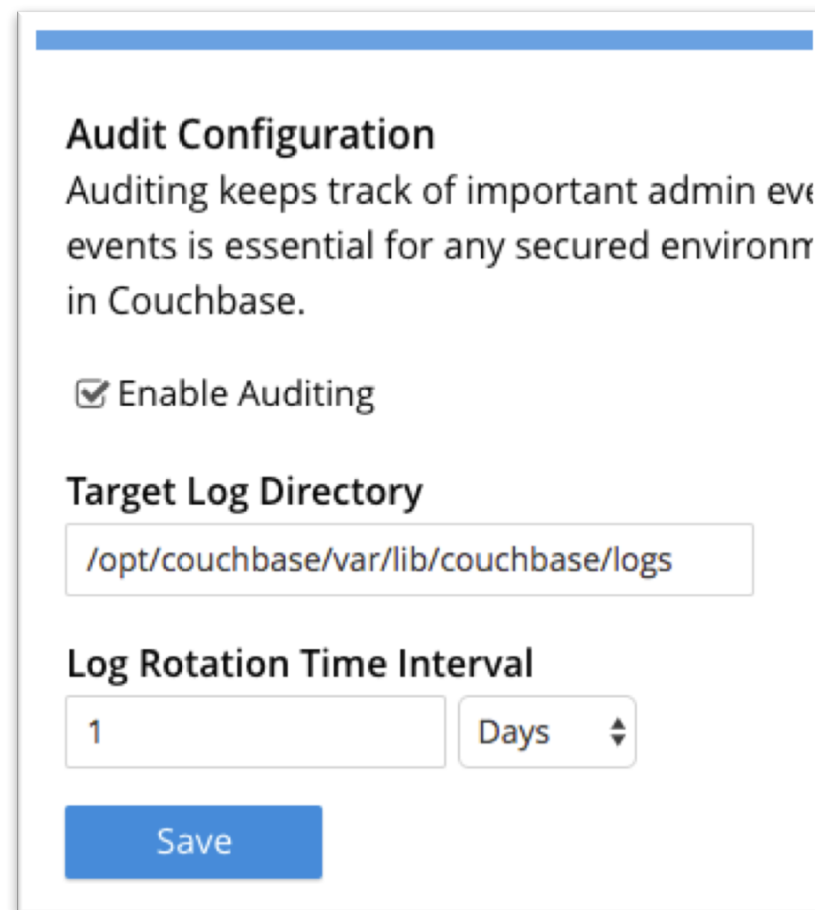

**Audit Configuration**

Auditing keeps track of important admin events and is essential for any secured environment in Couchbase.

☒ Enable Auditing

**Target Log Directory**

**Log Rotation Time Interval**

Days

<https://developer.couchbase.com/documentation/server/current/security/security-auditing.html>



# 6

## Backup & Restore



## Perform the following steps in order to backup some data

- Create a target folder

```
cd /tmp  
mkdir cb-backup  
cd /opt/couchbase/bin
```

- Prepare the backup archive

```
/opt/couchbase/bin/cbbackupmgr config --archive /tmp/cb-backup --repo workshop
```

- Backup the data twice and then use the list command to list the increments!

```
cbbackupmgr backup -a /tmp/cb-backup -r workshop -c http://localhost:8091  
-u Administrator -p couchbase
```

```
cbbackupmgr list -archive=/tmp/cb-backup --repo=workshop
```

## Perform the following steps in order to restore some data

- Delete a document in the bucket travel-sample via the UI
- Get the count of document – 31590 (after delete)
- Restore the database.

```
cbbackupmgr list --archive=/tmp/cb-backup --repo=workshop
```

```
cbbackupmgr restore --archive /tmp/cb-backup --repo workshop -c http://localhost:8091 -u Administrator -p couchbase --start 2017-11-10T18_07_25.462463124+01_00 --end 2017-11-10T18_07_25.462463124+01_00
```

- Does the document come back? => Try again with --force-updates

```
cbbackupmgr restore --archive /tmp/cb-backup --repo workshop -c http://localhost:8091 -u Administrator -p couchbase --start 2017-11-10T18_07_25.462463124+01_00 --end 2017-11-10T18_07_25.462463124+01_00 --force-updates
```



# 7 | XDCR





## Let's XDCR the travel-sample bucket to a new bucket "travel-destination"

- Create a new bucket "travel-destination"
  - RAM Quota = 100MB
  - No Replica
  - Conflict Resolution: Sequence Number
  - Flush: Enable
- Add a remote cluster (the local one)
  - Name of the Cluster: WorkshopCouchbase
  - IP of the local cluster.
- Add replication from "travel-sample" to "travel-destination"
  - Default Settings

Remote Clusters

Add Remote Cluster

name	IP/hostname	
WorkshopCouchbase	192.168.56.102:8091	<div>DeleteEdit</div>

Ongoing Replications

Add Replication

bucket	protocol	from	to	filtered	status	when	
travel-sample	Version 2	this cluster	bucket "travel-destination" on cluster "WorkshopCouchbase"	No	Replicating	<div></div>	<div>DeleteEdit</div>



## Let's update a document in the source cluster.

- Update 1 document in travel-sample
  - Select 1 document “airline\_10”
  - Check the metadata this document.
  - Save the revision (CAS) id.
- Create a new document in travel-sample
  - ID = airline\_XX
- Check the “airline\_10” document in the “travel-destination” bucket.
- Check the document count on both buckets.
- Bonus: Play with bi-directional replication.

```
1 {  
2   "id": "airline_10",  
3   "rev": "1-14f33c01fd1f0000000000002000000",  
4   "expiration": 0,  
5   "flags": 33554432  
6 }
```

```
1 {  
2   "id": "airline_10",  
3   "rev": "2-14f671d35bd200000000000002000000",  
4   "expiration": 0,  
5   "flags": 33554432  
6 }
```

# Thank you

