



Applied Python Programming for Life Scientists

Boas Pucker & Hanna Schilbert
Genetics & Genomics of Plants, CeBiTec, Bielefeld University





Introduction of participants

- Name
- Study program (semester)
- Bioinformatics experiences
- Research interests
- motivation?
- ...



Hanna Schilbert



2014-2016: Molecular Biology

Functional and comparative genomics, crops, flavonoid biosynthesis

2016-2018: Genome-based Systems Biology

Bioinformatics, phylogenetic analyses, nutrigenetics/genomics

2018: Visiting student at the Antonio Vidal-Puig lab, Clinical Biochemistry, Cambridge

Molecular nutrition and metabolism, differential gene expression analyses

2018: Research assistant in the research group of Bernd Weisshaar

April 2019: PhD student in Genetics and Genomics of Plants

Dry lab: Applied bioinformatics in crops (rapeseed), genomics, transcriptomics, phylogeny

Wet lab: flavonoid biosynthesis, complementation experiments



Boas Pucker

2009-2010: Biochemistry

2010-2013: Biology (Genetics, Cell Biology & Physiology)

Functional Genomics, Metabolic Engineering, Comparative Genomics

2013-2015: Genome-based Systems Biology

Synthetic Biology (iGEM2014), Software Development, Genomics

Since 2016: PhD student in Genome Research & Bioinformatics

Plant Genomics, Bioinformatics, Synthetic Biology (iGEM2016-2019)

2018: Visiting Scientist at the Brockington Lab, Plant Sciences, University of Cambridge

Since 2018: Genetics & Genomics of Plants, CeBiTec, Bielefeld University





Research



Gene prediction

De novo genome assembly

Functional annotation



De novo transcriptome assembly

Non-canonical splice sites

synteny

phylogeny




Genome Research

RNA-Seq analysis

Co-expression analysis

Gene families / pathways

Mapping-by-sequencing
(MBS)

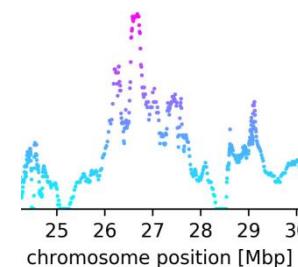

Public scripts: <https://github.com/bpucker>



Example documentation

```
1  <html>
2
3      <head>
4          <h1>Applied Python Programming for Life Scientists</h1>
5          <!-- fill in the following fields -->
6          <h2>SEMESTER</h2>
7          <h2>NAME</h2>
8          <h2>E-MAIL</h2>
9      </head>
10
11
12      <body>
13
14
15          <!-- here starts one block -->
16          <div id="day1">
17              <h3>Day 1 - Introduction</h3>
18              <p>all important information</p>
19              <p>homework: request UNIX-Account at CeBiTec Support</p>
20          </div>
21          <!-- here ends one block (can be copied) -->
22
23
24
25      </body>
26
27  </html>
```



Aims & content

- Basics of Python syntax



```
1 def print_hello_world():
2     """ function prints 'hello world!' """
3
4     print 'hello world!'
5
6
7 print_hello_world() #calling function
8
```



Aims & content

- Basics of Python syntax
 - parsing, filtering, exporting, converting



Genbank (.gb)

		: 1
	ncRNA	:: 35
	Frameshifted Genes	:: 35
	#Genome-Annotation-Data-END#	
	COMPLETENESS: full length.	
FEATURES		Location/Qualifiers
source		1..5079002
	/organism="Xanthomonas campestris pv. campestris"	
	/mol_type="genomic DNA"	
	/strain="B100"	
	/db_xref="taxon:340"	
	/pathovar="campestris"	
gene		1..1329
	/locus_tag="XCCB100_RS00005"	
	/old_locus_tag="xcc_b100_0001"	
	/old_locus_tag="xccb100_0001"	
CDS		1..1329
	/locus_tag="XCCB100_RS00005"	
	/old_locus_tag="xcc_b100_0001"	
	/old_locus_tag="xccb100_0001"	
	/inference="EXISTENCE: similar to AA sequence:SwissProt:Q8PRG2.1"	
	/note="Derived by automated computational analysis using gene prediction method: Protein Homology."	
	/codon_start=1	
	/transl_table=11	
	/product="chromosomal replication initiator protein DnaA"	
	/protein_id="WP_011035259.1"	
	/db_xref="GI:1499345720"	
	/translation="MDAPWRCLERLEAFPPEDVHTWLKLPLQAEDRGSGSILVYAPNAPIVEQDPEPQFVYAFAGNEVALVGSRSPRAPELPAPAVASAPAAPIVPVAGNLDSHYTFANFVGEGRNSQLGLAIIAQAAQPKGDRHANMLLGGSTGLKTHMFAGNALRQPAKVMWYLSRFQMSAMIRQLQKAMDQFKRQQFDQOQIDQIFQAGNTRQQEFTFHNLDFGRQQIILTCDPYREVEGLEPLRSRLAWLGSLVAIDPPDFETRAATILVAKAREGAEPDVAFLIAKQHGRNVRDLNTLARVANTRGTSITVEFAQTERTLRLRAQQAQAGIPNIQPKTVADYYGLQMKDLSLRSRSLARPVQAMALAKETEHSLPEIGDAFAGRDHTVLHACRQIRTLMEADGKLREDWEKLIRKLSE"	
gene		1605..2705
	/locus_tag="XCCB100_RS00010"	
	/old_locus_tag="xcc_b100_0002"	
	/old_locus_tag="xccb100_0002"	
CDS		1605..2705
	/locus_tag="XCCB100_RS00010"	
	/old_locus_tag="xcc_b100_0002"	
	/old_locus_tag="xccb100_0002"	
	/EC_number="2.7.7.7"	
	/inference="EXISTENCE: similar to AA sequence:RefSeq:WP_006451791.1"	
	/note="binds the polymerase to DNA and acts as a sliding clamp; Derived by automated computational analysis using gene prediction method: Protein Homology."	
	/codon_start=1	
	/transl_table=11	



FASTA (.fa/.fas/.fasta)



Aims & content

- Basics of Python syntax
- parsing, filtering, exporting, converting
- Generate figures (e.g. matplotlib)






Aims & content

- Basics of Python syntax
- parsing, filtering, exporting, converting
- Generate figures (e.g. matplotlib)
- Own projects/challenges?! => own solution & success



Why Python?

- Easy to learn
 - More efficient than Excel => important for big data
 - Check/modify => unlimited opportunities
 - Script needs to be written once and can be applied often
 - => frequent problems are ideal for bioinformatics
 - Very powerful with many libraries/modules
 - biopython (including NCBI BLAST+), scipy, numpy, Rpy, matplotlib
- ...

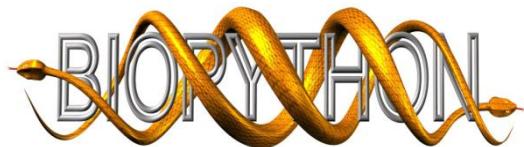



Examples

- Everything Excel does and much more
- Primer design and validation
 - Identify binding sites and their distances, nucleotide composition, codon frequency, etc.
- BLAST + evaluation of results
 - *in silico* translation of multiple sequences and automatic inspection of all resulting gene products
- Convert data formats (e.g. FASTA-like > FASTA)
- Advanced search&replace
- Your own ideas!!!



Outline

- Environment: ThinLinc, Xterm, Python
- Basic commands and data structures
- functions
- Control structures (if, else, for, while)
- File handling
- ...
- Your own project!!!



Environment: ThinLinc



ThinLinc

- IGLE or client on own computer
- Download ThinLinc client:
 - <https://www.cendio.com/thinlinc/download>
- LogIn:
 - Server: thinlinc.cebitec.uni-bielefeld.de
 - ID + PW



xterm / (l)qxterm

- Look for this symbol at bottom of screen
 - => xterm is started by clicking on it
- Type “lqxterm” into the terminal and hit ENTER
=> **always use lqxterm for running Python scripts!**
- (l)qxterms are intended for heavy computation





Starting Python



- Type the following commands into the lqxterm:

which python

- => displays default Python location/installation

python

- => starts Python: version 2.7.xxx should be displayed

- Enter this and hit ENTER: print “hello world!”



Starting Python



- Type the following commands into the lqxterm:

which python

- => displays default Python location/installation

python

- => starts Python: version 2.7.xxx should be displayed

- Enter this and hit ENTER: print “hello world!”

- Output: hello world!

=> Python is running!



File manager

- Click on “homes”
=> Opens your personal “homes”
- Type“/vol/apbiokurs/members” into file manager and hit ENTER
- right click and create a new subfolder: <UNIX-Name>
- Generate to subdirectories:
 - “scripts”
 - “data”




The first Python script

- Create new text file in directory “scripts” (via right click > new)
- Name it “test.py” (rename via right click on file)
- Right click on file > “open with” > “geany”
- Write “print ‘hello world!’ ” into file and save



Executing Python script

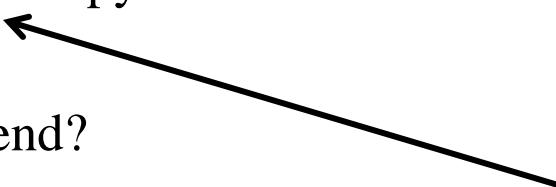- Select lqxterm:
CONTROL+ D (press at same time) => Python terminates
- Enter in lqxterm:
`cd /vol/apbiokurs/members/<UNIX-Name>/scripts`
- cd (=change directory) sets the current working directory
- Enter in lqxterm:
`python test.py`
- What happen?


Space is important!




Executing Python script II

- Arrow buttons can be used to navigate through history:
Arrow up=> last command (hit ENTER to confirm)
- Editing of previous commands (e.g. removal of typos)
- Important: script is always processed from top to bottom!



Filezilla

- Download & Installation (more recent version)
- Start Filezilla:

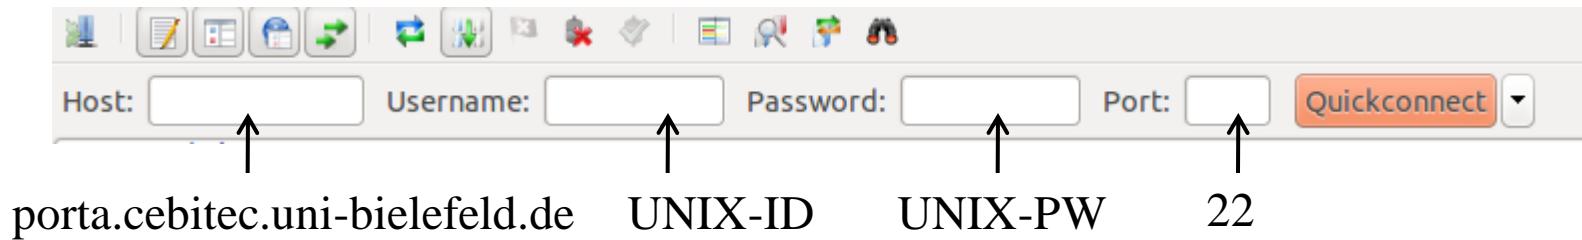

- Path to files: /vol/apbiokurs



Filezilla II

The screenshot shows the Filezilla interface with two panes: 'local' on the left and 'remote' on the right. A large arrow points from the 'local' pane towards the 'remote' pane, indicating the direction of a file transfer operation. A box labeled 'Drag&Drop' is overlaid on the interface between the two panes. The 'local' pane displays a directory tree with several files and folders, including 'vmlinuz.old', 'vmlinuz', 'initrd.img.old', 'initrd.img', and various system directories like 'bin', 'boot', 'cdrom', 'dev', 'etc', 'var', 'usr', 'tmp', 'sys', 'srv', 'sbin', 'run', 'root', 'proc', 'opt', 'mnt', 'media', 'lost+found', 'lib64', 'lib32', and 'lib'. The 'remote' pane shows a similar directory structure under '/vol/apbiokurs'. The bottom status bar indicates 'Queue: empty'.

all actions (protocol)

Local site: /

Remote site: /vol/apbiokurs

local

remote

Drag&Drop

Transfer of files

Queued files Failed transfers Successful transfers (26)

Queue: empty



Simple commands & variable types

```
1
2 print "test"                      #print
3 my_list = ["1", "2", "3", 4, 5, 6]  #list
4 my_int = 1                          #int
5 my_float = float( 3.1 )            #float
6 my_string = str( my_int )          #string
7
```



Comments / structure

- Two ways to add comments:
 - '#' rest of the line is command and ignored by Python
 - ' """' comment ' """ ' text in triple quotation marks is a comment which can be extended over multiple lines
- Use ASCII characters only (NO ä, ö, ü, ß ...)
- Empty lines are ignored by Python
=> Use space to structure code

```
1
2
3 def load_dAFs( filename ):
15
16
17 def load_gene_positions( gff3 ):
30
31
32 def calculate_dAF_per_gene( gene_positions, dAFs ):
51
52
53 def load_variant_effects( filename ):
54     """! @brief load all variant effects from given file """
55
56     variant_effects = {}
57     with open( filename, "r" ) as f:
58         f.readline() #header
59         line = f.readline()
60         while line:
```



Assignment / comparison

- ‘=’ used to assign value to variable:

```
a = "hello world!"
```

```
print a
```

- ‘==’ compares two values/variables:

```
a = "hello world!"
```

```
b = "test"
```

```
c = "test"
```

```
a == b
```

```
b == c
```

- Variable names may contain characters, underline, and numbers (not at the start!)



Variable type string

- a, b, and c are strings (“str”)
- Python allows to check the variable type:
`type(a)`
- Almost all variable types can be converted to string:
`str(<VARIABLE>)`



Variable types integer & float

- Two variable types for numbers:
 - integer = complete number (example: 3)
 - float = decimal number (example: 3.1415926)
- Important: “.” NOT“,” separates numbers in float!
- Some strings can be converted to integer/float:

```
my_int = int( “3” )  
my_float = float( “3.145926” )
```
- Check result via type(<VARIABLE>)

π

π



Python as calculator

- Numbers can be used for calculations ;-)

a = 3

b = 2

print a+b #addition

print a*b #multiplication

print a**b #exponentiation

print a/b #division

print a/float(b)

print a%b #modulo division

print a < b #alternatives: >=, <=, >, and ==

print a != b #test for inequality

- Calculating roots?
- Interested in more complex math? => numpy, scipy



Variable type list

- List can contain elements of different types (e.g. strings):

```
my_list = [ a, b, c ]           #list of strings
```

```
print my_list
```

```
new_list = [ “eins”, “zwei”, “drei” ]
```

- Elements can be accessed via index
- Index is given in square brackets after the list name:

```
print new_list[ 1 ]
```

- Matching your expectation?



Indices in Python

- Python starts counting at 0!!!

```
new_list = [ "eins", "zwei", "drei" ]  
#index:      0      1      2
```

- Lists can be concatenated:

```
new_list = new_list + [ "vier", "fünf", "sechs", "sieben" ]  
#new_list = [ "eins", "zwei", "drei", "vier", "fünf", "sechs", "sieben" ]  
#index =      0      1      2      3      4      5      6
```

- Print subset of list:

print new_list[3:]	#elements with index to end
print new_list[:3]	#elements in front of the given index
print new_list[3:5]	#elements with first index in front of second



Indices in Python II

- Strings have indices as well:

```
a = "hello world test string!"
```

```
print a[1:]
```

```
print a[5:10]
```

```
print a[:-1]      #-1 = only last element
```

```
print a[-5:-1]    #-5 = starting from 5th element from the end of the  
                  #list without the very last one
```



Variable type boolean (True/False)

- Already used for comparison:

```
print 1 == 1
```

```
print 1 > 1
```

```
print 1 == True
```

```
print True+True
```

```
print True + False
```

- Boolean variables can be used for calculations (like numbers)
- Most of the time used only for internal calculations



Brackets

- Two important types of brackets:
 - [] to generate lists and to access elements via index

```
a = []      #empty list
b = "test"   #a string
print b[1]
```
 - () to transfer arguments to functions

- => What are functions?

Examples:

- str(<VARIABLE>)
- int(<VARIABLE>)
- float(<VARIABLE>)




Exercises

- 3.1) Save 3,14159265359 in a variable of type float!
- 3.2) Convert variable from float to integer!
- 3.3) Convert variable back! What happens?
- 3.4) Convert variable type to string!
- 3.5) Save ‘Python’ in a string variable!
- 3.6) Convert variable type to float! What happens?
- 3.7) What is a pitfall in regards to division when working with int/float?



Functions

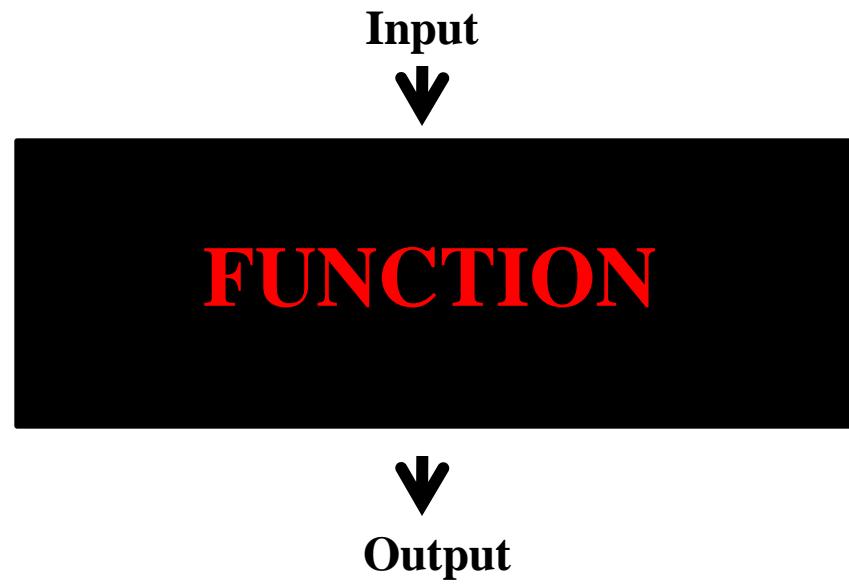



Functions

```
10 def sqrt_root( number ):
11     """ calculates sqrt root of given number """
12
13     sqrt_root = number**0.5      #calculation
14
15     return sqrt_root
16
17 result = sqrt_root( 125 )    #function call
18
19 print result
```

Function indicator

Function name
(no spaces in name!)

Argument/parameter

Body of function
(everything happens here)

Return of result
(optional)

Calling function with an argument
(definition above required)

Function is only defined (nothing happens)



Advantages of functions

- Generate modules=> write it ones and apply it often (for different purposes)
- structure=> increases readability of your code
- Nesting of calculations:

```
1 def get_gc_content( seq ):
2     """ calculates GC content of given sequence """
3     return float( seq.count('G')+ seq.count('C') ) / len(seq)
4
5 gc_content = get_gc_content("ATGCGACTCAATGCA")
6 print gc_content
```



Important functions

<code>str(<VARIABLE>)</code>	#converts variable to string
<code>int(<VARIABLE>)</code>	#converts variable to integer
<code>float(<VARIABLE>)</code>	#converts variable to float
<code><STRING1>.count("<STRING2>")</code>	#counts occurrences of string2 in string1
<code><LISTE>.count(<LISTENELEMENT>)</code>	#counts occurrences of element in list
<code>len(<STRING/LISTE>)</code>	#calculates length of string/list

- Warning: Functions return error if invalid arguments (e.g. wrong variable type) are given!



Exercises

- Primer: “ATGCCATGCATTGACTACG”
- 3.8) Calculate length of primer and print it!
- 3.9) Get number of Gs and print it!
- 3.10) Write a function to analyze the nucleotide composition of a primer and print it!
- 3.11) Is it a suitable primer? Why (not)?



Control structures



if & else

- Distinguish between two cases:

```
1 a = 5 #define variable
2 #user inputs number:
3 b = input("please enter number!")
4 if b < a: #if b is smaller than a
5     print "b is smaller than a"
6 else: #in all other cases
7     print "b is NOT smaller than a"
```


- Action depends on result of comparison



elif

- Distinguish between multiple cases:

```
1 a = 5 #define variable
2 #user inputs number:
3 b = input("please enter number!")
4 if b < a: #if b is smaller than a
5     print "b is smaller than a"
6 elif b== a: #both are equal
7     print "b is matching a"
8 else: #in all other cases
9     print "b is NOT smaller than a"
```



- Action depends on result of comparison





Exercises

- 4.1) Write script for guessing numbers!
- 4.2) Add tips (smaller/larger) during the guessing process!



Concept of loops

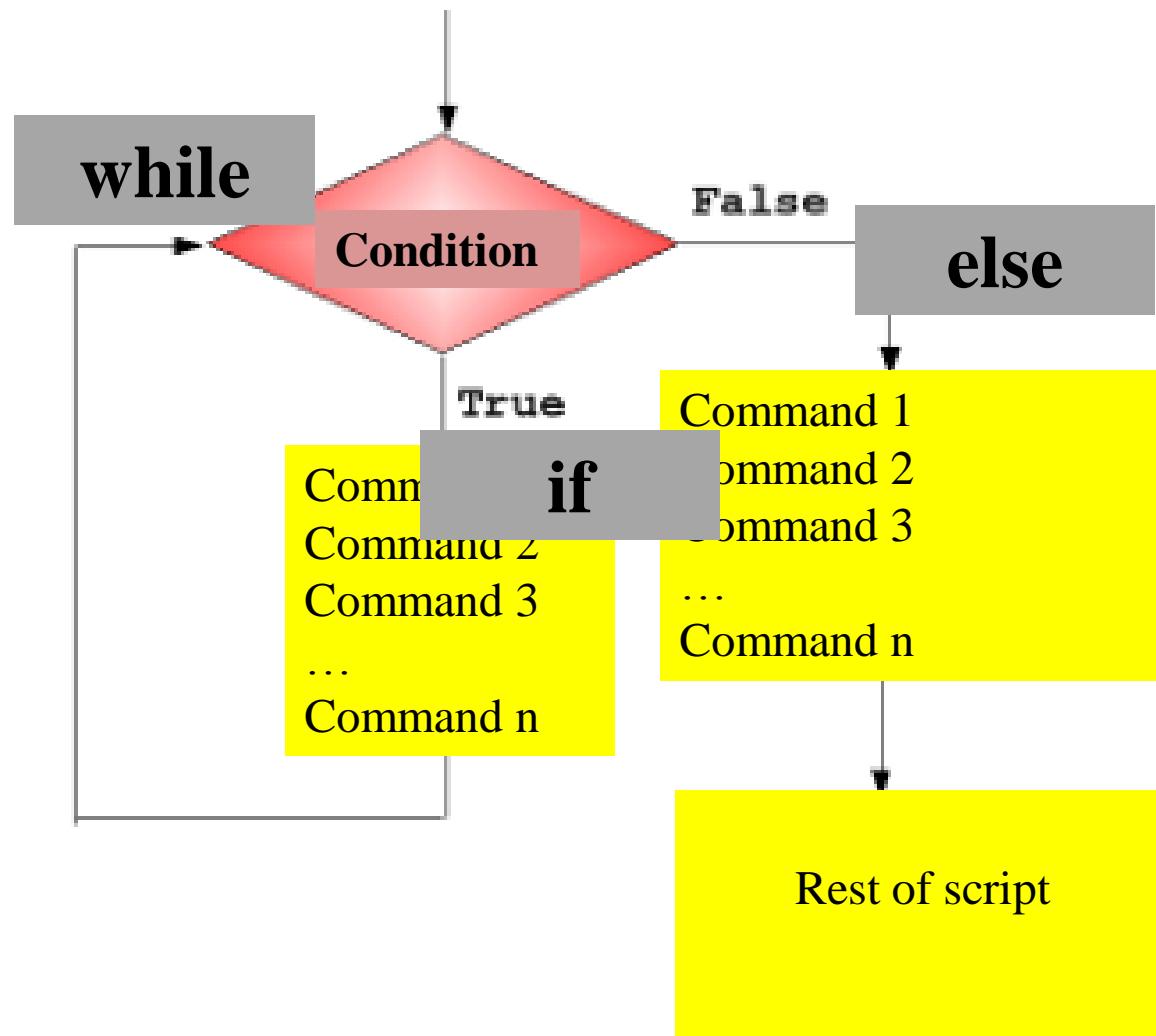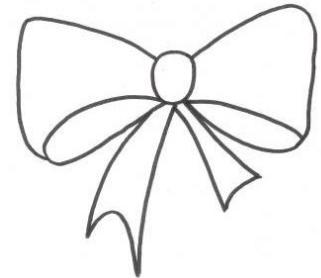



While – loop (example)

```
1 a = 0
2 while a < 10:      #checks if a is smaller than 10
3     print str( a ) + " is smaller than 10"
4     a += 1    #a = a+1
5     #something useful could happen here
6     print "a was increased by 1"
7     print str( a ) + "is larger than 10"
```

Code is executed until the condition for this loop becomes false



While – infinite loop

```
1 #infinite loop:  
2 a = 0  
3 while True: #always true  
4     a += 1 #a = a+1  
5     print str( a )  
6 print "this line is never reached"
```

WARNING: this loop is infinite!



For loop

```
1 list_of_species = [ "E.coli", "B.subtilis", "S.cerevisiae", "C.glutamicum", "A.tumefaciens" ]
2 for species in list_of_species:
3     if len( species ) < 12: #Length of names is calculated and compared
4         print species          #Name is printed
5
6 #Line 3+4 is executed several times:
7 #1: species = "E.coli"
8 #2: species = "B.subtilis"
9 #3: species = "S.cerevisiae"
10 # ...
```



For loop

Control variable
(species)

List of data
(list_of_species)

```
1 list_of_species = [ "E.coli", "B.subtilis", "S.cerevisiae", "C.glutamicum", "A.tumefaciens" ]
2 for species in list_of_species:
3     if len( species ) < 12: #Length of names is calculated and compared
4         print species
5
6 #Line 3+4 is executed several times:
7 #1: species = "E.coli"
8 #2: species = "B.subtilis"
9 #3: species = "S.cerevisiae"
10 # ...
```

Species name is printed if
shorter than 12 characters



Exercises

- 4.6) Write a function counting to 100 and printing all number which can be divided by 4 without any residue!
 - Info: $10 \% 2$ #modulo division in Python
- 4.7) Write a function counting down from 1000 to 0 and printing all numbers!
- 4.8) Generate a list of species names! Write a function printing all species names starting with “E”!
- 4.9) Expand this function to limit the printing to species names which are additionally shorter than 10 characters!
- 4.10) Expand this function to limit the printing to species names which are additionally ending with “a”.



range()

```
1 list_of_species = ["E.coli", "B.subtilis", "S.cerevisiae", "C.glutamicum", "A.tumefaciens"]
2 length = len( list_of_species ) #length = 5
3 for i in range( length ):    #starts at 0 and runs to i=4 (five values)
4     if len( list_of_species[ i ] ) < 12:    #length of name is calculated and compared
5         print list_of_species[ i ] #name is printed
6
7 #i is taking five different values:
8 #1: i=0
9 #2: i=1
10 #3: i=2
11 #4: i=3
12 #5: i=4
13 #i=5 is never reached by range()
```

enumerate()

```
1 list_of_species = ["E.coli", "B.subtilis", "S.cerevisiae", "C.glutamicum", "A.tumefaciens"]
2 for idx, species in enumerate( list_of_species ):
3     if len( species ) < 12: #length of names is calculated and compared
4         print "position of " + species + " is: " + str( idx )
5
6 #i is taking five different values:
7 #1: i=0 and species="E.coli"
8 #2: i=1 and species="B.subtilis"
9 #3: i=2 and species="S.cerevisiae"
10 #4: i=3 and species="C.glutamicum"
11 #5: i=4 and species="A.tumefaciens"
12 #i=5 is never reached
```



Exercises

- 5.4) Write a script to print 50x “here” and the current value of the control variable!
- 5.5) Write a script to walk through the species list and to print the character from the species where the index corresponds to the current control variable value!




File handling



Concept of file handling

- “connection” from Python to file
- Read = Transfer of data **from** file
- Write = Transfer of data **into** file

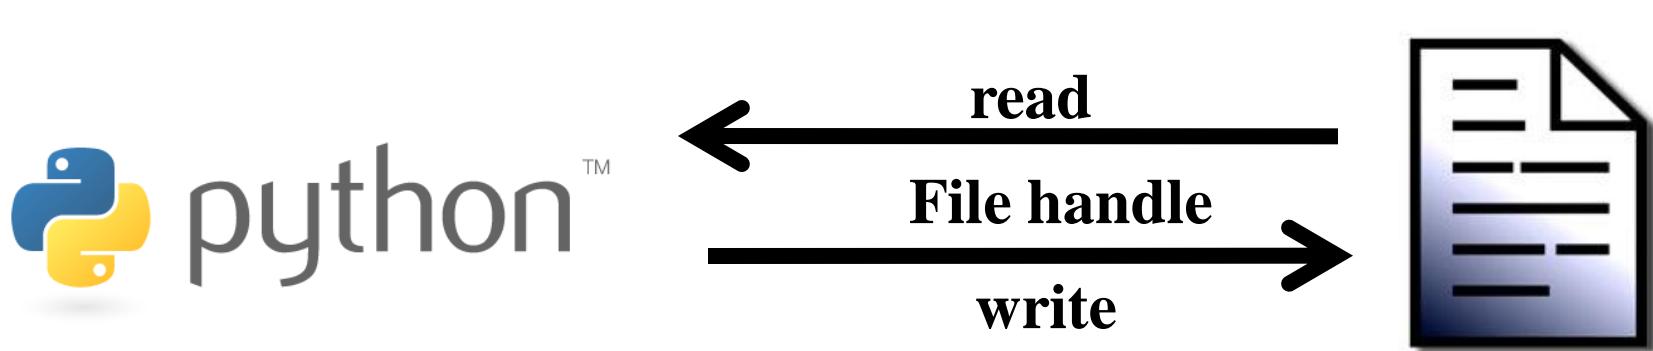

Read a file (parsing)

“connection” from Python to file File in working directory

```
1 f = open( "test.txt", "r" ) # "r" ist default
2 lines = f.readlines()
3 f.close()
4
oder
5
6 with open( "test.txt", "r" ) as f: # "r" ist default
7     lines = f.readlines()
```

Close “connection”

Function for reading all lines

Tipp: way 2 is better, because the connection is closed automatically

“connection” from Python to file



Reading a file (big data)

```
1 with open( "text.txt", "r" ) as f: # "r" is default
2     line = f.readline() # reads next line
3     while line: # until end of file is reached
4         print line
5         line = f.readline() # reads next line
```

- Advantage: only one line is read and processed at a time
- NGS data (e.g. FASTQ/SAM/BAM/VCF) are usually several GB in size
=> RAM limitations
- Very long sequence (e.g. genome sequences) in FASTA might be too large for available RAM



Analyze file - example

- How many lines are in AtCol0_Exons.fasta? (large file!)
- Under UNIX: head <DATEINAME>

```
>AT1G01010.1|exon-1 | 1-283 | chr1:3631-3913 FORWARD LENGTH=283
AAATTATTAGATATAACCAACCAGAGAAAACAATACATAATCGGAGAAATACAGATTACAGAGAGCGAGAGAGATCGAC
GGCGAAGCTCTTACCCGGAAACCATTGAAATCGGACGGTTAGTGAAAATGGAGGATCAAGTTGGGTTGGGTTCCGTC
CGAACGACGAGGAGCTCGTTGGTCACTATCTCCGTAAACAAATCGAAGGAAACACTAGCCGCGACGTTGAAGTAGCCATC
AGCGAGGTCAACATCTGTAGCTACGATCCTTGGAACTTGCCT
>AT1G01010.1|exon-2 | 366-646 | chr1:3996-4276 FORWARD LENGTH=281
TCCAGTCAAAGTACAAATCGAGAGATGCTATGTGGTACTTCTTCTCGTAGAGAAAAACAACAAAGGGATCGACAGAGC
AGGACAAACGGTTCTGGTAAATGGAAGCTTACCGGAGAATCTGTTGAGGTCAAGGACCAGTGGGATTTGTAGTGAGGG
CTTCGTGGTAAGATTGGTCATAAAAGGGTTTGGTGTTCCTCGATGGAAGATAACCTGACAAAACCAAATCTGATTGGG
TTATCCACGAGTTCCACTACGACCTTACCAAGAACATCAG
>AT1G01010.1|exon-3 | 856-975 | chr1:4486-4605 FORWARD LENGTH=120
AGGACATATGTCATCTGCAGACTTGAGTACAAGGGTGATGATGCGGACATTCTATGCTTATGCAATAGATCCACTCC
CGCTTTGTCCCCAATATGACTAGTAGTGCAGGTTCTGTG
```



(multiple) FASTA

Name of sequence (header): line starts with ‘>’

```
>AT1G01010.1|exon-1 | 1-283 | chr1:3631-3913 FORWARD LENGTH=283
AAATTATTAGATATACCAAACCAAGAGAAAACAAATACATAATCGGAGAAATACAGATTACAGAGAGCGAGAGAGATCGAC
GGCGAACGCTCTTACCCGAAACCATTGAAATCGGACGGTTAGTGAAAATGGAGGATCAAGTTGGGTTGGGTTCCGTC
CGAACCGACGAAGAGCTCGTGGTCACTATCTCCGTAAACAAAATCGAAGGAAACACTAGCCCGACGTTGAAGTAGCCATC
ACCGAGGGTCAACATCTGTAGCTACGATCCTTGGAACTTGCCT
>AT1G01010.1|exon-2 | 366-646 | chr1:3996-4276 FORWARD LENGTH=281
TCCAGTCAAAGTACAAATCGAGAGATGCTATGTGGTACTTCTCTCGTAGAGAAAACAACAAAGGGAATCGACAGAGC
AGGACAAACGGTTCTGGTAAATGGAAGCTTACCGGAGAATCTGTTGAGGTCAAGGACCAGTGGGATTTGTAGTGAGGG
CTTCGTGTAAGATTGGTCATAAAAGGTTTGGTCTCGATGGAAGATAACCTGACAAAACCAAATCTGATTGGG
TGTATCCACGAGTTCCACTACGACCTCTTACCAAGAACATCAG
>AT1G01010.1|exon-3 | 856-975 | chr1:4486-4605 FORWARD LENGTH=120
AGGACATATGTCATCTGCAGACTTGAGTACAAGGGTGATGATGCGGACATTCTATCTGCTTATGCAATAGATCCCACCTCC
CGCTTTGTCCCCAATATGACTAGTAGTGCAGGTTCTGTG
```

(multiple) FASTA

Name of sequence (header): line starts with ‘>’

```
>AT1G01010.1|exon-1 | 1-283 | chr1:3631-3913 FORWARD LENGTH=283  
AAATTATTAGATATACCAACCAGAGAAAACAAATACATAATCGGAGAAATACAGATTACAGAGA  
GGCGAACGCTCTTACCCGAAACCATTGAAATCGGACGGTTAGTGAAAATGGAGGATCAAGTT  
CGAACGACGAAGAGCTCGTGGTCACTATCTCCGTAAACAAAATCGAAGGAAACACTAGCCGCA  
ACGAGGGTCAACATCTGTAGCTACGATCCTTGGAACTTGCCT  
>AT1G01010.1|exon-2 | 366-646 | chr1:3996-4276 FORWARD LENGTH=281  
TCCAGTCAAAGTACAAATCGAGAGATGCTATGTGGTACTTCTCTCGTAGAGAAAACAACAAAGGG  
AGGACAAACGGTTCTGGTAAATGGAAGCTTACCGGAGAATCTGTTGAGGTCAAGGACCA  
CTTCTCGTGGTAAGATTGGTCATAAAAGGGTTTGGTCTCGATGGAAGATA  
TGTGAGGG  
>AT1G01010.1|exon-3 | 856-975 | chr1:4486-4605 FORWARD LENGTH=120  
AGGACATATGTCATCTGCAGACTTGAGTACAAGGGTGATGATGCGGACATTCTATGCTTATGCA  
ATAGATCCCACCTCC  
CGCTTTGTCCCCAATATGACTAGTAGTGCAGGTTCTGT
```

one entry

(multiple) FASTA

Name of sequence (header): line starts with ‘>’

```
>AT1G01010.1|exon-1 | 1-283 | chr1:3631-3913 FORWARD LENGTH=283  
AAATTATTAGATATAACCAACCAGAGAAAACAAATACATAATCGGAGAAATACAGATTACAGAGA  
GGCGAACGCTCTTACCCGGAAACCATTGAAATCGGACGGTTAGTGAAAATGGAGGATCAAGTT  
CGAACGACGAAGAGCTCGTTGGTCACTATCTCCGTAAACAAAATCGAAGGAAACACTAGCCGCA  
ACGAGGGTCAACATCTGTAGCTACGATCCTTGGAACTTGCCT  
>AT1G01010.1|exon-2 | 366-646 | chr1:3996-4276 FORWARD LENGTH=281  
TCCAGTCAAAGTACAAATCCAGAGATGCTATGTGGTACTTCTCTCGTAGAGAAAACAACAAAGGGAATCGACAGAGC  
AGGACAAACGGTTCTGGTAATGGAAGCTTACCGGAGAATCTGTTGAGGTCAAGGACCAGTGGGATTTGTAGTGAGGG  
CTTCGTGTAAGATTGGTCAAAAAAGGTTTGGTCTCGATGGAAGATAACCTGACAAAACCAATCTGATTGGG  
TGTATCCACGAGTTCACTACGACCTTACCAAGAACATCAG  
>AT1G01010.1|exon-3 | 856-975 | chr1:4486-4605 FORWARD LENGTH=120  
AGGACATATGTCATCTGCAGACTTGAGTACAAGGGTGATGATGCGGACATTCTATGCTTATGCAATAGATCCCAC  
CGCTTTCTCCCCAATATGACTAGTAGTGCAGGTTCTGT
```

one entry

Sequence lines (no limit!)

Analyze file - example

```
1 with open( "/vol/apbiokurs/data/AtCol0_Exons.fasta", "r" ) as f:  
2     line = f.readline() #reading first line  
3     line_counter = 0 #counting lines  
4     while line:  
5         line_counter += 1 #counting lines  
6         line = f.readline()  
7     #number in line_counter needs to be converted to string:  
8     print "File contains " + str( line_counter ) + " lines"
```



Exercises

- 6.1) Count number of sequences (= number of headers) in /vol/apbiokurs/data/AtCol0_Exons.fasta!
- 6.2) Count number of sequence lines!
- 6.3) Count number of characters in document! (How many per line?)
- 6.4) How long are all contained sequences combined?
- 6.5) Calculate the average sequence length in this file!



And back again... writing into file!

1 Read:

```
2 with open( "test.txt", "r" ) as f: # "r" (read) is default
3     lines = f.readlines()
```

difference: r = read; w = write

8 Write:

```
9 with open( "test2.txt", "w" ) as out:
10    out.write( "hello world!" )
```

Writes a string into a file

- If output file does not exists, it will be created!
- File handle (f and out) can have any name!



Read & write

```
1 with open( "test.txt", "r" ) as f: #open file to read
2     with open( "test2.txt", "w" ) as out: #open file to write
3         line = f.readline() #read from first file
4         while line:
5             #this would be the place to apply filters
6             out.write( line )
7             line = f.readline()
```



Exercises

- 7.1) Read the file AtCol0_Exons.fasta and write all headers (starting with ‘>’) into a new file!
- 7.2) Read the file AtCol0_Exons.fasta and write the following:
 - Line if it is a header
 - Length of line if it is a sequence line
- 7.3) Calculate the number of sequences, the cumulative length, and the average length in the new file! Are they matching the values of the original file?
- 7.4) Write sequences into a new file if their length is a multiple of 10!



White space characters

- New line ('\n') und tab ('\t') are special characters
print "hello\tworld!\nhello\tworld!\n"
- Python interprets these characters in print statements, but functions like readline() and write() do not!
=> New line needs to be added “manually” to each new line

```
1 with open( "test_file.txt", "w" ) as out:  
2     out.write( "first test" )  
3     out.write( "second test" )  
4     out.write( "third test\n" )  
5     out.write( "fourth test\n" )  
6     out.write( "fifth test" )  
7     out.write( "sixth test" )
```

How many lines does
this file have?



strip()

- Removes white space characters from borders of a string (often used for new lines at the line end):

```
1 line = ">name_of_first_seq\n"
2 print line
3 #>name_of_first_seq
4 # [empty line generated by \n ]
5 line = line.strip()
6 print line
7 #>name_of_first_seq
```



split()

- Separates a string at each given occurrence of the given substring (e.g. tab, comma, ...)
- Generates list of strings

```
1 #tab-delimited file
2 line = "spalte1\tspalte2\tspalte3\tspalte4\n"
3 #line should be splitted at tabs
4 columns = line.strip().split('\t')
5 print columns
6 #["spalte1", "spalte2", "spalte3", "spalte4"]
```



join()

- Combines strings of a list by putting a given substring between them (e.g. underline)
- Important: all elements of list need to be strings!

```
1 #tab-delimited file
2 line = "spalte1\tspalte2\tspalte3\tspalte4\n"
3 #line should be splitted at tabs
4 columns = line.strip().split('\t')
5 print columns
6 #[ "spalte1", "spalte2", "spalte3", "spalte4"]
7
8 new_line = "_".join( columns )
9 print new_line
10 #spalte1_spalte2_spalte3_spalte4
```



Exercises

- 7.5) Read the file AtCol0_Exons.fasta and write the following:
 - Only ArabidopsisGeneIdentifier (e.g. AT1G01010)
 - Gene identifier, exon name, and exon length (tab-delimited)




```
>AT1G01010.1|exon-1 | 1-283 | chr1:3631-3913 FORWARD LENGTH=283
AAATTATTAGATATAACCAACCAGAGAAAAACAAATACATAATCGGAGAAAATACAGATTACAGAGAGCCAGAGAGATCGAC
GGCGAACGCTTTACCCGGAAACCATTGAAATCGGACGGTTAGTGAAAATGGAGGATCAAGTTGGGTTGGGTTCCGTC
CGAACGACGAGGAGCTCGTGGTCACTATCTCGTAACAAAATCGAAGGAAACACTAGCCGCGACGTTGAAGTAGCCATC
AGCGAGGTCAACATCTGTAGCTACGATCCTTGGAACTTGCCT
>AT1G01010.1|exon-2 | 366-646 | chr1:3996-4276 FORWARD LENGTH=281
TCCAGTCAAAGTACAAATCGAGAGATGCTATGTGGTACTTCTTCTCGTAGAGAAAAACAACAAAGGGAATCGACAGAGC
AGGACAAACGGTTCTGGTAAATGGAAGCTTACCGGAGAATCTGTTGAGGTCAAGGACCAAGTGGGATTTGTAGTGAGGG
CTTCGTGGTAAGATTGGTCATAAAAGGGTTTGGTCTCGATGGAAGATACTGACAAAACCAAATCTGATTGGG
TTATCCACGAGTTCCACTACGACCTCTTACCAAGAACATCAG
>AT1G01010.1|exon-3 | 856-975 | chr1:4486-4605 FORWARD LENGTH=120
AGGACATATGTCATCTGCAGACTTGAGTACAAGGGTGATGATGCGGACATTCTATCTGCTTATGCAATAGATCCCACCTCC
CGCTTTGTCCCCAATATGACTAGTAGTGCAGGTTCTGTG
```



Modules



Concept of modules

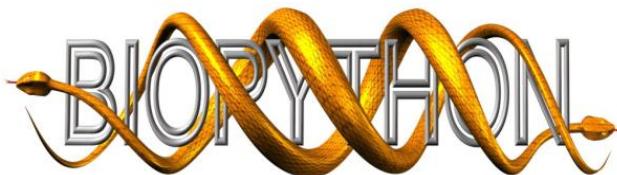


NcbiblastnCommandline
NCBIXML



pythonTM



plt.show()
plt.color()

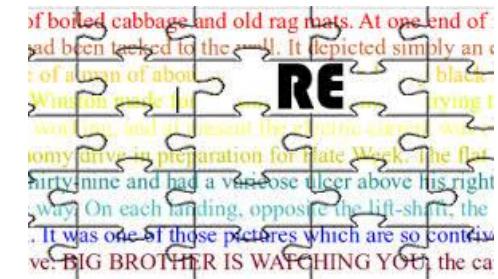

re.findall()
re.match()



np.array()



Import of modules

```
1 #basic import:  
2 import re  
3 #import of module under abbreviation:  
4 import numpy as np  
5 #import part of module:  
6 from datetime import datetime  
7  
8 #usage of module functions:  
9 re.findall()  
10 datetime.now()  
11  
12 #try this (requires import):  
13 print str( datetime.now() )
```



Run time calculation

- Current time is saved in two different places
- Difference is calculated to get the run time

```
1 from datetime import datetime  
2  
3 t1 = datetime.now()  
4 #something should happen here  
5 t2 = datetime.now()  
6  
7 print "it took " + str( t2-t1 )
```



Regular expressions

- regular expressions (= re) enable efficient search for substrings in a given string

```
1 import re
2 some_string = "AT2G12340.1|exon-1|23745-23965|AT2G12340.2exon-1_23745-23965"
3 hits = re.findall( "AT\dG\d{5}", some_string ) #generates list of hits
4 #searches for "AT\dG\d{5}"
5 #AT, G are matching the very same character
6 #\d is matching all number 0-9
7 #{5} specifies five repetitions of the previous element
8
9 print hits
```



Exercises

- 8.1) Write all AGIs of AtCol0_exons.fasta into a new file!
- 8.2) Some IDs occur multiple times. Add a filter step to reduce the results to unique IDs!
- 8.3) Calculate frequency of each AGI and construct a histogram (matplotlib)!
Tip: `plt.hist(<LIST_OF_VALUES>)`



DNA, RNA, and peptide sequences

Reverse complement

What happens here?

```
1 def revcomp( seq ):           Sequence of bases e.g. ATGACATGA
2
3     seq = seq.lower()          Converts input to lower case: atgacatga
4
5     #key:value (=dictionary)
6     complement = { 'a':'t', 't':'a', 'c':'g', 'g':'c' }
7
8     new_seq = []               Get complement for each base
9
10    for nt in seq:
11        new_seq.append( complement[ nt ] )
12
13    #list[::-1] inverts list (last element becomes first)
14    new_seq = "".join( new_seq[::-1] )
15
16    return new_seq              Inverts list (=reverse)
```




Exercises

- 9.1) Write a function to get the reverse complement (upper case letters) of a DNA sequence given in upper case letters!
- 9.2) Write a function to convert a DNA sequence into a RNA sequence!
- 9.3) Write a function to translate a DNA sequence into amino acids (first frame only)!

Tipp: http://en.wikipedia.org/wiki/DNA_codon_table

- 9.4) Write a function to translate DNA sequences in all 6 frames into peptide sequences! The longest peptide sequence per DNA sequence should be returned!

EasyGUI

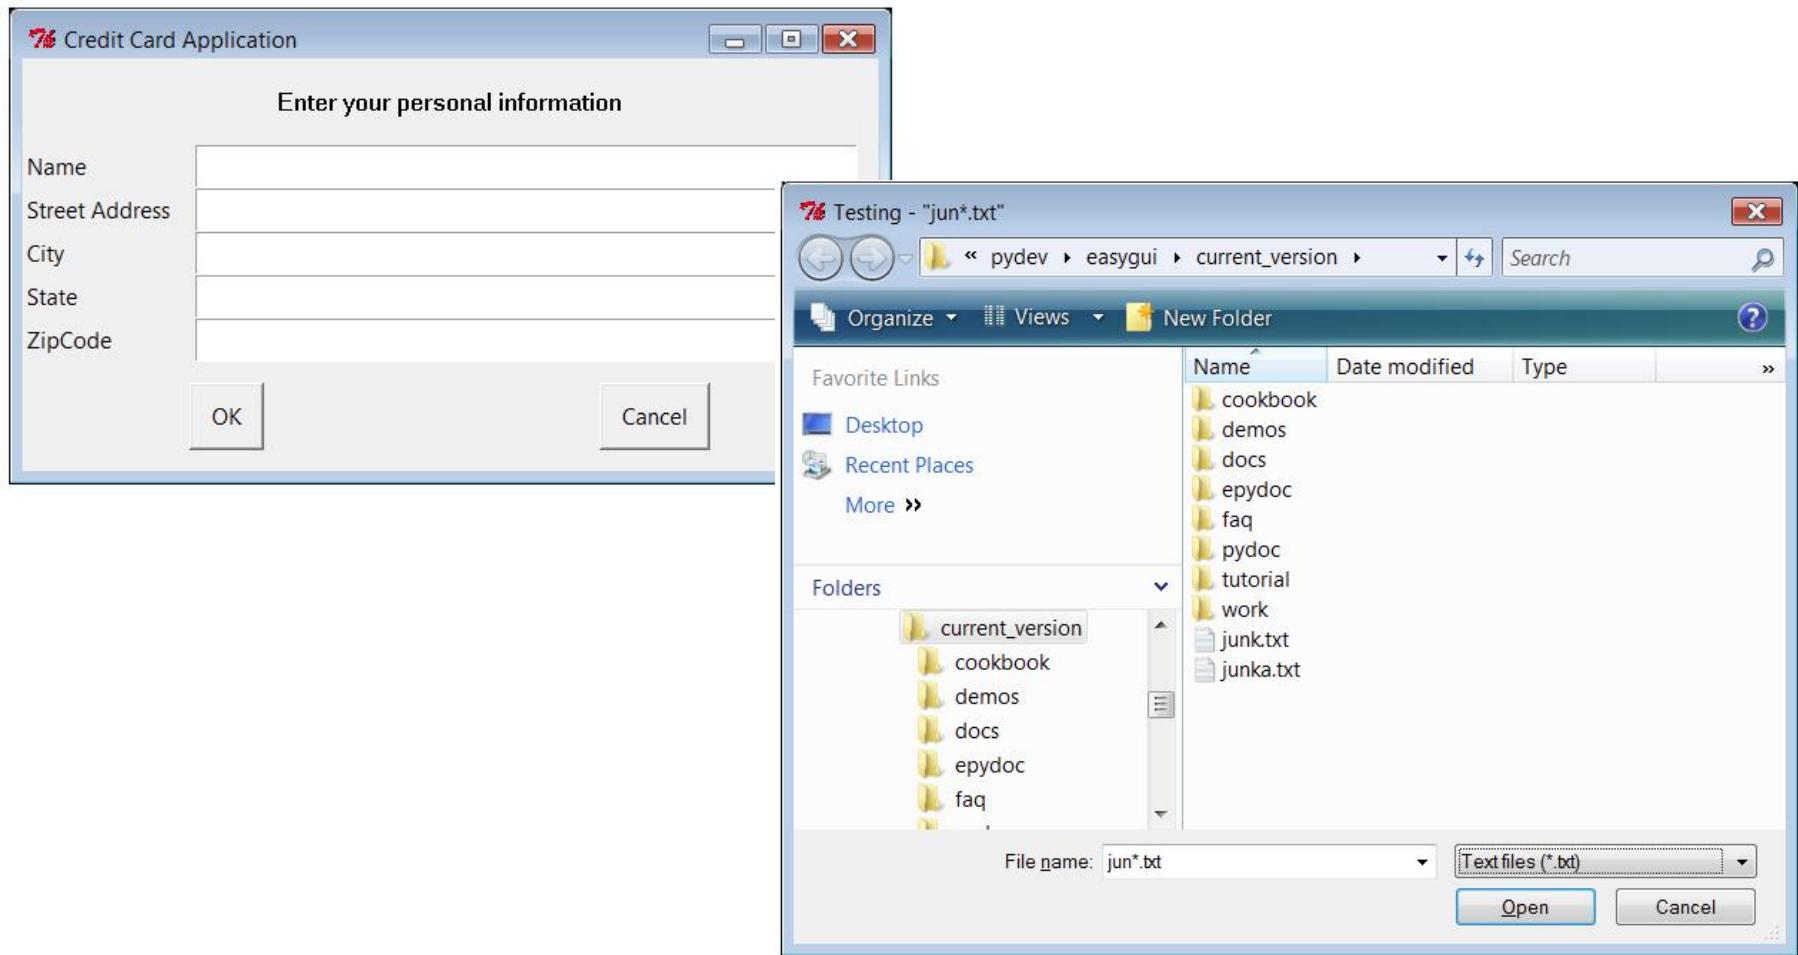



EasyGUI - documentation

<http://www.ferg.org/easygui/tutorial.html>

<http://easygui.sourceforge.net/tutorial.html#introduction>

<https://easygui.wordpress.com/>

Downloads:

<https://pypi.python.org/pypi/easygui/0.97.4#downloads>



Two issues

Easygui project shuts down

Posted on [2013/03/06](#)

Effective March 6, 2013, I am shutting down the EasyGui project.

The EasyGui software will continue to be available at its current location, but I will no longer be supporting, maintaining, or enhancing it.

The reasons for this decision are personal, and not very interesting. I'm older now, and retired. I no longer do software development, in any programming language. I have other interests that I find more compelling. I spend time with my family. I play and promote [petanque](#). Life is good, but it is different.

During the course of my software development career I've had occasion to shut down a number of projects. On every occasion when I turned over a project to a new owner, the results were disappointing. Consequently, I have decided to shut down the EasyGui project rather than to try to find a new owner for it.

The EasyGui software will remain frozen in its current state. I invite anyone who has the wish, the will, the energy, and the vision to continue to evolve EasyGui, to do so. Copy it, fork it, and make it the basis for your own new work.

— Steve Ferg, March 6, 2013

Warning about using EasyGui with IDLE

... but it should work!



Selected EasyGUI functions

- `msgbox` = displays message box
- `ccbox / ynbox` = poll with yes/no box
- `buttonbox` = diverse buttons displayed (suitable as menu)
- `choicebox` = select options from a given list
- `enterbox` = enter some text
- `diropenbox/fileopenbox/filesavebox` = GUI for file handling



Basic structure

```
1 import easygui as eg
2 import sys
3
4 while 1:
5     #
6     #your functions / boxes
7     #
8     msg = "do you want to continue?"
9     title = "tool usage"
10    if eg.ccbox( msg, title ):
11        pass
12    else:
13        sys.exit( 0 )
```



Exercises

- 10.1) Write a script to handle input of primer names and sequences! All information should be saved in a multiple FASTA file.
- 10.2) Write a script to return a matching primer sequence from a FASTA file based on a given primer name.
- 10.3) Write a script to combine both functionalities: return primer sequence, if name is already present OR generate new entry if primer name is novel.



Advanced Python





Overview

- Submission of processes to shell for execution and result handling
- BLAST result analysis
- Concept of plots via axes in matplotlib
- General figure types: plot, boxplot, barplot
 - Genome figures: scatter plots, box plots, chromosome plots, gene cluster plots
- Statistics in Python: tests and theoretical background
 - t-test, W-test, U-test, cor-test, χ^2 -test
- HTML construction



Analyze problem

- Split problem into parts => solutions for small parts are more generic and thus often available
- Precise description of problem is necessary:



stackoverflow

- Best hit in approximately 90-95% of all cases
- Stackoverflow is chat forum for programmers (different languages)
- Problems are described in questions
- Answers often contain examples which can be directly applied
- Answers are judged by members => look for green marking and the number of positive votes



Example

- Problem: get paths of all files in a certain directory
- Search expression: “python get all files in directory”

The screenshot shows a Google search results page with the query "python get all files in directory". The results are filtered to "Web" and show approximately 2,050,000 results. The first five results are from Stack Overflow:

- How to list all files of a directory in Python - Stack Overflow**
stackoverflow.com/.../how-to-list-all-files-of-a-direc... ▾ Diese Seite übersetzen
08.07.2010 - How can I list all files of a directory in python and add them to a list? ...
os.listdir() will get you everything that's in a directory - files and directories.
- Find all files in directory with extension .txt with python ...**
stackoverflow.com/.../find-all-files-in-directory-with... ▾ Diese Seite übersetzen
19.10.2010 - How can I find all files in directory with the extension .txt in python? ...
You can use glob : import glob, os os.chdir("mydir") for file in glob.glob("*.*txt"); ...
- filesystems - Directory listing in Python - Stack Overflow**
stackoverflow.com/.../directory-listing-in-python ▾ Diese Seite übersetzen
23.09.2008 - Directory listing in Python ... vote favorite. 131. How do I get a list of all files (and directories) in a given directory in Python? python filesystems ...
- python - Get a filtered list of files in a directory - Stack Overflow**
stackoverflow.com/.../get-a-filtered-list-of-files-in-a... ▾ Diese Seite übersetzen
08.02.2010 - I am trying to get a list of files in a directory using Python, but I do not want a ... of an os.listdir() and to append all the matching files to a new list.
- how to get only files in directory python - Stack Overflow**
stackoverflow.com/.../how-to-get-only-files-in-direc... ▾ Diese Seite übersetzen
27.01.2014 - How to list all files of a directory in Python 11 answers. I have this code:
allFiles = os.listdir(myPath) for module in allFiles: if 'Module' in module: ...
- Python: list files in the current directory ONLY - Stack Overflow**
stackoverflow.com/.../python-list-files-in-the-curren... ▾ Diese Seite übersetzen
15.08.2012 - In Python, I only want to list all the files in the current directory ONLY. I do not want files listed from any subdirectory or parent. There do seem to ...



Example

533 user like this answer

This answers solved the question

14 Answers

active oldest votes

You can use `glob`:

```
import glob, os
os.chdir("/mydir")
for file in glob.glob("*.txt"):
    print(file)
```

or simply `os.listdir`:

```
import os
for file in os.listdir("/mydir"):
    if file.endswith(".txt"):
        print(file)
```

or if you want to traverse directory, use `os.walk`:

```
import os
for root, dirs, files in os.walk("/mydir"):
    for file in files:
        if file.endswith(".txt"):
            print(os.path.join(root, file))
```

share improve this answer

edited Apr 22 at 17:44

Tarantula
4,794 ● 3 ● 22 ● 39

answered Oct 19 '10 at 1:12

ghostdog74
102k ● 17 ● 116 ● 188

1 Using solution #2, How would you create a file or list with that info? – Merlin Oct 19 '10 at 3:48

35 @ghostdog74: In my opinion it would more appropriate to write `for file in f` than for `for files in f` since what is in the variable is a single filename. Even better would be to change the `f` to `files` and then the for loops could become `for file in files`. – martineau Oct 26 '10 at 14:18

18 @computermacgyver: No, `file` is not a reserved word, just the name of a predefined function, so it's quite possible to use it as a variable name in your own code. Although it's true that generally one should avoid collisions like that, `file` is a special case because there's hardly ever any need to use it, so it is often consider an exception to the guideline. If you don't want to do that, PEP8 recommends appending a single underscore to such names, i.e. `file_`, which you'd have to agree is still quite readable. – martineau Oct 14 '12 at 19:04

2 Thanks, martineau, you're absolutely right. I jumped too quickly to conclusions. – computermacgyver Oct 15 '12 at 19:53

1 Really cool answer, you could replace `r,d,f` by `r_,f` to avoid unused variable declaration. – AsTeR Mar 8 '13 at 20:16



Official Python documentation

- Systematic documentation of all functions in a module with all possible arguments
- Sometimes examples are given as well

The screenshot shows a web browser displaying the Python 2.7.10rc0 documentation for the `glob` module. The URL is `2.7.10rc0 Documentation > The Python Standard Library > 10. File and Directory Access > 10.7. glob — Unix style pathname pattern expansion`. The page title is "10.7. `glob` — Unix style pathname pattern expansion". The left sidebar contains links to other modules like `tempfile` and `fnmatch`, and buttons for reporting bugs and searching. The main content area starts with a brief description of the `glob` module's purpose and how it differs from shell-style globbing. It then details the `glob.glob(pathname)` function, which returns a list of matching file paths. Below this, it describes the `glob.iglob(pathname)` function, which returns an iterator for the same results. A code example shows how to use `glob.glob` to find files like `1.gif`, `2.txt`, and `card.gif`. Another section explains that files starting with a dot (like `.card.gif`) won't be matched by default, with a code example showing the result of `glob.glob('.gif')`.

10.7. `glob` — Unix style pathname pattern expansion

[Source code: Lib/glob.py](#)

The `glob` module finds all the pathnames matching a specified pattern according to the rules used by the Unix shell. No tilde expansion is done, but `*`, `?`, and `*` are correctly matched. This is done by using the `os.listdir()` and `fnmatch.fnmatch()` functions in concert, and not by actually invoking a subshell. Note that unlike beginning with a dot (`.`) as special cases. (For tilde and shell variable expansion, use `os.path.expanduser()` and `os.path.expandvars()`.)

For a literal match, wrap the meta-characters in brackets. For example, `[?]`` matches the character `'?'`.

`glob.glob(pathname)`

Return a possibly-empty list of path names that match `pathname`, which must be a string containing a path specification. `pathname` can be either absolute (like `..../Tools/*/*.gif`), and can contain shell-style wildcards. Broken symlinks are included in the results (as in the shell).

`glob.iglob(pathname)`

Return an `iterator` which yields the same values as `glob()` without actually storing them all simultaneously.

New in version 2.5.

For example, consider a directory containing only the following files: `1.gif`, `2.txt`, and `card.gif`. `glob()` will produce the following results. Notice how any leading `./` or `..` is stripped off the results.

```
>>> import glob
>>> glob.glob('./[0-9].*')
['1.gif', './2.txt']
>>> glob.glob('*.*')
['1.gif', 'card.gif']
>>> glob.glob('?.gif')
['1.gif']
```

If the directory contains files starting with `.` they won't be matched by default. For example, consider a directory containing `card.gif` and `.card.gif`:

```
>>> import glob
>>> glob.glob('*.gif')
['card.gif']
>>> glob.glob('.*.gif')
['.card.gif']
```



Books?

- There is enough out there
 - Google's Python Class: <https://developers.google.com/edu/python/>
 - Youtube: <https://www.youtube.com/watch?v=tKTZoB2Vjuk>



BLAST

NIH U.S. National Library of Medicine NCBI National Center for Biotechnology Information Sign in to NCBI

BLAST® » blastn suite

Standard Nucleotide BLAST

blastn blastp blastx tblastn tblastx

Enter Query Sequence
Enter accession number(s), gi(s), or FASTA sequence(s) [more...](#)

Clear Query subrange [more...](#)
From
To

Or, upload file No file selected.

Job Title
Enter a descriptive title for your BLAST search [more...](#)

Align two or more sequences [more...](#)

Choose Search Set

Database
 Human genomic + transcript Mouse genomic + transcript Others (nr etc.):
Nucleotide collection (nr/nt) [more...](#)

Organism
Optional Enter organism name or id—completions will be suggested Exclude [more...](#)
Enter organism common name, binomial, or tax id. Only 20 top taxa will be shown [more...](#)

Exclude
Optional Models (XM/XP) Uncultured/environmental sample sequences

Limit to
Optional Sequences from type material

Entrez Query
Optional Enter an Entrez query to limit search [more...](#)

YouTube Create custom database

Program Selection

Optimize for
 Highly similar sequences (megablast)
 More dissimilar sequences (discontiguous megablast)
 Somewhat similar sequences (blastn)
Choose a BLAST algorithm [more...](#)



How to execute processes via shell

- `os.popen(command)`
- Can be used to do almost everything via Python
- Python stops at line until command is completed
- Example:
`os.popen('mkdir my_new_popen_test')`



Running BLAST

- BLAST = Basic Local Alignment Search Tool

```
blastn -query <query_file> \  
-subject <subject_file> \ # -db <db_name>  
-out <output_file> \  
-outfmt 6
```
- Useful arguments:

```
-evalue <FLOAT> # e-value cutoff  
-num_threads <INT> # number of parallel threads
```



BLAST results (outfmt 6)

1.	qseqid	query (e.g., gene) sequence id
2.	sseqid	subject (e.g., reference genome) sequence id
3.	pident	percentage of identical matches
4.	length	alignment length
5.	mismatch	number of mismatches
6.	gapopen	number of gap openings
7.	qstart	start of alignment in query
8.	qend	end of alignment in query
9.	sstart	start of alignment in subject
10.	send	end of alignment in subject
11.	eval	expect value
12.	bitscore	bit score

(source: <http://www.metagenomics.wiki/tools/blast/blastn-output-format-6>)

BLAST result parsing

```
1 def load_BLAST_results( input_file ):
2     """! @brief load all BLAST results from file """
3
4     data = []
5     with open( input_file, "r" ) as f:
6         line = f.readline()
7         while line:
8             parts = line.strip().split('\t')
9             data.append( { 'query': parts[0],
10                         'subject': parts[1],
11                         'query_start': int( parts[6] ),
12                         'query_end': int( parts[7] ),
13                         'score': float( parts[-1] ) }
14         )
15         line = f.readline()
16     return data
```

AT1G01010	NdCChr1.g1.t1	100.00	429	0	0	1	429	1	429	0.0	895	
AT1G01010	NdCChr4.g18734.t1	32.84	469	247	15	1	428	2	443	4e-56	194	
AT1G01010	NdCChr1.g127.t1	34.23	336	157	10	1	330	1	278	1e-41	152	
AT1G01010	NdCChr1.g128.t1	32.38	349	157	14	1	331	1	288	4e-39	146	
AT1G01010	NdCChr4.g18730.t1	39.33	178	95	5	1	175	2	169	1e-32	126	
AT1G01010	NdCChr3.g12773.t1	39.63	164	89	2	1	162	1	156	1e-28	115	
AT1G01010	NdCChr4.g22969.t1	40.74	162	79	5	5	159	11	162	3e-28	117	
AT1G01010	NdCChr4.g18733.t1	40.00	165	90	5	1	162	2	160	4e-28	115	
AT1G01010	NdCChr3.g17122.t1	42.31	156	74	6	5	153	15	161	4e-27	112	



How to organize a Python script ...

- Executable script under LINUX:

```
#!/usr/bin/env python #takes python version in path
```

```
#!/usr/bin/python #specifies a specific python version
```


- Author
- Version
- Imports
- Usage

```
1  ### Boas Pucker ###
2  ### bpucker@cebitec.uni-bielefeld.de ###
3  ### v0.2 ####
4
5  __usage__ = """
6      python construct_RNA_seq_coverage_file.py\n
7      --in <BAM_FILE>\n
8      --out <OUTPUT_FILE>
9
10     --bam_is_sorted <PREVENTS_EXTRA_SORTING_OF_BAM_FILE>
11
12     feature requests and bug reports: bpucker@cebitec.uni-bielefeld.de
13     """
14
15 __cite__ = """ Pucker & Brockington, 2018: https://doi.org/10.1186/s12864-018-5360-z """
16
17
18 import os, sys
19
20 # --- end of imports --- #
21
22 def main( arguments ):
```



matplotlib

- „import matplotlib.pyplot as plt“
- Visualization of complex data
- Automatic generation of plots
- Amazing customization options

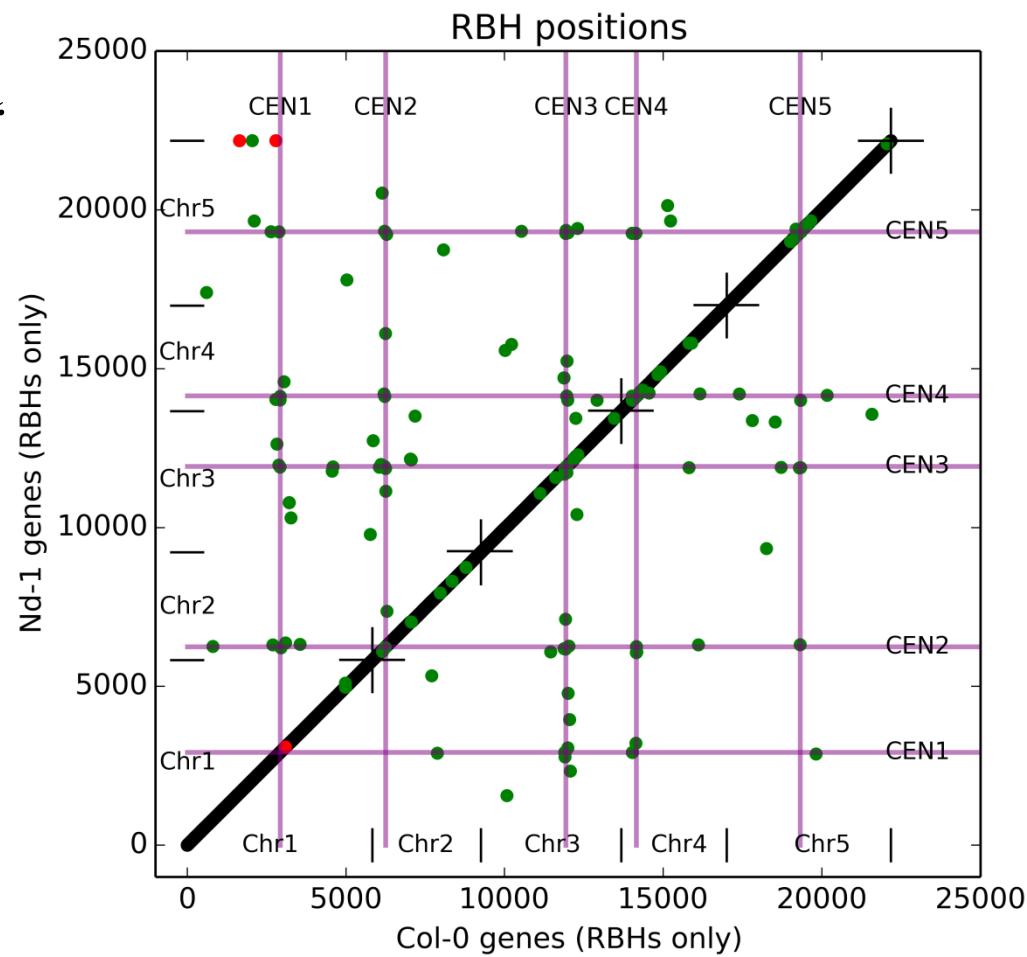


(Pucker *et al.*, 2016)



Box plot


```
1 import matplotlib.pyplot as plt
2 import numpy as np
3
4 d1 = np.random.rand(50) * 100 #generate random numbers
5 d2 = np.random.rand(50) * 100
6 d3 = np.random.rand(50) * 100
7
8 data = [d1, d2, d3] # multiple box plots on one figure
9
10 plt.figure()
11 plt.boxplot(data)
12 plt.show()
```

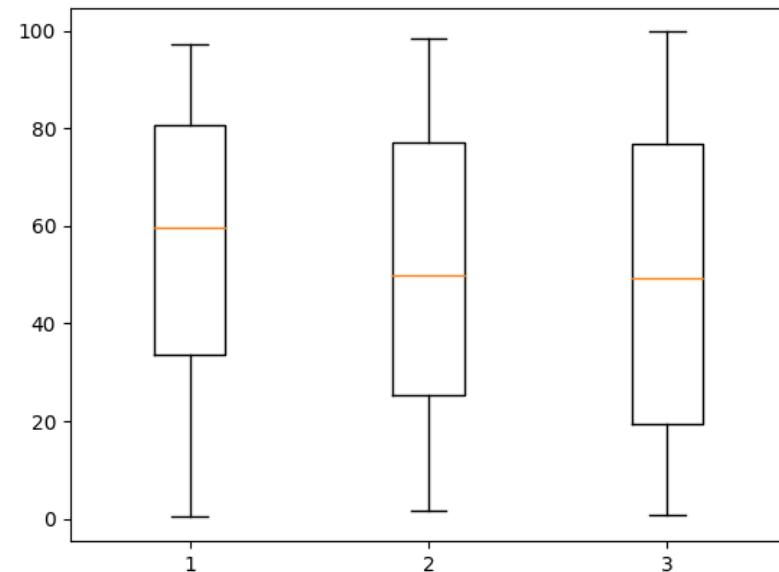



Scatter plot


```
1 import matplotlib.pyplot as plt
2
3 fig, ax = plt.subplots( figsize=( 10, 4 ) ) #defining size of plot
4
5 x_values = [ 1, 2, 3, 4, 5, 6, 7, 8, 9, 10 ]
6 y_values = [ 12, 6, 10, 4, 8, 15, 10, 11, 3, 9 ]
7
8 ax.scatter( x_values, y_values, color="red", s=10, marker="o", label="test" )
#setting color, marker size, marker shape and label of this group
9
10 ax.legend( numpoints=1 )
#each group is represented by only one marker in the legend (default=3)
11
12 ax.set_xlim( 0, 11 ) #set range of x-axis
13 ax.set_ylim( 0, 15 ) #set range of y-axis
14
15 ax.set_xlabel( "pseudochromosome position [Mbp]" )
16
17 ax.spines["top"].set_visible(False) #remove lines and ticks
18 ax.spines["right"].set_visible(False) #remove lines and ticks
19
20 plt.subplots_adjust(left=0.05, right=0.99, top=0.97, bottom=0.12)
#adjust size of plot within figure
21
22 plt.show()
23 fig.savefig( "my_plot.png", dpi=600 ) #write figure into output file
24 plt.close( "all" ) #destroy created figures (cleaning up)
```

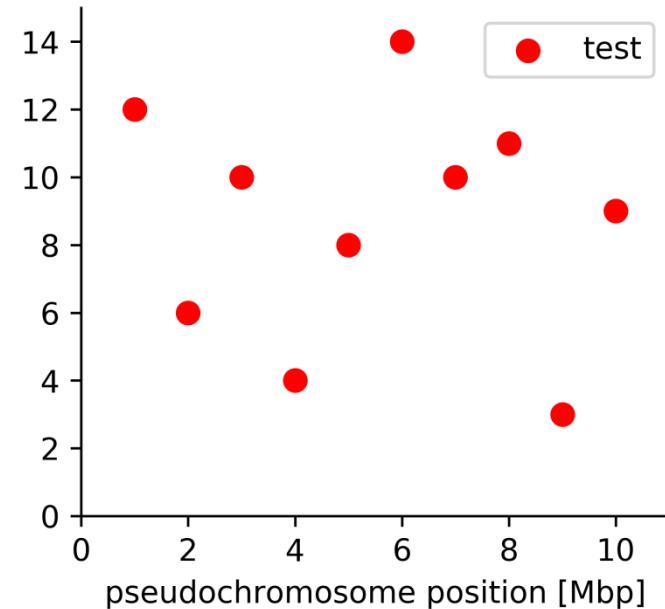



Histogram


```
1 import matplotlib.pyplot as plt
2
3 # --- end of imports --- #
4
5 gene_space = [ 3, 3, 6, 6, 9, 9, 12, 3, 3, 1, 2, 3, 4, 5, 6, 7, 8, 9, 10,
6 [ 11, 12, 13, 14, 15, 16, 17, 18, 19, 20,
7 [ 12, 15, 18, 21, 24, 27, 30 ]
8 intergenic = [ 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 1, 2, 3, 4, 5, 6, 7, 8, 9,
9 [ 1, 2, 3, 4, 5, 6, 7, 1, 2, 3, 4, 1, 2, 1 ]
10
11 fig, ( ax1, ax2 ) = plt.subplots( 1, 2, sharey=False )
12 counts, bins, patches = ax1.hist( gene_space, bins=max( gene_space ), align="left" )
13 ax1.set_title( "CDS" )
14 ax1.set_xlim( 0, 30 )
15 ax1.set_xlabel( "InDel size [bp]" )
16 ax1.set_ylabel( "number of InDels" )
17
18 counts, bins, patches = ax2.hist( intergenic, bins=max( intergenic ), align="left" )
19 ax2.set_title( "not_CDS" )
20 ax2.set_xlim( 0, 30 )
21 ax2.set_xlabel( "InDel size [bp]" )
22 plt.subplots_adjust( wspace=0.3 ) #increase space between figures
23
24 plt.show()
25 fig.savefig( prefix + "InDel_size_distribution.png", dpi=300 )
26 plt.close('all')
```

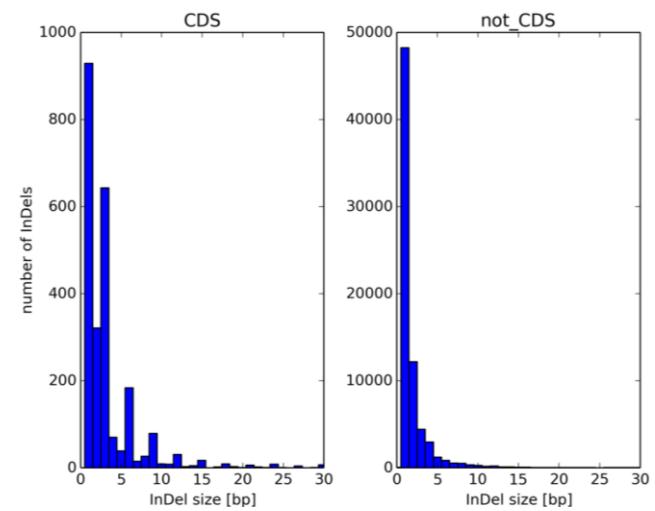

(Pucker et al., 2016)



'barplot' figure

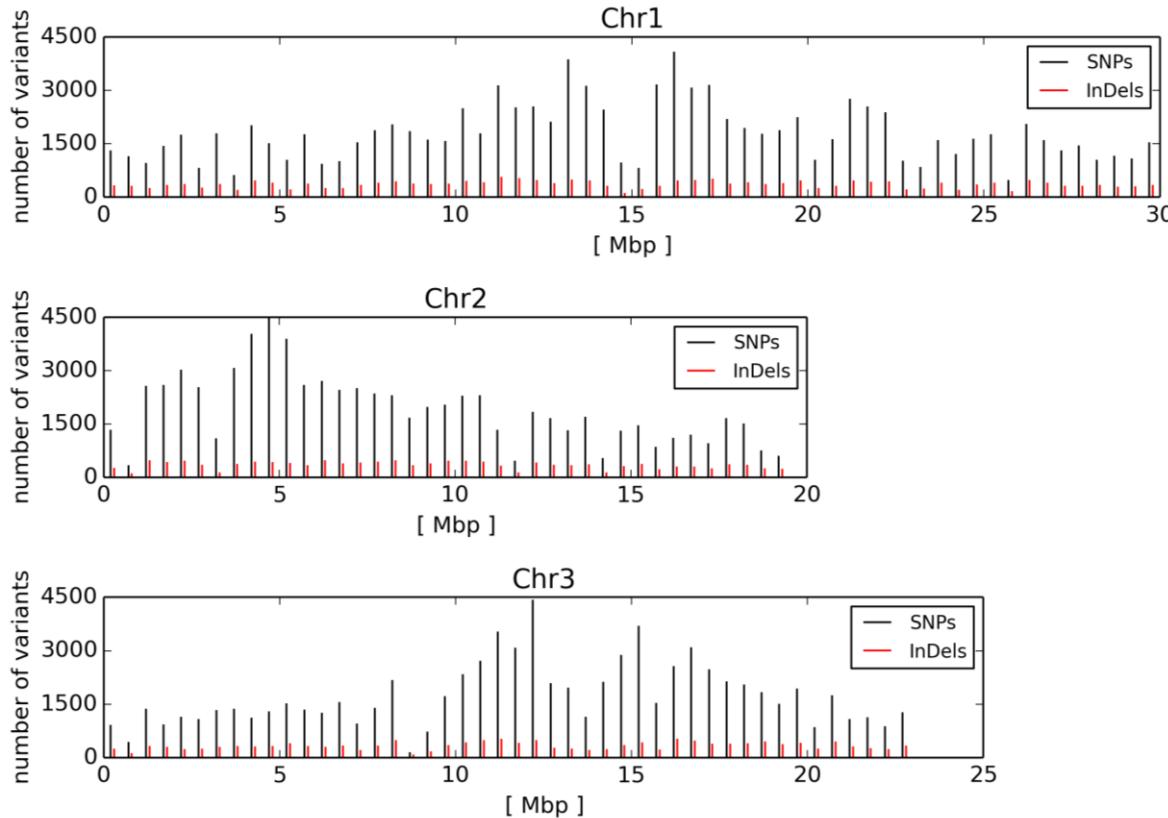


barplots.py generates barplots at specific positions by drawing a normal line

(script is available in course repository)

(Pucker et al., 2016)



Gene structure plot

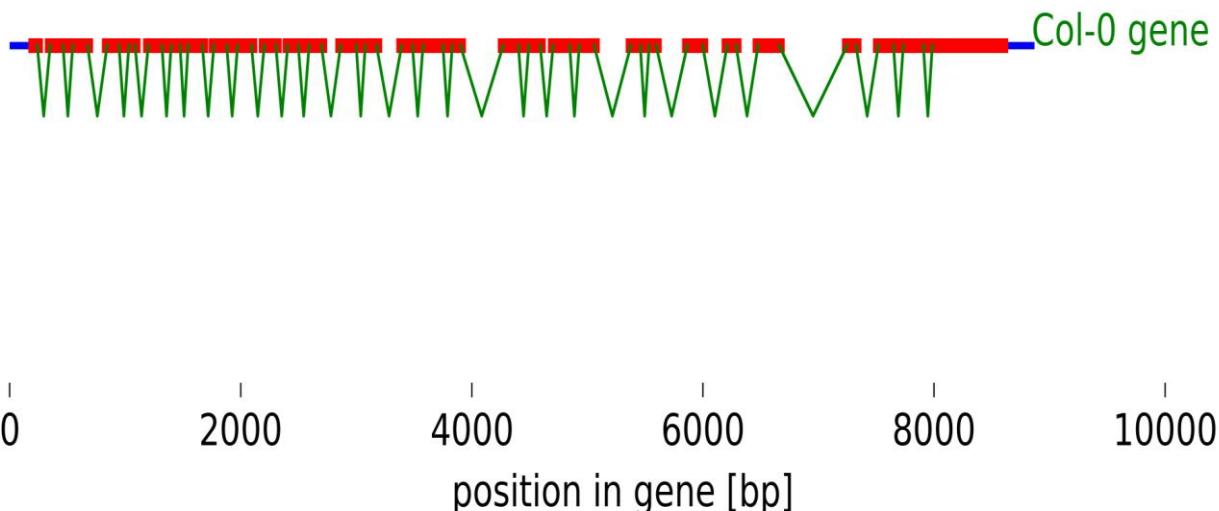

(Pucker et al., 2017)

`gene_structure_plot.py` generates visualizations
of gene/transcript structures based on GFF
annotations



Exercise: operon structure plot

- Construct a figure to illustrate the order and orientation of genes in the gum gene cluster in *Xanthomonas campestris* pv. *campestris*!



Statistics



Theoretical background

- Normal distribution plot

Compare observed sample against the expected distribution

H_0 = sample was taken from distribution

H_0 can only be rejected or kept due to insufficient evidence against it

H_0 can NEVER be confirmed!



Shapiro-Wilk test

scipy.stats.shapiro

`scipy.stats.shapiro(x, a=None, reta=False)`

[\[source\]](#)

Perform the Shapiro-Wilk test for normality.

The Shapiro-Wilk test tests the null hypothesis that the data was drawn from a normal distribution.

Parameters: `x : array_like`

 Array of sample data.

`a : array_like, optional`

 Array of internal parameters used in the calculation. If these are not given, they will be computed internally. If `x` has length `n`, then `a` must have length `n/2`.

`reta : bool, optional`

 Whether or not to return the internally computed `a` values. The default is False.

Returns: `W : float`

 The test statistic.

`p-value : float`

 The p-value for the hypothesis test.

`a : array_like, optional`

 If `reta` is True, then these are the internally computed "a" values that may be passed into this function on future calls.

See also:

`anderson` The Anderson-Darling test for normality

`kstest` The Kolmogorov-Smirnov test for goodness of fit.

Notes

The algorithm used is described in [R634] but censoring parameters as described are not implemented. For $N > 5000$ the W test statistic is accurate but the p-value may not be.

The chance of rejecting the null hypothesis when it is true is close to 5% regardless of sample size.

<https://docs.scipy.org>



Correlation

scipy.stats.pearsonr

scipy.stats.pearsonr(*x*, *y*)

[\[source\]](#)

Calculates a Pearson correlation coefficient and the p-value for testing non-correlation.

The Pearson correlation coefficient measures the linear relationship between two datasets. Strictly speaking, Pearson's correlation requires that each dataset be normally distributed. Like other correlation coefficients, this one varies between -1 and +1 with 0 implying no correlation. Correlations of -1 or +1 imply an exact linear relationship. Positive correlations imply that as *x* increases, so does *y*. Negative correlations imply that as *x* increases, *y* decreases.

The p-value roughly indicates the probability of an uncorrelated system producing datasets that have a Pearson correlation at least as extreme as the one computed from these datasets. The p-values are not entirely reliable but are probably reasonable for datasets larger than 500 or so.

Parameters: *x* : (*N*,) array_like

Input

y : (*N*,) array_like

Input

Returns: (*Pearson's correlation coefficient*,
2-tailed p-value)

<https://docs.scipy.org>



t-test

scipy.stats.ttest_ind

```
scipy.stats.ttest_ind(a, b, axis=0, equal_var=True, nan_policy='propagate')
```

[source]

Calculates the T-test for the means of *two independent* samples of scores.

This is a two-sided test for the null hypothesis that 2 independent samples have identical average (expected) values. This test assumes that the populations have identical variances by default.

Parameters:

a, b : array_like

The arrays must have the same shape, except in the dimension corresponding to *axis* (the first, by default).

axis : int or None, optional

Axis along which to compute test. If None, compute over the whole arrays, *a*, and *b*.

equal_var : bool, optional

If True (default), perform a standard independent 2 sample test that assumes equal population variances [R643]. If False, perform Welch's t-test, which does not assume equal population variance [R644].

New in version 0.11.0.

nan_policy : {'propagate', 'raise', 'omit'}, optional

Defines how to handle when input contains nan. 'propagate' returns nan, 'raise' throws an error, 'omit' performs the calculations ignoring nan values. Default is 'propagate'.

Returns:

statistic : float or array

The calculated t-statistic.

pvalue : float or array

The two-tailed p-value.

Notes

We can use this test, if we observe two independent samples from the same or different population, e.g. exam scores of boys and girls or of two ethnic groups. The test measures whether the average (expected) value differs significantly across samples. If we observe a large p-value, for example larger than 0.05 or 0.1, then we cannot reject the null hypothesis of identical average scores. If the p-value is smaller than the threshold, e.g. 1%, 5% or 10%, then we reject the null hypothesis of equal averages.

<https://docs.scipy.org>



Wilcoxon test

scipy.stats.wilcoxon

`scipy.stats.wilcoxon(x, y=None, zero_method='wilcox', correction=False)`

[\[source\]](#)

Calculate the Wilcoxon signed-rank test.

The Wilcoxon signed-rank test tests the null hypothesis that two related paired samples come from the same distribution. In particular, it tests whether the distribution of the differences $x - y$ is symmetric about zero. It is a non-parametric version of the paired T-test.

Parameters: `x : array_like`

The first set of measurements.

`y : array_like, optional`

The second set of measurements. If `y` is not given, then the `x` array is considered to be the differences between the two sets of measurements.

`zero_method : string, {"pratt", "wilcox", "zsplit"}, optional`

`"pratt":`

Pratt treatment: includes zero-differences in the ranking process (more conservative)

`"wilcox":`

Wilcox treatment: discards all zero-differences

`"zsplit":`

Zero rank split: just like Pratt, but splitting the zero rank between positive and negative ones

`correction : bool, optional`

If True, apply continuity correction by adjusting the Wilcoxon rank statistic by 0.5 towards the mean value when computing the z-statistic.

Default is False.

Returns: `T : float`

The sum of the ranks of the differences above or below zero, whichever is smaller.

`p-value : float`

The two-sided p-value for the test.

Notes

Because the normal approximation is used for the calculations, the samples used should be large. A typical rule is to require that $n > 20$.



Mann-Whitney rank test

scipy.stats.mannwhitneyu

```
scipy.stats.mannwhitneyu(x, y, use_continuity=True, alternative=None)
```

[source]

Computes the Mann-Whitney rank test on samples x and y.

Parameters: `x, y : array_like`

Array of samples, should be one-dimensional.

`use_continuity : bool, optional`

Whether a continuity correction (1/2.) should be taken into account. Default is True.

`alternative : None (deprecated), 'less', 'two-sided', or 'greater'`

Whether to get the p-value for the one-sided hypothesis ('less' or 'greater') or for the two-sided hypothesis ('two-sided'). Defaults to None, which results in a p-value half the size of the 'two-sided' p-value and a different U statistic. The default behavior is not the same as using 'less' or 'greater': it only exists for backward compatibility and is deprecated.

Returns:

`statistic : float`

The Mann-Whitney U statistic, equal to min(U for x, U for y) if `alternative` is equal to None (deprecated; exists for backward compatibility), and U for y otherwise.

`pvalue : float`

p-value assuming an asymptotic normal distribution. One-sided or two-sided, depending on the choice of `alternative`.

Notes

Use only when the number of observation in each sample is > 20 and you have 2 independent samples of ranks. Mann-Whitney U is significant if the u-obtained is LESS THAN or equal to the critical value of U.

This test corrects for ties and by default uses a continuity correction.

<https://docs.scipy.org>



Chi square test

scipy.stats.chisquare

```
scipy.stats.chisquare(f_obs, f_exp=None, ddof=0, axis=0)
```

[source]

Calculates a one-way chi square test.

The chi square test tests the null hypothesis that the categorical data has the given frequencies.

Parameters: `f_obs` : array_like

Observed frequencies in each category.

`f_exp` : array_like, optional

Expected frequencies in each category. By default the categories are assumed to be equally likely.

`ddof` : int, optional

“Delta degrees of freedom”: adjustment to the degrees of freedom for the p-value. The p-value is computed using a chi-squared distribution with $k - 1 - ddof$ degrees of freedom, where k is the number of observed frequencies. The default value of `ddof` is 0.

`axis` : int or None, optional

The axis of the broadcast result of `f_obs` and `f_exp` along which to apply the test. If `axis` is None, all values in `f_obs` are treated as a single data set. Default is 0.

Returns: `chisq` : float or ndarray

The chi-squared test statistic. The value is a float if `axis` is None or `f_obs` and `f_exp` are 1-D.

`p` : float or ndarray

The p-value of the test. The value is a float if `ddof` and the return value `chisq` are scalars.

See also:

`power_divergence`, `mstats.chisquare`

Notes

This test is invalid when the observed or expected frequencies in each category are too small. A typical rule is that all of the observed and expected frequencies should be at least 5.

The default degrees of freedom, $k-1$, are for the case when no parameters of the distribution are estimated. If p parameters are estimated by efficient maximum likelihood then the correct degrees of freedom are $k-1-p$. If the parameters are estimated in a different way, then the dof can be between $k-1-p$ and $k-1$. However, it is also possible that the asymptotic distribution is not a chisquare, in which case this test is not appropriate.

<https://docs.scipy.org>



Exercise: analyze the unknown data

- Construct a suitable visualization!
- Analyze distribution and trends!
- Apply statistical test to investigate difference!

HTML

- Construction of a HTML-based heatmap

gene ID	0H	4H	Salt	Heat	Inflorescence	leaf	Root	seedlings_HiK	seedlings_HiK2	Leaf_SSC
(p)	0.02	0.0	0.0	0.0	0.0	4.33	1.44	1.2	0.0	
(c)	0.0	0.0	0.0	0.0	0.0	1.17	0.11	0.0	0.0	
(c)	0.0	0.0	0.0	0.0	0.0	3.0	0.11	0.4	0.0	
p	1.76	29.23	14.65	6.11	203.75	265.2	0.83	199.33	199.7	54.4
a	0.0	0.0	0.0	0.01	1.38	0.0	0.0	0.0	0.1	0.0
(c)	0.0	0.03	0.01	0.0	0.25	0.0	0.0	0.0	0.1	0.02
y	0.01	0.01	0.0	0.06	13.88	0.0	0.0	0.11	0.1	0.01
u	6.25	58.89	41.42	15.61	69.5	5.4	3.83	157.22	163.1	22.49
h	0.86	5.04	0.09	0.24	33.5	0.8	12.67	8.78	8.5	1.07
y	10.74	43.0	4.78	6.45	29.0	1.2	7.17	62.67	67.0	25.48
e	19.29	14.22	6.14	5.21	4.88	1.6	11.5	28.11	24.2	13.68
w	35.33	45.16	52.79	70.1	17.5	74.2	6.67	21.89	22.6	65.95
q	6.03	24.4	2.69	2.38	80.0	35.6	19.83	55.22	59.9	11.16
k	5.74	15.9	1.35	4.56	57.5	3.0	1.17	9.44	7.5	8.47
s	0.27	1.74	0.07	0.25	11.38	0.2	0.0	0.78	0.4	0.11
i	0.04	0.0	0.0	0.0	36.0	0.0	0.0	0.89	1.1	0.0
j	0.0	0.0	0.0	0.0	18.0	0.0	0.0	0.67	0.7	0.0
c	9.84	14.92	17.27	7.68	16.13	27.0	26.0	26.89	23.7	11.58
e	17.99	9.41	7.94	8.45	11.38	21.2	13.83	19.22	19.7	14.81

HTML template

```
1  <table border=1>
2    <tr>
3      {% for name in column_names %}
4        <th> {{ name }} </th>
5      {% endfor %}
6    </tr>
7    {% for gene in genes %}
8      <tr width="20px">
9        <th>{{ gene['name'] }}</th>
10       {% for value in gene['values'] %}
11         <td bgcolor={{value['color']}} width="20px"> <span title={{value['title']}}> <font color="black"> {{value['value']}} </font> </span></td>
12         
13       {% endfor %}
14     </tr>
15   {% endfor %}
16 </table>
```

different conditions/tissues

different genes/transcripts

precomputed color

value converted to test

construct_heatmap.py reads values from text file and prepares data structures to fill this template

HTML document can be converted to PDF



Exercise: construct heatmap

- Read data table and construct heatmap for the gene expression in HTML!
- Add mouse-over effect to display functional gene annotation!



Biological background of presented examples

- Nd-1 genome assembly (Pucker *et al.*, 2016):
 - <https://doi.org/10.1371/journal.pone.0164321>
- Non-canonical splice sites (Pucker *et al.*, 2017):
 - <https://doi.org/10.1186/s13104-017-2985-y>
- *Croton tiglum* transcriptome assembly (Haak *et al.*, 2018):
 - <https://doi.org/10.3389/fmolb.2018.00062>
- Genome-wide analyses supported by RNA-Seq reveal non-canonical splice sites in plant genomes (Pucker & Brockington, 2018):
 - <https://doi.org/10.1186/s12864-018-5360-z>
- A Chromosome-level Sequence Assembly Reveals the Structure of the *Arabidopsis thaliana* Nd-1 Genome and its Gene Set (Pucker *et al.*, 2019):
 - <https://doi.org/10.1101/407627>
- NAVIP: <https://github.com/bpucker/NAVIP>