


Java User Input

User input in Java

- Sometimes we need to take input from the user.
- Creates a connection between the program and it's user.
- Most common way to take input is using the java scanner class.

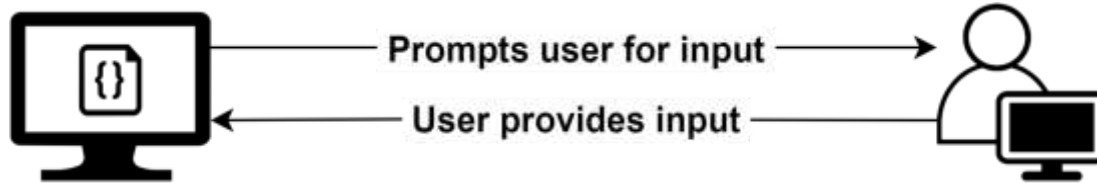


What is a Java Scanner Class?

- A predefined class that reads data from the keyboard or a text file.
- Found in the `java.util` package.
- Can read all types of data (numeric, strings and other data types).
- Easiest way to take input from the user.

User Input using Scanner class

- Import the java.util.Scanner package
- Create an object of the Scanner class
- Syntax:

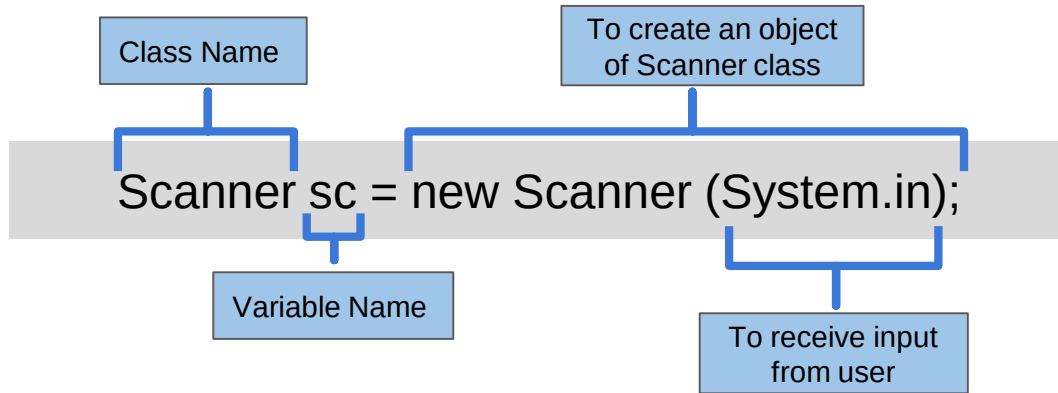

Example

```
1. import java.util.Scanner;
2. class UserInput {
3.     public static void main (String [] args){
4.         Scanner sc = new Scanner (System.in);
5.         String st1 = sc.nextLine();
6.         System.out.println("Output: " + st1);
7.     }
8. }
```

Welcome to DrJava. Working directory is C:\Users\Desktop

>

Output: Hello World

Inputting Different Datatypes

Method	Usage
<code>nextInt()</code>	Reads an integer value from the user
<code>nextLong()</code>	Reads a long value from the user
<code>nextFloat()</code>	Reads a float value from the user
<code>nextDouble()</code>	Reads a double value from the user
<code>nextBoolean()</code>	Reads a boolean value from the user
<code>nextLine()</code>	Reads a string value from the user
<code>next()</code>	Reads a string value until a space (" ") is encountered

Inputting Integer Datatype

```
1. import java.util.Scanner;
2. public class UserInput {
3.     public static void main (String [] args){
4.         Scanner sc = new Scanner (System.in);
5.         System.out.print("Enter an integer: ");
6.         int num1 = sc.nextInt();
7.         System.out.println("Output: " + num1);
8.     }
9. }
```

Welcome to DrJava. Working directory is C:\Users\Desktop

> Enter an integer:

Output: 65

Inputting Boolean Datatype

```
1. import java.util.Scanner;
2. public class UserInput {
3.     public static void main (String [] args){
4.         Scanner sc = new Scanner (System.in);
5.         System.out.print("Enter a boolean: ");
6.         boolean bool = sc.nextBoolean();
7.         System.out.println("Output: " + bool);
8.     }
9. }
```

Welcome to DrJava. Working directory is C:\Users\Desktop

> Enter a boolean:

Output: true

Inputting String Datatype

```
1. import java.util.Scanner;
2. public class UserInput {
3.     public static void main (String [] args){
4.         Scanner sc = new Scanner (System.in);
5.         System.out.print("Enter a string: ");
6.         String st1 = sc.nextLine();
7.         System.out.println("Output: " + st1);
8.     }
9. }
```

Welcome to DrJava. Working directory is C:\Users\Desktop

> Enter a string:

Hello there CSE110

Output: Hello there CSE110

Inputting String Datatype (Contd.)

```
1. import java.util.Scanner;
2. public class UserInput {
3.     public static void main (String [] args){
4.         Scanner sc = new Scanner (System.in);
5.         System.out.print("Enter a string: ");
6.         String st1 = sc.next();
7.         System.out.println("Output: " + st1);
8.     }
9. }
```

Welcome to DrJava. Working directory is C:\Users\Desktop

> Enter a string:

Hello there CSE110

Output: Hello

THANK YOU!