


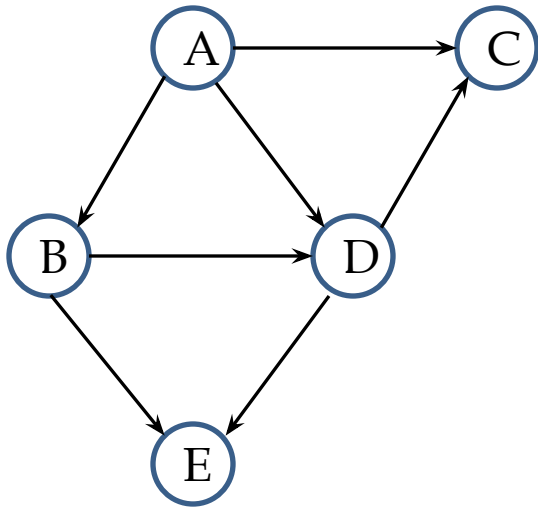


BFS





Queue

BFS

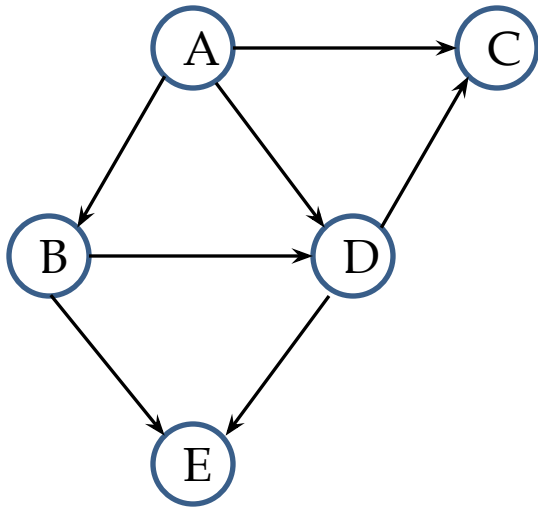



Queue

BFS

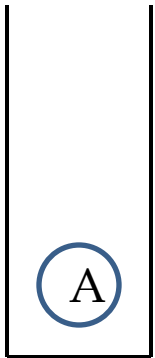
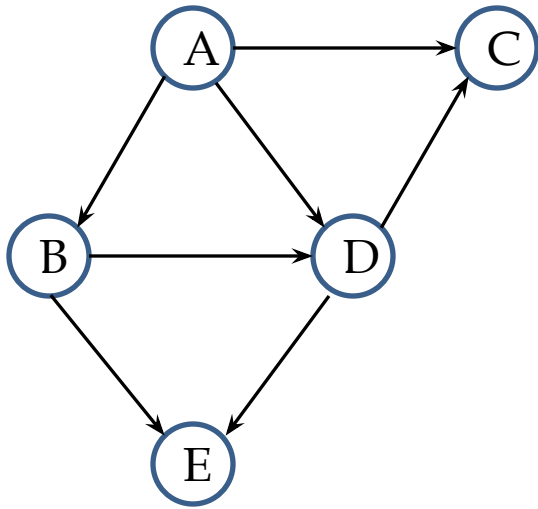


Queue



BFS

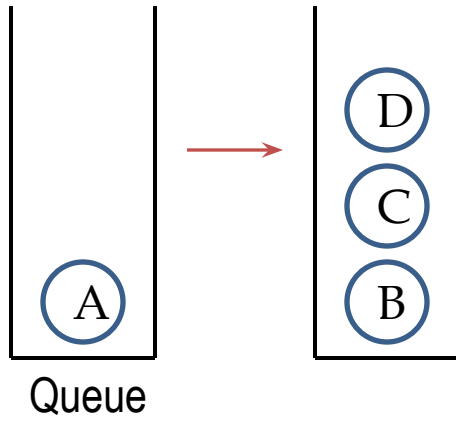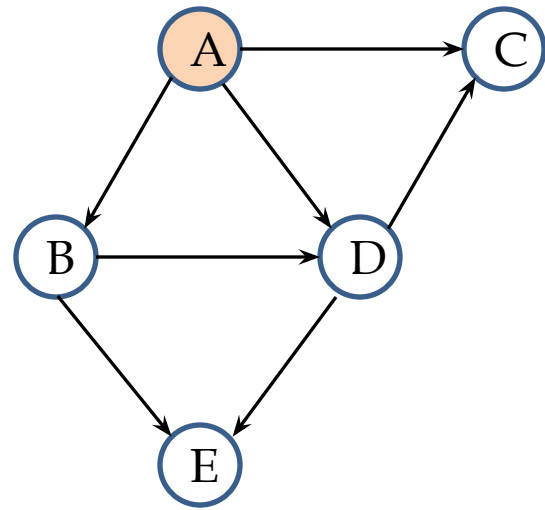



BFS

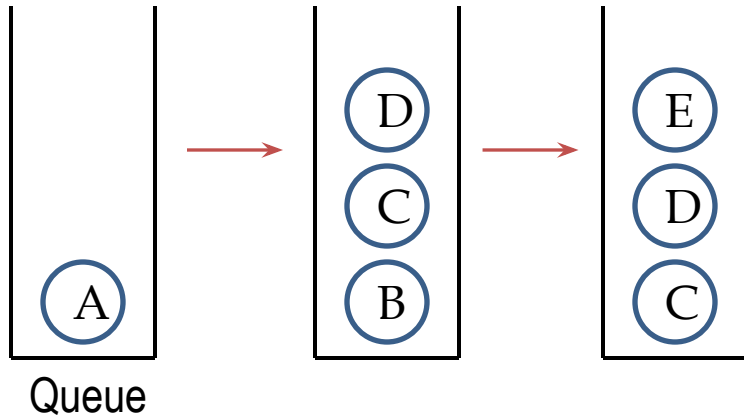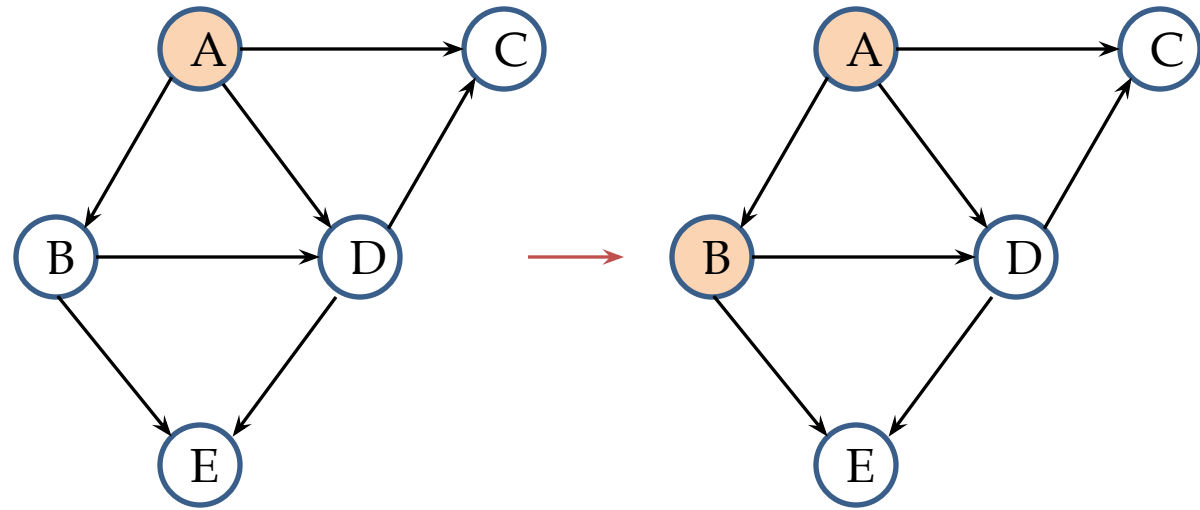



BFS

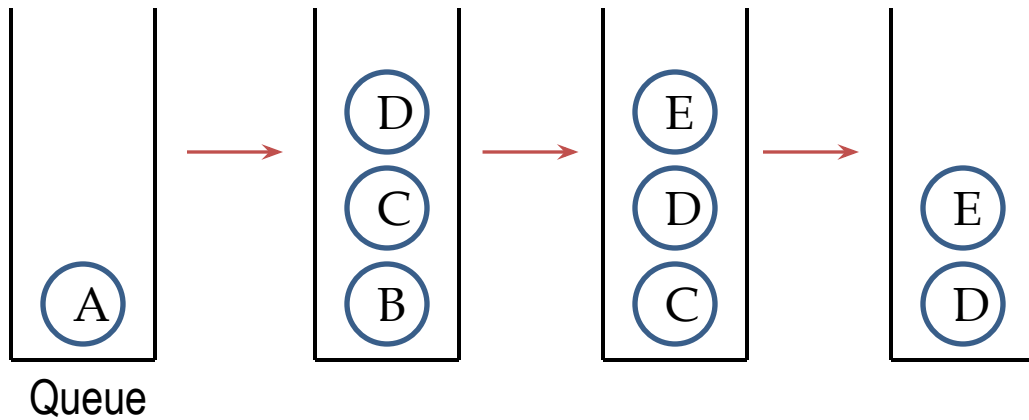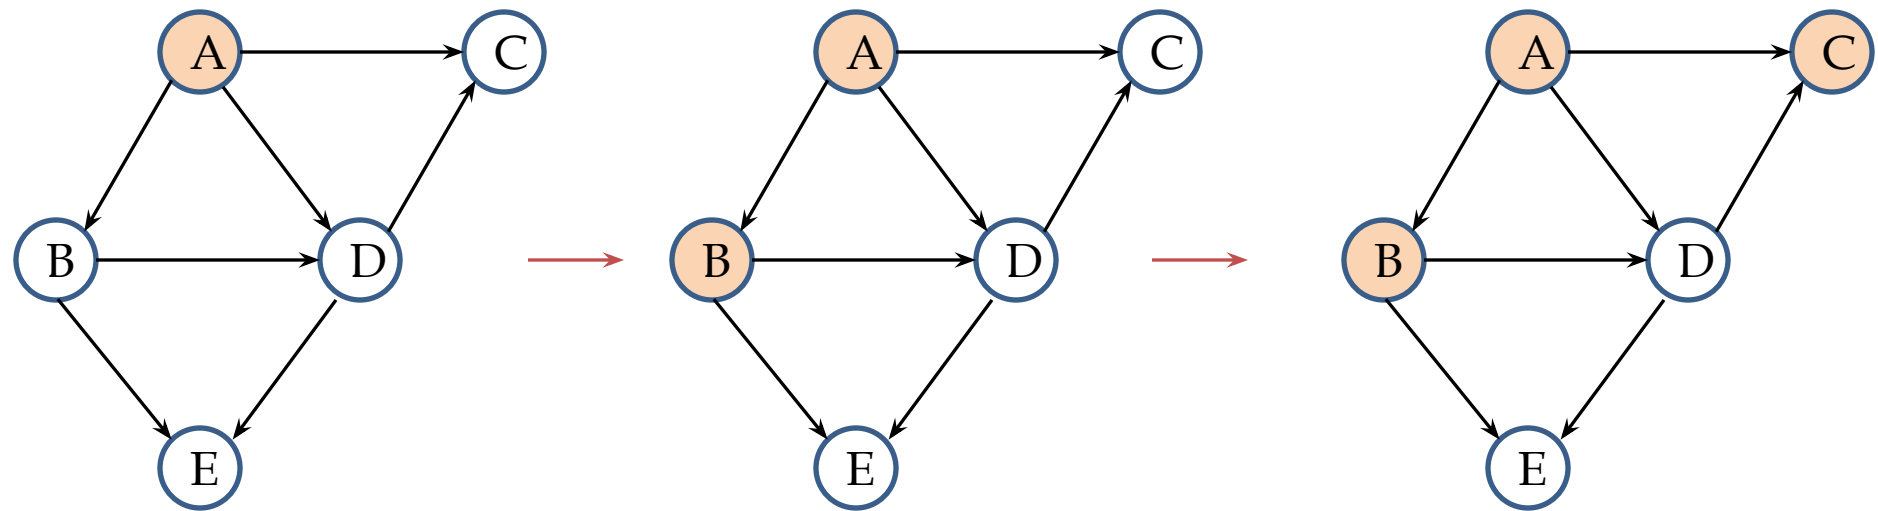

BFS

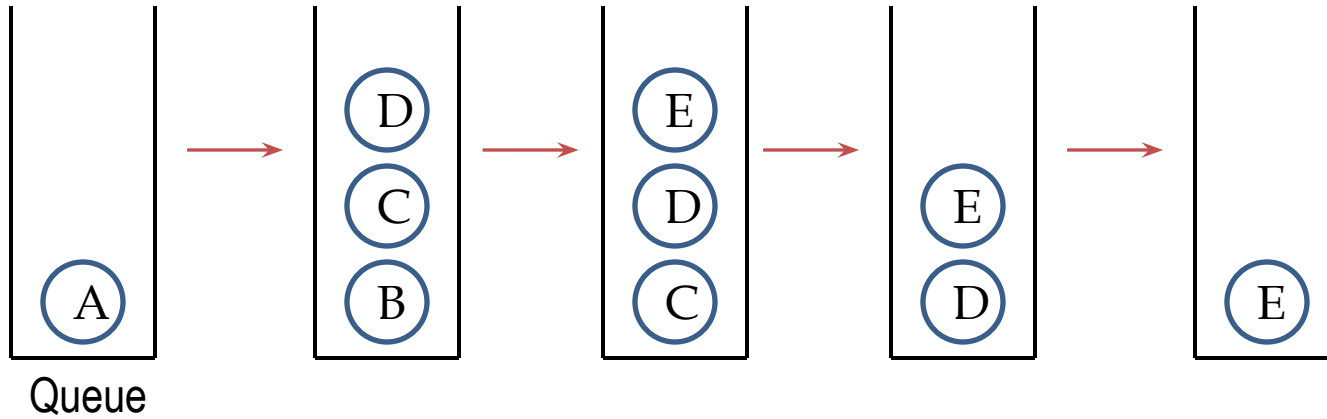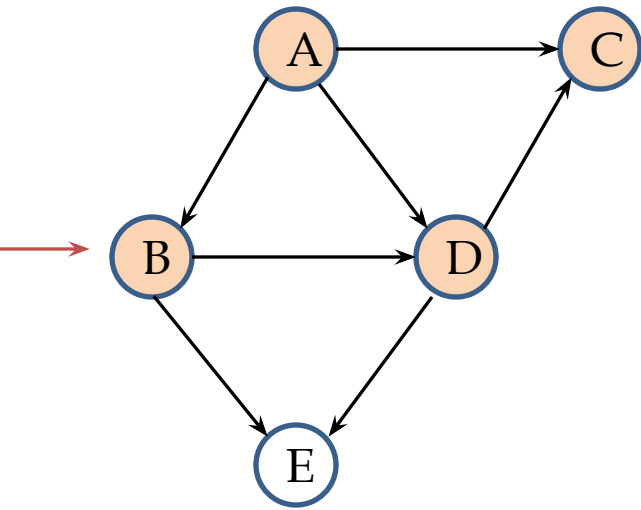

BFS

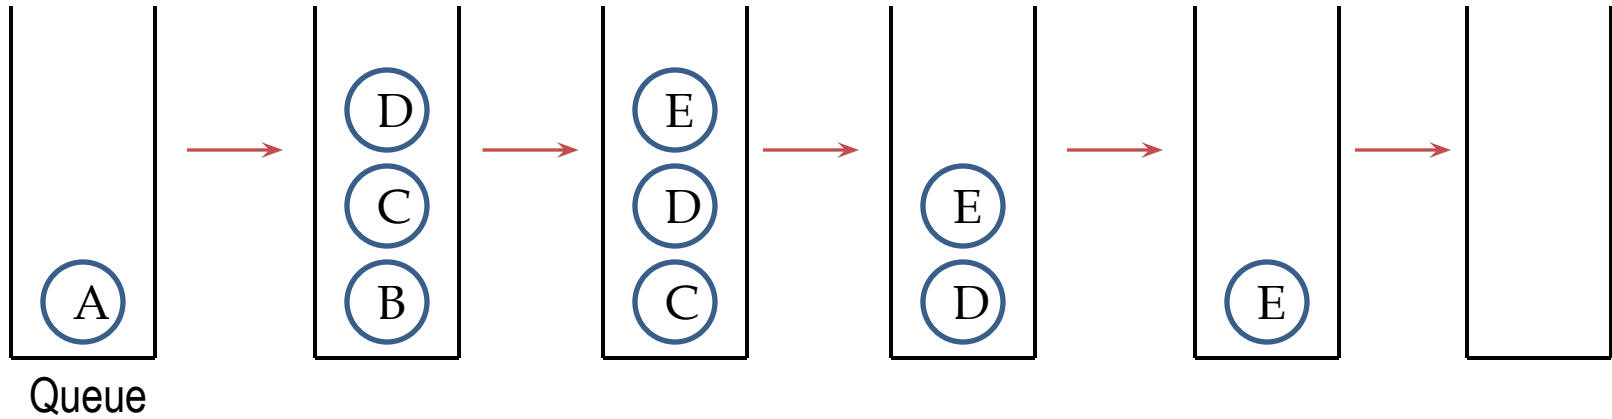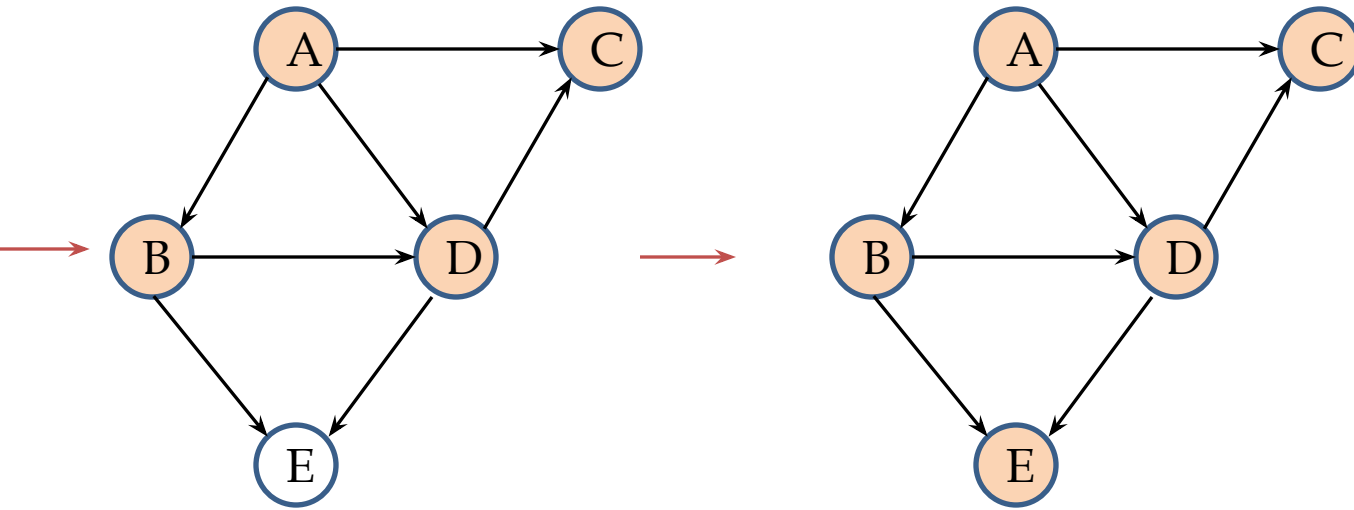



BFS

BFS (Graph, source)

```
create a queue Q
mark all nodes as unvisited
mark source as visited
enqueue source into Q



while Q is not empty:
    u = dequeue(Q)
    print u
    for each neighbor v of u:
        if v is unvisited:
            mark v as visited
            enqueue v into Q
```

DFS

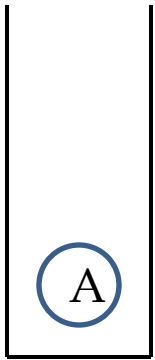
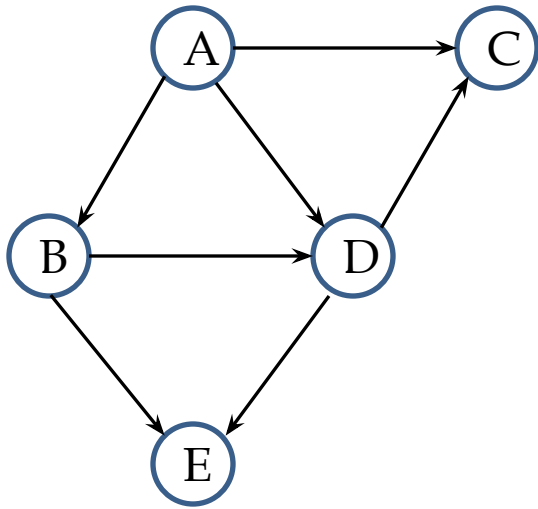


Stack



DFS

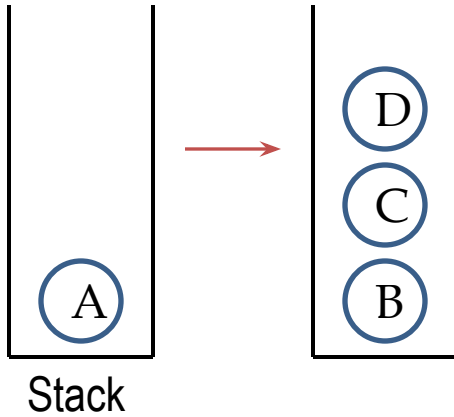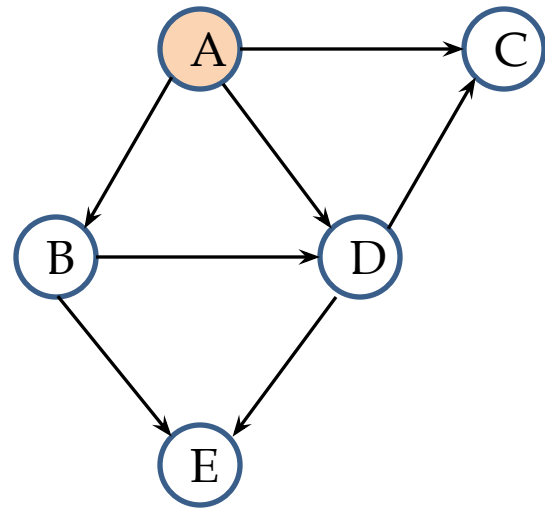



DFS

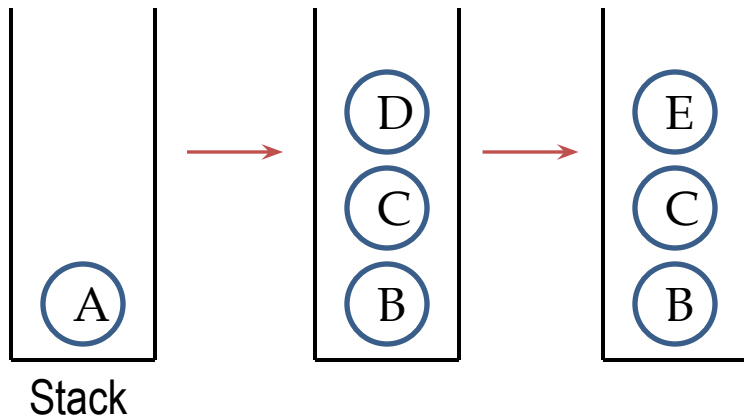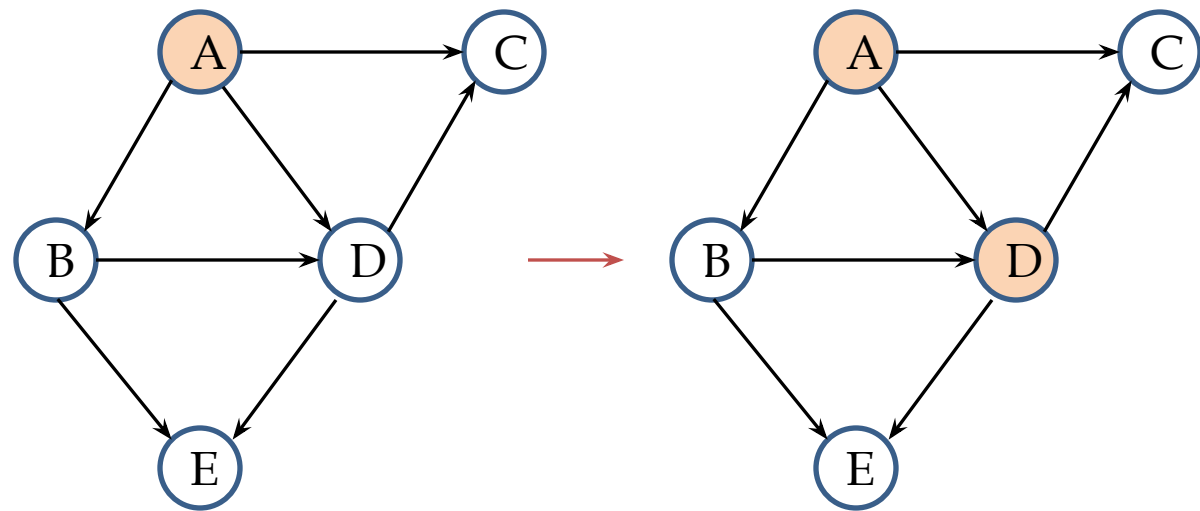

DFS

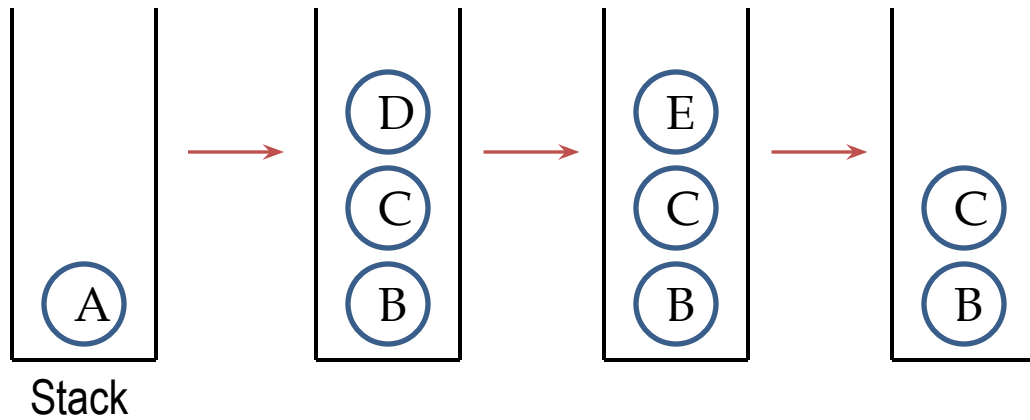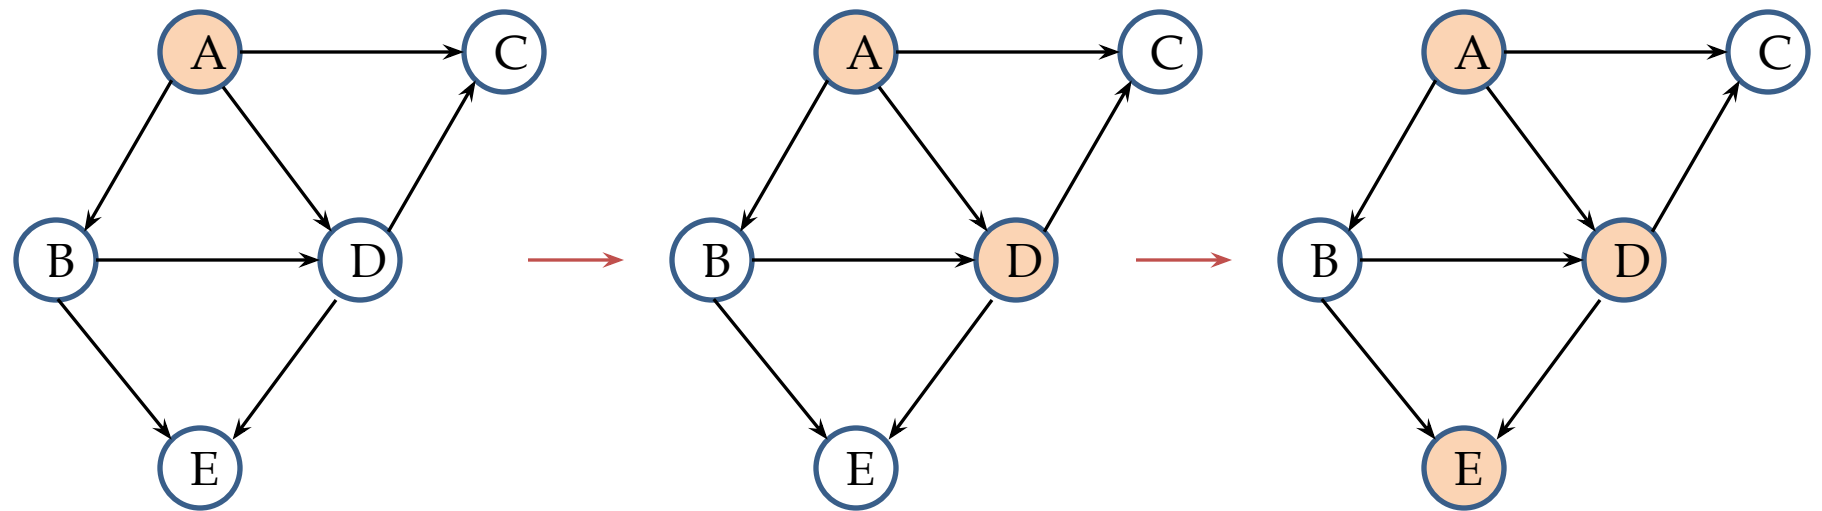

DFS

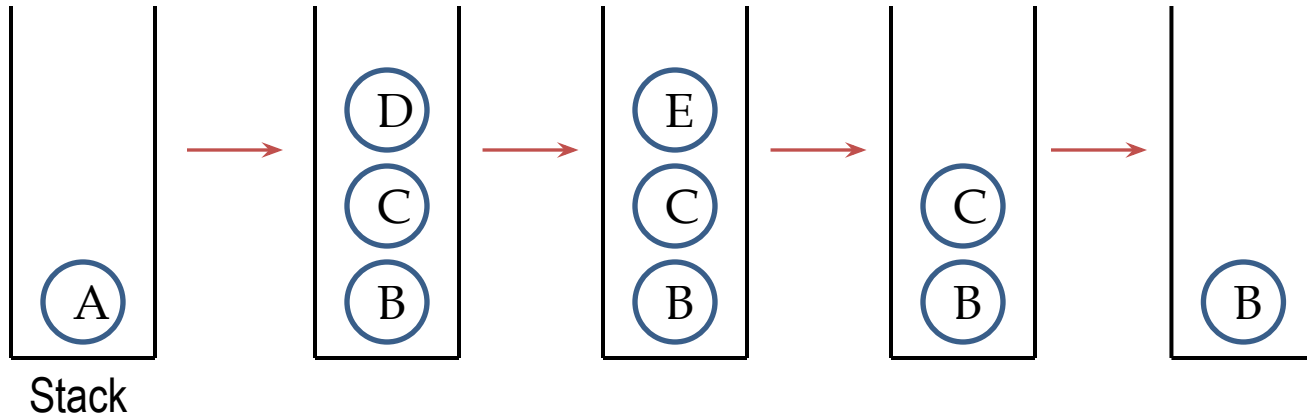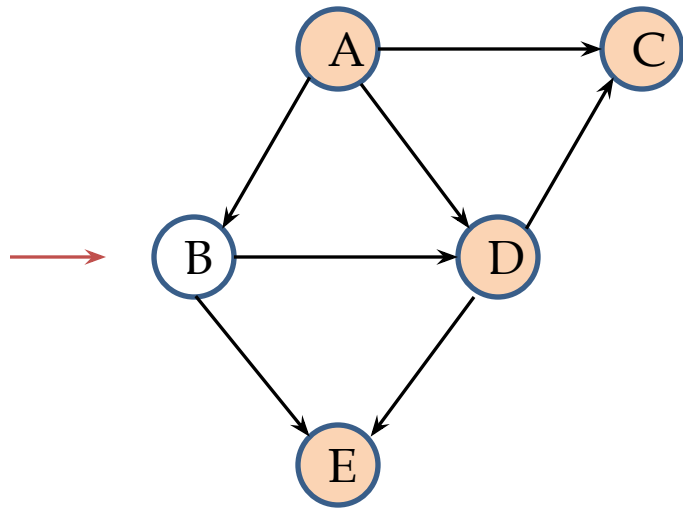

DFS

