

BRAC UNIVERSITY
CSE331 : Automata and Computability
Assignment 1

1. Draw the state diagram of a DFA for the following RL:

$L_1(M) \rightarrow \{w \in \Sigma^* \mid w \text{ doesn't contain } 00\}$, where $\Sigma = \{0, 1\}$.

$L_2(M) \rightarrow \{w \in \Sigma^* \mid w \text{ doesn't contain } 11\}$, where $\Sigma = \{0, 1\}$.

A. $L(M) \rightarrow \{w \in \Sigma^* \mid \text{the length of } w \text{ is a multiple of 2 or 3}\}$, where $\Sigma = \{0, 1\}$. (use 6 states)

B. $L(M) \rightarrow \{w \in \Sigma^* \mid \text{the sum of the symbols of } w \text{ is a multiple of 3}\}$, where $\Sigma = \{0, 1, 2\}$.

C. $L(M) \rightarrow \{w \in \Sigma^* \mid \text{the decimal equivalent of } w \text{ is a multiple of 5}\}$, where $\Sigma = \{0, 1\}$.

D. $L(M) \rightarrow \{w \in \Sigma^* \mid |w| \% 4 = 2\}$

E. $L(M) \rightarrow \{w \in \Sigma^* \mid w \text{ is any string not in } 0^*1^*\}$, where $\Sigma = \{0, 1\}$.

F. $L(M) \rightarrow \{w \in \Sigma^* \mid \text{Every even position letter in } w \text{ is different from the first letter of } w\}$,
where $\Sigma = \{0, 1\}$.

G. $L(M) \rightarrow (L_1 \cap L_2)'$ (use 4 states)

2. Write a RE for the following RL:

$L_1(M) \rightarrow \{w \in \Sigma^* \mid \text{every third position in } w \text{ is } 1\}$, where $\Sigma = \{0, 1\}$.

$L_2(M) \rightarrow \{w \in \Sigma^* \mid \text{every } 1 \text{ in } w \text{ is followed by at least two } 0\}$, where $\Sigma = \{0, 1\}$.

A. $L(M) \rightarrow \{w \in \Sigma^* \mid |w| \% 3 \neq 1\}$, where $\Sigma = \{0, 1\}$.

B. $L(M) \rightarrow \{w \in \Sigma^* \mid w \text{ starts and ends with the same symbol}\}$, where $\Sigma = \{0, 1\}$.

C. $L(M) \rightarrow \{w \in \Sigma^* \mid w \text{ contains equal numbers of } 01 \text{ and } 10\}$, where $\Sigma = \{0, 1\}$.

D. $L(M) \rightarrow \{w \in \Sigma^* \mid w \text{ contains at most two } 11\}$, where $\Sigma = \{0, 1\}$.

E. $L(M) \rightarrow \{w \in \Sigma^* \mid w \text{ does not contain } 101\}$, where $\Sigma = \{0, 1\}$.

F. $L(M) \rightarrow L_1'$


G. $L(M) \rightarrow L_1 \cap L_2$

BRAC UNIVERSITY
CSE331 : Automata and Computability
Assignment 2

1. Draw the state diagram of an NFA for the following RL over $\{0, 1\}$:

- A. $L(M) \rightarrow \{w \in \Sigma^* \mid w \text{ contains } 1001 \text{ or } 11\}$. (use 5 states)
- B. $L(M) \rightarrow \{w \in \Sigma^* \mid w \text{ contains a } 1 \text{ in the third position from the end}\}$.
- C. $L(M) \rightarrow \{w \in \Sigma^* \mid \text{length of } w \text{ is a multiple of } 2 \text{ or } 3\}$.


2. Convert the following NFA into DFA:

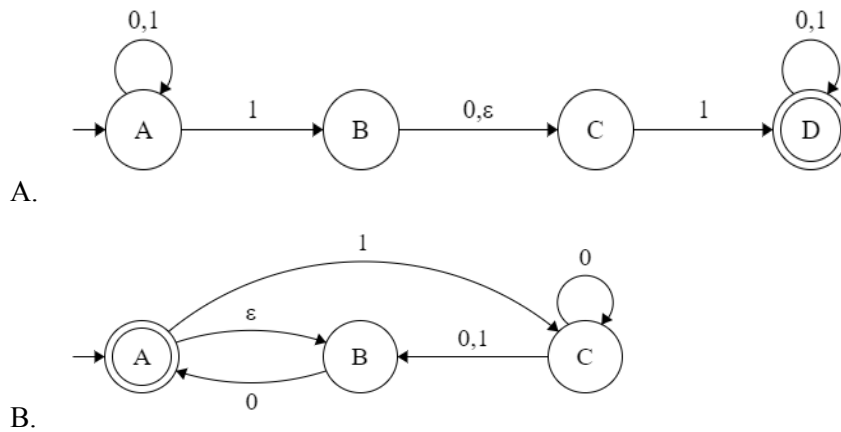

3. Convert the following RE into NFA:

- A. $10(01 \mid 0)^*$
- B. $(0 \mid 01^*0)^*01^*0$

4. Convert the following DFA into RE:

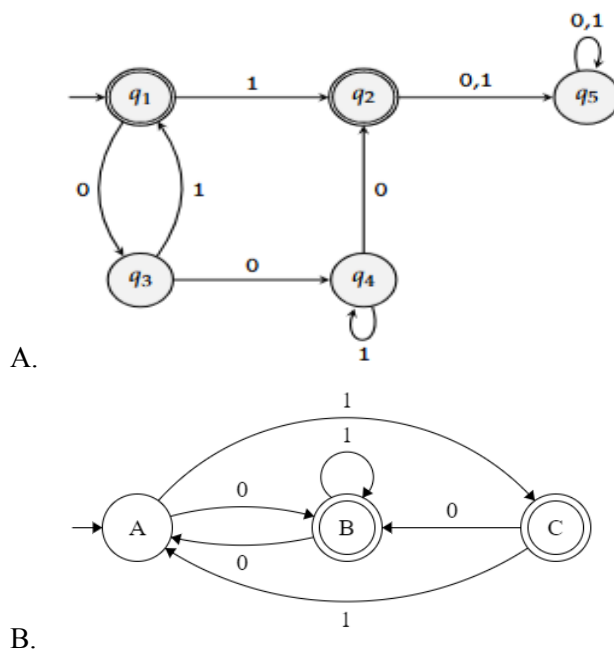

BRAC UNIVERSITY
CSE331 : Automata and Computability
Assignment 3

1. Use the pumping lemma to show that the following languages are not regular:

- A. $L(M) \rightarrow \{0^{2n}1^n \mid n \geq 0\}$, where $\Sigma = \{0, 1\}$.
- B. $L(M) \rightarrow \{0^n1^m0^{f(n,m)} \mid n, m \geq 0\}$, where $f(n, m) = n * m$ and $\Sigma = \{0, 1\}$.
- C. $L(M) \rightarrow \{0^n1^m \mid n > m\}$, where $\Sigma = \{0, 1\}$.
- D. $L(M) \rightarrow \{0^{n^2} \mid n \geq 0\}$, where $\Sigma = \{0, 1\}$.
- E. $L(M) \rightarrow \{w \text{ is not a palindrome}\}$, where $\Sigma = \{0, 1\}$.

2. Write a CFG for the following CFL:

- A. $L(M) \rightarrow \{0^n1^m \mid n, m \geq 0 \text{ and } 2n = 3m\}$, where $\Sigma = \{0, 1\}$
- B. $L(M) \rightarrow \{0^n1^m2^m3^n \mid n, m > 0\}$, where $\Sigma = \{0, 1, 2, 3\}$
- C. $L(M) \rightarrow \{w = 0^i1^j2^k \mid i, j, k \geq 0 \text{ and } j < i + k\}$, where $\Sigma = \{0, 1, 2\}$
- D. $L(M) \rightarrow \{w_1\#w_2 \mid \text{the number of } 00 \text{ in } w_1 \text{ is equal to the number of } 11 \text{ in } w_2\}$, where $\Sigma = \{0, 1\}$
- E. $L(M) \rightarrow \{w\#x \mid w^R \text{ is a substring of } x\}$, where $\Sigma = \{0, 1\}$

BRAC UNIVERSITY
CSE331 : Automata and Computability
Assignment 4

1. Draw the state diagram of a PDA for the following CFL:

- A. $L(M) \rightarrow \{0^n 1^m \mid n, m \geq 0 \text{ and } 2n = 3m\}$, where $\Sigma = \{0, 1\}$
- B. $L(M) \rightarrow \{0^n 1^m 2^m 3^n \mid n, m > 0\}$, where $\Sigma = \{0, 1, 2, 3\}$
- C. $L(M) \rightarrow \{w = 0^i 1^j 2^k \mid i, j, k \geq 0 \text{ and } j < i + k\}$, where $\Sigma = \{0, 1, 2\}$
- D. $L(M) \rightarrow \{w_1 \# w_2 \mid \text{the number of } 00 \text{ in } w_1 \text{ is equal to the number of } 11 \text{ in } w_2\}$, where $\Sigma = \{0, 1\}$
- E. $L(M) \rightarrow \{w \# x \mid w^R \text{ is a substring of } x\}$, where $\Sigma = \{0, 1\}$

2. Draw the state diagram of a TM that decides the following languages:

- A. $L(M) \rightarrow \{w \in \Sigma^* \mid w \text{ contains equal numbers of } 0\text{s and } 1\text{s}\}$, where $\Sigma = \{0, 1\}$
- B. $L(M) \rightarrow \{0^n 1^n 2^n \mid n, m \geq 0\}$, where $\Sigma = \{0, 1, 2\}$
- C. $L(M) \rightarrow \{0^i 1^j 2^k \mid i, j, k > 0 \text{ and } k = i * j\}$, where $\Sigma = \{0, 1, 2\}$
- D. $L(M) \rightarrow \{0^{2^n} \mid n \geq 0\}$, where $\Sigma = \{0\}$
- E. $L(M) \rightarrow \{w \in \Sigma^* \mid w \text{ is a palindrome}\}$, where $\Sigma = \{0, 1\}$

3. Prove that the following languages are decidable.

- A. $L = \{\langle M, w \rangle \mid \text{The Turing machine } M \text{ halts on input } w \text{ within } N \text{ steps}\}$
- B. $L = \{\langle G \rangle \mid G \text{ is a connected undirected graph}\}$

4. Show that the following statements are true:

- A. The collection of decidable languages is closed under Union.
- B. The collection of decidable languages is closed under Complement.