

# Introduction to Computational Quantum Mechanics: Application-based Learning with Python

**Braden M. Weight**  
Department of Physics and Astronomy  
University of Rochester

April 28, 2023

# Contents

<b>1</b>	<b>Python and Environments</b>	<b>4</b>
1.1	Miniconda . . . . .	4
1.2	Conda Environments . . . . .	5
1.3	The First Python Code! . . . . .	6
<b>2</b>	<b>Types of Variables in Python</b>	<b>11</b>
2.1	Built-in Data Types . . . . .	11
2.1.1	Integers . . . . .	11
2.1.2	Floating Points . . . . .	12
2.1.3	Complex Numbers . . . . .	12
2.1.4	Strings . . . . .	12
2.1.5	Dictionaries . . . . .	12
2.1.6	Lists . . . . .	12
2.1.7	Booleans . . . . .	13
2.2	Numpy Arrays . . . . .	19
<b>3</b>	<b>Numerical Calculus</b>	<b>23</b>
3.1	Differentiation . . . . .	23
3.1.1	Analytic Differentiation . . . . .	23
3.1.2	Numerical Differentiation . . . . .	24
3.2	Root-finding Algorithms . . . . .	25
3.2.1	Bisection Method . . . . .	25

3.2.2	Newton-Raphson . . . . .	26
3.2.3	Using External Modules: SciPy and Numpy	27
3.3	Integration . . . . .	28
3.3.1	Analytic Integration . . . . .	28
3.3.2	Numerical Integration . . . . .	28

## Preface

All codes, lecture notes, and homeworks can be accessed at  
[https://github.com/bradenmweight/Intro\\_Computational\\_Quantum\\_Mechanics](https://github.com/bradenmweight/Intro_Computational_Quantum_Mechanics)

# Chapter 1

## Python and Environments

### 1.1 Miniconda

Anaconda is a distribution of python is extremely convenient to install and utilize. Anaconda comes in two forms: Anaconda and Miniconda. Anaconda comes pre-installed with many things, while Miniconda is the bare minimum of pre-installed packages. I suggest everyone start with Miniconda and simply install on top of the what you need as we go along. The Anaconda website can be found [here](#).

To install the Miniconda distribution, follow these steps:

- Log into the cluster.
- Migrate to the location you want to install Miniconda, usually in home ("~/")
- Get the install file from the web:  

```
wget https://repo.anaconda.com/miniconda/Miniconda3-latest-Linux-x86_64.sh
```
- Verify the completed download:  

```
ls -lh Miniconda3-latest-Linux-x86_64.sh
```
- Convert the file to an executable file and run it:  

```
chmod +x Miniconda3-latest-Linux-x86_64.sh  
./Miniconda3-latest-Linux-x86_64.sh
```
- Reload the terminal:  

```
source ~/.bashrc
```
- Check to see if conda works:  

```
conda --help
```

## 1.2 Conda Environments

By default, anaconda provides the "base" environment, which is the default python that comes with the version of Miniconda that you installed. For now, we can use this default environment for everything that we will need for the remainder of this course. However, when one becomes involved with multiple hard-core projects involving different versions of python and, worse, interfering package versions, then one should consider to build additional environments and switch between them for long-term projects. For this projected individual, we will outline how to manage environments.

The following is a list of commands to check the new conda environment:

- List the environments currently available:  
`conda env list`
- Check the current environment variable:  
`echo $CONDA_PREFIX`
- List the available/installed packages:  
`conda list`
- Make sure the correct conda/user's python is being called (not the system python...):  
`which python`

The following is a list of commands to manage the current conda environment:

- Install the Numpy package (useful for number operations and linear algebra):  
`conda install numpy`
- Install the Scipy (similar to Numpy but with some other features that we may use) and Matplotlib (plotting) packages :  
`conda install scipy matplotlib`
- Example for removing the XYZ and ABC packages:  
`conda remove XYZ ABC`
- Create a new anaconda environment called "myENV" with a specific choice of python version (optional):  
`conda create --name myENV python=3.9`
- To switch between two conda environments, one needs to deactivate the current (doesn't matter what it is called) and activate the next:  
`conda deactivate`  
`conda activate myENV`

## 1.3 The First Python Code!

In this section, the reader will be exposed to some common items in all python codes, namely the import block, the “`__name__ == '__main__'`” block (although technically optional, but highly recommended), and general, user-defined functions. Additionally, we will compose mathematical functions with Numpy and plot them using Matplotlib. Keep in mind that we will learn in later chapters about the types of variables in python and how to use them properly and efficiently. Our goal here is to introduce the reader to their first full code to make simple plots while learning about code styling and general python code layout.

---

```
# NAME: my_first_python_code.py

#####
# THIS IS A SINGLE-LINE COMMENT
"""
THIS IS A BLOCK COMMENT.
IT CAN GO FOR MANY LINES.
"""
#####

# Python modules
import random

# External modules
import numpy as np
import matplotlib
matplotlib.use('Agg') # This is required for the NDSU cluster...not sure why
from matplotlib import pyplot as plt

# User-made modules
# We don't yet have any of these.

""" Description of the above imports:
    `as np' renames the Numpy module to 'np'
    A function inside the module Matplotlib is called pyplot.
    We want it, and we rename it as plt
"""

def my_print_function(something_to_print):
    """
    This is a function comment.
    They are useful whenever you define a new function.
    You should always tell the purpose of the function
        as well as what is its input and output.

    For example:
    The purpose of this function is to read a string and print the string.
    INPUT: something_to_print [str]
    OUTPUT: None
    """
```

```

print( "My function is printing something:" )
print( something_to_print )

# This is a return statement.
# For this function, it is optional. Default is ``None``/
return None

def main():
    # This is the main function of the code.
    # This enables one to get main from both the command line
    # as well as from another python module.

    something_to_print = "Hello, world." # String variable

    print("Print directly:", something_to_print) # Print directly to the screen

    # Write a function to print whatever you provide to it
    my_print_function( something_to_print )

# This checks whether someone is calling this module at the command line directly,
# or whether it is being called from another python file as a user-defined module
if ( __name__ == "__main__" ): # This will evaluate to True if run from the command line
    main()

```

---

- Create a new file called “my\_first\_python\_code.py”

```
touch my_first_python_code.py
```

- Modify the code with your favorite text editor (i.e., VIM, Notepad++, Visual Studio Code, Nano, EMACS, etc.)

```
vim my_first_python_code.py
```

- Once your code is completed, you can run the code with the following command:

```
python3 my_first_python_code.py
```

---

```

# NAME: my_first_plot.py

# Python modules
import random

# External modules
import numpy as np
import matplotlib
matplotlib.use('Agg') # This is required for the NDSU cluster...not sure why
from matplotlib import pyplot as plt

```

```

# User-made modules
# We don't yet have any of these.

def get_globals():
    global X_GRID

    # Create a numpy array starting from 1 to 1000 in increments of 2
    X_GRID = np.arange( 1,1001,2 )

def get_Y_quadradttic():
    """
    The purpose of this function is to create the Y-values for a user-defined function
    INPUT:  None
    OUTPUT: Y [1D nd.array]
    """

    # Let's do a quadratic function
    Y_X = X_GRID ** 2 / 10**3 #  $y(x) = x^2 / 10^4$ 

    # This is a return statement.
    return Y_X

def plot_quadratic_1D_LINE(Y_X):
    """
    The purpose of this function is to generate a 1D line plot.
    Generates image file "Y_X_LINE.jpg"

    INPUT:  Y_X [1D nd.array]
    OUTPUT: None
    """

    plt.plot( X_GRID, Y_X, "-", c='black', linewidth=3, label="My 1D curve:\n $Y(X) = \frac{X^2}{10^3}$  $" )

    ##### OPTIONAL PLOTTING COMMANDS #####
    plt.legend()
    plt.xlim( X_GRID[0], X_GRID[-1] ) # Define x-axis as limits of your chosen X_GRID
    plt.ylim( 0 ) # Define one limit of the y-axis
    plt.xlabel("This is my X-Axis",fontsize=15)
    plt.ylabel("This is my Y-Axis",fontsize=15)
    plt.title("This is my title",fontsize=15)
    #####

    plt.savefig("Y_X_LINE.jpg",dpi=600)
    plt.clf() # This clears the internal plot in case we want to make another.

def get_Y_random():
    """
    The purpose of this function is to create the Y-values for a user-defined function
    INPUT:  None
    OUTPUT: Y [1D nd.array]
    """

    # How many Y-values do we need to get ?
    NGRID = len(X_GRID)

    ### Let's do a random function

```



```

# These are uniform random numbers on the interval [0,1)
RAND = random.random() # This is a single random number
RAND_LIST = [ 2*random.random() - 1 for j in range(NGRID) ] # This is a list of random numbers
# "for j in range(NGRID)" above just gives us the same number of randoms as the X_GRID variable
# "2*random.random() - 1" converts from [0,1) to [-1,1)

# Let's also do a set of random gaussian numbers with mean of 0 and width of 1.
RAND_GAUSS_LIST = [ random.gauss(0,1) for j in range(NGRID) ]

return RAND_LIST, RAND_GAUSS_LIST

def plot_random_1D_LINE_SCATTER_two_FUNCTIONS(Y1, Y2):
    """
    The purpose of this function is to generate a 1D line plot.
    Generates image file "Y_X_LINE.jpg"

    INPUT:  Y1 [1D nd.array]
    INPUT:  Y2 [1D nd.array]
    OUTPUT: None
    """

    plt.scatter( X_GRID, Y1, c="blue", label="Uniform Random" )
    plt.plot( X_GRID, Y2, "o", c="red", label="Guassian Random", alpha=0.25 )

    # Plot horizontal lines indicating certain quantities
    plt.plot( X_GRID, 1.0 * np.ones(len(X_GRID)), "--", c="black", lw=2, label="$\pm 1$" )
    plt.plot( X_GRID, -1.0 * np.ones(len(X_GRID)), "--", c="black", lw=2 )

    ##### OPTIONAL PLOTTING COMMANDS #####
    plt.legend()
    plt.xlim( 0, 1000 ) # Define x-axis as limits of your chosen X_GRID
    plt.ylim( -5,5 ) # Define limits of the y-axis
    plt.xlabel("Random Coordinate",fontsize=15)
    plt.ylabel("Random Value",fontsize=15)
    plt.title("Uniform vs. Gaussian Random Numbers",fontsize=15)
    #####

    plt.savefig("Y_X_RANDOM_SCATTER.jpg",dpi=600)
    plt.clf() # This clears the internal plot in case we want to make another.

def main():

    get_globals()

    # Let's plot a quadratic function
    Y_X = get_Y_quadradtic()
    plot_quadratic_1D_LINE(Y_X)

    # Let's plot a random function
    RAND_LIST, RAND_GAUSS_LIST = get_Y_random()
    plot_random_1D_LINE_SCATTER_two_FUNCTIONS(RAND_LIST, RAND_GAUSS_LIST)

if ( __name__ == "__main__" ):
    main()

```

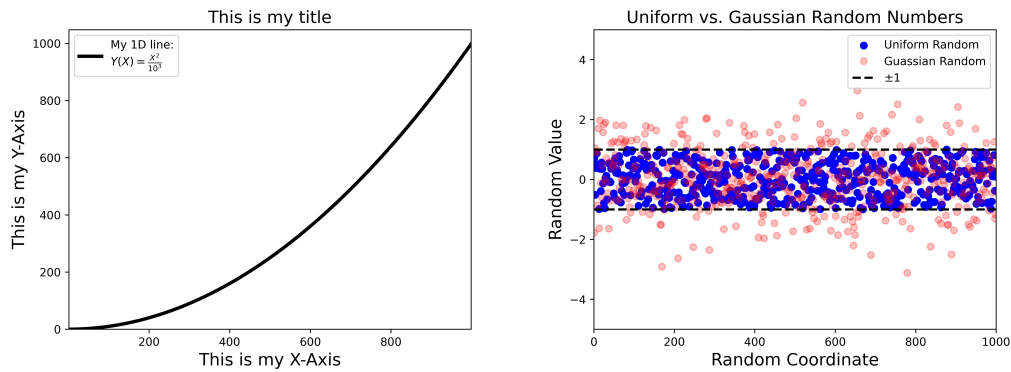


Figure 1.1: Generated from the code “my\_first\_plot.py”. (Left) A 1D line plot of a quadratic function.

- Create a new file called “my\_first\_plot.py”

```
touch my_first_plot.py
```

- Modify the code with your favorite text editor (*i.e.*, VIM, Notepad, VSCode, Nano, etc.)

```
vim my_first_plot.py
```

- Once your code is completed, you can run the code with the following command:

```
python3 my_first_plot.py
```

In these two example python codes, we have seen how to plot a simple 1D curve as well as how to generate and plot random data. These tools will be useful later when we discuss random motion of parties (*e.g.*, Brownian motion) using the Langevin equation. Although one can simply “copy and paste” these two examples, it is more useful to type each code out, line-by-line to make sure all commands are completely understood. The goal here is only to introduce one to the general structure of a python code and to see an example of how to plot 1D functions.

## Chapter 2

# Types of Variables in Python

In this chapter, we will learn about some of the types of variables that exist in Python. Some of these are common to all computer programming languages, such as the integer (int), floating point (float), string (str), boolean (bool), complex (complex) etc., while some are intrinsic to Python such as the dictionary (dict), list (lst), tuple (tuple). Here, “()” indicates the conversion (or casting) function of one variable to another, if possible.

We will also introduce the Numpy module to work with arrays/vectors, matrices, and higher-dimensional tensors and their mathematical operations. Numpy will become your most-used tool in python, as it naturally captures the mathematics of linear algebra (quantum mechanics) and has simple tools for reading and writing data to files.

### 2.1 Built-in Data Types

Here, we will briefly introduce some of the built-in data types in python that will be heavily used in day-to-day python coding. These variables do not need to be imported in the import block through any module.

#### 2.1.1 Integers

Everyone probably understands what an integer is from a mathematical sense from primary school. That is to say, an integer  $\mathcal{Z}$  is the set of whole numbers  $\{0, 1, 2, \dots\}$  plus their additive inverses  $\{-1, -2, -3, \dots\}$ . The point here is that their decimal values are filled with zeros to the right of the decimal such that, e.g.,  $1 = 1.0000000\dots$ . In this sense, there is no new information housed within the decimal value and so one can discard this information. From a computer science perspective, this will save memory and allow on to perform simplified mathematical operations on this type of variable in contrast to those that require additional information beyond the decimal point. For example, adding two integers will be computationally faster than adding two floating point numbers (see next section) whole decimal values require additional bitwise operations behind the scenes.

### 2.1.2 Floating Points

Floating point numbers are real numbers (in the mathematical sense)  $\mathcal{R}$  such that they are composed of all integers  $\mathcal{Z}$  plus all rational and irrational numbers in between. More importantly, unlike the integers, the values to the right of the decimal need not be zero and hence are important information to be kept. For example, a floating point number could be  $\pi \approx 3.14159$  (irrational) or 2.5 (rational) or 2.00000.

### 2.1.3 Complex Numbers

Complex numbers are number that are composed of two real numbers,  $a$  and  $b$ , such that  $z = a + ib = a + jb$ . The complex numbers  $z$  live in a two-dimensional space in the sense that they can only be described by two independent numbers  $a$  and  $b$  or rather as a vector  $(a, b)$  in the basis of  $\{(1, 0), (0, 1)\}$ . Python understands these values in the engineering notation where the imaginary unit  $i \rightarrow j$  by convention where  $j = \sqrt{-1}$  as usual. The complex variables, like real variables in two-dimensional space, has a magnitude  $z$  and a phase  $\theta_z$  defined as,

$$|z| = \sqrt{a^2 + b^2}, \quad (2.1)$$

$$\theta_z = \arctan\left(\frac{b}{a}\right). \quad (2.2)$$

These variables can be declared in python, for example, as  $z = a + b * 1j$ .

### 2.1.4 Strings

Strings are composed of characters. One character is any symbol (including a space) that can be written in ASCII or similar. In python, strings are noted by the enclosure by quotations. In principle, any quotations are valid. For example, ‘The string ASCII text’ = “The string ASCII text” = “”The string ASCII text”” = “””The string ASCII text”””, etc. For nested strings (i.e., printing strings of strings), one can make use of this, like in “ I want to show you my string, which is ‘This is my string’.”

### 2.1.5 Dictionaries

Dictionaries are variables that store other variables in the same way a real dictionary stores information. Dictionaries are composed of keys and values such that when you construct a dictionary, you provide it with a set of keys and set of values. Then you can reference the dictionary passing in a key, and the result will be the corresponding value. For example, constructing the dictionary as  $my\_dict = \{key : value\}$  can be referenced as  $my\_dict[key]$  returning  $value$ . The keys and corresponding values can be any variables type; there is no restriction.

### 2.1.6 Lists

Similarly to dictionaries, lists are a collection of variables; however, these collections are not composed of keys, only the values. For example, defining a list as

```
my_list = [ 1 , 2.5 , "a string", 1 + 2j ]
```

and can be referenced as `my_list[2]` returning "a string". There is again no restriction on the types of variables that can be housed inside the list. Additionally, a list can house other lists as

```
my_list = [ 1 , 2.5 , "a string", 1 + 2j, [1,2,3,4,5] ]
```

where `my_list[4]` would return the list `[1,2,3,4,5]`. One useful tool from lists is you can dynamically update them with the `append` function. Defining an empty list as

```
my_list = []
```

then you can append an element as

```
my_list.append( "a string" )
```

Now the list will look like `my_list = ["astring"]`.

### 2.1.7 Booleans

Boolean variables are True or False variables. By convention in python. The first letter of each is always capitalized. These variables allow on to perform comparisons of other variables in such things as if-statements, among many others. For example, `True == True` will evaluate to True, as `5 == 5` will evaluate to True. `1 == 2` will evaluate to False, but `1 + 1 == 2` will evaluate to True.

---

```
# NAME: built_in_variable_types.py

import math
import numpy as np

def learn_integers():
    """
    In this function, we will learn about integers.
    """

    print("\n##### BEGIN INTEGERS #####\n")

    a = 10 # Store the integer value of "10" in variable "a"
           # Python will automatically know that "10" is an integer
    # To check this, use the built-in type() function
    print(f"What type is variable a ? --> {type(a)}" )

    # What operations can we do on integers ?
    # Addition
    print(f"a = {a} --> a + 1 = {a + 1} --> {type(a + 1)}" )
    # Subtraction
    print(f"a = {a} --> a - 1 = {a - 1} --> {type(a - 1)}" )
    # Multiplication
    print(f"a = {a} --> a*5 = {a * 5} --> {type(a * 5)}" )
```

```

# Division
print(f"a = {a} --> a/5 = {a / 5} --> {type(a / 5)}" )
print(" Warning! Division produced a floating point variable.")
print(" To achieve an integer again, we need to do integer division.")
print(" Note that if the floating point result is 1.75, int(1.75) = 1 (i.e., rounds down)")
# Integer Division
print(f"a = {a} --> a//5 = {a // 5} --> {type(a // 5)}" )
print(f"a = {a} --> int(a/5) = {int(a / 5)} --> {type(int(a / 5))}" )
print()

# Integer Power
print(f"a = {a} --> a**2 = {a ** 2} --> {type(a ** 2)}" )
print()

# Other operations produce floating points
# Fractional Power (e.g., a square-root)
print("The following types of operations necessarily produce non-integer results:")
print(f"a = {a} --> a**(0.5) = {a ** (0.5)} --> {type(a ** (0.5))}" )
print(f"a = {a} --> a**(1/2) = {a ** (1/2)} --> {type(a ** (1/2))}" )
print(f"a = {a} --> math.sqrt(a) = {math.sqrt(a)} --> {type(math.sqrt(a))}" )
print(f"a = {a} --> math.log[a] = {math.log(a)} --> {type(math.log(a))}" )

print("\n##### END INTEGERS #####\n")

def learn_floating_points():
    """
    In this function, we will learn about floating point variables.
    """
    print("\n##### BEGIN FLOATS #####\n")

    a = 2.8 # Store the floating point value of "2.8" in variable "a"
            # Python will automatically know that "2.8" is an float
    # To check this, use the built-in type() function
    print(f"What type is variable a ? --> {type(a)}" )

    # What operations can we do on integers ?
    # Addition
    print(f"a = {a} --> a + 1 = {a + 1} --> {type(a + 1)}" )
    # Subtraction
    print(f"a = {a} --> a - 1 = {round(a - 1,3)} --> {type(a - 1)}" )
    # Multiplication
    print(f"a = {a} --> a*5 = {a * 5} --> {type(a * 5)}" )
    # Division
    print(f"a = {a} --> a/5 = {round(a / 5,3)} --> {type(a / 5)}" )

    print("\nWhat if we need an integer from a floating point ?")
    # Convert Result to Integer
    print(f"a = {a} --> int(a) = {int(a)} --> {type(int(a))}" )
    print(f"a = {a} --> math.floor(a) = {math.floor(a)} --> {type(math.floor(a))}" )
    print(f"a = {a} --> math.ceil(a) = {math.ceil(a)} --> {type(math.ceil(a))}" )

    print("\nWhat if we only want the first few decimal places ?")
    a = math.pi
    print(f"a = {a} --> round(a,0) = {round(a,0)} " )
    print(f"a = {a} --> round(a,1) = {round(a,1)} " )
    print(f"a = {a} --> round(a,2) = {round(a,2)} " )
    print(f"a = {a} --> round(a,3) = {round(a,3)} " )

```

```

# Other operations work as expected
print("\nThe other operations work as expected.")
print(f"a = {a} --> a**(2)      = {a ** (2)}      --> {type(a ** (2))}" )
print(f"a = {a} --> a**(0.5)    = {a ** (0.5)}    --> {type(a ** (0.5))}" )
print(f"a = {a} --> a**(1/2)    = {a ** (1/2)}    --> {type(a ** (1/2))}" )
print(f"a = {a} --> math.sqrt(a) = {math.sqrt(a)}  --> {type(math.sqrt(a))}" )
print(f"a = {a} --> math.log[a]  = {math.log(a)}   --> {type(math.log(a))}" )

print("\n##### END FLOATS #####\n")

def learn_complex_floats():
    """
    In this function, we will learn about complex variables.
    """
    print("\n##### BEGIN COMPLEX #####\n")

    # Two ways to make a complex
    a = complex(2,3)
    a = 2 + 3j # Store the integer value of "2 + 3j" in variable "a"
    # Python will automatically know that "2 + 3j" is complex
    # To check this, use the built-in type() function
    print(f"What type is variable a ? --> {type(a)}" )

    # What operations can we do on integers ?
    # Addition
    print(f"a = {a} --> a + 1 = {a + 1}      --> {type(a + 1)}" )
    print(f"a = {a} --> a + 1j = {a + 1j}    --> {type(a + 1j)}" )
    # Subtraction
    print(f"a = {a} --> a - 1 = {a - 1}      --> {type(a - 1)}" )
    print(f"a = {a} --> a - 1j = {a - 1j}    --> {type(a - 1j)}" )
    # Multiplication
    print(f"a = {a} --> a*5 = {a * 5}        --> {type(a * 5)}" )
    print(f"a = {a} --> a*5j = {a * 5j}      --> {type(a * 5j)}" )
    # Division
    print(f"a = {a} --> a/5 = {a / 5}        --> {type(a / 5)}" )
    print(f"a = {a} --> a/5j = {a / 5j}     --> {type(a / 5j)}" )

    print("\nWhat if we only want the first few decimal places ?")
    print("Here we can invoke Numpy to do this easily for us.")
    a = math.pi + math.pi/2 * 1.0j
    print(f"a = {a} --> np.around(a,0) = {np.around(a,0)} " )
    print(f"a = {a} --> np.around(a,1) = {np.around(a,1)} " )
    print(f"a = {a} --> np.around(a,2) = {np.around(a,2)} " )
    print(f"a = {a} --> np.around(a,3) = {np.around(a,3)} " )

    # Other operations work as expected
    print("\nThe other operations work as expected.")
    print(f"a = {a} --> a**(2)      = {a ** (2)}      ")
    print(f"a = {a} --> a**(0.5)    = {a ** (0.5)}    ")
    print(f"a = {a} --> a**(1/2)    = {a ** (1/2)}    ")
    try:
        print(f"a = {a} --> math.sqrt(a) = {math.sqrt(a)} ")
    except TypeError:
        print("math.sqrt(a) didn't work because a is complex.")
    try:
        print(f"a = {a} --> math.log[a] = {math.log(a)} ")

```

```

except TypeError:
    print("math.log[a] didn't work because a is complex.")

# Complex numbers have other operations
# Complex magnitude = |a| = sqrt[ RE**2 + IM**2 ]
# Complex phase      = |a| = arctan [ IM / RE ]
rad_to_deg = 180/math.pi

my_magnitude      = math.sqrt(a.real**2 + a.imag**2)
numpy_magnitude    = np.abs(a)

my_angle           = math.atan(a.imag / a.real)
numpy_angle        = np.angle(a, deg=True) # Result in degrees rather than radians
print("\nComplex Magnitude (degrees):", round( my_magnitude,4), round(numpy_magnitude,4) )
print("Complex Angle      (degrees):", round( my_angle * rad_to_deg,4), round(numpy_angle,4) )

print("\n##### END COMPLEX #####\n")

def learn_strings():
    """
    The purpose of this function is to learn strings.
    """

    print("\n##### BEGIN STRING #####\n")

    # A string is a list of characters
    my_string = "Hello, user"
    print(f"My String: '{my_string}' has {len(my_string)} characters. Yes, spaces count here.")
    print(f"The eighth character is my string is '{my_string[7]}' ")
    print(f"\nWhat if we try mathematical operations on strings ? Does it make sense ?")
    print(f"my_string + my_string = '{my_string + my_string}' --> It became a longer string.")
    print(f"my_string * 2          = '{my_string * 2}' --> It became a longer string.")

    try:
        print(f"my_string + 2 = '{my_string + 2}'")
    except TypeError:
        print("\tmy_string + 2 does not work")
    try:
        print(f"my_string / 2 = '{my_string / 2}'")
    except TypeError:
        print("\tmy_string / 2 does not work")

    # We can check if things are in the string
    print(f"\n Is 'user' in my string ? --> {'user' in my_string}")
    print(f" Is 'teacher' in my string ? --> {'teacher' in my_string}")

    # Check if two strings are equal
    print('"" Is "string_5" equal to "string_5" ? --> ""', "string_5" == "string_5" )
    print('"" Is "string_5" equal to "not the same string" ? --> ""', "string_5" == "not the same string" )

    # We can split strings based on characters
    print(f"\n my_string.split() splits based on spaces by default --> {my_string.split()} ")
    print(f"my_string.split(' ') splits based on spaces --> {my_string.split(' ')} ")
    print(f"my_string.split(',') splits based on commas --> {my_string.split(',')} ")
    print(f"my_string.split('ll') splits based on 'll' --> {my_string.split('ll')} ")

```



```

print(" The anove variable types are called lists. We will see this later.")

print("\n##### END STRING #####\n")

def learn_booleans():
    """
    The purpose of this function is to learn boolean variables.
    """

    print("\n##### BEGIN BOOL #####\n")

    print("Boolean variables are True or False.")

    my_true_bool = True # First letter MUST be capitalized. true will give an error.
    my_false_bool = False # First letter MUST be capitalized. false will give an error.

    print(f"Is True equal to False ? --> {my_true_bool == my_false_bool}")
    print(f"Is True equal to True ? --> {my_true_bool == my_true_bool}")

    print("\nWhat about mathematical operations, again ?")
    print(f" True * 0 = {True * 0}")
    print(f" True * 1 = {True * 1}")
    print(f" True * 5 = {True * 5}")
    print(" I use this feature quite often, even though it is strange.")
    print(" It allows quickly choosing between variables given conditions.")
    print(" We will use this later in the course.")
    print(f" 5 * (1 == 2) + 10 * (2 == 2) = {5 * (1 == 2) + 10 * (2 == 2)}")

    print("\n##### END BOOL #####\n")

def learn_lists():
    """
    The purpose of this function is to learn about lists.
    """

    print("\n##### BEGIN LIST #####\n")

    my_list = [ "Hello", 5, 2.5, True, [1,2,3,4] ]
    print(" Lists are collections of variables.")
    print(f''' "[ 'Hello', 5, 2.5, True, [1,2,3,4] ]" = {my_list}''')
    print(" They can store the same type or different types of variables within them.")
    print(" Get elements from the list:")
    print(f" my_list      = {my_list} --> {type(my_list)} ")
    print(f" my_list[0] = {my_list[0]} --> {type(my_list[0])} ")
    print(f" my_list[1] = {my_list[1]}      --> {type(my_list[1])} ")
    print(f" my_list[2] = {my_list[2]}      --> {type(my_list[2])} ")
    print(f" my_list[3] = {my_list[3]}      --> {type(my_list[3])} ")
    print(f" my_list[4] = {my_list[4]}      --> {type(my_list[4])} ")
    print(" The last element is actually another list filled with integers.")
    print(" To access these 'deeper' elements, we need to access them via a second index:")
    print(f" my_list[4][0] = {my_list[4][0]} --> {type(my_list[4][0])} ")
    print(f" my_list[4][1] = {my_list[4][1]} --> {type(my_list[4][1])} ")
    print(f" my_list[4][2] = {my_list[4][2]} --> {type(my_list[4][2])} ")
    print(f" my_list[4][3] = {my_list[4][3]} --> {type(my_list[4][3])} ")
    print("\n Lists are very powerful for storing data, but their mathematical operations are limited:")
    print(f" my_list + my_list = {my_list + my_list} --> Longer List")

```

```

print(f" my_list * 2 = {my_list * 2} --> Longer List")
print(" They act like strings actually.")

print("\n Another nice feature of lists is that you can dynamically change them:")
my_list = []
print(f"my_list = {my_list}")
my_list.append("1")
print(f"my_list = {my_list}")
my_list.append("2")
print(f"my_list = {my_list}")
my_list.append("3")
print(f"my_list = {my_list}")
print("This is useful for when you don't know the number of elements you will need.")

print("\n##### END LIST #####\n")

def learn_dictionaries():
    """
    The purpose of this function is to learn about dictionaries.
    """

    print("\n##### BEGIN DICTIONARY #####\n")

    print(" Dictionaries store keys and values and are able to be referenced by the keys.")
    my_dict = { "key": "value", 10: "ten", "carbon": 12.007, True: "I am true." }
    print( my_dict )
    print( f" my_dict['key'] = {my_dict['key']}" )
    print( f" my_dict[10] = {my_dict[10]}" )
    print( f" my_dict['carbon'] = {my_dict['carbon']}" )
    print( f" my_dict[True] = {my_dict[True]}" )
    print(" One can add keys and values dynamically:")
    my_dict["NEW_KEY"] = "NEW_VALUE"
    print( f" my_dict['NEW_KEY'] = {my_dict['NEW_KEY']}" )

    print("\n##### END DICTIONARY #####\n")

def main():
    learn_integers()
    #learn_floating_points()
    #learn_complex_floats()
    #learn_strings()
    #learn_booleans()
    #learn_lists()
    #learn_dictionaries()

if ( __name__ == "__main__" ):
    main()

```

---

## 2.2 Numpy Arrays

A very nice introduction to Numpy can be found, for free, at [W3Schools – Numpy Tutorial](#). In this website, they walk you through multiple examples of all aspects of Numpy with an interface to run and manipulate small codes yourself. This really enables the learner to change the examples slightly and see how it changes the result – a great way to learn !

---

```
# numpy_arrays.py

import numpy as np
import random
from scipy.linalg import expm as SCIPY_MAT_EXP

def learn_make_numpy_array():
    """
    In this function, we will learn about creating arrays.
    """

    print("\n##### BEGIN MAKE AND COMPARE ARRAYS #####\n")

    # This is a one-dimensional list -- a built-in data type
    my_1D_list = [1,2,3,4]
    print(f"my_1D_list = {my_1D_list}")

    # This converts the list to a numpy array
    # and is usually the easiest way to create
    # a simple numpy array
    my_1D_numpy_array = np.array(my_1D_list)
    print(f"my_1D_numpy_array = {my_1D_numpy_array}")
    print("\nObservations:")
    print("\tNote the difference in the way they are printed.")
    print("\tNumpy arrays usually do not have commas separating the values.")

    print("\nMaking two-dimensional arrays can be the same as for lists.")
    my_2D_list = [[1,2],[3,4]]
    my_2D_array = np.array(my_2D_list)
    print(f"my_2D_list = {my_2D_list}")
    print(f"my_2D_array = \n{my_2D_array}")
    print("\nObservations:")
    print("\tNote the difference in the way they are printed.")
    print("\tNumpy arrays attempt to print themselves like matrices when possible \
\n\t -- because that's what they are.")

    print("\nMaking higher-dimensional arrays can be the same as for lists \
but is more complicated to write down.")
    my_3D_list = [ [ [1,2] , [3,4] ], \
                   [ [5,6] , [7,8] ], \
                   [ [9,10], [11,12] ] ]

    my_3D_array = np.array(my_3D_list)
    print(f"my_3D_list = {my_3D_list}")
    print(f"my_3D_array = \n{my_3D_array}")
    print("\n\tHow can we examine these better ?")
```

```

print("\tLet's use of for-loop to print them.")
print("\tLet's iterate over the first index:")
shape = my_3D_array.shape # Will return (3,2,2)
print(f"The shape of my array is: {shape}")
for x in range(shape[0]):
    print(x, "\n", my_3D_array[x])

print("\n\tLet's iterate over the first and second index:")
for x in range(shape[0]):
    for y in range(shape[1]):
        print(x,y,my_3D_array[x,y])

print("\n\tLet's iterate over the first, second, and third index:")
for x in range(shape[0]):
    for y in range(shape[1]):
        for z in range(shape[2]):
            print(x,y,z,my_3D_array[x,y,z])

print("\nNow, can we do the opposite ? Compose the numpy array with a for-loop ?")
print("\nWe first need an empty array like we needed an empty list: A = np.zeros(shape)")
A = np.zeros( shape ) # = np.zeros( ( 3,2,2 ) )
for x in range(shape[0]):
    for y in range(shape[1]):
        for z in range(shape[2]):
            counter = x*shape[2]*shape[1] + y*shape[1] + z # 0,1,2,3,4,...,shape[0]*shape[1]*shape[2]
            print( counter + 1 )
            A[x,y,z] = counter + 1

print("Are the two arrays the same now ?")
same_check = ( A == my_3D_array ).all()
# Checks to make sure all the elements are the same.
# For integers, it is okay.
print( f"A == my_3D_array --> {A == my_3D_array}" )
print( f"\n(A == my_3D_array).all() --> {(A == my_3D_array).all()}" )
print("\n What about floats ?")
print("Let's make a random array of VERY small numbers:")
random_array = np.array([ [ [random.random()*10**-10 \
                            for z in range(shape[2])] \
                            for y in range(shape[1])] \
                            for x in range(shape[0])] ])

print( random_array )
print( f"\n(A + rand == my_3D_array).all() --> {(A + random_array == my_3D_array).all()}" )
print(f"\nCompare floats with built-in numpy function: np.allclose()")
print( f"np.allclose(A + rand, my_3D_array) --> {np.allclose(A + random_array, my_3D_array)}" )

print("\n##### END MAKE AND COMPARE ARRAYS #####\n")

def learn_array_math():
    """
    Here, we will learn about simple mathematical operations on numpy arrays.
    """

    print("\n##### BEGIN ARRAY MATH #####\n")

    A = np.array([1,2,3,4,5])
    print(f"A      = {A}")

```

```

print("\nArrays with numbers:")
print(f"A + 1 = {A + 1} = A + np.array([1,1,1,1,1]) = {A + np.array([1,1,1,1,1])}")
print(f"A - 1 = {A - 1}")
print(f"A * 2 = {A * 2}")
print(f"A / 2 = {A / 2}")
print(f"A // 2 = {A // 2}")

print("\nArrays with arrays:")
A = np.array([1,2,3,4,5])
B = np.array([5,5,5])
print(f"A      = {A}")
print(f"B      = {B}")
print(f"A + B --> DOES NOT WORK ! Shapes need to be the same for all operations.\n")

A = np.array([1,2,3,4,5])
B = np.array([5,5,5,5,5])
print(f"A      = {A}")
print(f"B      = {B}")
print(f"A + B = {A + B}")
print(f"A - B = {A - B}")
print(f"A * B = {A * B}")
print(f"A / B = {A / B}")

print("\nOften in QM, one encounters the needs to get differences between\n\
sets of eigenvalues (i.e., energies) of wavefunctions as matrices.")
ENERGY = np.array([1,2,3,4,5])
E_DIFF = np.subtract.outer(ENERGY,ENERGY)
print(f"E_DIFF = \n",E_DIFF)
print("\nSometimes, one needs to have 1/E_DIFF (e.g., non-adiabatic coupling = d_jk ~ 1/E_DIFF for j != k):\n")
print(f"1/E_DIFF = \n",1/E_DIFF)
print("\nWe found 'inf' terms since we divided by 0.")
print("We should have set the diagonal elements to 1.0 before inverting. Then set back to 0.0.")
E_DIFF[ np.diag_indices(len(ENERGY)) ] = 1.0 # Set diagonal elements to one before inverting.
E_DIFF_INV = 1/E_DIFF
E_DIFF_INV[ np.diag_indices(len(ENERGY)) ] = 0.0 # Return indices to zero.
print(f"1/E_DIFF = \n",E_DIFF_INV)
print("\nWe will make use of this stuff once we get to quantum mechanics.")

print("\nArray with complicated math:")
A = np.array([1,2,3,4,5])
print(f"A      = {A}")
print(f"e^A      = {np.exp(A)}")
print("\t-->This raised each individual element into the power of e.")
print(f"LOG[A]    = {np.log(A)}")
print("\t-->This took the natural log of each individual element.")
print("\nWhat about matrices ? Does EXP[M] make sense the way it works with vectors ?")
A = np.array([[1,2],[2,5]])
print(f"A      = \n{A}")
print(f"np.exp() = \n{np.exp(A)}")
print("\t--> This does not make sense ! How do we do exponentials of matrices ? \
\n\t\t--> Open mathematical question !")
print("\t--> Recall that exponentials of matrices are very common in QM: \
\n\t\tU|\psi(0)> ~ e^(HAMILTONIAN*t)|\psi(t)>")
print(f"e^A = 1 + 1/2 A^2 + 1/6 A^3 + 1/24 A^4 + ... (Taylor expansion)")
print("We can either (1) (i) diagonalize the matrix, \
\n\t\t(ii) exponentiate the diagonals (math is okay if matrix is diagonal), \
\n\t\tthen (iii) rotate back, OR,")

```

```

print("\t(2) we can use the Pade approximation.")
print("\n(1) Rotation to Diagonal Space")
Av, U = np.linalg.eigh(A)
print(f" U @ np.diag(Av) @ U.T = \n{U @ np.diag(Av) @ U.T}")
print(f" U @ np.diag(np.exp(Av)) @ U.T = \n{U @ np.diag(np.exp(Av)) @ U.T}")

print("\n(2) Pade Approximation")
print(f"SCIPY_MAT_EXP(A) = \n{SCIPY_MAT_EXP(A)}" )

print("\tYou may ask: if we know two ways to do it, why is it an open question ?")
print("\tThe problem is that in QM, the matrices are HUGE. Here, we did 2x2.")
print("\tFor realistic problems, one may find matrices of NxN with N ~ 10^50")
print("\tThe Pade approximation is much faster than (i) diagonalization, (ii) exponentiation, (iii) rotation")

#print("\n##### END ARRAY MATH #####\n")

def main():
    learn_make_numpy_array()
    #learn_array_math()

if ( __name__ == "__main__" ):
    main()

```

---

## Chapter 3

# Numerical Calculus

### 3.1 Differentiation

#### 3.1.1 Analytic Differentiation

Exact differentiation.

$$\frac{d}{dx}f(x) = f'(x) = \lim_{t \rightarrow 0} \frac{f(x+t) - f(x)}{t} \quad (\text{Exact}) \quad (3.1)$$

A worked example proving Eq. [3.1](#).

$$f(x) = Ax^2$$
$$f'(x) = \lim_{t \rightarrow 0} \frac{A(x+t)^2 - Ax^2}{t} \quad (3.2)$$

$$= \lim_{t \rightarrow 0} \frac{A(x^2 + 2xt + t^2) - Ax^2}{t} \quad (3.3)$$

$$= \lim_{t \rightarrow 0} \frac{A(2xt + t^2)}{t} \quad (3.4)$$

$$= \lim_{t \rightarrow 0} A(2x + t) \quad (3.5)$$

$$= 2Ax \quad (\text{This is the correct result !}) \quad (3.6)$$

Example analytic differentials of common functions.

$$f(x) = Ax^b \rightarrow f'(x) = Abx^{b-1} = \frac{b}{x}f(x) \quad (3.7)$$

$$f(x) = Ae^{bx} \rightarrow f'(x) = b(Ae^{bx}) = bf(x) \quad (3.8)$$

$$f(x) = Ae^{-ibx} \rightarrow f'(x) = -ib(Ae^{-ibx}) = -ibf(x) = \frac{b}{i}f(x) \quad (\text{Note : } i = -\frac{1}{i}) \quad (3.9)$$

$$f(x) = A \sin(bx) = A \frac{1}{2i} [e^{ibx} - e^{-ibx}] \rightarrow f'(x) = A \frac{ib}{2i} [e^{ibx} + e^{-ibx}] = Ab \cos(bx) \quad (3.10)$$

$$f(x) = A \cos(bx) = \frac{1}{2} [e^{ibx} + e^{-ibx}] \rightarrow f'(x) = \frac{ib}{2} [e^{ibx} - e^{-ibx}] = -Ab \sin(bx) \quad (3.11)$$

$$f(x) = A \log(bx) \rightarrow f'(x) = \frac{Ab}{bx} = \frac{A}{x} \quad (3.12)$$

### 3.1.2 Numerical Differentiation

#### First-order Finite Difference Expressions

Taylor series expansion around  $f(x + \Delta x)$ .

$$f(x + \Delta x) = f(x) + \Delta x f'(x) + \frac{1}{2} \Delta x^2 f''(x) + \frac{1}{3!} \Delta x^3 f'''(x) + \mathcal{O}(\Delta x^4) \quad (3.13)$$

Solve for  $f'(x)$  and drop all terms proportional to  $\Delta x$  or smaller.

$$f'(x) = \frac{f(x + \Delta x) - f(x)}{\Delta x} - \frac{1}{2} \Delta x f''(x) - \frac{1}{3!} \Delta x^2 f'''(x) + \mathcal{O}(\Delta x^4) \quad (3.14)$$

In other words, first-order finite difference expression for the first derivative of a function can be expressed as the **pre-limit** exact expression,

$$f'(x) = \lim_{\Delta x \rightarrow 0} \frac{f(x + \Delta x) - f(x)}{\Delta x} \quad (\text{Exact}) \quad (3.15)$$

$$\approx \frac{f(x + \Delta x) - f(x)}{\Delta x} + \mathcal{O}(\Delta x) \quad (\text{Forward Difference}) \quad (3.16)$$

There is no reason why we chose to expand around  $f(x + \Delta x)$ . We can equivalently expand around  $f(x - \Delta x)$  as,

$$f'(x) \approx \frac{f(x) - f(x - \Delta x)}{\Delta x} + \mathcal{O}(\Delta x) \quad (\text{Backward Difference}) \quad (3.17)$$

Each of these two expressions achieve an accuracy of  $\mathcal{O}(\Delta x)$ . Now, if we average the forward and backward expressions, we can achieve an order of magnitude higher accuracy,

$$f'(x) \approx \frac{1}{2} \left[ \frac{f(x + \Delta x) - f(x)}{\Delta x} + \frac{f(x) - f(x - \Delta x)}{\Delta x} \right] \quad (3.18)$$

$$\approx \frac{f(x + \Delta x) - f(x - \Delta x)}{2\Delta x} + \mathcal{O}(\Delta x^2) \quad (\text{Central Difference}) \quad (3.19)$$



We now have an expression with an accuracy of  $\mathcal{O}(\Delta x^2)$ . This is the best we can do in first order (i.e., dropping terms proportional to  $\Delta x$  or smaller), but we can express higher-order approximations to the first derivative by including more terms in our expansion to achieve greater accuracy.

### Higher-order Finite Difference Expressions

Second-order Central Difference:

$$f'(x) \approx \frac{-2f(x - \Delta x) - 3f(x) + 6f(x + \Delta x) - 2f(x + 2\Delta x)}{6\Delta x} + \mathcal{O}(\Delta x^3) \quad (3.20)$$

Fourth-order Central Difference:

$$f'(x) \approx \frac{f(x - 2\Delta x) - 8f(x - \Delta x) + 8f(x + \Delta x) - f(x + 2\Delta x)}{12\Delta x} + \mathcal{O}(\Delta x^4) \quad (3.21)$$

### Higher-order Derivatives

Manipulating Eq. 3.13, one can arrive at expressions for the second derivative as well, to varying approximation.

$$f''(x) \approx \frac{f(x) - 2f(x + \Delta x) + f(x + 2\Delta x)}{\Delta x^2} + \mathcal{O}(\Delta x) \quad (\text{Forward Difference}) \quad (3.22)$$

$$f''(x) \approx \frac{f(x) - 2f(x - \Delta x) + f(x - 2\Delta x)}{\Delta x^2} + \mathcal{O}(\Delta x) \quad (\text{Backward Difference}) \quad (3.23)$$

$$f''(x) \approx \frac{f(x - \Delta x) - 2f(x) + f(x + \Delta x)}{\Delta x^2} + \mathcal{O}(\Delta x^2) \quad (\text{Central Difference}) \quad (3.24)$$

$$(3.25)$$

and also higher-order second derivatives using the central difference as,

$$f''(x) \approx \frac{-f(x - 2\Delta x) + 16f(x - \Delta x) - 30f(x) + 16f(x + \Delta x) - f(x + 2\Delta x)}{12\Delta x^2} + \mathcal{O}(\Delta x^4) \quad (\text{Second - order Central Difference}) \quad (3.26)$$

## 3.2 Root-finding Algorithms

Often, we need to find the roots (or zeros) of functions. For example, when performing a geometry optimization using some quantum chemical software, the goal is to minimize the energy with respect to the change in nuclear positions. A minimum is nothing more than the zero of its first derivative function.

### 3.2.1 Bisection Method

The simplest of all root-finding schemes is the bisection method. This method does not use the derivative of the function at all and simply provides a scheme based on the intermediate value theorem.

**Intermediate value Theorem**

If  $f(a)f(b) < 0$  (i.e.,  $f(a)$  and  $f(b)$  have opposite signs), then there exists a root ( $f(x_0) = 0$ ) between  $a$  and  $b$  in the function  $f(x)$ .

**Algorithm**

1. Define convergence criteria,  $\epsilon = 10^{-N}$  (e.g.,  $N = 15$ )
2. Choose interval  $\mathcal{I} \in [a_0, b_0]$  such that  $f(a_0)f(b_0) < 0$  (i.e. they have opposite signs).  
  
##### BEGIN FOR-LOOP (n) #####
3. Calculate the midpoint of the interval:  $c_n = \frac{a_n + b_n}{2}$
4. Check convergence:
  - (a) If  $f(c_n)$  is a root within defined convergence ( $|f(c_n)| < \epsilon$ ), then the root is  $x_0 = c_n$  and exit the loop.  
  
Or, a more robust criterion is,
  - (b) If the length of the interval is the same order of magnitude as the convergence criterion  $|b_n - a_n| \leq \epsilon$ , then the root is  $x_0 = \frac{a_n + b_n}{2}$  and exit the loop.
5. If there is no root within convergence, bisection the interval:
  - (a) If  $f(a_n)f(c_n) > 0$  (i.e. they have the same sign), the new interval is  $\mathcal{I} \in [a_{n+1}, b_{n+1}] = [c_n, b_n]$ .
  - (b) If  $f(a_n)f(c_n) < 0$  (i.e. they have the opposite signs), the new interval is  $\mathcal{I} \in [a_{n+1}, b_{n+1}] = [a_n, c_n]$ .
6. Return to step 2.  
  
##### END FOR-LOOP (n) #####

Alternatively, one can simply run this loop for a fixed number of iterations instead of checking for the convergence explicitly.

What are some of the limitations to this method ? (I) One needs to know *a priori* an interval where the minimum will be found. Can you think of any others ?

**3.2.2 Newton-Raphson**

The Newton-Raphson method is a more robust method in the sense that it incorporates the derivative of the function into the scheme and has a faster rate of convergence compared to the bisection method. However, this method is not guaranteed to converge to a root if the starting point is not in the neighborhood of a root.

$$y = f(x_n) + f'(x_n) * (x - x_n) \quad (\text{Tangent Line at } x = x_n) \quad (3.27)$$

The root of this line can be easily defined exactly the point when  $y = 0$ . Solving for this value, the expression for the next approximation for the root is,

$$x_{n+1} = x_n - \frac{f(x_n)}{f'(x_n)}. \quad (3.28)$$

Choosing a convergence criterion based on the interval size,

$$\frac{|x_{n+1} - x_n|}{|x_n|} \leq \epsilon, \quad (3.29)$$

now defines the algorithm. One simply replaces the  $x_{n+1}$  and convergence criterion in the bisection procedure. This scheme is great if one knows the analytic expression for the derivative of the function  $f(x)$ . However, often one does not know this and must be approximated via finite difference expressions, for example, Eq. 3.18.

### Secant Method (1<sup>st</sup>-order Newton-Raphson)

The secant method is simply the Newton-Raphson approach with a first-order numerical approximation to the first derivative. This can be written as,

$$x_{n+1} = x_n - f(x_n) \frac{x_n - x_{n-1}}{f(x_n) - f(x_{n-1})}, \quad f'(x_n) \approx \frac{f(x_n) - f(x_{n-1})}{x_n - x_{n-1}} \quad (3.30)$$

#### Algorithm

1. Define convergence criteria,  $\epsilon = 10^{-N}$  (e.g.,  $N = 15$ )
  2. Choose starting position,  $x_0$ .  
##### BEGIN FOR-LOOP (n) #####
  3. Calculate the next position:  $x_{n+1} = x_n - f(x_n) \frac{x_n - x_{n-1}}{f(x_n) - f(x_{n-1})}$
  4. Check convergence:
    - (a) If  $\frac{|x_{n+1} - x_n|}{|x_n|} \leq \epsilon$  is satisfied, exit loop with root  $r_0 = \frac{x_{n+1} + x_n}{2}$ .
    - (b) Else, return to step 3 with  $x_n = x_{n+1}$
- ##### END FOR-LOOP (n) #####

### 3.2.3 Using External Modules: SciPy and Numpy

Python contains many modules that can help with differentiation and optimization of functions. [SCIPY.OPTIMIZE](#) offers many powerful algorithms for optimizing multivariate functions. Further, for general differentiation of functions, [NUMPY.GRADIENT](#) offers a simple way to approximate derivatives for multivariate.

### 3.3 Integration

#### 3.3.1 Analytic Integration

The definite integral  $I$  of a function  $f(x)$  over the range  $[a, b]$  is defined as,

$$I = \int_a^b dx f(x) = F(b) - F(a), \quad (3.31)$$

where  $F(x)$  is the indefinite integral of the function  $f(x)$ . A simple example would be,

$$I = \int_a^b dx Ax^n = A \frac{1}{n} x^{n+1} \Big|_a^b = A \frac{1}{n} [b^{n+1} - a^{n+1}] \quad (3.32)$$

#### 3.3.2 Numerical Integration

To obtain a useful approximation to this integral, we can Taylor expand it,

$$I = \int_x^{x+\Delta x} d\xi f(\xi) \quad (3.33)$$

$$= F(x + \Delta x) - F(x) \quad (3.34)$$

$$= [F(x) + \Delta x F'(x) + \frac{1}{2} \Delta x^2 F''(x) + \frac{1}{6} \Delta x^3 F'''(x) + \mathcal{O}(\Delta x^4)] - F(x) \quad (3.35)$$

$$= \Delta x F'(x) + \frac{1}{2} \Delta x^2 F''(x) + \frac{1}{6} \Delta x^3 F'''(x) + \mathcal{O}(\Delta x^4) \quad (3.36)$$

$$= \Delta x f(x) + \frac{1}{2} \Delta x^2 f'(x) + \frac{1}{6} \Delta x^3 f''(x) + \mathcal{O}(\Delta x^4). \quad (3.37)$$

From here, we can factor out a common  $\frac{1}{2} \Delta x$  to get,

$$I = \frac{1}{2} \Delta x [2f(x) + \Delta x f'(x) + \frac{1}{3} \Delta x^2 f''(x) + \mathcal{O}(\Delta x^3)]. \quad (3.38)$$

This result (in the brackets) looks a lot like a Taylor series expansion of  $[f(x) + f(x + \Delta x)] = 2f(x) + \Delta x f'(x) + \frac{1}{2} \Delta x^2 f''(x) + \mathcal{O}(\Delta x^3)$ . We can multiply this expression (on both sides) by  $\Delta x/2$  to obtain,

$$\int_x^{x+\Delta x} d\xi f(\xi) \approx \frac{1}{2} \Delta x [f(x) + f(x + \Delta x)]. \quad (\text{Trapazoidal Rule}) \quad (3.39)$$

We can approximate this further by considering only one of the two points to obtain the most basic integration technique (Riemann) as,

$$\int_x^{x+\Delta x} d\xi f(\xi) \approx f(x) \Delta x. \quad (\text{Riemann Sum}) \quad (3.40)$$

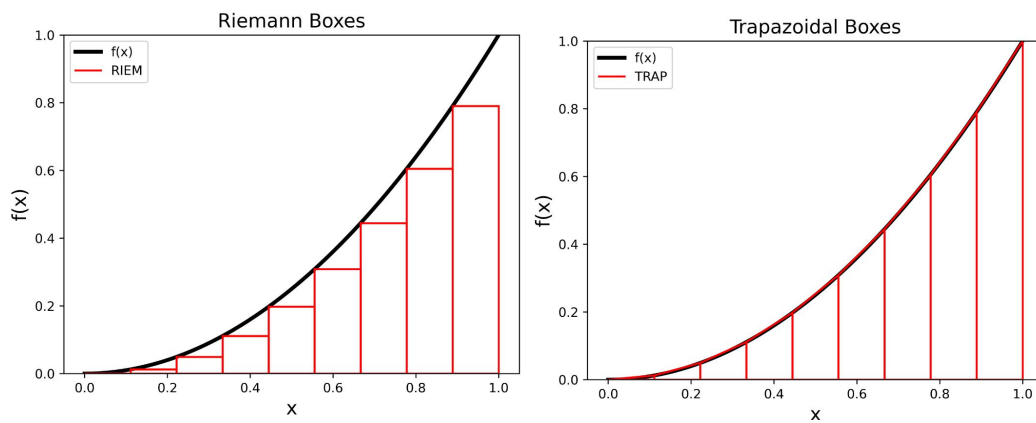


Figure 3.1: (left) Riemann sum boxes and (right) trapezoidal boxes for the integration of  $f(x) = x^2$  from 0 to 1.