



SOURCING YOUR OWN FUNCTIONS

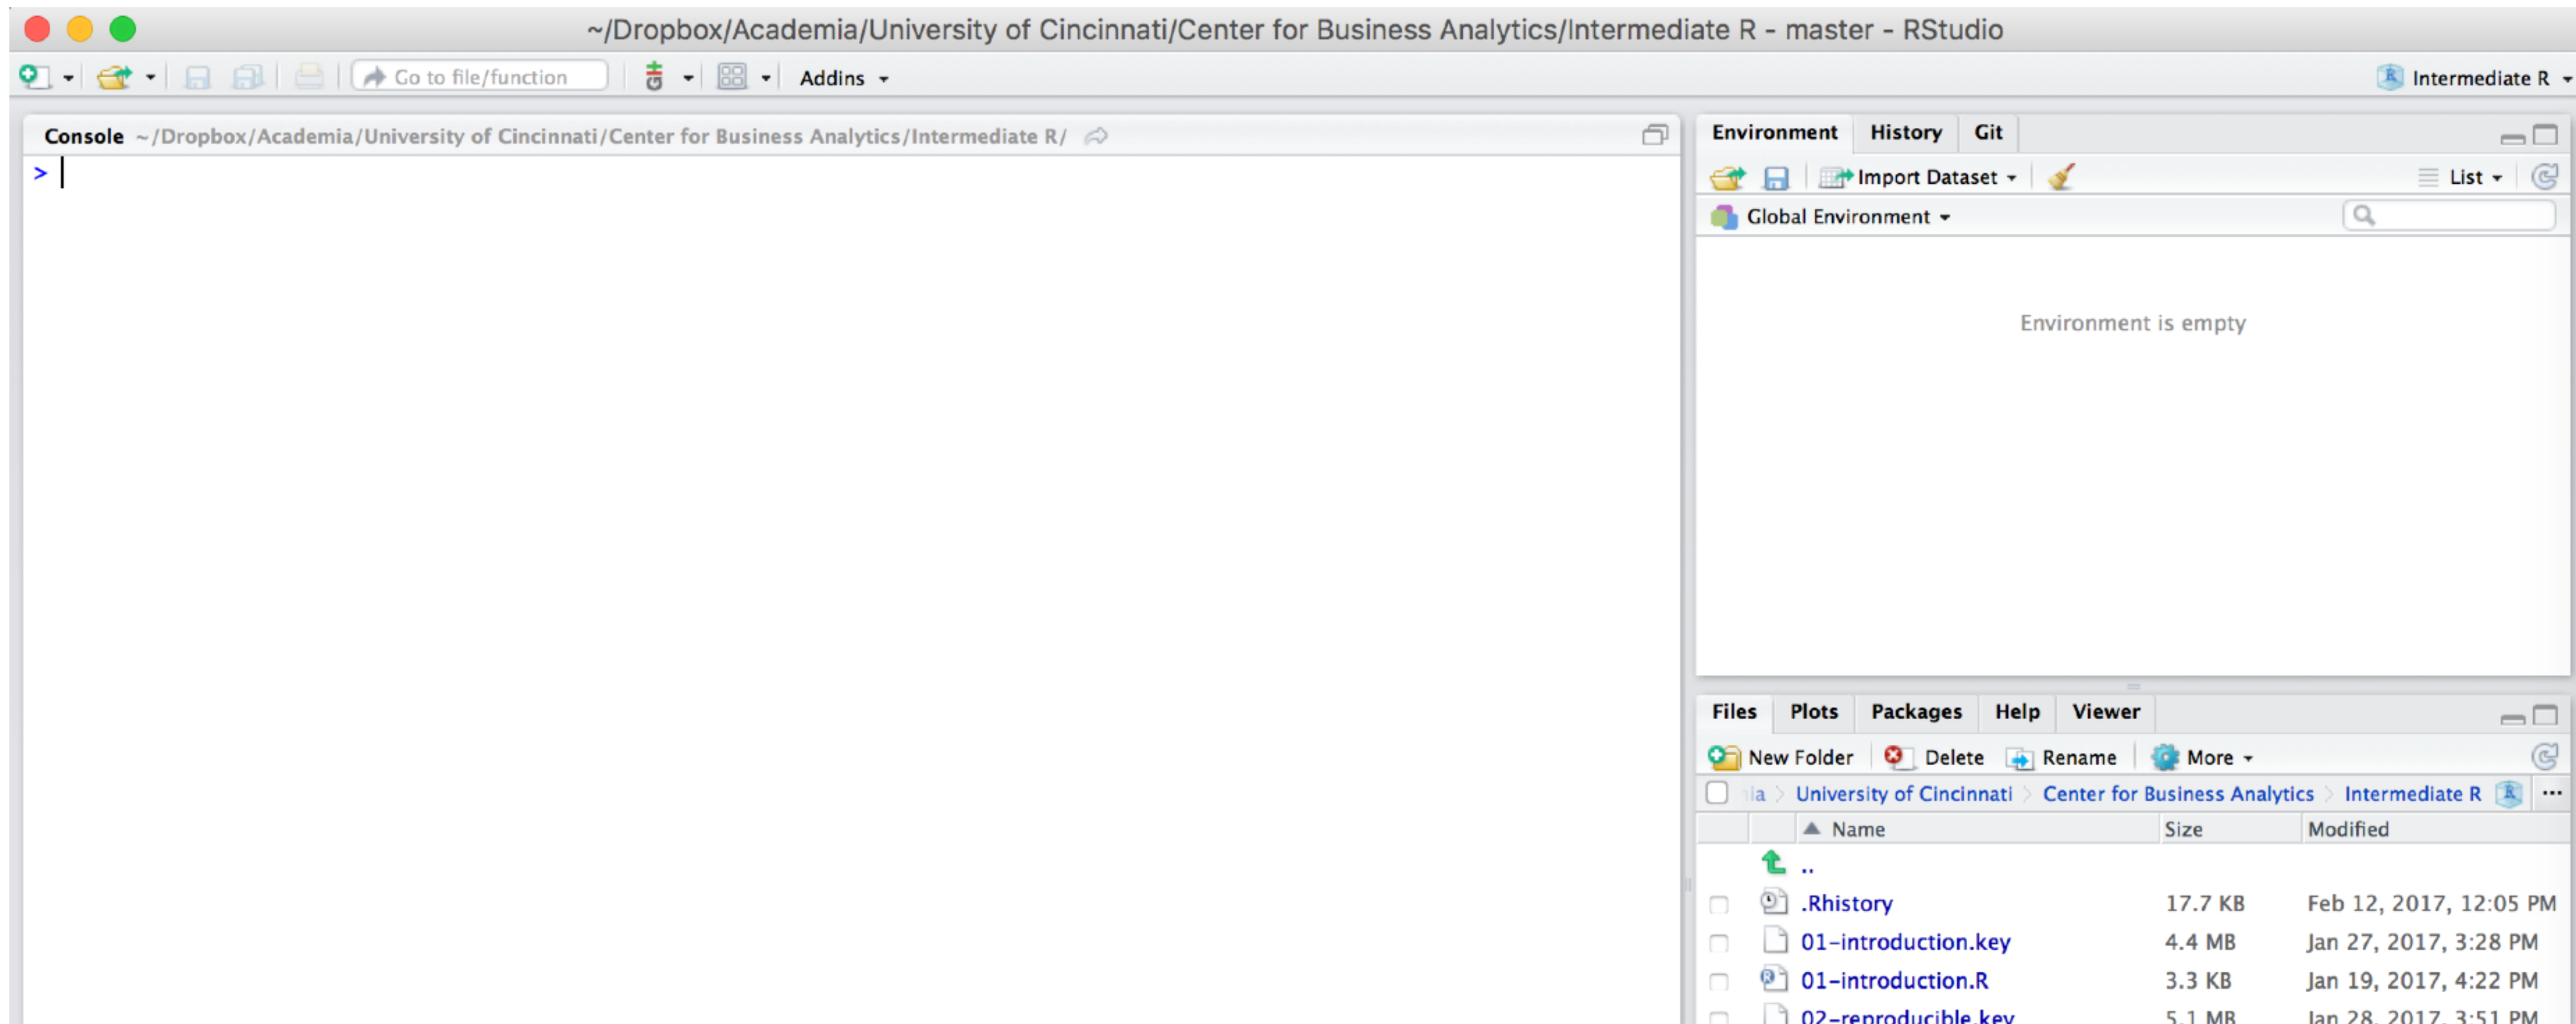

SOURCING YOUR OWN FUNCTIONS

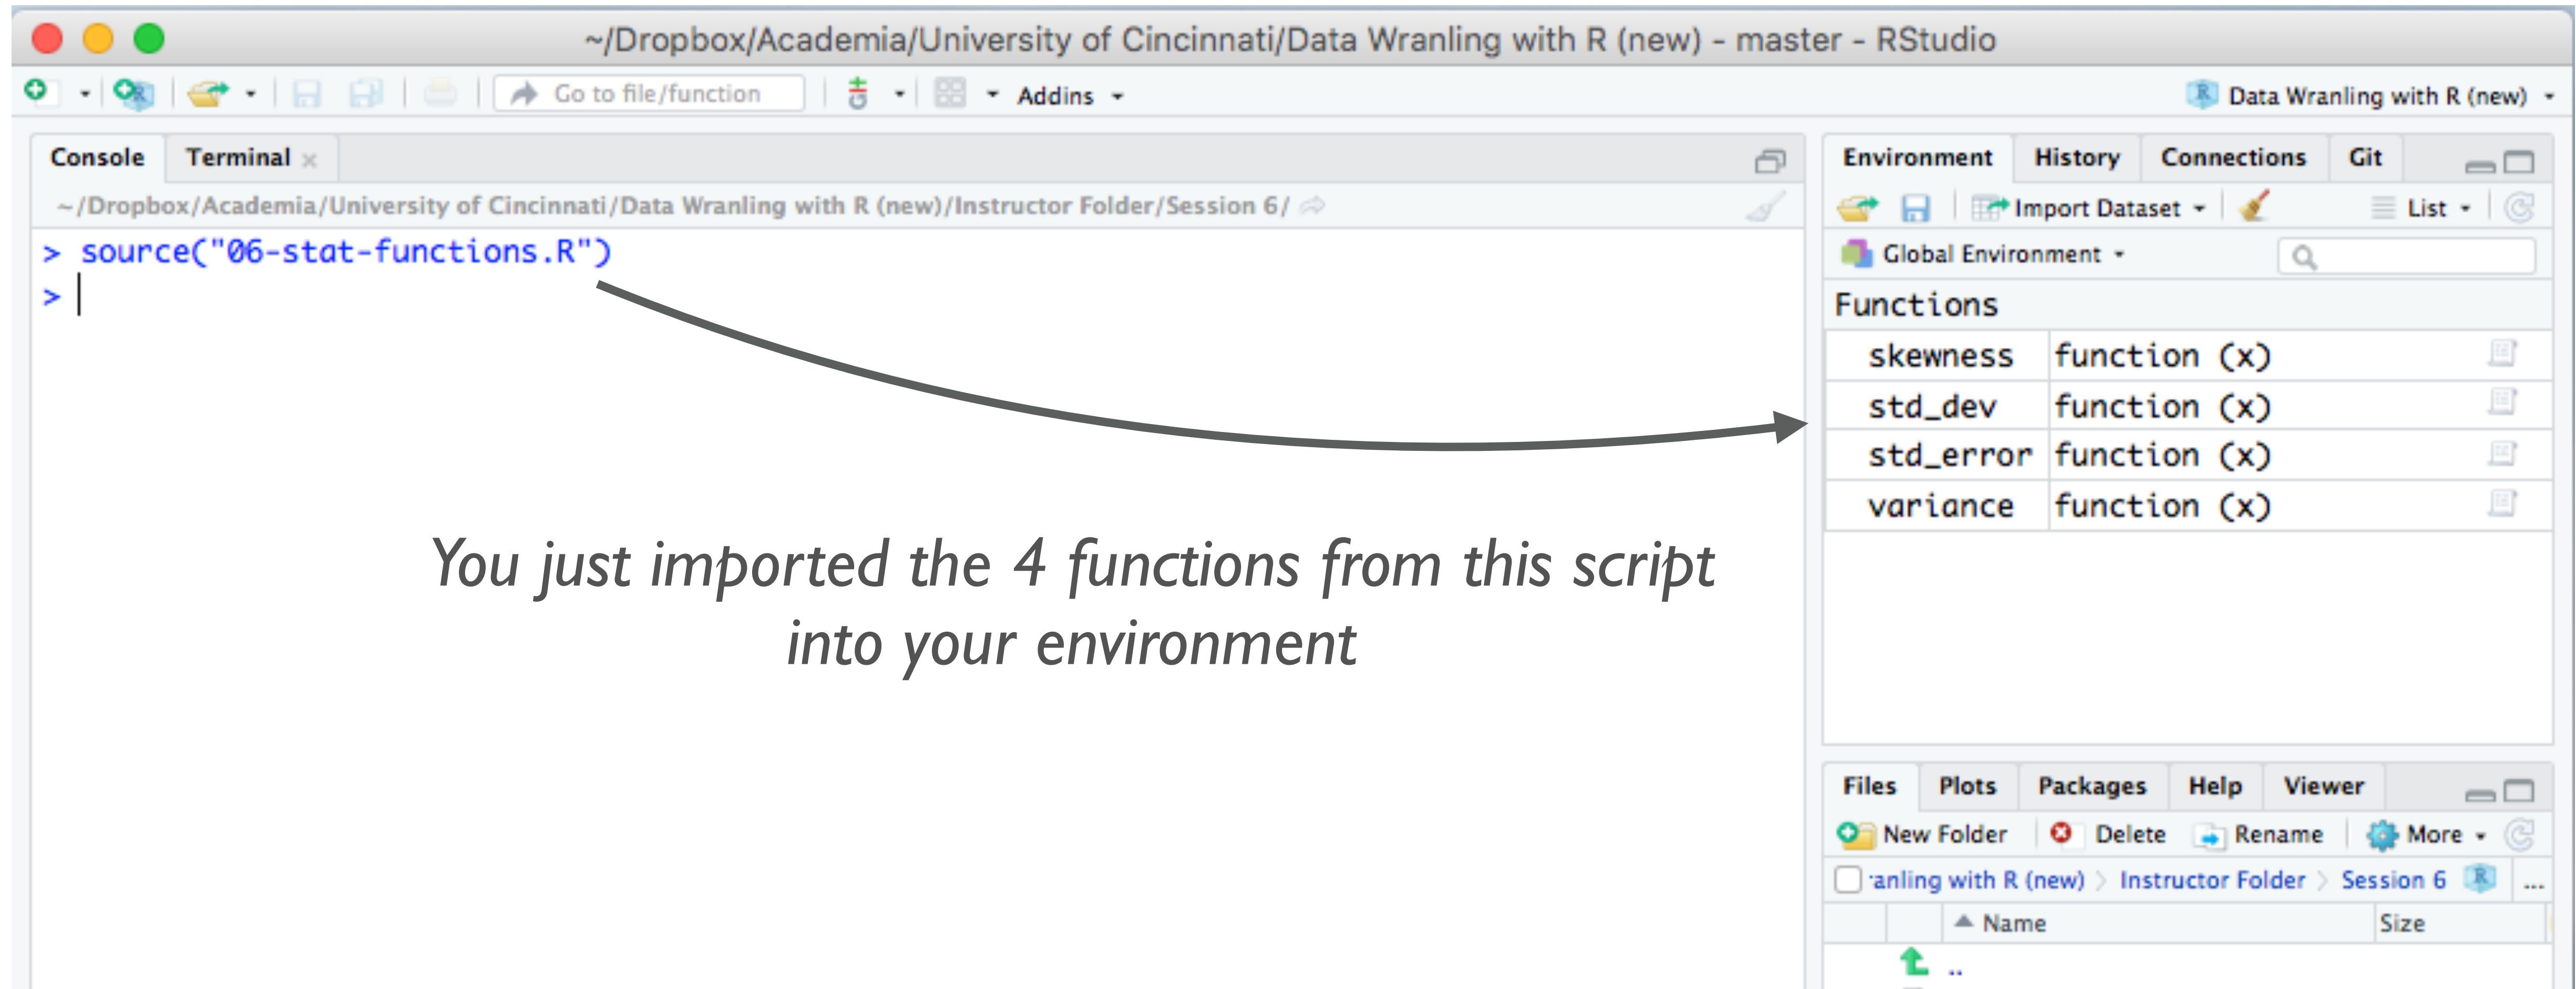

The screenshot shows the RStudio interface. The console on the left displays the command `source("06-stat-functions.R")` being executed. An arrow points from this command to the Environment pane on the right, which shows a table of functions imported from the script.

You just imported the 4 functions from this script into your environment

Functions	
skewness	function (x)
std_dev	function (x)
std_error	function (x)
variance	function (x)