PHYSICAL EXPERIENCE · PILOT PACKET

MeSticker Photo Booth & Kiosk

A walk-up machine that turns a group selfie into cut-around AI cartoon stickers in about two minutes. Pay, snap, and a printed sticker strip comes out.

Two formats: a countertop kiosk and a walk-in booth with a curtain

One shared stack: touchscreen laptop, print-and-cut sticker printer, tap-to-pay reader

The ask: scope and build pilot unit #1 together, then pilot in NYC

Prepared for Patrick by Bradley · Rev B · October 27, 2026

All renders and drawings are design intent; dimensions get confirmed against real parts before cutting.

THE IDEA

Photo booths, but you walk out with stickers of your crew

People already pay for photo booths at bars and events (the median US rental is $681 per event). MeSticker keeps that format and changes the take-home. Guests get a strip of **cut-around AI cartoon stickers** that ends up on phones, laptops and water bottles. No attendant needed. We launch in **New York City at $20 a session**.

What already exists

- The MeSticker app: AI cartoon styles, working today
- Full booth design with a 10-sheet fabrication drawing set, panel cut files (DXF) and a tube cut list
- Countertop kiosk concept design
- Parts list and pilot plan (this packet)

Guest flow · about 2 minutes

1 Walk up
Attract screen loops tonight's best stickers and the price

→

2 Tap to pay
Card, Apple Pay or Google Pay on the reader. $20 a session

→

3 Pick a style
Cartoon, chibi, anime and more, on the touchscreen

→

4 Snap
Countdown with lights on; booth takes 4 poses

→

5 Peel
Printer prints and cuts the strip; it drops into the tray

Better take-home

A sticker stays in view for months. A paper strip goes in a drawer.

Runs itself

Tap to pay, auto-print and auto-cut. The venue does nothing but plug it in.

Two markets

Placements in bars and venues, plus event rentals: weddings, corporate parties, brand activations.

TWO FORMATS, ONE STACK

Countertop kiosk or walk-in booth





A · Countertop kiosk pilot first

Sits on a bar counter. One person at a time, or small groups. Fast to build and easy to move between venues. It proves the whole stack.

B · Walk-in booth

The full photo booth with a velvet curtain, a marquee sign and a bench for 2–4 people. The bigger draw for events and busy venues. Fully drawn, ready to quote.


	A · COUNTERTOP KIOSK	B · WALK-IN BOOTH
Size (approx.)	≈ 45 W × 55 D × 60 H cm. To be redrawn around the real printer (34.5 × 43 × 24 cm) and laptop	180 × 110 × 200 cm body, 231 cm with sign (drawn, F-02)
Construction	Small welded or folded frame + ACM or acrylic panels, or a mostly 3D-printed shell	1.5″ steel tube frame (≈ 47 m) + 3 mm ACM skins (8 sheets), 2 modules
Guests	1–2 at a time	2–4 per session, private behind the curtain
Best for	Bar counters, pop-ups, testing venues	Events, rentals, flagship venues
Build effort	Days to a couple of weeks	Several weeks
Parts cost	≈ $3.5–4K (stack) + enclosure materials	≈ $7.7–11.6K all-in prototype estimate

Proposal: build A first to prove the printer, payment and software in a real bar. Then build B with the same stack inside it.

THE STACK · SHARED BY BOTH FORMATS

What runs inside the box

How the parts connect

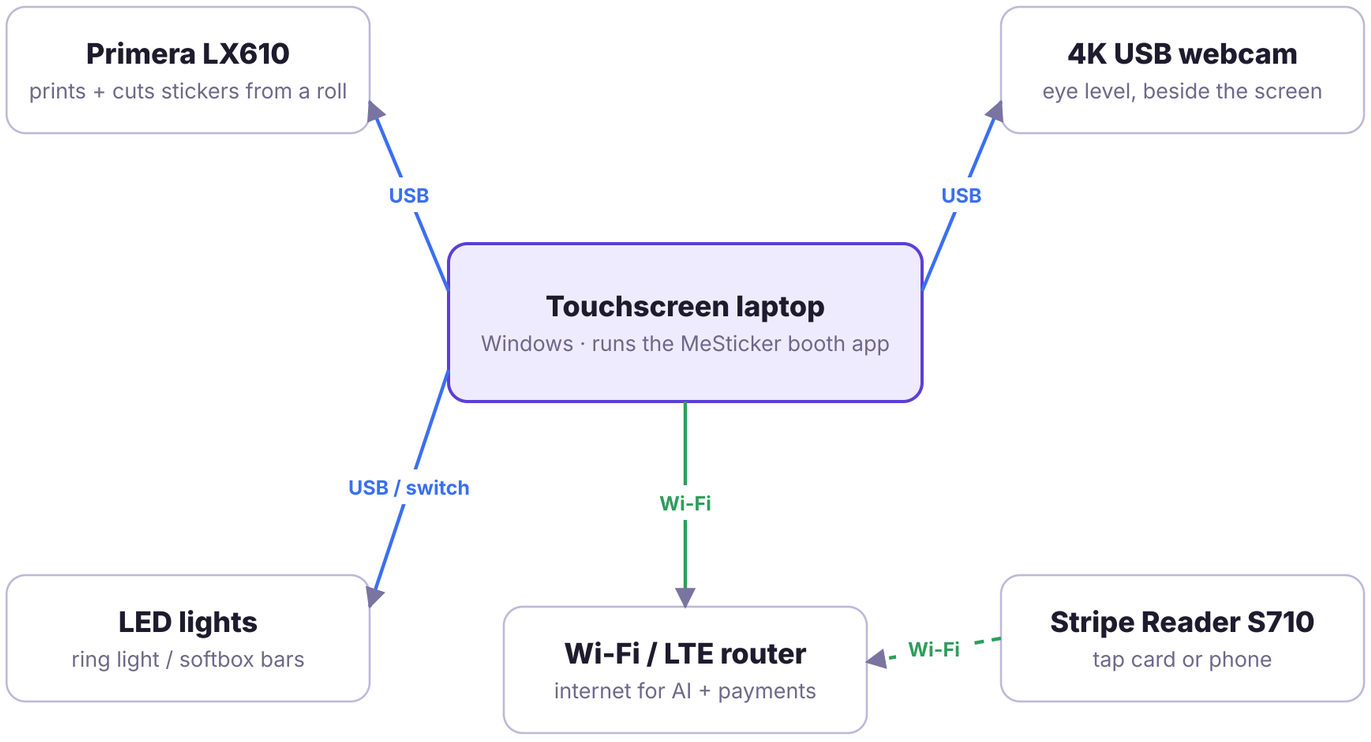

The internet link reaches the AI models and Stripe. The reader talks to Stripe directly. One wall plug feeds everything through a power strip.

PART	PICK	EST. USD
Computer + screen	Bradley's touchscreen convertible laptop (Windows)	have it
Sticker printer	Primera LX610 color label printer with built-in cutter + PTCreate Pro software	≈ 2,850
Sticker media	White gloss label roll, 4″ wide	confirm
Camera	4K USB webcam	100–200
Payment	Stripe Reader S710	≈ 300
Lighting	LED ring + light bars	50–100
Power + network	Surge strip, LTE router backup	100–200
Stack total		**≈ 3.4–3.65K**

Fit-critical sizes to design around

- Primera LX610 ≈ 345 × 432 × 242 mm, 5.7 kg (vendor listing). Paper exits the front
- Laptop: measure open in tablet/stand mode; screen at eye level
- Reader on a reachable shelf; webcam just above the screen
- Airflow: intake low, exhaust high; service door for roll swaps

PILOT PLAN

From idea to a working unit in a bar in about 8 weeks

THIS WEEK

Decide + order

- Bradley orders printer, reader, webcam
- Patrick: what his shop can make + materials on hand
- Pick kiosk or booth for unit #1

WEEKS 1–2

Bench test

- All parts on a table, wired up
- Booth software: tap → snap → print
- Gate: hands-free strip in < 2 min

WEEKS 2–4

Build unit #1

- Patrick measures the real parts
- Final drawings + cut files for his tools
- Fabricate, fit electronics, test

WEEKS 4–8

NYC pilot

- 1–2 venues at $20 a session
- Track sessions, jams, refills
- Decide: more kiosks or the booth

Questions for Patrick


- What can the shop do in-house: welding, sheet metal bending, CNC router, laser, 3D printing, paint or powder coat?
- Preferred materials: steel tube + ACM (as drawn), aluminum extrusion, plywood/MDF + laminate, or acrylic?
- Which unit first, kiosk or booth, and a realistic timeline for it?
- Rough cost to build unit #1, and how you'd like to structure the pilot together
- Anything in the drawings that is hard or expensive to make? Please mark it up.


Who does what


BRADLEY	PATRICK
Buys the electronics stack	Reviews the drawings and marks them up
Builds the booth software + payments	Picks materials and methods
Bench-tests the printer and stack	Builds the enclosure for unit #1
Lines up NYC pilot venues	Helps install and service during the pilot

FORMAT A · COUNTERTOP KIOSK (CONCEPT)

Countertop kiosk: what's inside, and its size

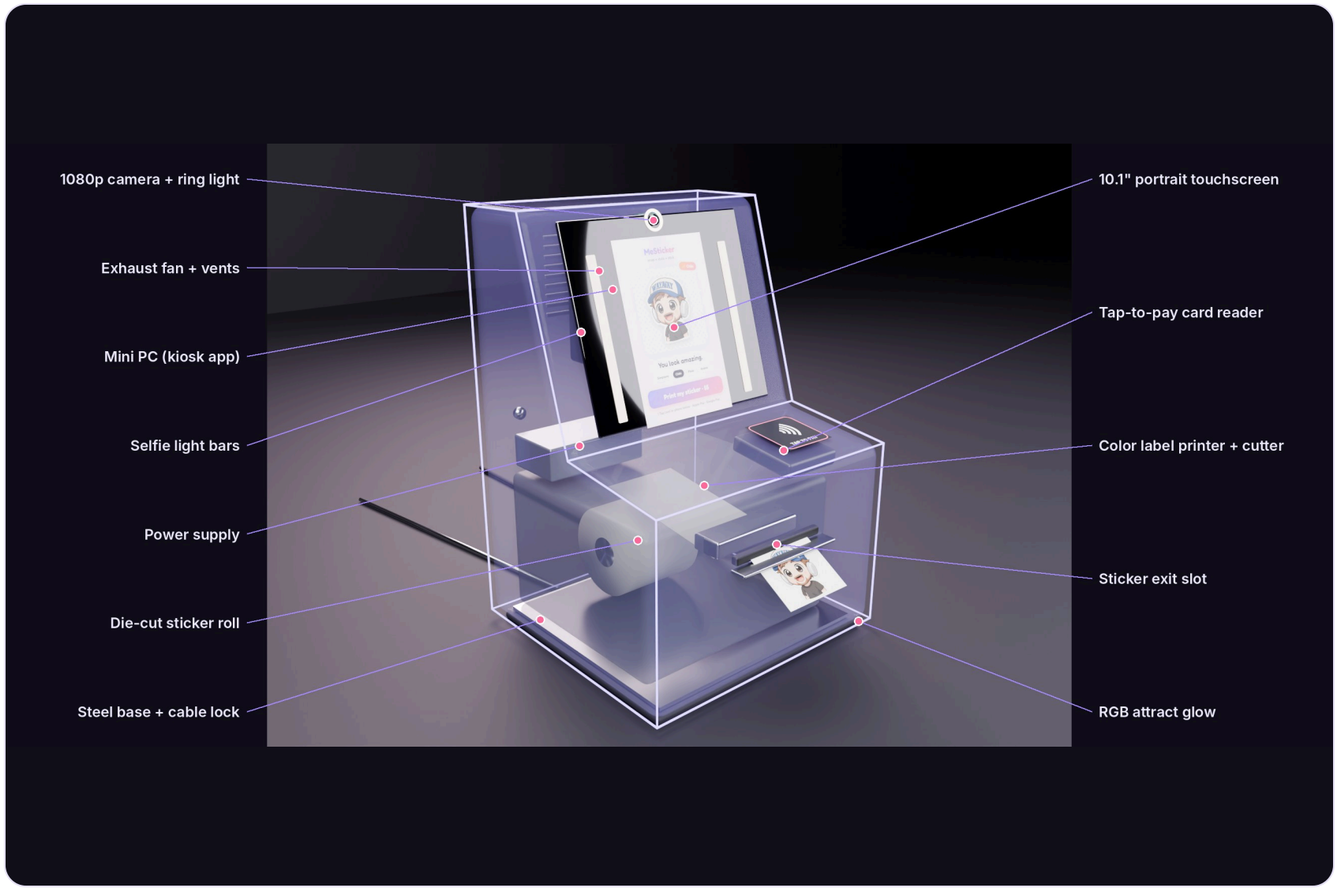

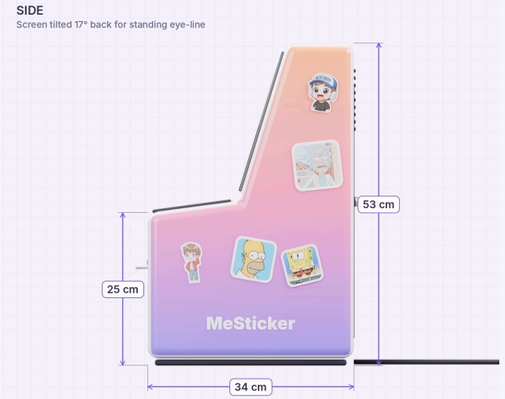

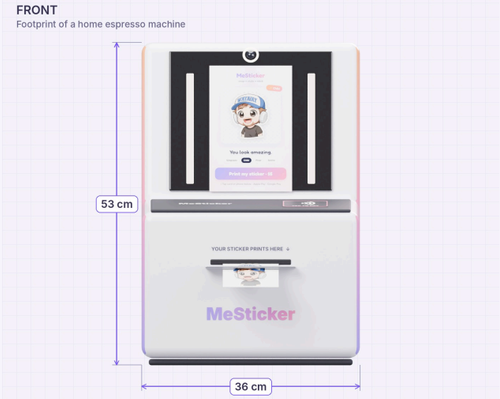


This concept was drawn around an earlier, smaller printer and a dedicated 10″ screen (36 × 34 × 53 cm). With the chosen stack (Primera LX610 + the laptop) the box grows to about 45 × 55 × 60 cm. The layout stays the same: screen and camera up top, printer below, the sticker slot on the front, tap-to-pay on the ledge, service door at the back. We'll redraw it once we've measured the real parts together.

FORMAT B · WALK-IN BOOTH


The walk-in booth, inside and out



Outside: 43″ attract screen, sticker pickup tray, velvet curtain, marquee sign, printed vinyl wrap.

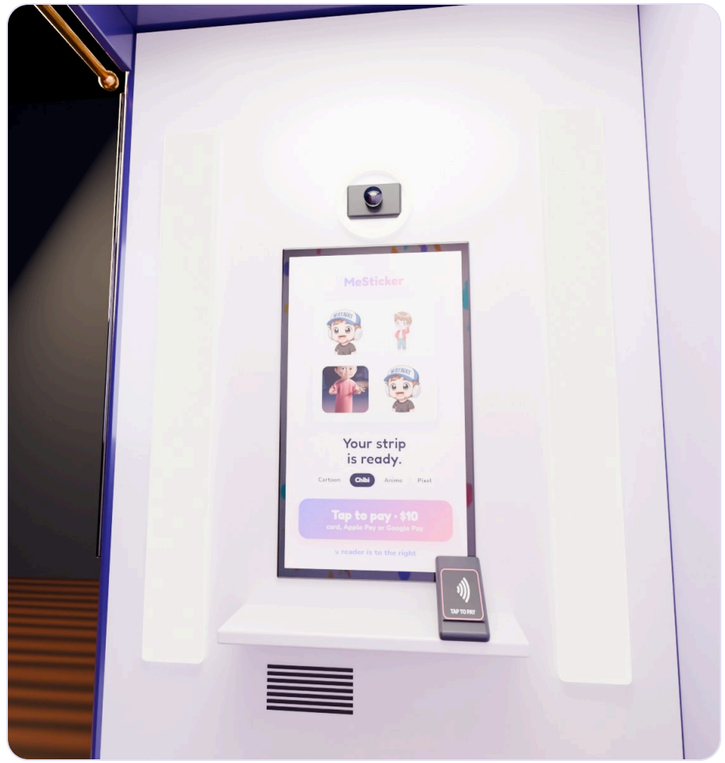

Inside the camera wall: 27″ touchscreen, camera with ring light, softbox bars, tap-to-pay shelf.

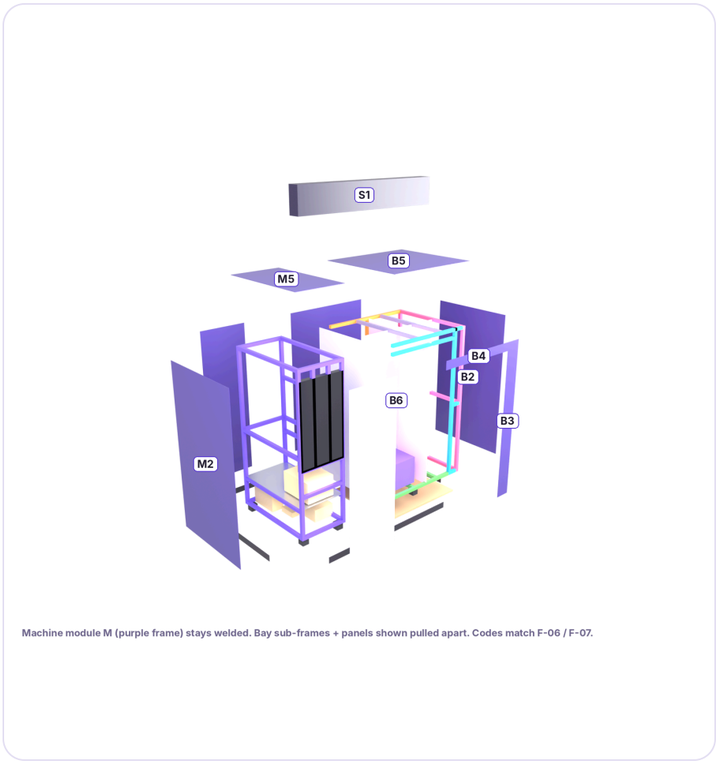


The machine module stays welded and rolls through a door. The bay is five bolt-together frames plus panels.

Next 10 pages: drawing set Rev A (F-01 to F-10). Elevations, plan, inside walls, steel frame and tube cut list (≈ 47 m of 1.5″ tube), panel drawings and nesting (8 sheets of 4×8 ACM), wiring, details and assembly order. Units are mm. The separate file package has the DXF cut files for all 17 panels, CSV cut lists and 3D models (OBJ, STL, GLB, Blender). The drawings show a dedicated PC and screens; the laptop can stand in for the pilot.


F-01 · General arrangement

Walk-in AI sticker booth: machine module (screens, camera, printer) + curtained guest bay



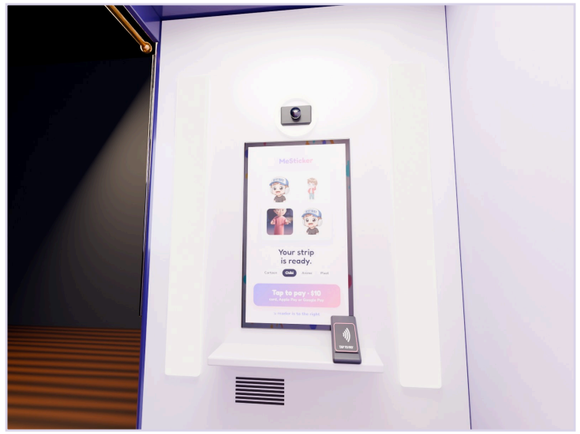

Inside: camera wall

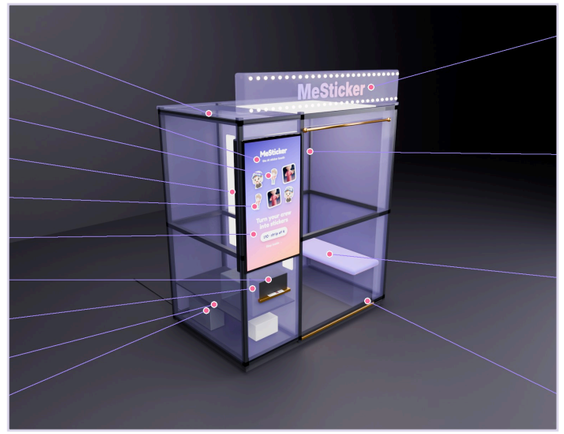

Frame + equipment (x-ray)

OVERALL	MM
Length (machine 600 + bay 1200)	1800
Depth	1100
Body height (incl. 80 plinth)	2000
Height with sign	2310
Curtain opening (w × h)	1000 × 1820
Machine module (rolls in whole)	600 × 1100 × 2000
Guest bay (flat-pack)	1200 × 1100 × 2000
Est. weight, all-in	≈ 180–230 kg


CONSTRUCTION

- Frame: 1.5" (38.1 mm) square steel tube, 16 ga, MIG welded, powder-coated black. See F-05.
- Skins: 3 mm aluminum composite panel (ACM), riveted or VHB-bonded to the frame, gloss plum outside, gloss white on the camera wall. See F-06.
- The machine module is one welded frame on 4 locking casters. The bay is 5 bolt-together sub-frames (end, back, front, floor, roof), joined to the machine posts with M8 bolts. See F-09.
- All electronics live in the machine module, behind a locked service door on its end wall. One power cord goes to the wall. See F-04 and F-08.
- The marquee sign is a separate box that bolts to the roof frame and plugs in.


SHEET INDEX

- F-01 General arrangement · F-02 Front + end elevations · F-03 Plan + back elevation · F-04 Inside elevations (camera wall, machine section)
- F-05 Steel frame + tube cut list · F-06 Panel drawings · F-07 Panel schedule + sheet nesting · F-08 Electrical + data · F-09 Details · F-10 Assembly

F-02 · Front + end elevations

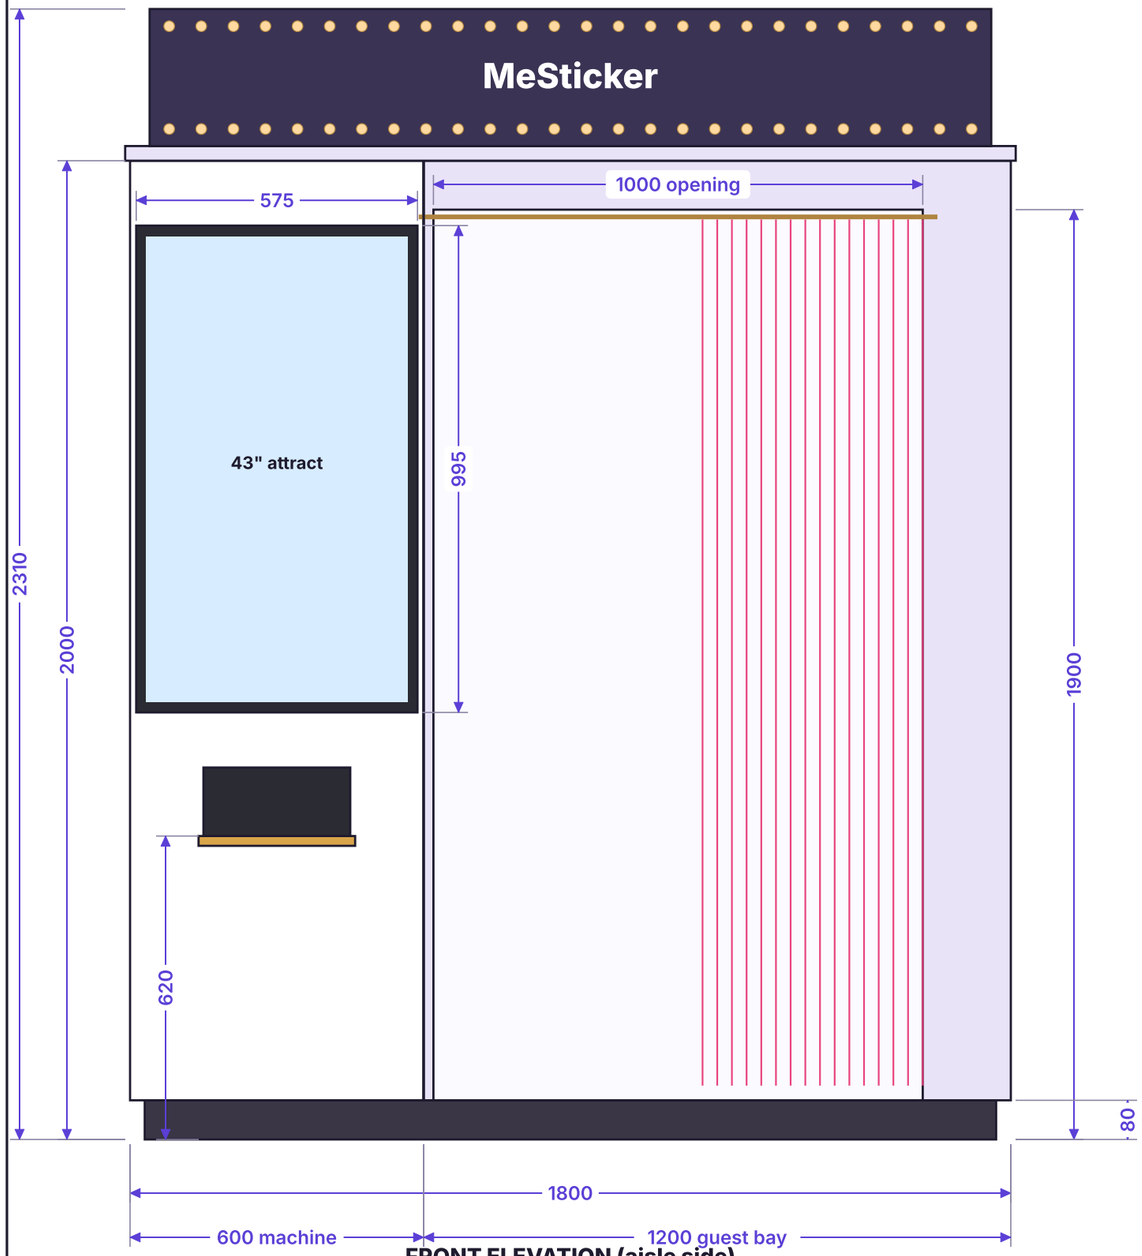

FRONT ELEVATION (aisle side)

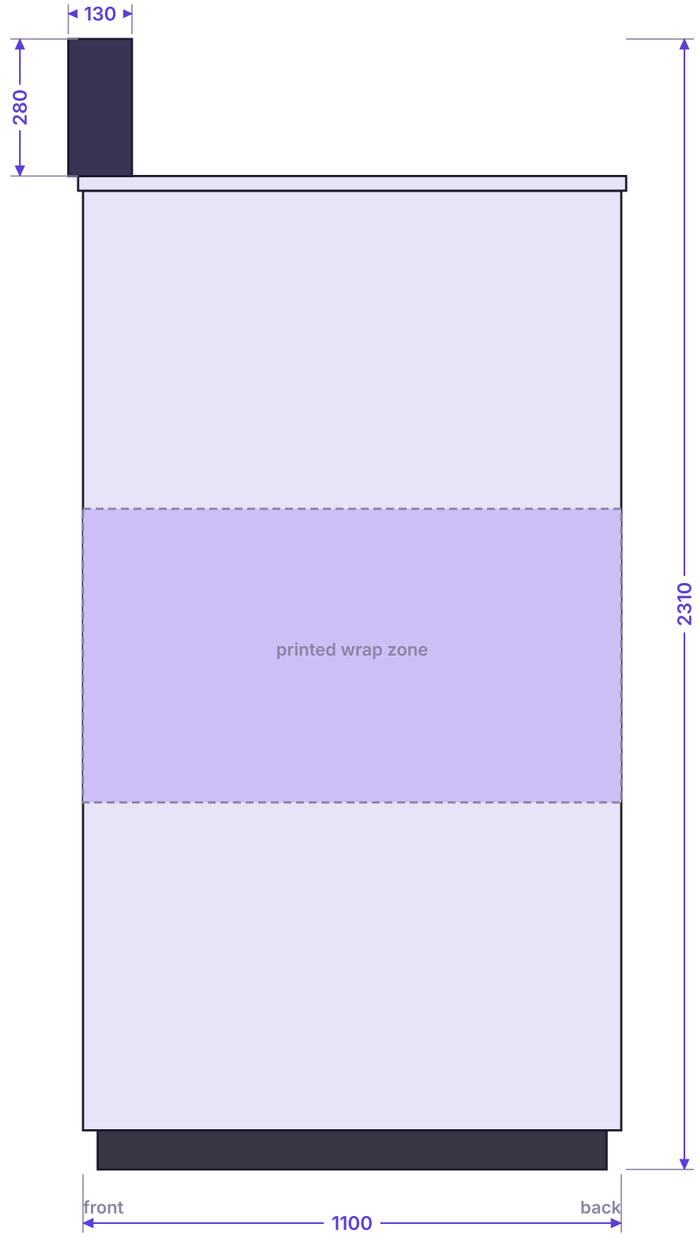

END ELEVATION (bay end)

NOTES


- The sign overhangs the front face by 30 mm.
- The curtain rod is at 1885 mm. The curtain clears the floor by 20 mm.
- The attract display mounts on VESA to the two display stiles (F-05). Its bezel overlaps the panel cutout by 15 mm on each side.
- The pickup tray is a 120 mm deep recess with a brushed brass lip at 600 mm.
- The plinth skirt is inset 30 mm all round and hides the casters and levelers.

MeSticker Photo Booth


Fabrication drawing set · units mm · do not scale drawings, use dimensions · tolerance ±2 mm unless noted

SHEET	TITLE	REV	DATE
F-02	Front + end elevations	A	2026-10-24

F-03 · Plan + back elevation

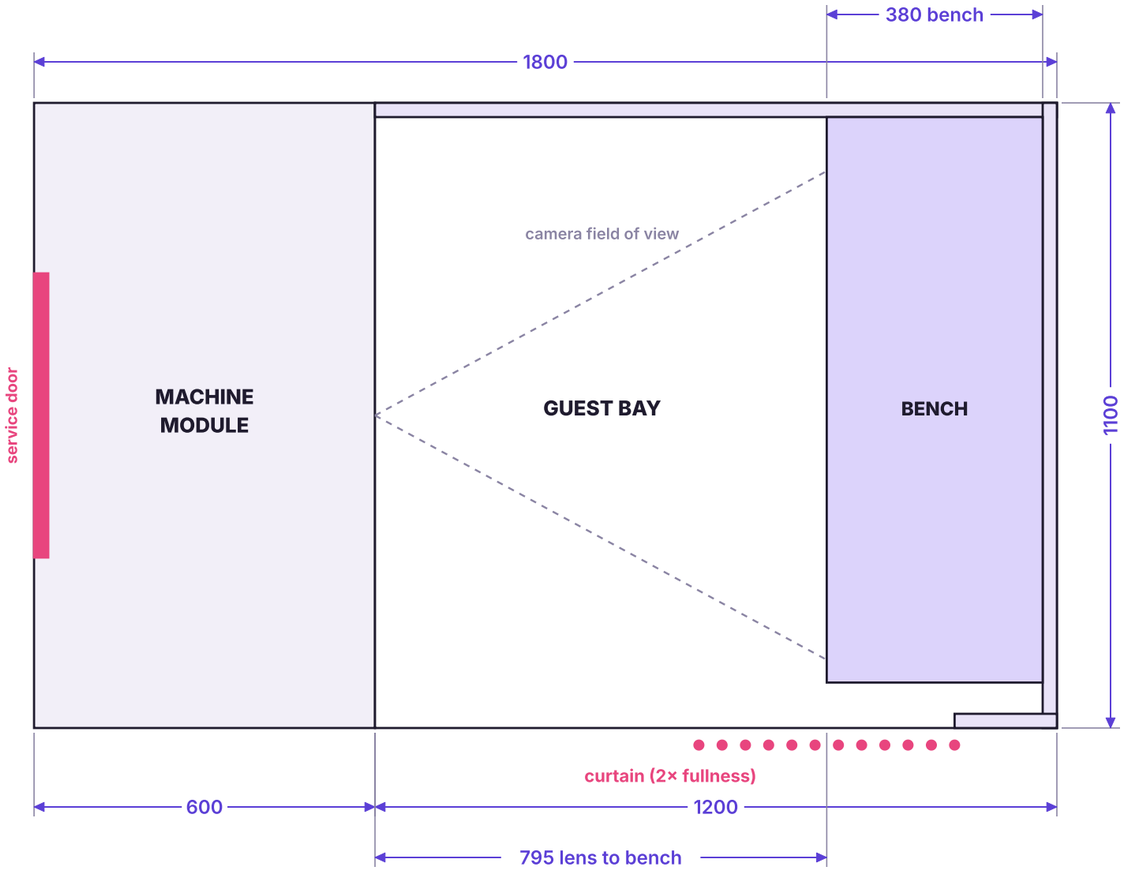

PLAN (roof off, front at bottom)

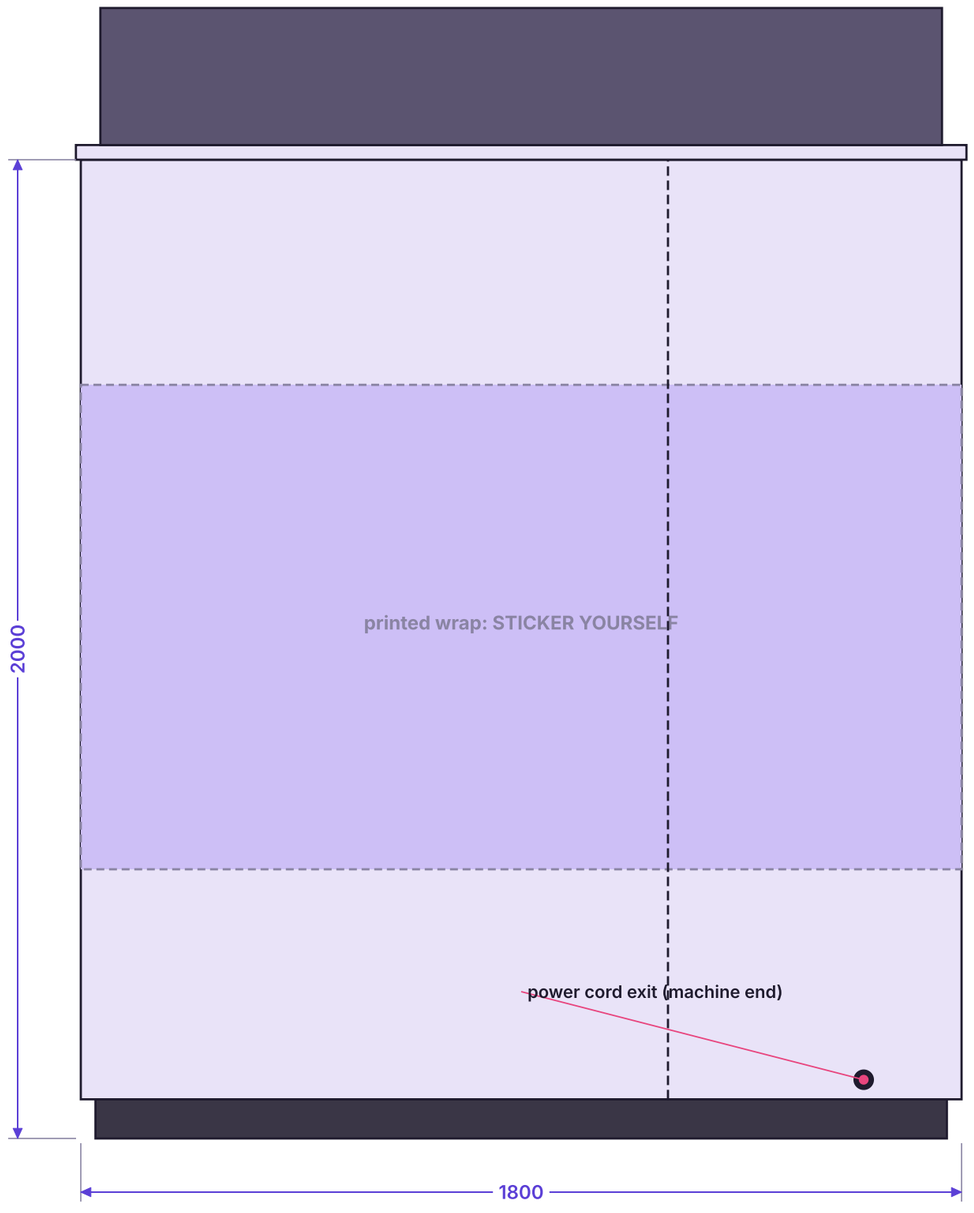

BACK ELEVATION


NOTES

- Leave 300 mm clear behind the booth for the power cord and airflow, and 600 mm at the machine end so the service door can open.
- The camera lens sits 795 mm from the bench front edge. With a 90°+ wide lens, that fits four people on the bench.
- The bay panels join the machine module along the seam at x = 600 (dashed).


MeSticker Photo Booth Fabrication drawing set · units mm · do not scale drawings, use dimensions · tolerance ±2 mm unless noted	SHEET **F-03**	TITLE **Plan + back elevation**	REV **A**	DATE **2026-10-24**

F-04 · Inside elevations

A: camera wall seen from the bench. B: section through the machine module, looking at the end wall

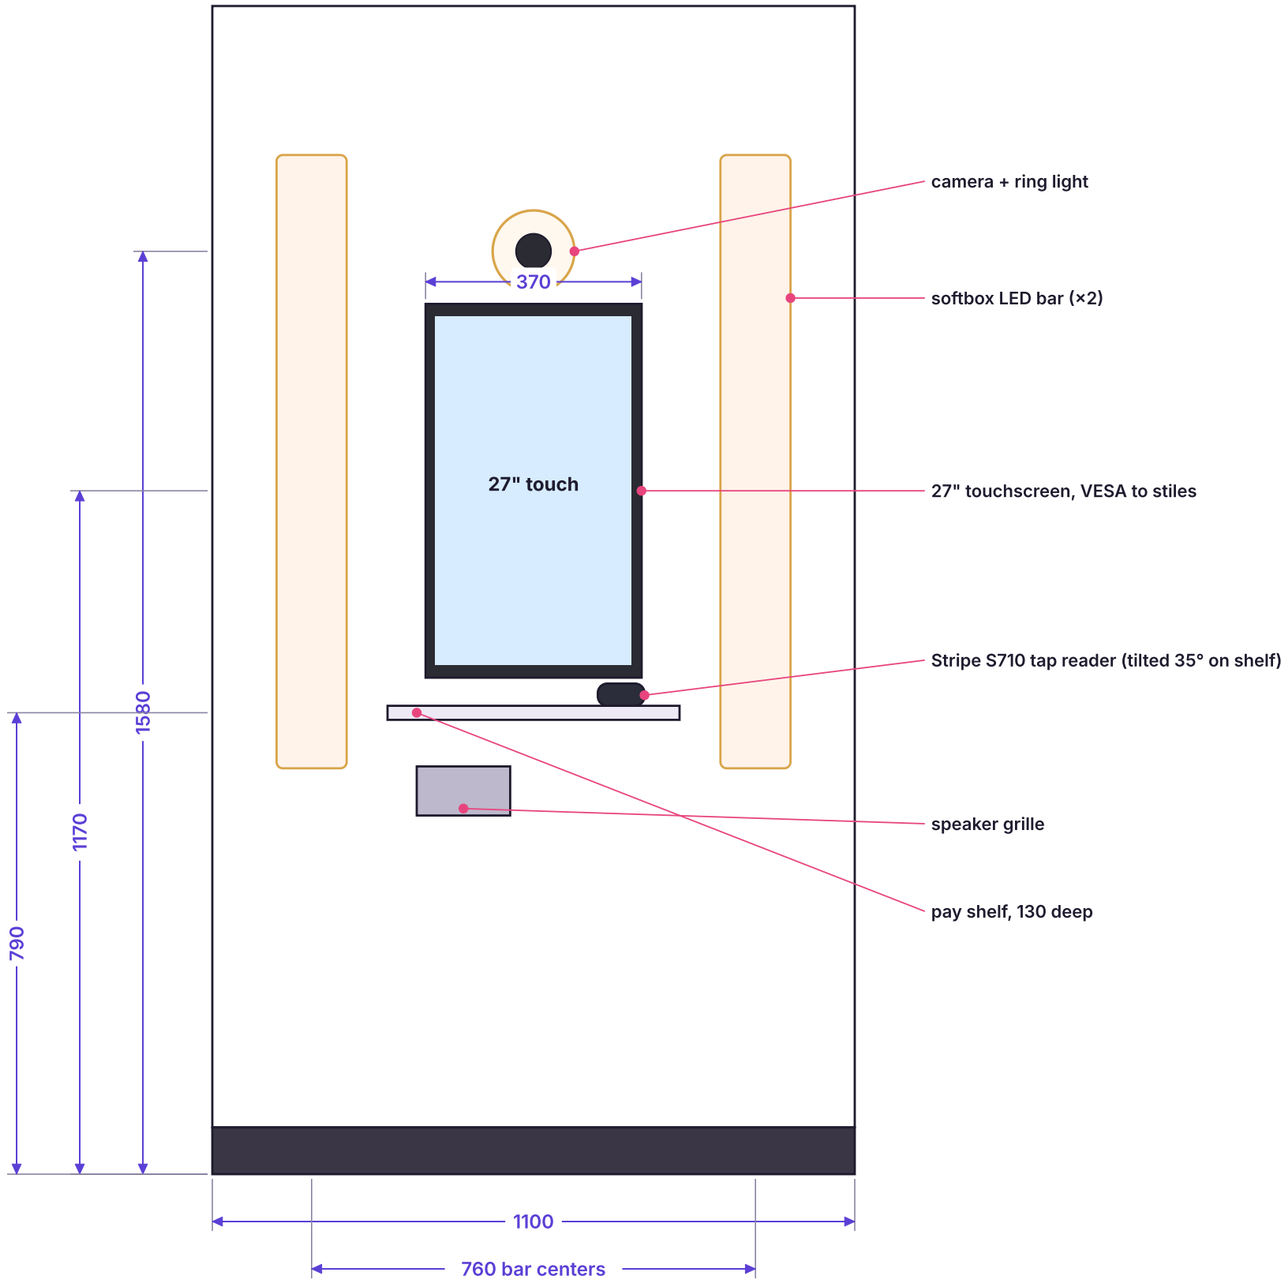

A · CAMERA WALL (from the bench)

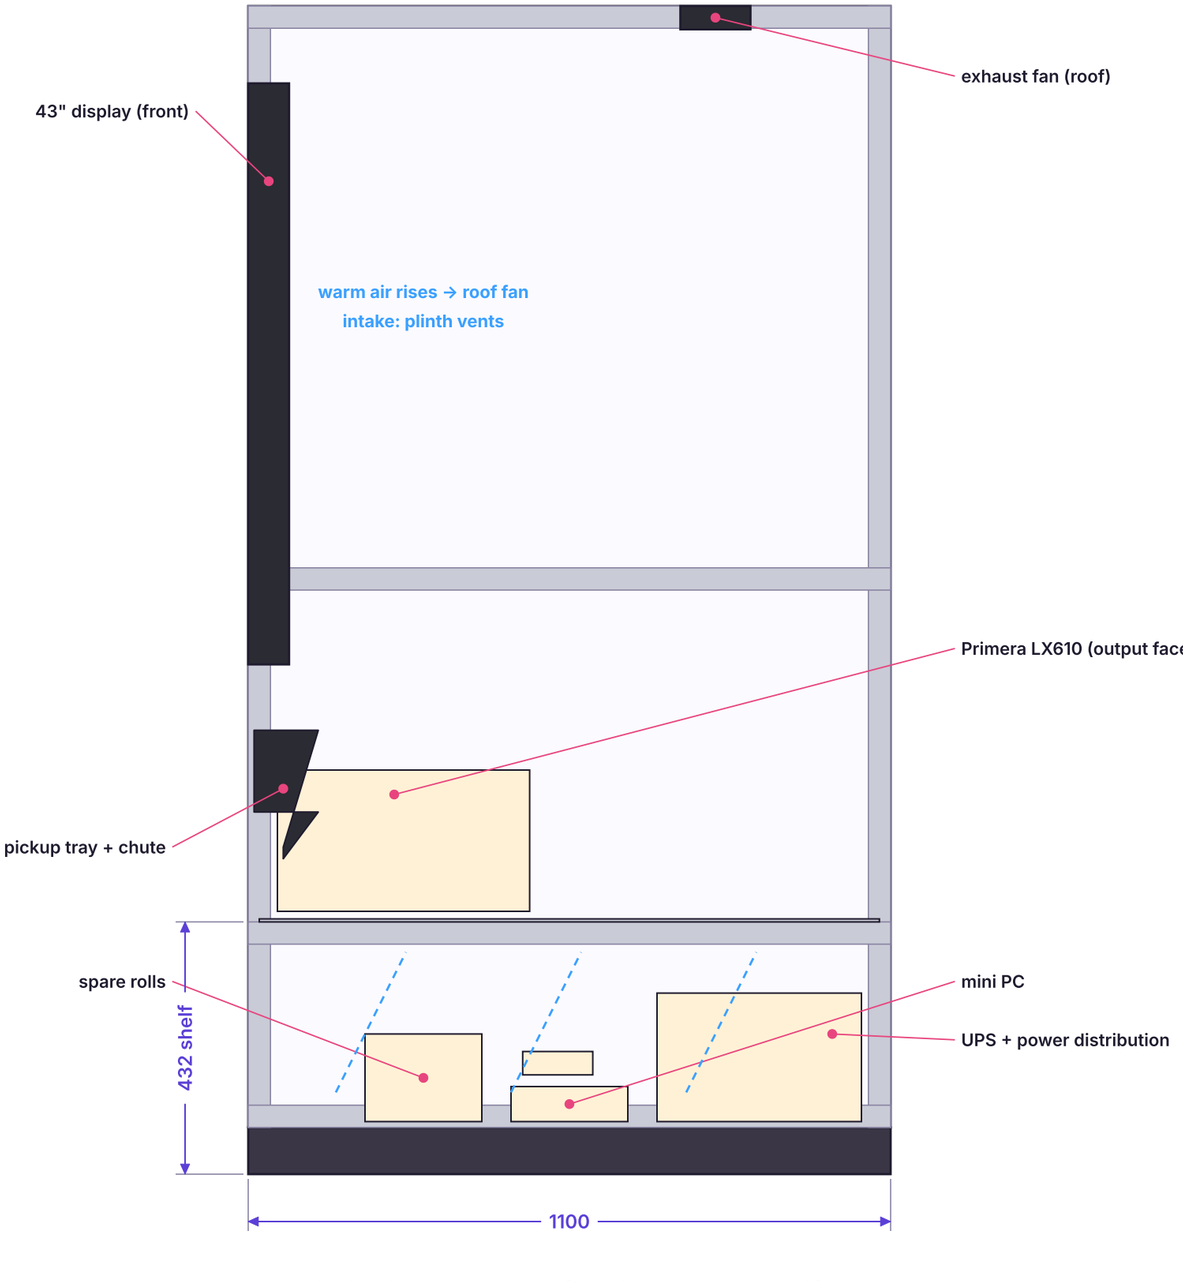

B · MACHINE SECTION (looking at the end wall)

MeSticker Photo Booth


Fabrication drawing set · units mm · do not scale drawings, use dimensions · tolerance ±2 mm unless noted

SHEET	TITLE	REV	DATE
F-04	Inside elevations	A	2026-10-24

F-05 · Steel frame + tube cut list

1.5" (38.1 mm) square tube, 16 ga. M = welded machine module. B-* = bolt-together bay sub-frames

- M · machine module (welded, rolls in whole)
- B-end · bay end wall frame
- B-back · bay back wall frame
- B-front · pillar + header frame
- B-floor · threshold + floor joists
- B-roof · roof joists

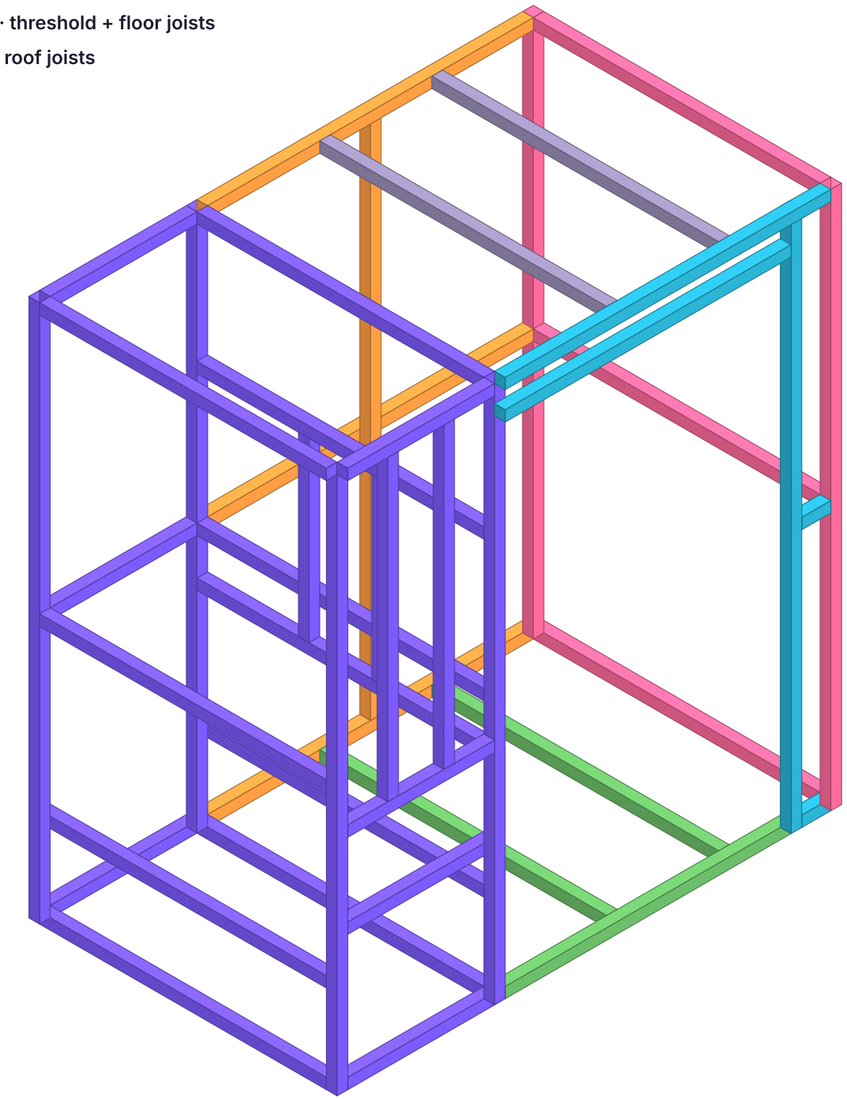

front-left corner (origin)

SUB-FRAME	PART	CUT LENGTH	QTY
B-back	Center stile	1843.8	1
B-back	X rail bottom	1161.9	1
B-back	X rail mid	1161.9	1
B-back	X rail top	1161.9	1
B-end	Post	1920	2
B-end	Y rail bottom	1023.8	1
B-end	Y rail mid	1023.8	1
B-end	Y rail top	1023.8	1
B-floor	Floor joist	1023.8	2
B-floor	Threshold rail	1020	1
B-front	Pillar post	1920	1
B-front	Header top rail	1161.9	1
B-front	Header lower rail	1020	1
B-front	Pillar rail	103.8	2
B-roof	Roof joist	1023.8	2
M	Post	1920	4
M	Display mount stile	1063.8	2
M	Y rail bottom	1023.8	2
M	Y rail mid	1023.8	2
M	Y rail top	1023.8	2
M	Printer shelf rail	1023.8	2
M	Camera wall rail	1023.8	2
M	Touchscreen mount stile	631.9	2
M	X rail bottom	523.8	2
M	X rail mid	523.8	1
M	X rail top	523.8	2
M	Front face rail	523.8	2

Total 46.6 m of tube. Buy ≈ 9 × 20 ft (6.1 m) sticks incl. 12% waste.

FRAME NOTES


- Cut lengths are clear lengths between posts (butt joints). Add-ons not shown: caster plates, VESA mount plates, door sub-frame, sign mounting tabs.
- Bay sub-frames bolt to the machine posts with 6 mm steel tabs and M8 bolts into rivnuts (F-09). Every bay frame comes apart for doorways.
- Powder-coat after welding. Mask the rivnut faces.

F-06 · Panel drawings

Flat panels as cut, viewed from outside. Cutouts dimensioned from the bottom-left corner of each panel


M1 · Machine front

3 mm ACM, gloss white

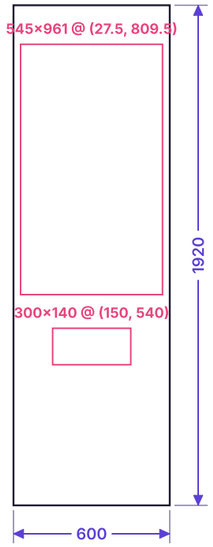


M2 · Machine end wall

3 mm ACM, gloss plum

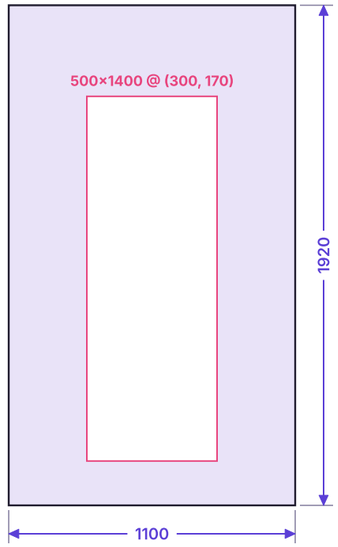


M4 · Camera wall

3 mm ACM, gloss white

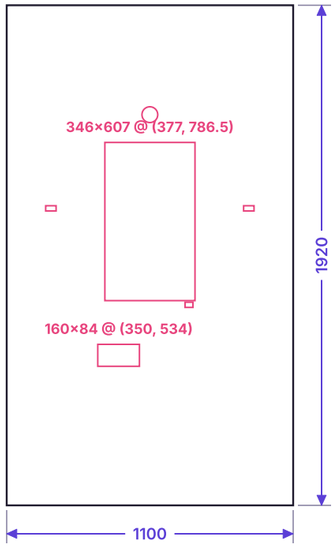


M5 · Machine roof

3 mm ACM, gloss plum




B1 · Bay back wall

3 mm ACM, gloss plum (wrapped)

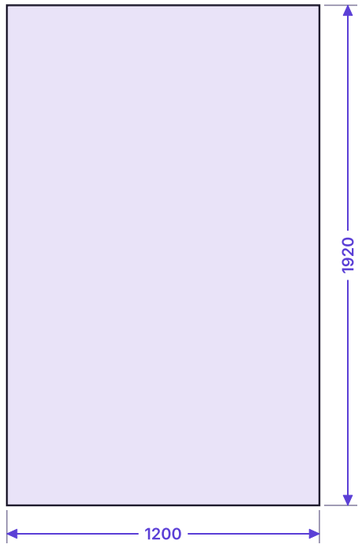

B2 · Bay end wall

3 mm ACM, gloss plum (wrapped)

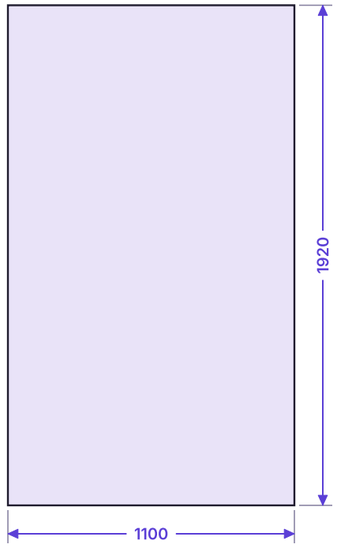


B3 · Front pillar

3 mm ACM, gloss plum



B5 · Bay roof

3 mm ACM, gloss plum

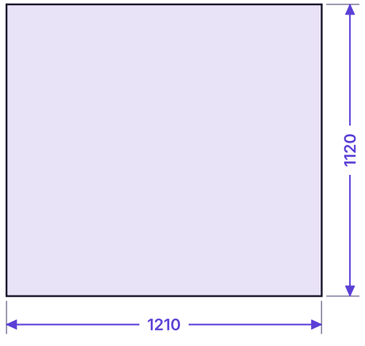

PANEL NOTES

- Cut on a CNC router with a V-groove bit if folded returns are wanted. DXF files of every panel are in the package.
- Cutout sizes include 5 mm clearance. Displays overlap the panel face from behind.
- Small slots on M4 are cable pass-throughs for the softboxes and the reader.
- Orient the protective film so the gloss face is outside.

MeSticker Photo Booth Fabrication drawing set · units mm · do not scale drawings, use dimensions · tolerance ±2 mm unless noted	SHEET **F-06**	TITLE **Panel drawings**	REV **A**	DATE **2026-10-24**


F-07 · Panel schedule + sheet nesting


4×8 ft (1220 × 2440 mm) sheets. Simple guillotine layout with a 10 mm kerf allowance

CODE	PANEL	W	H	QTY	MATERIAL
M1	Machine front (aisle face)	600	1920	1	3 mm ACM, gloss white
M2	Machine end wall	1100	1920	1	3 mm ACM, gloss plum
M2D	Service door	530	1430	1	3 mm ACM on 1" tube sub-frame
M3	Machine back	600	1920	1	3 mm ACM, gloss plum (wrapped)
M4	Camera wall (inside)	1100	1920	1	3 mm ACM, gloss white
M5	Machine roof	610	1120	1	3 mm ACM, gloss plum
B1	Bay back wall (outside)	1200	1920	1	3 mm ACM, gloss plum (wrapped)
B2	Bay end wall (outside)	1100	1920	1	3 mm ACM, gloss plum (wrapped)
B3	Front pillar	180	1920	1	3 mm ACM, gloss plum
B4	Front header	1020	100	1	3 mm ACM, gloss plum
B5	Bay roof	1210	1120	1	3 mm ACM, gloss plum
B6	Backdrop liner (end wall, inside)	1094	1890	1	3 mm ACM, printed backdrop vinyl
B7	Back wall liner (inside)	1194	1890	1	9 mm acoustic felt panel
B8	Bay floor deck	1161.9	1023.8	1	18 mm plywood + 3 mm rubber
P1	Plinth skirt, long	1740	70	2	3 mm ACM, black
P2	Plinth skirt, short	1040	70	2	3 mm ACM, black
S1	Sign face	1720	280	1	3 mm ACM, gloss black + printed logo

≈ 8 sheets of 3 mm ACM

Buy one spare for mistakes. The felt liner (B7) and plywood deck (B8) are separate.

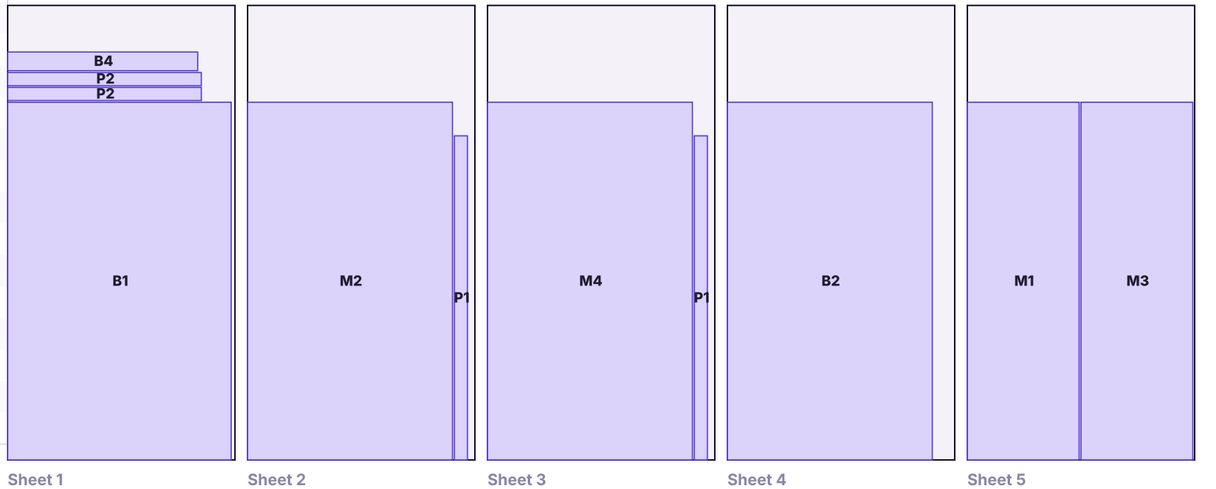

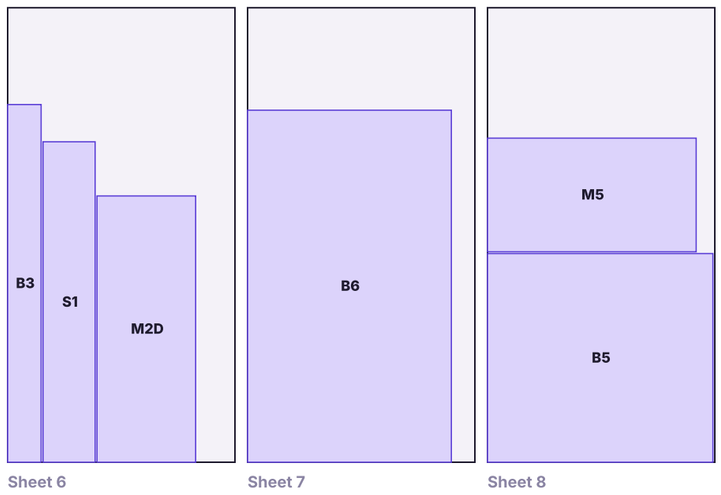


MeSticker Photo Booth

Fabrication drawing set · units mm · do not scale drawings, use dimensions · tolerance ±2 mm unless noted

SHEET	TITLE	REV	DATE
F-07	Panel schedule + sheet nesting	A	2026-10-24

F-08 · Electrical + data

One 120 V / 15 A outlet. Everything is fed from the UPS in the machine module

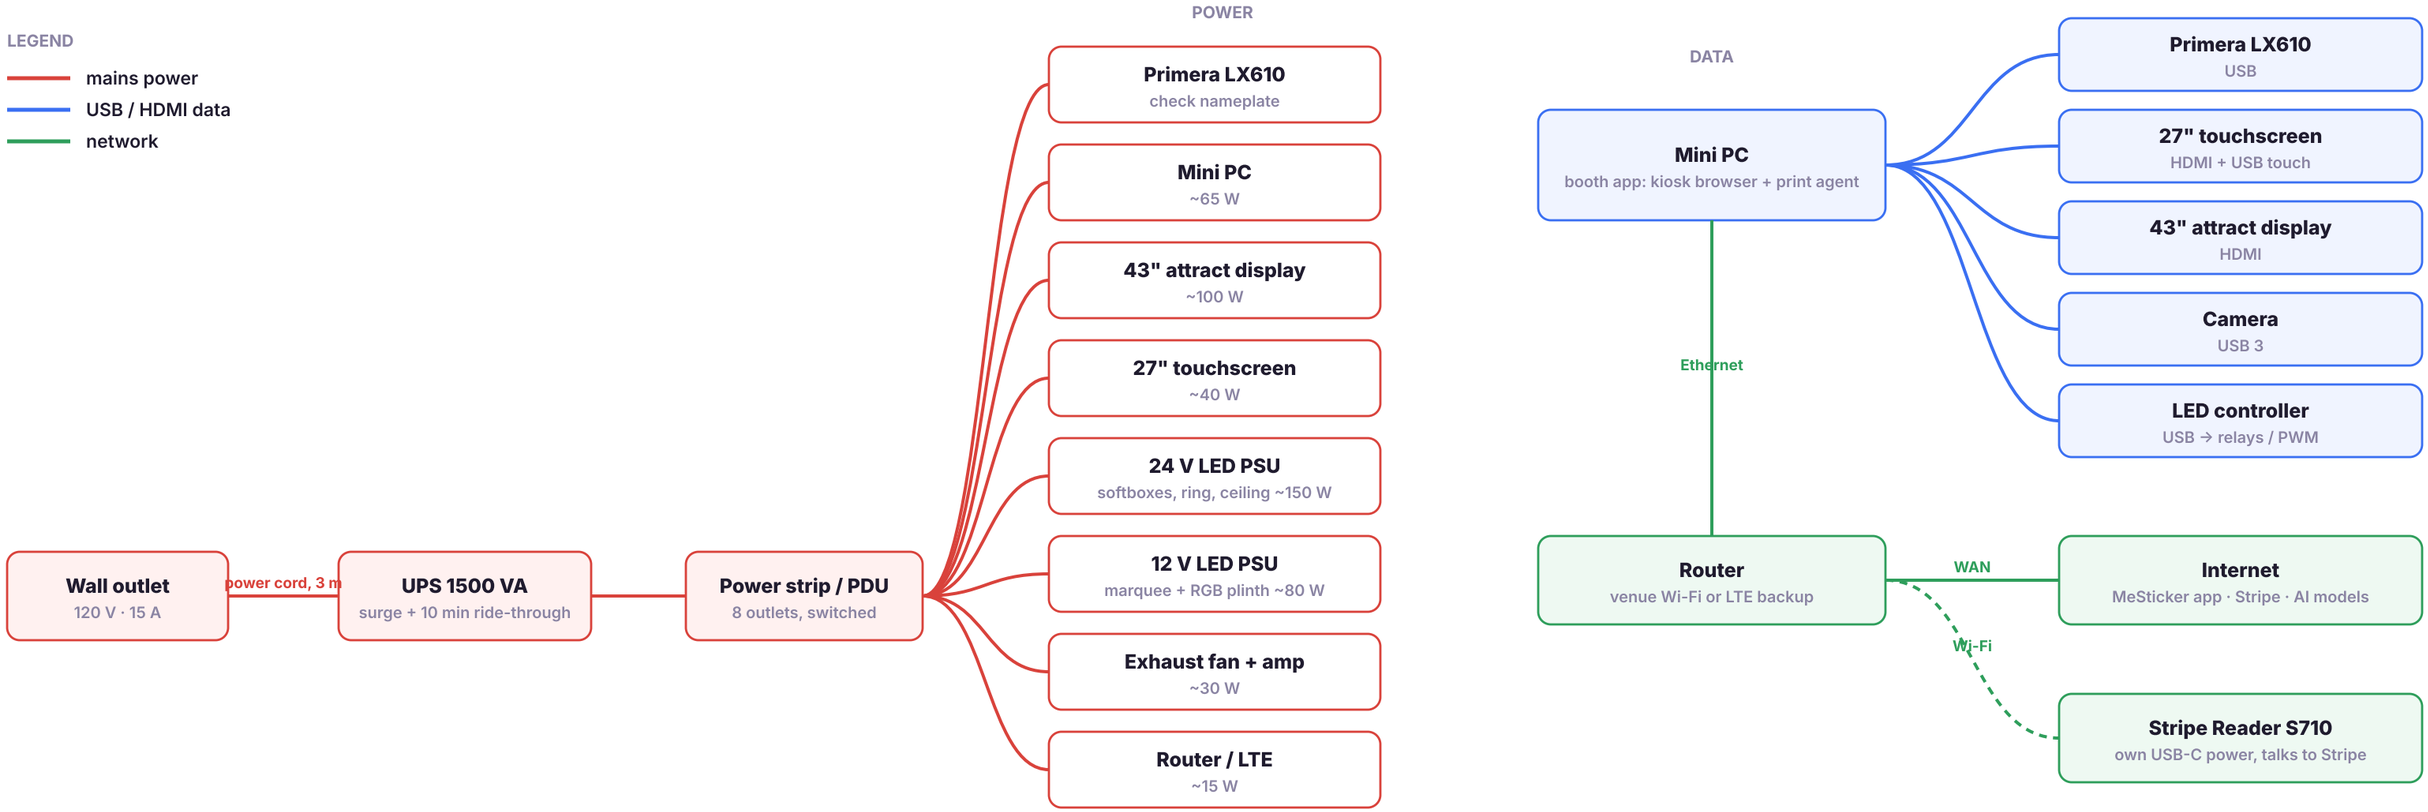


CIRCUIT	EST. LOAD
Electronics	~350 W
Lighting	~230 W
Printer	nameplate
Total (est.)	≈ 650–750 W ≈ 6 A

WIRING NOTES


- All mains wiring inside the machine module, on the PDU. Use UL-listed power supplies only, and strain-relieve the main cord where it exits.
- The low-voltage LED runs (24 V and 12 V) go through the frame tubes to the softboxes, ceiling panel, sign and plinth. The sign uses a quick-disconnect plug.
- The S710 reader talks to Stripe directly over Wi-Fi or Ethernet (server-driven integration). It needs no USB connection to the PC.
- Fit an LTE router as a backup for bad venue Wi-Fi. The booth should stop taking payment when it's offline.
- Leave a service loop on every cable so the printer shelf can slide out.

F-09 · Details


D1 · Bay-to-machine joint

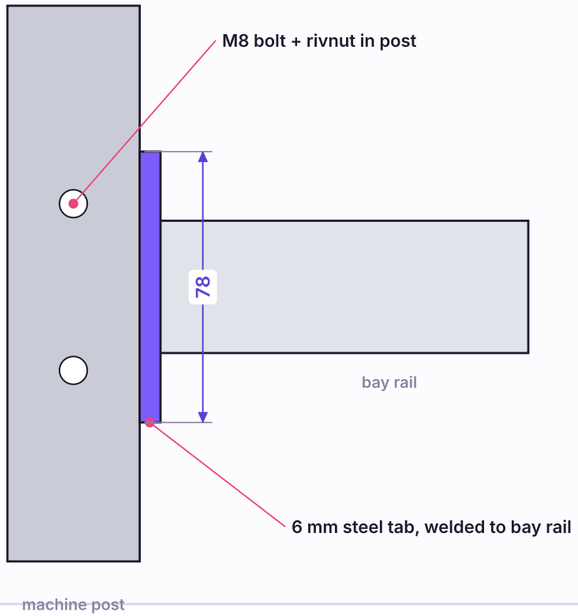


D2 · Caster + leveler corner

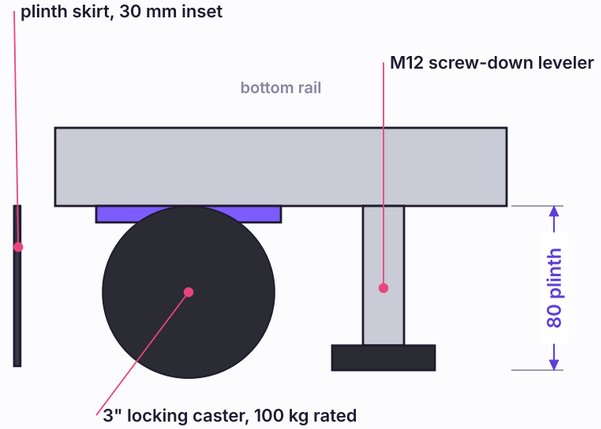


D3 · Pickup chute (section)

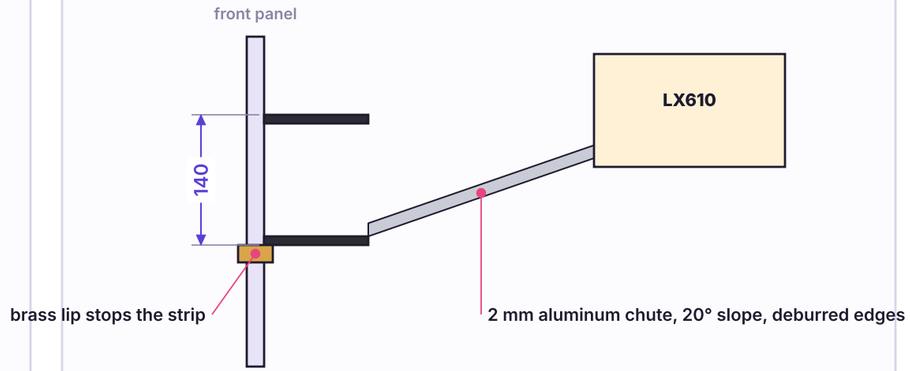


D4 · Curtain rod

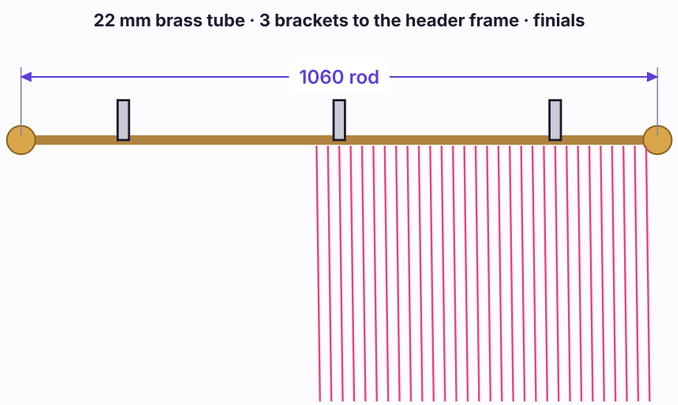

D5 · Marquee sign (section)

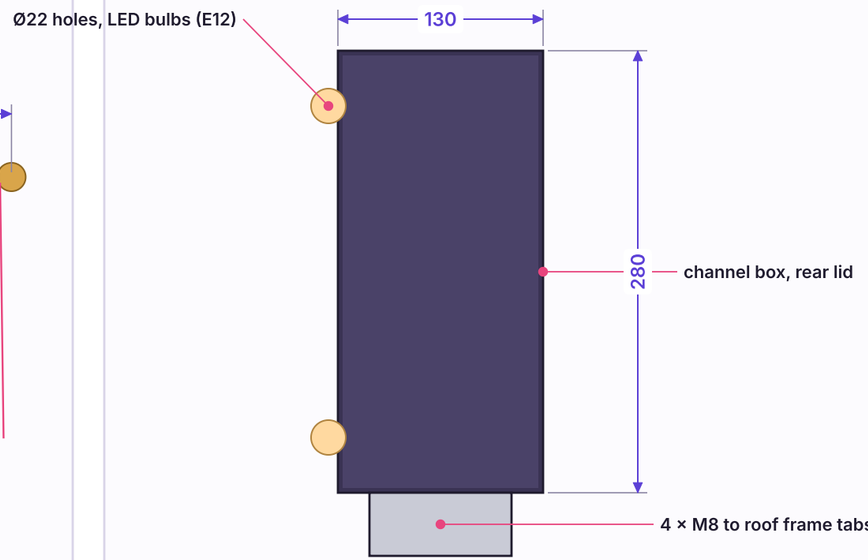

D6 · Service door (machine end)

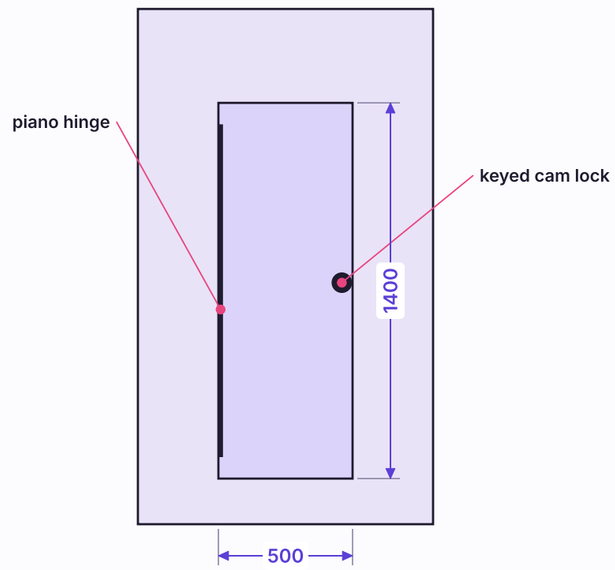


MeSticker Photo Booth

Fabrication drawing set · units mm · do not scale drawings, use dimensions · tolerance ±2 mm unless noted


SHEET	TITLE	REV	DATE
F-09	Details	A	2026-10-24

F-10 · Assembly sequence

Exploded view: machine module (purple frame) stays whole. Bay sub-frames and panels bolt on at the venue

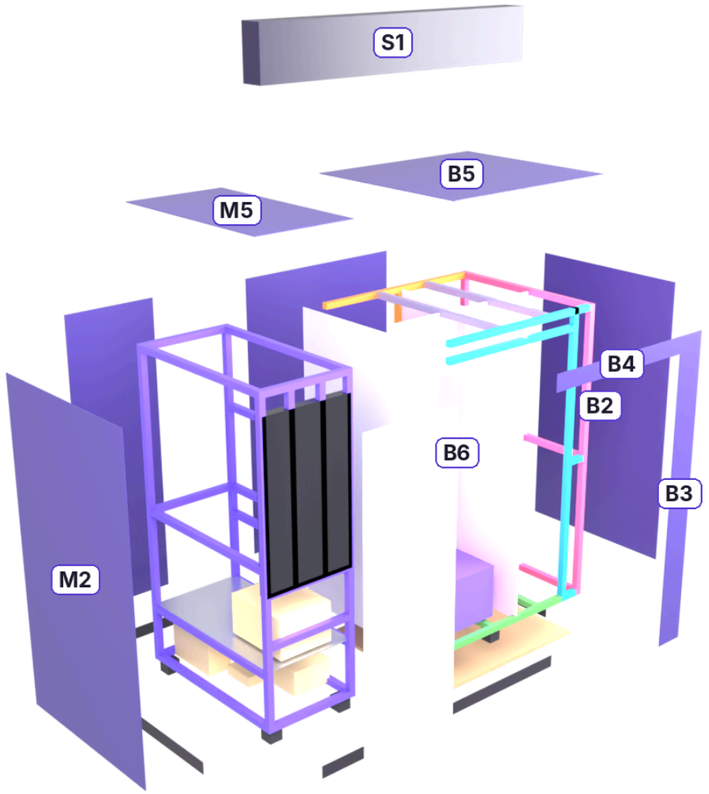

Machine module M (purple frame) stays welded. Bay sub-frames + panels shown pulled apart. Codes match F-06 / F-07.

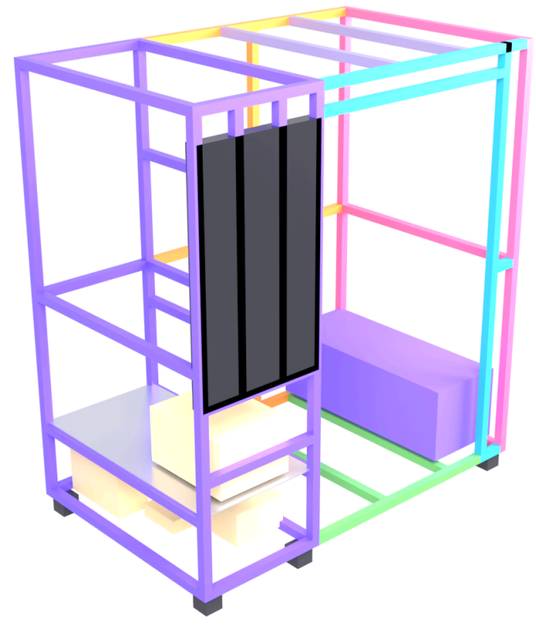

Frame + equipment, panels off

INSTALL (VENUE)

- Roll the machine module in. Bolt the bay end, back and front frames to it, then the floor and roof joists. Drop in the floor deck and bench.
- Hang the bay panels and liners, then the roof panels. Lift the sign on and plug it in. Hang the curtain. Level all corners with the levelers, then lock the casters.

BUILD ORDER (SHOP)

- Weld the machine frame (M). Fit the caster plates, VESA plates and the printer shelf. Powder-coat.
- Weld the 5 bay sub-frames. Test-fit them to M with M8 bolts, then mark and unbolt.
- Cut the panels from DXF (F-06, F-07). Dry-fit, then rivet or VHB-bond the M panels. Bay panels go on their sub-frames.
- Fit the electronics in M (F-04 B, F-08). Run the LED leads through the tubes. Bench-test the whole booth.

WHAT'S IN THE FILE PACKAGE

Files for the shop

FILE	WHAT IT IS
MeSticker_PhotoBooth_Fabrication_Drawings_RevA.pdf	The 10-sheet booth drawing set (also in this packet)
dxf/ (17 files)	One DXF per panel, in mm. Layers: OUTLINE, CUTOUT, TEXT. Ready for a CNC router or laser
tube_cut_list.csv	Steel tube cut list by sub-frame (length × quantity)
panel_schedule.csv	Every panel: size, material, cutout positions
3d/	Fabrication model as OBJ, STL (frame and panels) and GLB, plus the rendered Blender file
spec.py	The one dimension file every drawing, DXF and model is generated from. Change it and everything regenerates

Before cutting anything

- Measure the real printer's paper exit height and the screens' VESA mounting patterns
- The bay floor sits about 14 cm above the ground (one step). Keep it, or lower the floor frame
- Confirm doorways and stairs at the first pilot venue

Questions or mark-ups: Bradley. Send photos of marked-up pages, or reply with notes and the drawings will be revised to Rev B.