


Guide-intersection HW beats mean random subsets, but trails full HW


Intersection primary gain 0.002014 < 0.010; identity gain 0.003731 < 0.005.

Metadata-defined support: 21–51 electrodes/session; eight ordinary subsets of the same size; all selected λ=1.

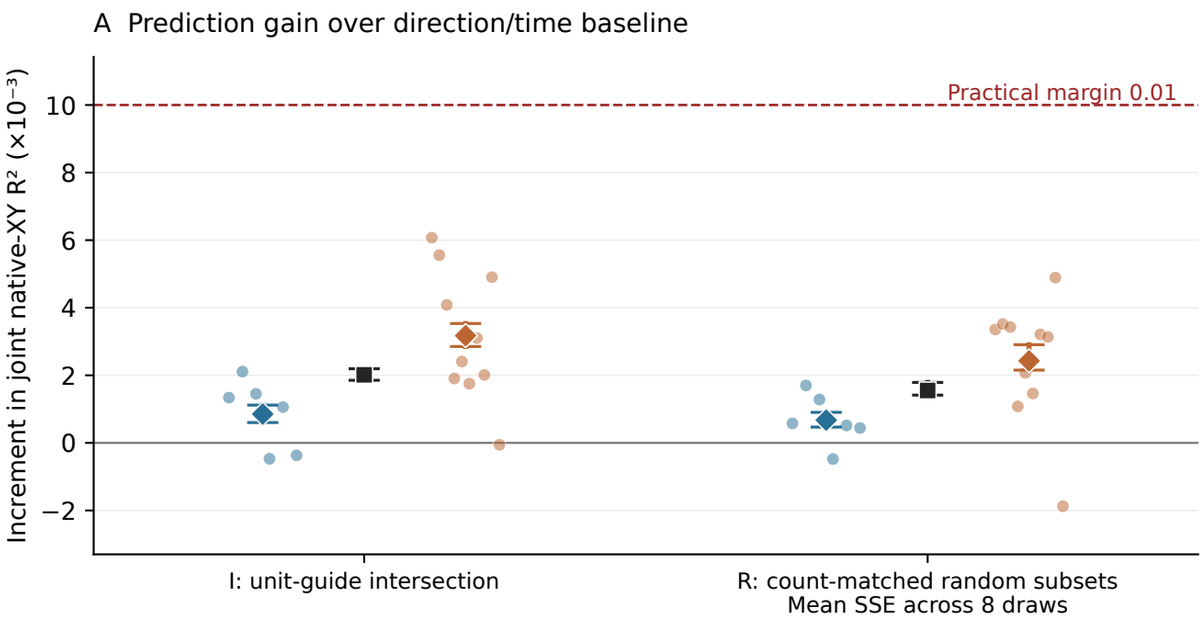

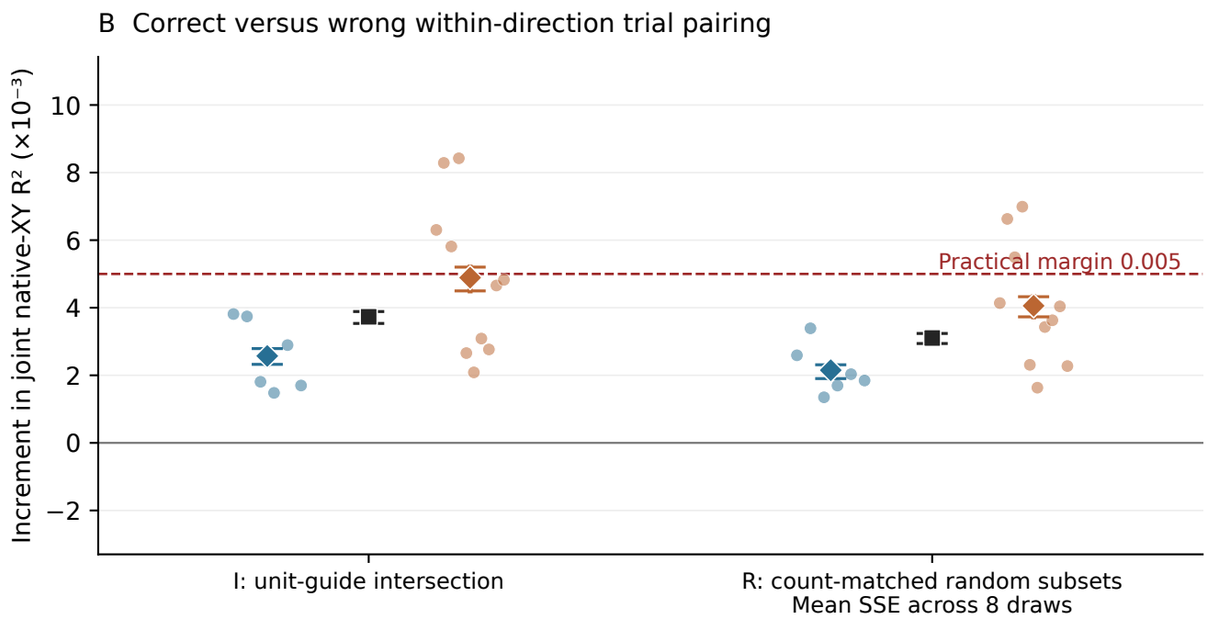

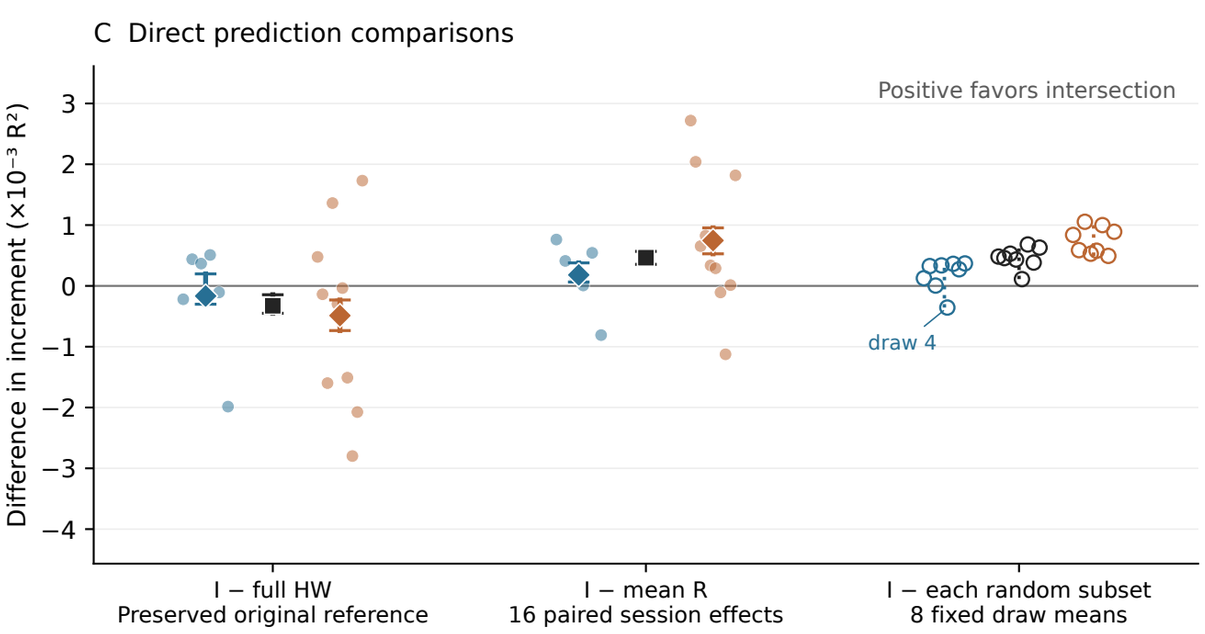

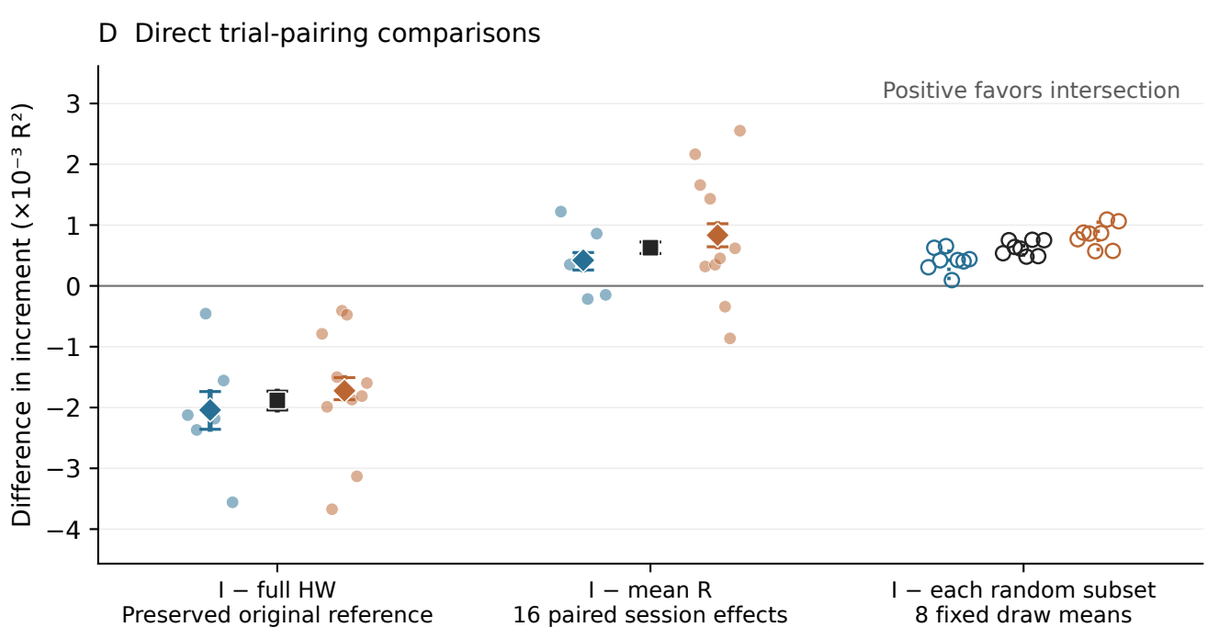

Mean I − R stays positive in both animals after every omission; individual random subsets have exceptions.

Mihili primary: draw 4 favors the random subset; nonpositive omission results occur for draws 2, 4. Draw IDs are 0–7.

◆ Mihili mean ◆ Chewie mean ■ Equal-animal mean ○ Individual draw mean

Small filled dots: all 16 sessions. Solid bars: fixed-prediction session-omission ranges. Open dots/dotted spans: 8 draw means and their range.
Ranges are descriptive, not confidence intervals or p-values. The overlapping subsets are not independent biological replicates (2 animals: 6 and 10 sessions).
Guide membership does not identify spike contamination; no spike values were used. This is a nonpromotable support sensitivity, not a pairing null.
I/R preserve true neural–behavioral pairing, original trials, native XY targets and baseline. Each reduced support refits its own HW neural state.
Matching electrode counts or λ does not match anatomical coverage, fitted covariance or effective df. R averages correct/wrong-pair SSEs, not predictions.
Full HW predictions remain unchanged. Original- and I-selected λ coincide, so both full-HW contrasts overlap exactly; every contrast shares original D.
I − full HW is negative in both animal means; Mihili's primary sign flips when 2014-03-07 is omitted. All signed session and draw values remain visible.
Exposed development data · row scales differ, both metrics share each row's full linear scale · CSV includes all individual-draw sessions and omissions.