

Reduced budgets lower prediction relative to full HW in both animals

Own-baseline gains persist, but miss 0.010: C 0.002213; T 0.001031; CT 0.000932.


A Prediction gain: Full HW at its original selected λ

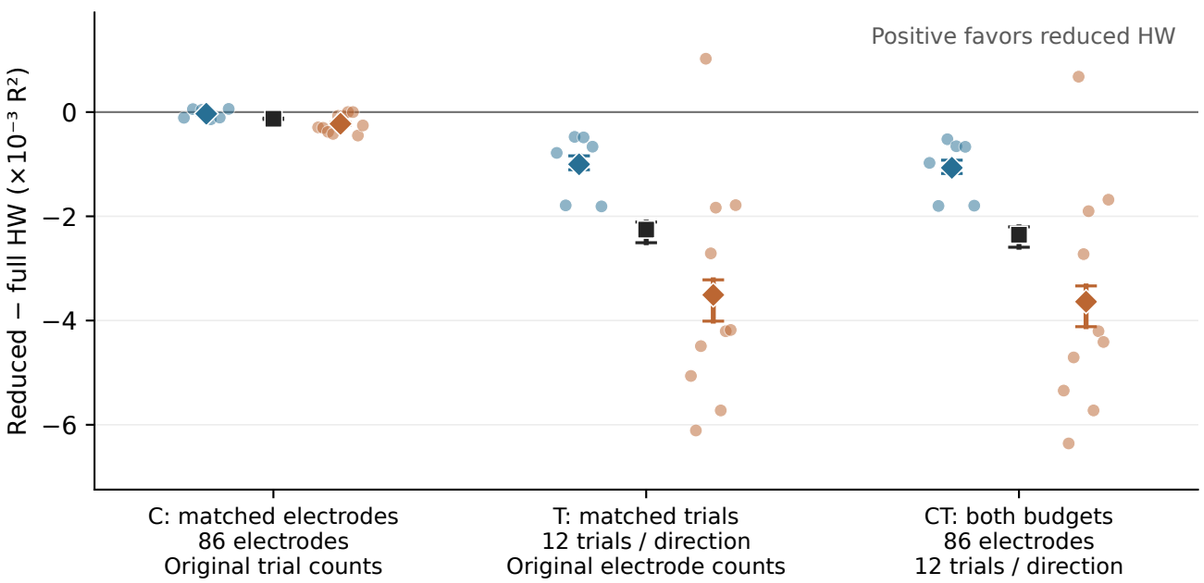


B Identity increment: Full HW at its original selected λ

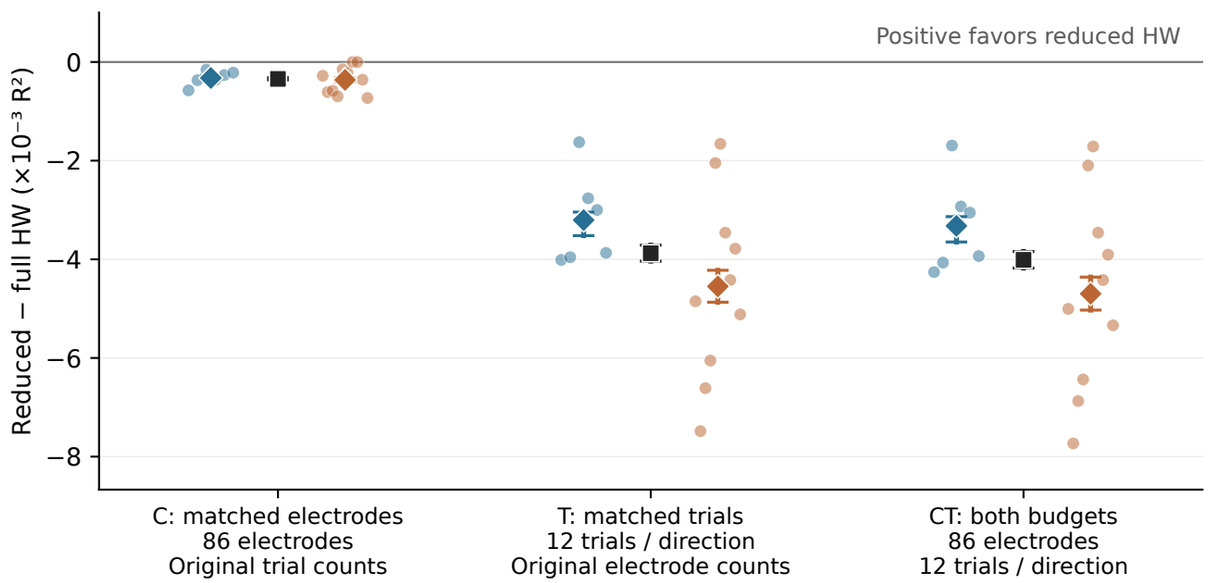

C Prediction gain: Full HW at the reduced condition's selected λ

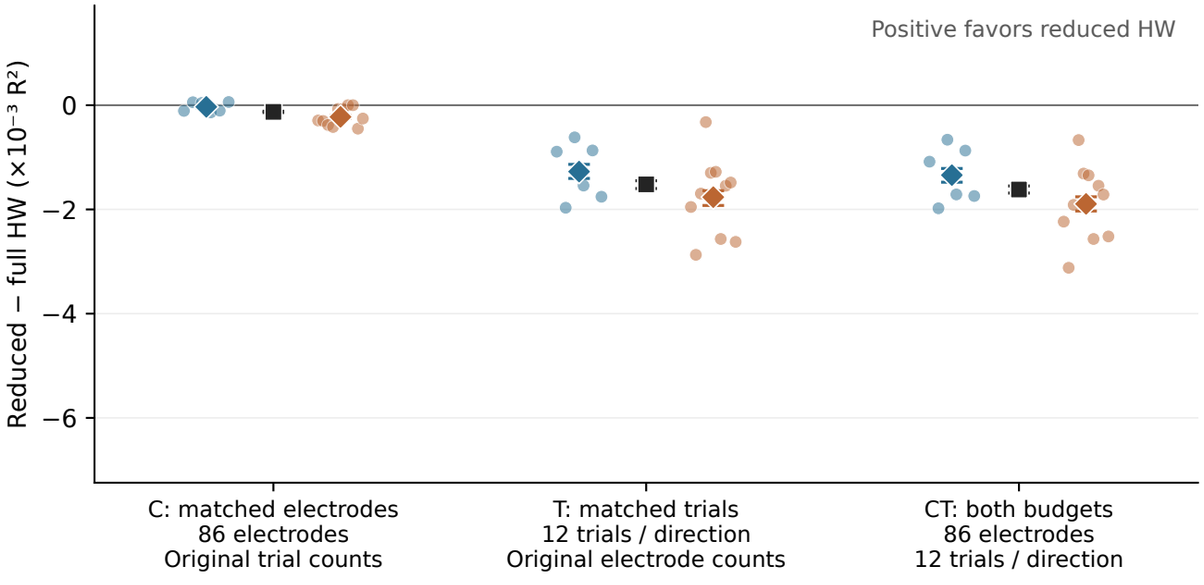

D Identity increment: Full HW at the reduced condition's selected λ

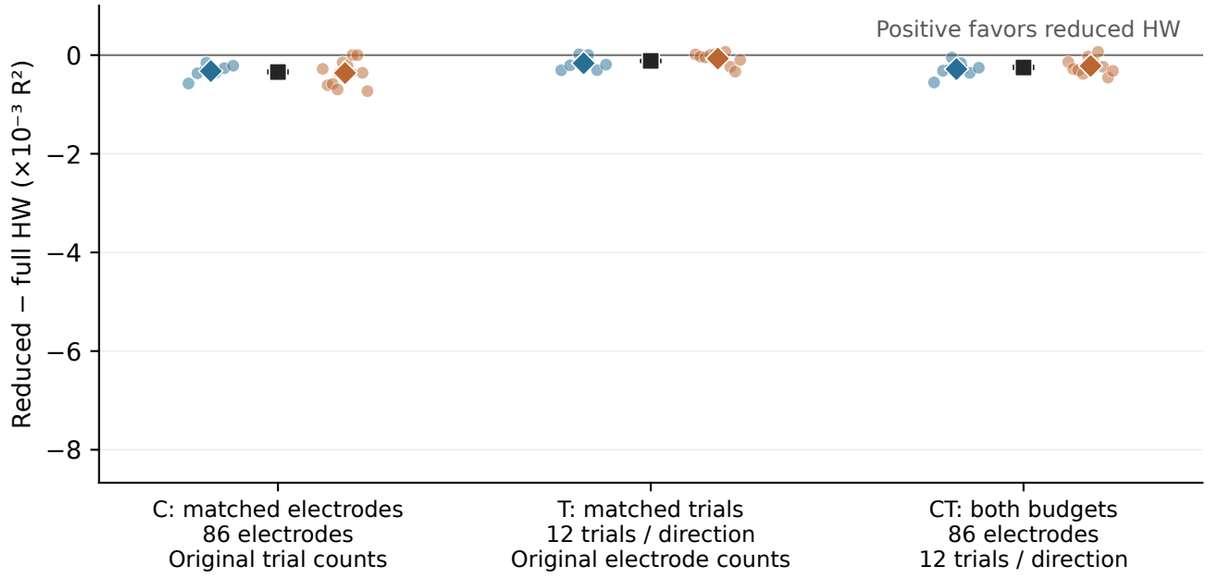

◆ Mihili mean ◆ Chewie mean ■ Equal-animal mean

Small dots: all 16 sessions. Bars: fixed-prediction session-omission ranges; not confidence intervals. Shared column scales retain every signed value.
Prediction gain = (SSEfull − SSEreduced) / Dretained; identity contrasts use the same retained trial pairs. These are full-prediction comparisons.
Each session averages 8 normalized subset-view contrasts before animal aggregation; overlapping views are not independent observations.
Full HW keeps its original fitting data and saved predictions. Reduced models refit their behavioral baseline and neural state on their retained support.
C reuses full HW in the two 86-electrode sessions. C selects λ=1; T/CT select λ=10. Equal counts or λ do not imply equal anatomical coverage or effective df.
Exposed development data · 2 animals · nonpromotable resource sensitivity · original primary failure remains.