# Does residual marginal selection survive different initializers?

Points: four sessions per animal. Black diamond: animal mean. Bars: fixed session-omission range.

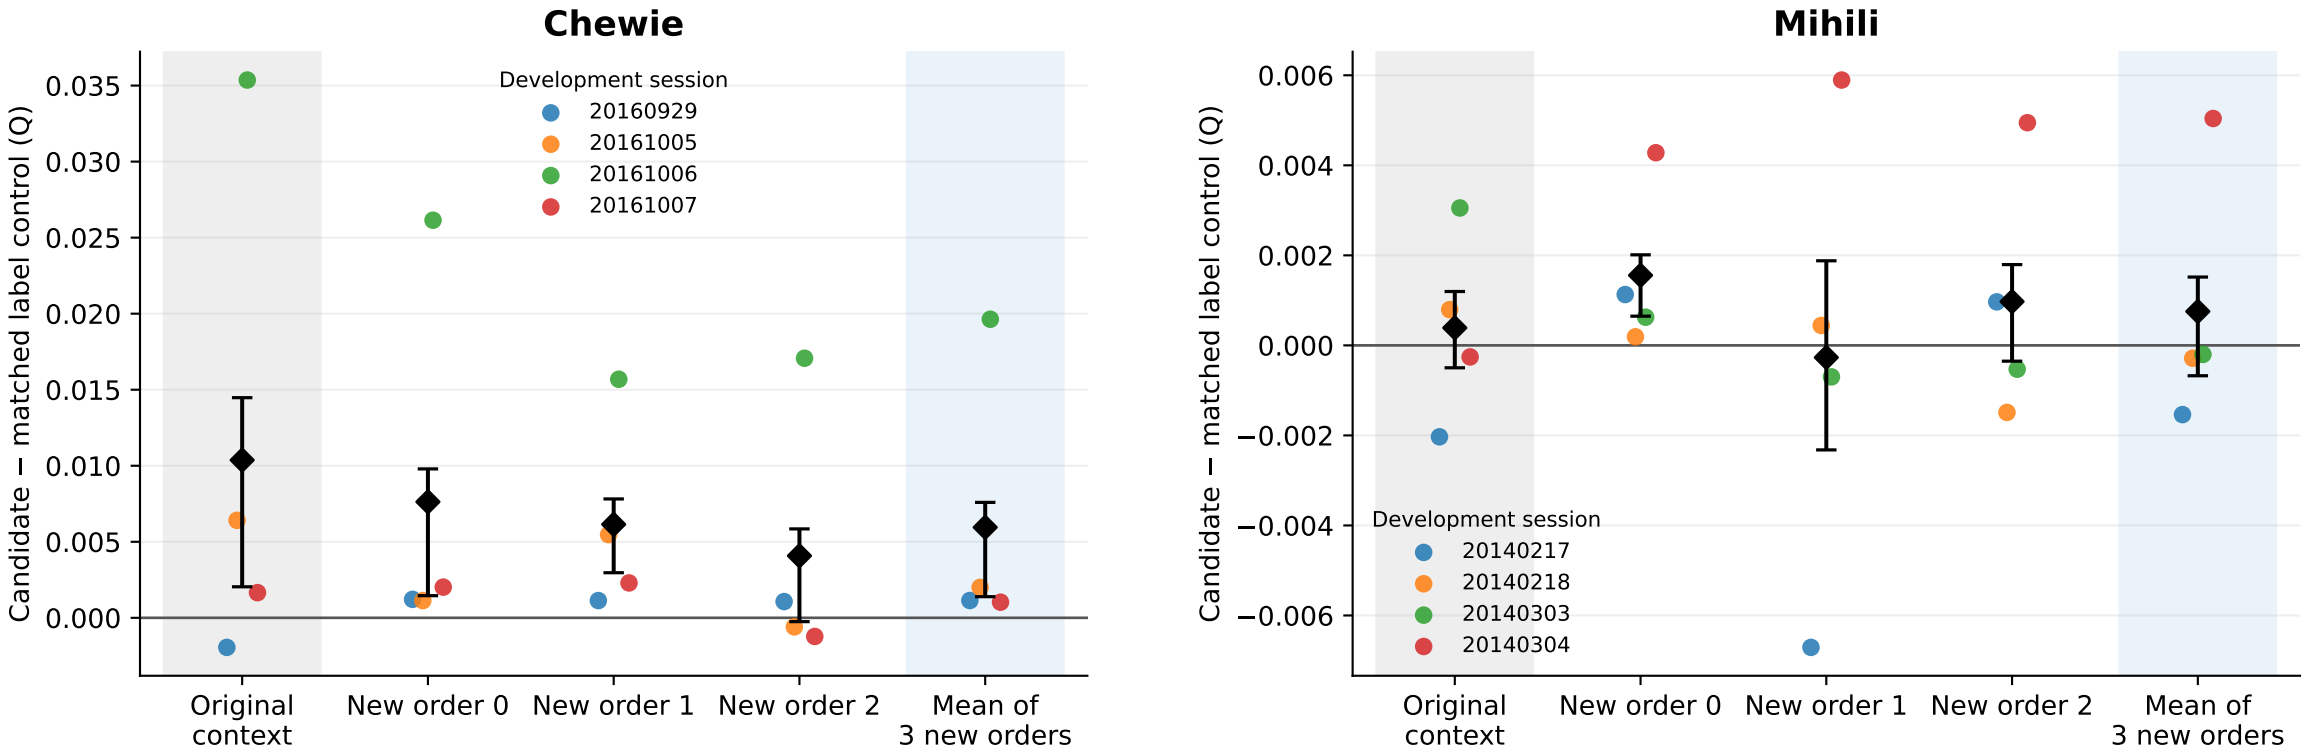


Mean-order both-animal screen: PASS  Each-order both-animal sensitivity screen: FAIL

Original is separate context: training prefixes, nulls and CV change. Mean-five SSE within order, then mean-three Q.
Orders overlap; two animals and exposed development sessions. Bars are not confidence intervals. Held sessions remain closed.