



April 2015

# Styling BrainJocks SCORE

Ben Cato & Emily Lord

[BRAINJOCKS.COM](http://BRAINJOCKS.COM)

# Course Overview

01

Overview of class pre-requisites – Twitter Bootstrap 3, LESS pre-processor, SCORE component documentation

02

Understanding SCORE's file structure – default project scaffolding and LESS file organization

03

The value of SCORE

04

Where to start?  
Approaches to project development

05

Understanding SCORE's grid system – page layout, inner structure, and stripes; using responsive grid mixins

06

Styling SCORE components – overriding Bootstrap and using class selections

07

SCORE front-end best practices

# 01

## Overview of Pre-requisites

BOOTSTRAP 3, LESS PRE-PROCESSOR, &  
SCORE COMPONENT DOCUMENTATION



01.1

# Bootstrap 3 Overview

---





# What is Bootstrap?

- Naturally responsive UI framework
- Based on LESS pre-processor
- Provides a native responsive grid
- Source code includes:
  - Styling for native grid
  - Styling for over 20 native components
  - JavaScript file for JS-dependent components
- References:
  - [Bootstrap 3 Site](#)
  - [Bootstrap Tutorial](#)



# Using the Grid

- Every page uses a container that holds rows and columns
- Bootstrap uses a 12-column layout per row (by default)
- Each element uses a specific class to pull in native Bootstrap styling
  - Example class names: `.container`, `.row`, `.col-md-4`
- References:
  - [How Bootstrap's Grid Works](#)

# Using the Grid




.col-md-1	.col-md-1	.col-md-1	.col-md-1	.col-md-1	.col-md-1	.col-md-1	.col-md-1	.col-md-1	.col-md-1	.col-md-1	.col-md-1
.col-md-8								.col-md-4			
.col-md-4				.col-md-4				.col-md-4			
.col-md-6						.col-md-6					

```
<div class="container">
  <div class="row">
    <div class="col-md-1"></div>
    <div class="col-md-1"></div>
    <div class="col-md-1"></div>
    <div class="col-md-1"></div>
    <div class="col-md-1"></div>
    <div class="col-md-1"></div>
    <div class="col-md-1"></div>
    <div class="col-md-1"></div>
    <div class="col-md-1"></div>
    <div class="col-md-1"></div>
    <div class="col-md-1"></div>
  </div>
  <div class="row">
    <div class="col-md-8"></div>
    <div class="col-md-4"></div>
  </div>
  <div class="row">
    <div class="col-md-4"></div>
    <div class="col-md-4"></div>
    <div class="col-md-4"></div>
  </div>
  <div class="row">
    <div class="col-md-6"></div>
    <div class="col-md-6"></div>
  </div>
</div>
```

# The Anatomy of Bootstrap's Grid



- Container:
  - Width based on screen size
  - 15px padding on left and right
  - Margin: 0 auto (always horizontally centered)

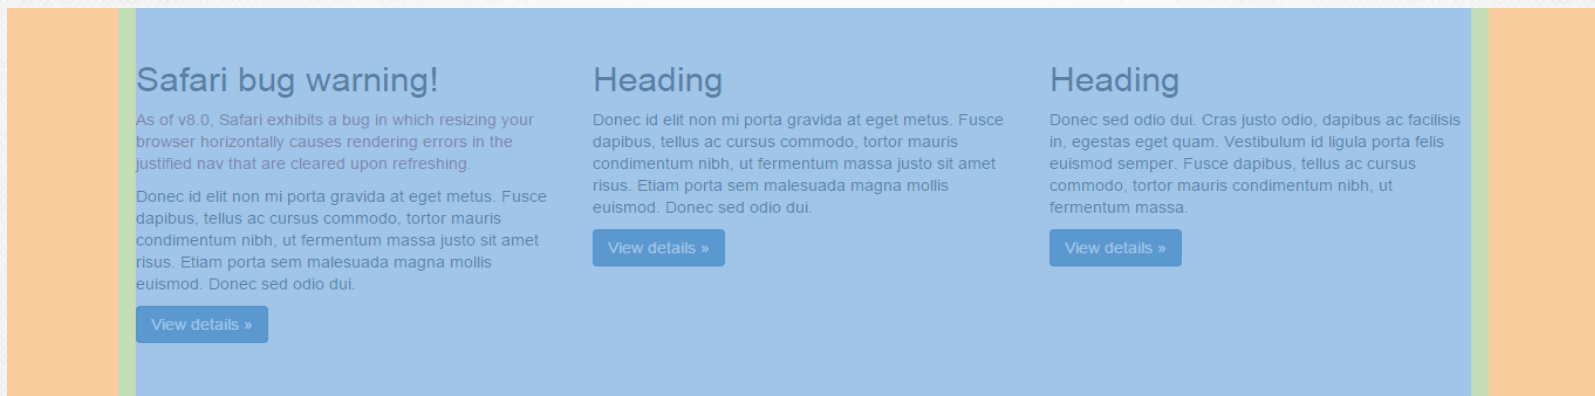



# The Anatomy of Bootstrap's Grid



- Row:
  - Width is 100% of parent
  - -15px margin on left and right
  - Parent should either be a container or a column

## Safari bug warning!

As of v8.0, Safari exhibits a bug in which resizing your browser horizontally causes rendering errors in the justified nav that are cleared upon refreshing.

Donec id elit non mi porta gravida at eget metus. Fusce dapibus, tellus ac cursus commodo, tortor mauris condimentum nibh, ut fermentum massa justo sit amet risus. Etiam porta sem malesuada magna mollis euismod. Donec sed odio dui.

[View details »](#)

## Heading

Donec id elit non mi porta gravida at eget metus. Fusce dapibus, tellus ac cursus commodo, tortor mauris condimentum nibh, ut fermentum massa justo sit amet risus. Etiam porta sem malesuada magna mollis euismod. Donec sed odio dui.

[View details »](#)

## Heading

Donec sed odio dui. Cras justo odio, dapibus ac facilisis in, egestas eget quam. Vestibulum id ligula porta felis euismod semper. Fusce dapibus, tellus ac cursus commodo, tortor mauris condimentum nibh, ut fermentum massa.

[View details »](#)

# The Anatomy of Bootstrap's Grid



- Column:
  - Width is specified by developer using a class or mixin
    - NOTE: Bootstrap uses 12-column grid
  - 15px padding on left and right (30px between columns)
  - ALWAYS inserted into a row

The image shows three identical Bootstrap grid columns side-by-side. Each column is a light blue box with a green border on the right. Inside each box, there is a heading 'Safari bug warning!' or 'Heading', a paragraph of Lorem Ipsum text, and a 'View details »' button. Below each box, a yellow tooltip shows the class and dimensions: 'div.col-lg-4 390px x 287px'.

**Safari bug warning!**

As of v8.0, Safari exhibits a bug in which resizing your browser horizontally causes rendering errors in the justified nav that are cleared upon refreshing.

Donec id elit non mi porta gravida at eget metus. Fusce dapibus, tellus ac cursus commodo, tortor mauris condimentum nibh, ut fermentum massa justo sit amet risus. Etiam porta sem malesuada magna mollis euismod. Donec sed odio dui.

[View details »](#)

`div.col-lg-4 390px x 287px`

**Heading**

Donec id elit non mi porta gravida at eget metus. Fusce dapibus, tellus ac cursus commodo, tortor mauris condimentum nibh, ut fermentum massa justo sit amet risus. Etiam porta sem malesuada magna mollis euismod. Donec sed odio dui.

[View details »](#)

`div.col-lg-4 390px x 287px`

**Heading**

Donec id elit non mi porta gravida at eget metus. Fusce dapibus, tellus ac cursus commodo, tortor mauris condimentum nibh, ut fermentum massa justo sit amet risus. Etiam porta sem malesuada magna mollis euismod. Donec sed odio dui.

[View details »](#)

`div.col-lg-4 390px x 287px`

# The Anatomy of Bootstrap's Grid



- Nested row with columns:
  - To break up a column into more columns, first insert a nested row

## Safari bug warning!

As of v8.0, Safari exhibits a bug in which resizing your browser horizontally causes rendering errors in the justified nav that are cleared upon refreshing.

Donec id elit non mi porta gravida at eget metus. Fusce dapibus, tellus ac cursus commodo, tortor mauris condimentum nibh, ut fermentum massa justo sit amet risus. Etiam porta sem malesuada magna mollis euismod. Donec sed odio dui.

[View details »](#)

## Heading

Donec id elit non mi porta gravida at eget metus. Fusce dapibus, tellus ac cursus commodo, tortor mauris condimentum nibh, ut fermentum massa justo sit amet risus. Etiam porta sem malesuada magna mollis euismod. Donec sed odio dui.

[View details »](#)

## Heading

Donec id elit non mi porta gravida at eget metus.

[View details »](#)

## Heading

Donec id elit non mi porta gravida at eget metus.

[View details »](#)

div.row 780px × 137px



# The Anatomy of Bootstrap's Grid



- Nested row with columns:
  - Insert columns into the row like normal
  - Still `.col-lg-6`, will be half the width of parent row

## Safari bug warning!

As of v8.0, Safari exhibits a bug in which resizing your browser horizontally causes rendering errors in the justified nav that are cleared upon refreshing.

Donec id elit non mi porta gravida at eget metus. Fusce dapibus, tellus ac cursus commodo, tortor mauris condimentum nibh, ut fermentum massa justo sit amet risus. Etiam porta sem malesuada magna mollis euismod. Donec sed odio dui.

[View details »](#)

## Heading

Donec id elit non mi porta gravida at eget metus. Fusce dapibus, tellus ac cursus commodo, tortor mauris condimentum nibh, ut fermentum massa justo sit amet risus. Etiam porta sem malesuada magna mollis euismod. Donec sed odio dui.

[View details »](#)

## Heading

Donec id elit non mi porta gravida at eget metus.

[View details »](#)

`div.col-lg-6` 390px × 137px

## Heading

Donec id elit non mi porta gravida at eget metus.

[View details »](#)

`div.col-lg-6` 390px × 137px





# Mobile Breakpoints

- Pixel, em, or rem value representing a screen width
  - Bootstrap uses pixels, defines 4 sizes: xs, sm, md, lg
- Mobile sizes do not have enough horizontal real estate for most columns to appear next to each other
- Grid columns “wrap” when screen width is less than mobile breakpoint size
  - All columns become 100% of screen width
  - Columns stack in order of leftmost column becomes top column, columns to the right stack below in order

# Mobile Breakpoints



## Safari bug warning!

As of v8.0, Safari exhibits a bug in which resizing your browser horizontally causes rendering errors in the justified nav that are cleared upon refreshing.

Donec id elit non mi porta gravida at eget metus. Fusce dapibus, tellus ac cursus commodo, tortor mauris condimentum nibh, ut fermentum massa justo sit amet risus. Etiam porta sem malesuada magna mollis euismod. Donec sed odio dui.

[View details »](#)



## Heading1

Donec id elit non mi porta gravida at eget metus. Fusce dapibus, tellus ac cursus commodo, tortor mauris condimentum nibh, ut fermentum massa justo sit amet risus. Etiam porta sem malesuada magna mollis euismod. Donec sed odio dui.

[View details »](#)

## Heading2

Donec sed odio dui. Cras justo odio, dapibus ac facilisis in, egestas eget quam. Vestibulum id ligula porta felis euismod semper. Fusce dapibus, tellus ac cursus commodo, tortor mauris condimentum nibh, ut fermentum massa.

[View details »](#)

## Safari bug warning!

As of v8.0, Safari exhibits a bug in which resizing your browser horizontally causes rendering errors in the justified nav that are cleared upon refreshing.

Donec id elit non mi porta gravida at eget metus. Fusce dapibus, tellus ac cursus commodo, tortor mauris condimentum nibh, ut fermentum massa justo sit amet risus. Etiam porta sem malesuada magna mollis euismod. Donec sed odio dui.

[View details »](#)

## Heading1

Donec id elit non mi porta gravida at eget metus. Fusce dapibus, tellus ac cursus commodo, tortor mauris condimentum nibh, ut fermentum massa justo sit amet risus. Etiam porta sem malesuada magna mollis euismod. Donec sed odio dui.

[View details »](#)

## Heading2

Donec sed odio dui. Cras justo odio, dapibus ac facilisis in, egestas eget quam. Vestibulum id ligula porta felis euismod semper. Fusce dapibus, tellus ac cursus commodo, tortor mauris condimentum nibh, ut fermentum massa.

[View details »](#)



# Column Operations

## 1. Offset

- a. Moves columns to the right a specified number of column units
- b. Uses class `.col-md-offset-*`
  - i. Example: `col-md-offset-4` increases left margin by 4 column units

## 2. Order

- a. Switches order of columns
- b. Uses classes `.col-md-push-*` and `.col-md-pull-*`

`.col-md-3 .col-md-pull-9`

`.col-md-9 .col-md-push-3`

```
<div class="row">
  <div class="col-md-9 col-md-push-3">.col-md-9 .col-md-push-3</div>
  <div class="col-md-3 col-md-pull-9">.col-md-3 .col-md-pull-9</div>
</div>
```

Copy





# Column Operations

## 3. Responsive utilities

- a. Show or hide columns based on viewport width
- b. Uses classes `.visible-**` or `.hidden-**`
  - i. Example: `.hidden-md` is hidden from 992px – 1200px

	Extra small devices Phones (<768px)	Small devices Tablets (≥768px)	Medium devices Desktops (≥992px)	Large devices Desktops (≥1200px)
<code>.visible-xs*</code>	Visible	Hidden	Hidden	Hidden
<code>.visible-sm*</code>	Hidden	Visible	Hidden	Hidden
<code>.visible-md*</code>	Hidden	Hidden	Visible	Hidden
<code>.visible-lg*</code>	Hidden	Hidden	Hidden	Visible
<code>.hidden-xs</code>	Hidden	Visible	Visible	Visible
<code>.hidden-sm</code>	Visible	Hidden	Visible	Visible
<code>.hidden-md</code>	Visible	Visible	Hidden	Visible
<code>.hidden-lg</code>	Visible	Visible	Visible	Hidden






# Native Components

- Bootstrap styles native components using specific class names: nav, navbar, carousel, jumbotron, tabs, accordions, etc.
  - Note: by default, SCORE components inherit Bootstrap's native component styles
- Bootstrap.js included in project scaffolding for use with components that require JavaScript
  - Carousel, tabs, accordions, navigation
- References:
  - [Bootstrap 3 Components](#)
  - [JavaScript Components](#)



# SCORE Component Docs

- [Parent page for Bootstrap UI components](#)
  - Containers
  - Content
  - Navigation
- Includes example screenshot and HTML output



01.2

# LESS Overview

---

# LESS Basics



- CSS pre-processor (compiles into CSS)
  - All valid CSS is valid LESS
- Makes writing CSS easier with several added features
- Allows nested styles, which is amazing – but can easily get out of control
  - Try to keep nesting no more than 4 levels deep
- Reference: [LESS Tutorial](#)



# LESS Compiling



Compiler



CSS

```
1 //LESS
2 ul {
3   list-style: none;
4   li {
5     float: left;
6     a {
7       color: #f00;
8     }
9   }
10 }
```

Compiler



```
1 //CSS:
2 ul {
3   list-style: none;
4 }
5 ul li {
6   float: left;
7 }
8 ul li a {
9   color: #foo;
10 }
```

# LESS Compilers

COMMAND LINE



MAC



WINDOWS



---

REFERENCE: [List of popular compilers](#)

---



# Exercise 1.1: Installing a Compiler

1. Navigate to <http://wearekiss.com/simpleless>
2. Download compiler
3. Open the 1\_less\_exercise folder from class files
4. Manually compile main.less

Exercise 1 – LESS Exercise

# Good Nesting Example



less.less	CSS.CSS
1 //LESS	1 //CSS:
2 ul {	2 ul {
3     list-style: none;	3     list-style: none;
4     li{	4     }
5         float: left;	5     ul li {
6         a {	6         float: left;
7             color: #f00;	7     }
8         }	8     ul li a {
9     }	9         color: #foo;
10 }	10 }



# Bad Nesting Example



```
less.less
1 //LESS
2 .container {
3   .row-class {
4     .column-class {
5       ul {
6         list-style: none;
7         li {
8           float: left;
9           a {
10            color: #foo;
11          }
12        }
13      }
14    }
15  }
16 }

CSS.CSS
1 //CSS:
2 .container .row-class .column-class ul li a {
3   color: #foo;
4 }
```

# LESS Variables

- Declared locally or globally and prefixed with @
- Can be a color, font, another variable, etc.
- Code is easily maintained – changing the value of the variable will change all occurrences
- Bootstrap includes native variables for colors, fonts, and common mobile breakpoints

```
less.less
1 @brand-color: #foo;
2
3 header, footer {
4   background-color: @brand-color;
5 }
6
7 h1 {
8   color: @brand-color;
9 }
```




# Exercise 1.2: Using a Variable

1. Navigate to less > site > variables.less
2. Define a new variable, @button-color
3. Navigate to site-buttons.less in the same folder
4. Change the background color of all SCORE button components (class of .btn-default) to @button-color
5. After successful compilation, open \_html > index.html in a browser
6. Change @button-color to another color value
7. Compile main.less and view index.html in the browser

Exercise 1 – LESS Exercise

# LESS Mixins

- Create easily reusable and maintainable blocks of code
- Commonly used for styles that require browser prefixes
- Can accept parameters to use different values in different locations

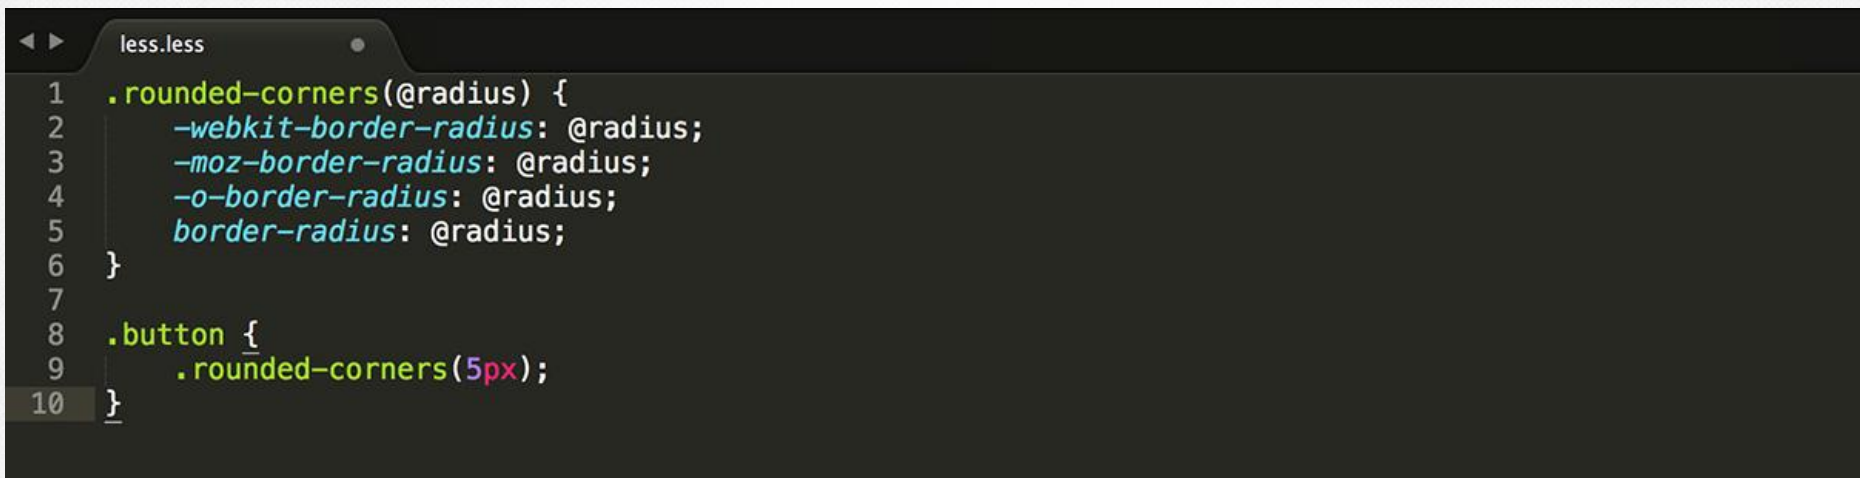

```
less.less
1  .rounded-corners(@radius) {
2      -webkit-border-radius: @radius;
3      -moz-border-radius: @radius;
4      -o-border-radius: @radius;
5      border-radius: @radius;
6  }
7
8  .button {
9      .rounded-corners(5px);
10 }
```





# Exercise 1.3: Using a Mixin

1. Navigate to variables.less
2. Define a new mixin .fun-transition, which will rotate something 45 degrees
3. Navigate to site-buttons.less
4. Insert .fun-transition into the button's hover state
5. Compile main.less and view index.html in the browser. Hover over a button.
6. Modify .fun-transition to accept a parameter for the angle of rotation, use variable @angle
7. Insert any angle value into the call to .fun-transition in site-buttons.less
8. Compile main.less and hover over a button on index.html

Exercise 1 – LESS Exercise

# LESS Operators



## ○ &

- Appends statement to immediate parent
- Commonly used for compound classes and pseudo elements

<pre>1 //LESS: 2 .class1 { 3   &amp;.class1-variant { 4     color: #foo; 5   } 6 }</pre>	<pre>1 //CSS: 2 .class1.class1-variant { 3   color: #foo; 4 }</pre>
<pre>1 //LESS 2 .button { 3   &amp;:first-child { 4     border-radius: 4px; 5   } 6   &amp;:hover { 7     color: #foo; 8   } 9 }</pre>	<pre>1 //CSS 2 .button:first-child { 3   border-radius: 4px; 4 } 5 .button:hover { 6   color: #foo; 7 }</pre>

# LESS Operators



- >
  - Direct child selector (same as in CSS)
  - Can be nested and combined with &

```
less.less
1 //LESS
2 .class1 {
3   & > .class2 {
4     color: #foo;
5   }
6 }

CSS.CSS
1 //CSS
2 .class1 > .class2 {
3   color: #foo;
4 }
```

# Nesting Media Queries

- Media queries can be nested to specify mobile behavior for individual elements



```
less.less
1 //LESS
2 .class1 {
3   @media only screen and (min-width: 768px) {
4     color: #foo;
5   }
6   @media only screen and (min-width: 992px) {
7     color: #fff;
8   }
9 }

CSS.CSS
1 //CSS
2 @media only screen and (min-width: 768px) {
3   .class1 {
4     color: #foo;
5   }
6 }
7 @media only screen and (min-width: 992px) {
8   .class1 {
9     color: #fff;
10  }
11 }
```



# 02


## Understanding SCORE's File Structure

Organization of project files, LESS files, and HTML sandbox.

# “Areas” Scaffolding




- ALL project files are SHARED between Sitecore and UI developers

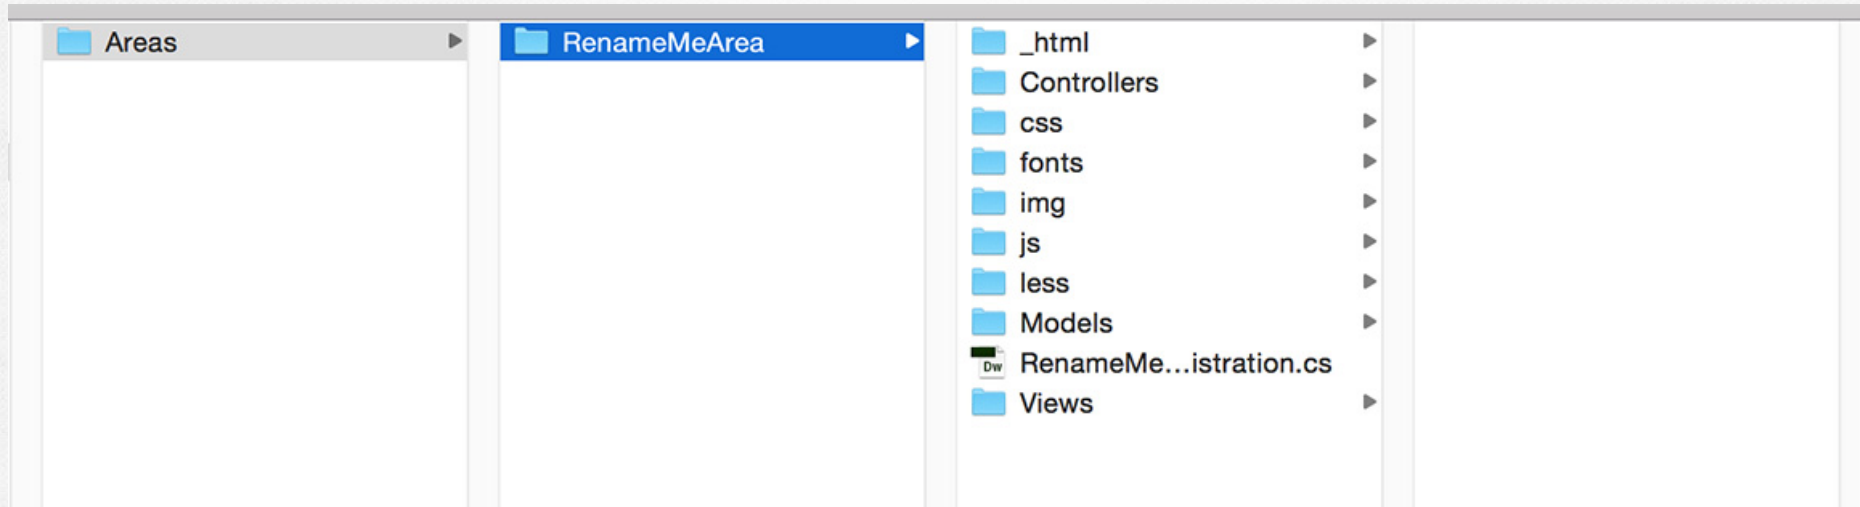

# Bootstrap Folder




- Contains all of Bootstrap's default LESS files
- Location to access Bootstrap's variables and mixins, if needed

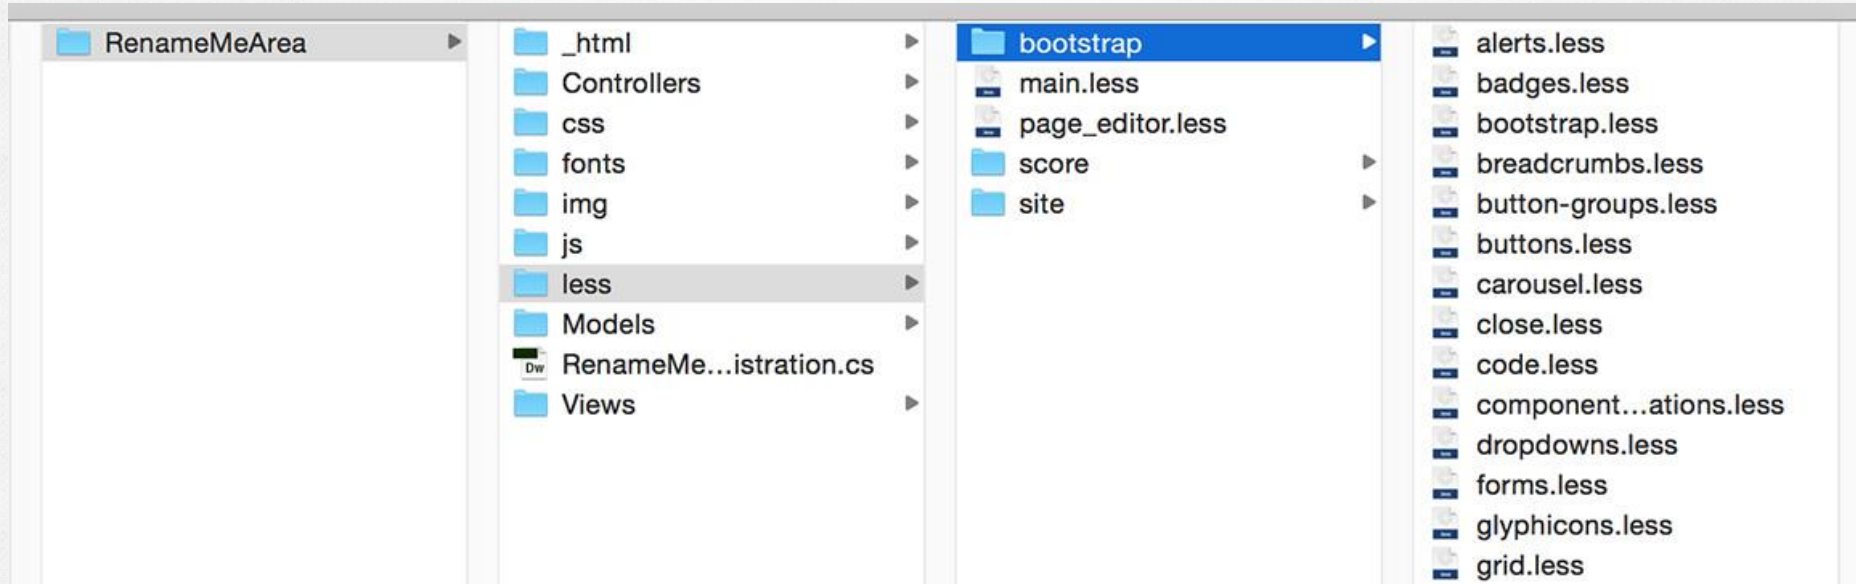

# SCORE Folder



- Contains all of SCORE's default LESS files
- Location to modify SCORE-specific styles, if needed
  - Example: score-nav.less

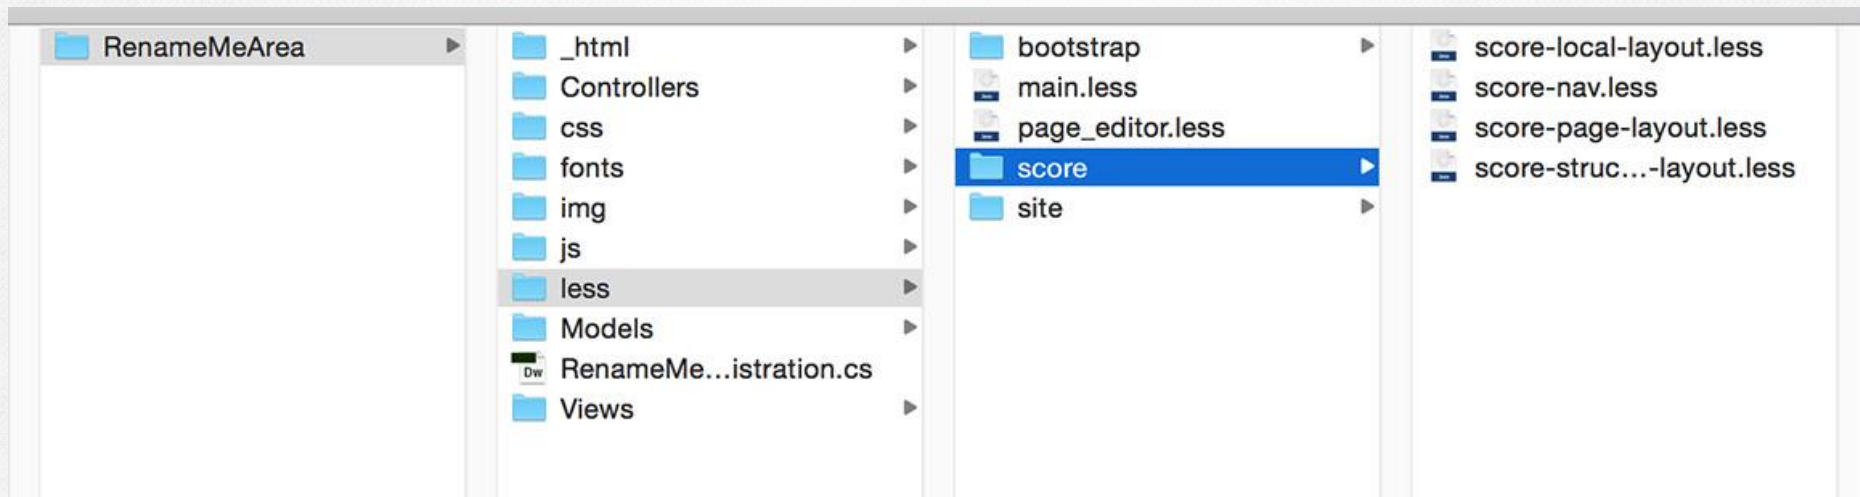






# Site Folder


- Location to modify/include all site-specific styles
- Create site-specific variables and mixins

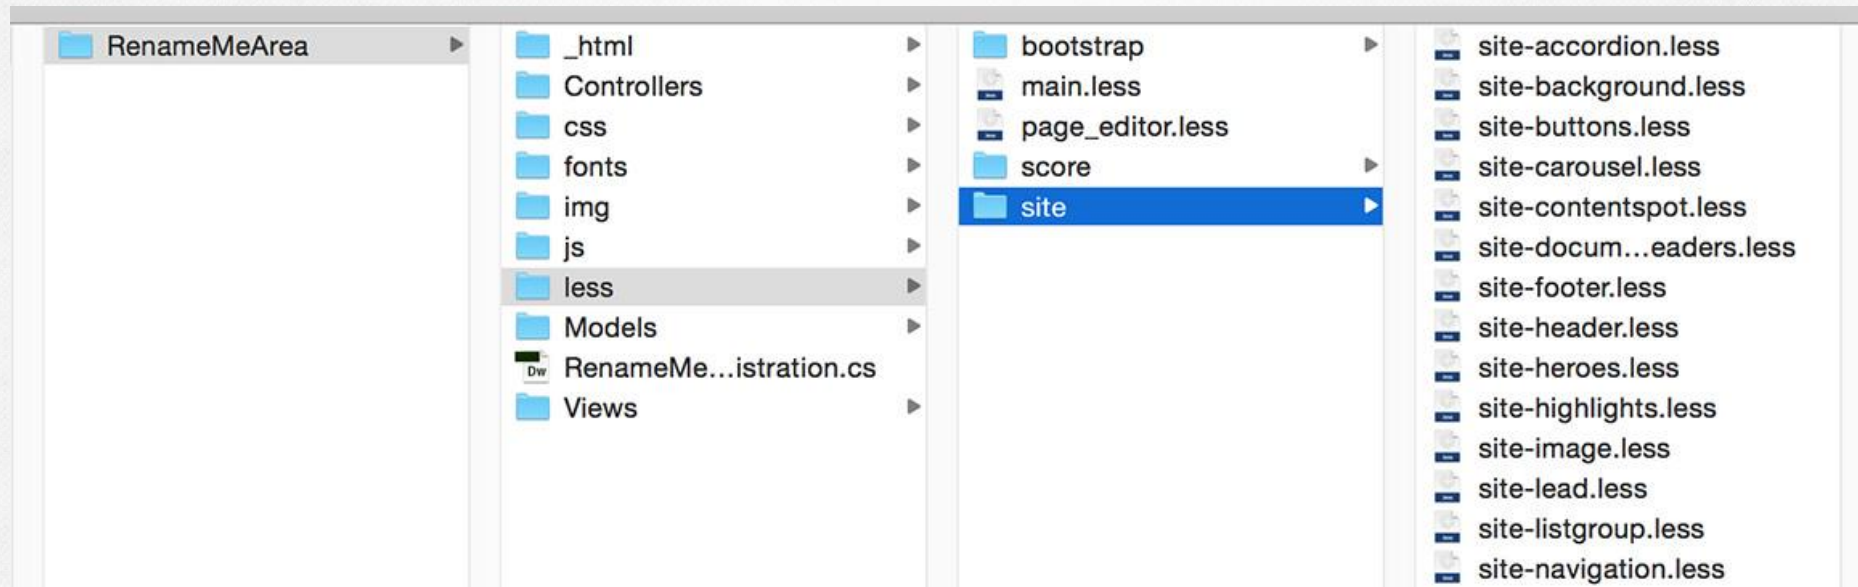

# Project CSS



- NEVER edit CSS styles directly
- CSS files are ONLY to be compiled via LESS

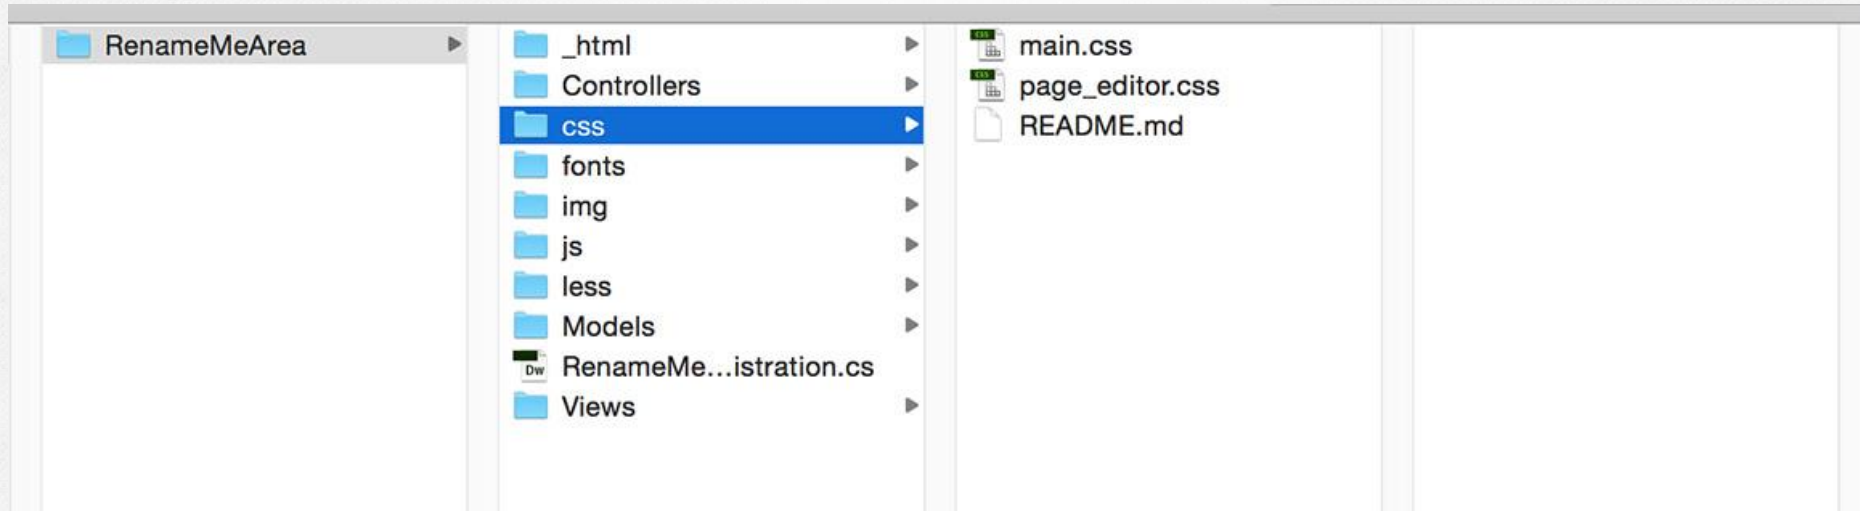



# Main LESS

- Compiles to main.css
- main.less imports all Bootstrap, SCORE, and site LESS files

```
main.less x
1 // Core variables and mixins
2 @import "bootstrap/bootstrap.less";
3
4 // Score styles
5 @import "score/score-nav.less";
6 @import "score/score-page-layout.less";
7 @import "score/score-structural-layout.less";
8 @import "score/score-local-layout.less";
9
10 // tenant styles
11 @import "site/site-variables.less";
12 @import "site/site-accordion.less";
13 @import "site/site-background.less";
14 @import "site/site-buttons.less";
15 @import "site/site-carousel.less";
16 @import "site/site-contentspot.less";
17 @import "site/site-documentheaders.less";
18 @import "site/site-footer.less";
19 @import "site/site-header.less";
```

# Page Editor LESS



- Styles are specific to the SCORE page editor experience
- Components may need to render differently in page editor via CSS
- Components initially inherit main.css
- Page editor CSS overrides main.css and can include additional styles if needed



# Page Editor CSS

Collections: Carousel

Collections: Carousel Pane Ultimate Sitecore Experience

Background Image:  Text color: White (#ffffff) Background color: No color

Inner Structure: 1 Column

Panels: Center Text



BrainJocks SCORE™  
The Ultimate Sitecore Experience

[No text in field]

GET STARTED!

Collections: Carousel Pane Score Features - Blue vector panel

Background Image:  Text color: White (#ffffff) Background color: No color

Inner Structure: 1 Column

Panels: Center Text




BrainJocks SCORE™ Features  
[No text in field]



# HTML Sandbox

- `_html` is your “sandbox” (for POC pages)
- Includes a “kitchen sink” `example.html` file
  - Shows header, `.pageWrapper`, and footer placement
  - Includes example markup of SCORE page, structural, and stripe components
  - Contains all default markup and styles for most common SCORE components

# HTML Sandbox

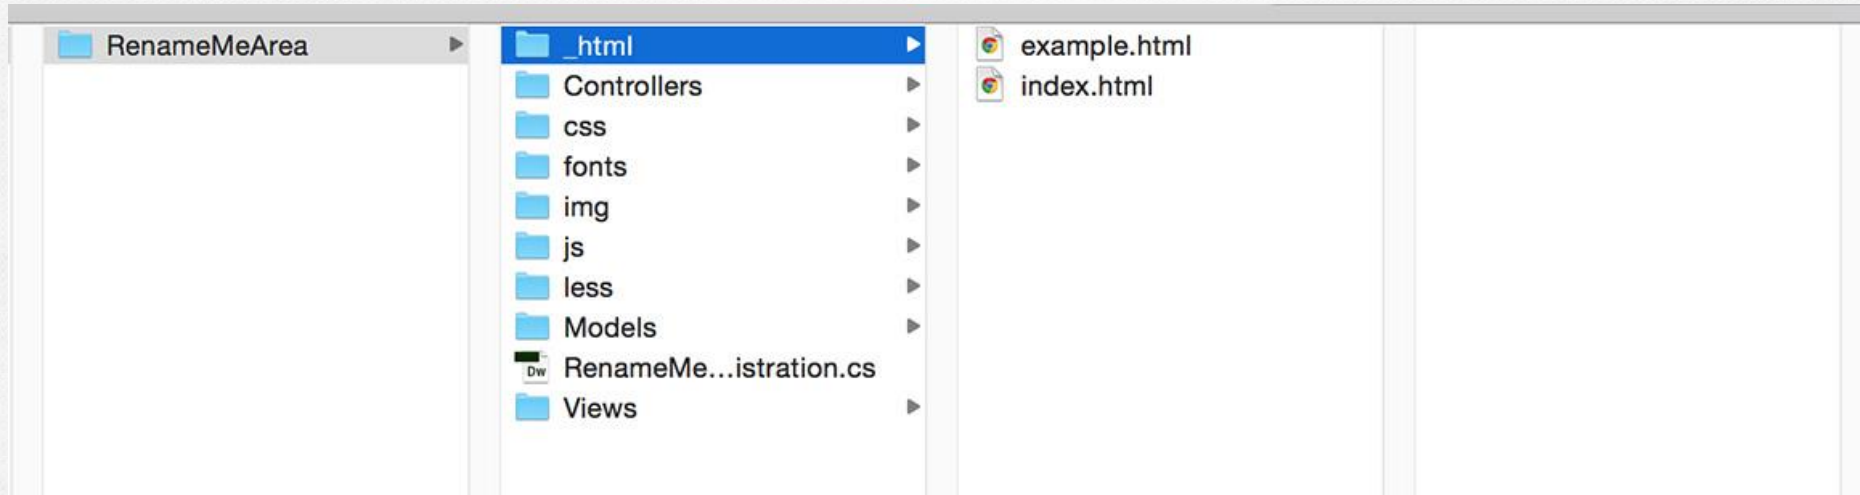

[Review example.html](#)



# Vertical Spacing Strategies



- Bootstrap does not come with vertical spacing for all components
- SCORE makes use of a global variable: `@vertical-spacing`
  - All SCORE content components have class `.score-component` which has `margin-bottom: @vertical-spacing`
  - Alternative: specifying margin for every component individually
  - Global variable is easy to maintain
- Best practice: always use `margin-bottom` to accomplish spacing rather than `margin-top`





03

## The Value of SCORE

# SCORE Benefits

1. Reusable components
2. Portability
3. Saves time
4. Saves money!





# Bootstrap Markup

- Not portable or fluid when used with components
- Front-end dev has no control over column sizes, etc.
  - Set in HTML for the component and is difficult to change
- Project committed to a 12-column grid

# SCORE Markup



- SCORE components are categorized as container, content, or navigation
  - Container components hold other components
- Fixed set of HTML based on Bootstrap
  - HTML generated from inserting component in Sitecore
  - Cannot change for SCORE components
  - Custom components use custom HTML
- Significantly increased flexibility for content administrators
- Markup is portable and can be manipulated by front-end developer



# 04

## Where to Start?

Approaches to project development



# Where to start?

- Two approaches to begin project development
  - Front-end first, back-end last (you write HTML)
  - Back-end first, front-end last (you are given HTML)
- Determining factors:
  - Budget
  - Time constraints
  - Resources
  - Team preference
- Decide whether to build whole pages with components or build stand-alone components



# Pros and Cons: Front-End First

- Pros
  - Solid POC from the beginning (show progress to clients, designers, team members)
  - Point out design flaws early in the process
  - Sitecore devs have a good foundation to start their development
  - Design assets are implemented from the start (image cropping, scaling, saving to project folders)
- Cons
  - Potential re-work after page is built in Sitecore
  - Potential wasted file space with unused styles
  - More pressure on front-end for usable markup





# Pros and Cons: Back-End First

- Pros
  - Back-end devs have total control over markup
  - Saves time and effort from front-end perspective
  - Limited front-end involvement at the beginning of the project
- Cons
  - More pressure on back-end for usable markup
  - Sitecore devs have limited visibility with design
  - Potential for HTML re-work after it reaches front-end stage



# 05

## Understanding SCORE's Grid

Page layout, inner structure, and stripes; using  
responsive grid mixins


# Container Components

- Page layout = .container + row
- Inner structure = row
- Stripes



Exercise 2 – Grid Examples


# SCORE Building Blocks – Page Layout




1 Column



1 Column Wide Screen




2 Column - Equal




2 Column - Large Left




2 Column - Large Right



3 Column - Equal



3 Column - Large Middle



4 Column - Equal

# SCORE Building Blocks – Page Layout

```
bootstrap.html
1 <div class="container">
2   <div class="row">
3     <div class="col-md-12">
4       ...
5     </div>
6   </div>
7 </div>

score.html
1 <div class="score-container">
2   <div class="container">
3     <div class="score-page score-column1">
4       <div class="score-main">
5         <div class="score-inner">
6           ...
7         </div>
8       </div>
9     </div>
10  </div>
11 </div>
```



# SCORE Building Blocks – Page Layout

```
bootstrap.html
1 <div class="container">
2   <div class="row">
3     <div class="col-md-6">
4       ...
5     </div>
6     <div class="col-md-6">
7       ...
8     </div>
9   </div>
10 </div>

score.html
1 <div class="score-container">
2   <div class="container">
3     <div class="score-page score-column2-equal">
4       <div class="score-side">
5         <div class="score-inner">
6           ...
7         </div>
8       </div>
9       <div class="score-side2">
10        <div class="score-inner">
11          ...
12        </div>
13      </div>
14    </div>
15  </div>
16 </div>
```

# SCORE Building Blocks – Page Layout

```
bootstrap.html
1 <div class="container">
2   <div class="row">
3     <div class="col-md-8">
4       ...
5     </div>
6     <div class="col-md-4">
7       ...
8     </div>
9   </div>
10 </div>

score.html
1 <div class="score-container">
2   <div class="container">
3     <div class="score-page score-column2-largeleft">
4       <div class="score-main">
5         <div class="score-inner">
6           ...
7         </div>
8       </div>
9       <div class="score-side">
10        <div class="score-inner">
11          ...
12        </div>
13      </div>
14    </div>
15  </div>
16 </div>
```

# SCORE Building Blocks – Page Layout

```
bootstrap.html
1 <div class="container">
2   <div class="row">
3     <div class="col-md-4">
4       ...
5     </div>
6     <div class="col-md-8">
7       ...
8     </div>
9   </div>
10 </div>

score.html
1 <div class="score-container">
2   <div class="container">
3     <div class="score-page score-column2-largeright">
4       <div class="score-side">
5         <div class="score-inner">
6           ...
7         </div>
8       </div>
9       <div class="score-main">
10        <div class="score-inner">
11          ...
12        </div>
13      </div>
14    </div>
15  </div>
16 </div>
```

# SCORE Building Blocks – Page Layout

```
bootstrap.html
1 <div class="container">
2   <div class="row">
3     <div class="col-md-4">
4       ...
5     </div>
6     <div class="col-md-4">
7       ...
8     </div>
9     <div class="col-md-4">
10      ...
11    </div>
12  </div>
13 </div>

score.html
1 <div class="score-container">
2   <div class="container">
3     <div class="score-page score-column3-equal">
4       <div class="score-side">
5         <div class="score-inner">
6           ...
7         </div>
8       </div>
9       <div class="score-main">
10        <div class="score-inner">
11          ...
12        </div>
13      </div>
14      <div class="score-side2">
15        <div class="score-inner">
16          ...
17        </div>
18      </div>
19    </div>
20  </div>
21 </div>
```



# SCORE Building Blocks – Page Layout

```
bootstrap.html
1 <div class="container">
2   <div class="row">
3     <div class="col-md-3">
4       ...
5     </div>
6     <div class="col-md-6">
7       ...
8     </div>
9     <div class="col-md-3">
10      ...
11    </div>
12  </div>
13 </div>


score.html
1 <div class="score-container">
2   <div class="container">
3     <div class="score-page score-column3-largemiddle">
4       <div class="score-side">
5         <div class="score-inner">
6           ...
7         </div>
8       </div>
9       <div class="score-main">
10        <div class="score-inner">
11          ...
12        </div>
13      </div>
14      <div class="score-side2">
15        <div class="score-inner">
16          ...
17        </div>
18      </div>
19    </div>
20  </div>
21 </div>
```

# SCORE Building Blocks – Page Layout


```
bootstrap.html
1 <div class="container">
2   <div class="row">
3     <div class="col-md-3">
4       ...
5     </div>
6     <div class="col-md-3">
7       ...
8     </div>
9     <div class="col-md-3">
10      ...
11    </div>
12    <div class="col-md-3">
13      ...
14    </div>
15  </div>
16 </div>

score.html
1 <div class="score-container">
2   <div class="container">
3     <div class="score-page score-column4-equal">
4       <div class="score-side">
5         <div class="score-inner">
6           ...
7         </div>
8       </div>
9       <div class="score-main">
10        <div class="score-inner">
11          ...
12        </div>
13      </div>
14      <div class="score-main2">
15        <div class="score-inner">
16          ...
17        </div>
18      </div>
19      <div class="score-side2">
20        <div class="score-inner">
21          ...
22        </div>
23      </div>
24    </div>
25  </div>
26 </div>
```


# SCORE Building Blocks – Inner Structure




1 Column




2 Column - Equal




2 Column - Variable




2 Column - Wide Left




2 Column - Wide Right




3 Column - Equal




3 Column - Variable



3 Column - Wide Middle



4 Column - Equal



4 Column - Variable

# SCORE Building Blocks – Inner Structure

```
bootstrap.html
1 <div class="container">
2   <div class="row">
3     <div class="col-md-12">
4       ...
5       <div class="row">
6         <div class="col-md-6">
7           ...
8         </div>
9         <div class="col-md-6">
10          ...
11        </div>
12      </div>
13    </div>
14  </div>
15 </div>

score.html
1 <div class="score-container">
2   <div class="container">
3     <div class="score-page score-column1">
4       <div class="score-main">
5         <div class="score-inner">
6           ...
7           <div class="score-structural
8             score-column2-equal">
9             <div class="score-left">
10              ...
11            </div>
12            <div class="score-right">
13              ...
14            </div>
15          </div>
16        </div>
17      </div>
18    </div>
19  </div>
20 </div>
```



# SCORE Building Blocks – Inner Structure

```
bootstrap.html
1 <div class="container">
2   <div class="row">
3     <div class="col-md-12">
4       ...
5       <div class="row">
6         <div class="col-md-8">
7           ...
8         </div>
9         <div class="col-md-4">
10          ...
11        </div>
12      </div>
13    </div>
14  </div>
15 </div>

score.html
1 <div class="score-container">
2   <div class="container">
3     <div class="score-page score-column1">
4       <div class="score-main">
5         <div class="score-inner">
6           ...
7           <div class="score-structural
8             score-column2-wideleft">
9             ...
10            <div class="score-left">
11              ...
12            </div>
13            <div class="score-right">
14              ...
15            </div>
16          </div>
17        </div>
18      </div>
19    </div>
20  </div>
21 </div>
```

# SCORE Building Blocks – Inner Structure

```
bootstrap.html
1 <div class="container">
2   <div class="row">
3     <div class="col-md-12">
4       ...
5       <div class="row">
6         <div class="col-md-4">
7           ...
8         </div>
9         <div class="col-md-8">
10          ...
11        </div>
12      </div>
13    </div>
14  </div>
15 </div>

score.html
1 <div class="score-container">
2   <div class="container">
3     <div class="score-page score-column1">
4       <div class="score-main">
5         <div class="score-inner">
6           ...
7           <div class="score-structural
8             score-column2-wideright">
9             ...
10            <div class="score-left">
11              ...
12            </div>
13            <div class="score-right">
14              ...
15            </div>
16          </div>
17        </div>
18      </div>
19    </div>
20  </div>
21 </div>
```

# SCORE Building Blocks – Inner Structure

```
bootstrap.html
1 <div class="container">
2   <div class="row">
3     <div class="col-md-12">
4       ...
5       <div class="row">
6         <div class="col-md-4">
7           ...
8         </div>
9         <div class="col-md-4">
10          ...
11        </div>
12        <div class="col-md-4">
13          ...
14        </div>
15      </div>
16    </div>
17  </div>
18</div>

score.html
1 <div class="score-container">
2   <div class="container">
3     <div class="score-page score-column1">
4       <div class="score-main">
5         <div class="score-inner">
6           ...
7           <div class="score-structural
8             score-column3-equal">
9             ...
10            <div class="score-left">
11              ...
12            </div>
13            <div class="score-center">
14              ...
15            </div>
16            <div class="score-right">
17              ...
18            </div>
19          </div>
20        </div>
21      </div>
22    </div>
23  </div>
24</div>
```


# SCORE Building Blocks – Inner Structure

```
bootstrap.html
1 <div class="container">
2   <div class="row">
3     <div class="col-md-12">
4       ...
5       <div class="row">
6         <div class="col-md-2">
7           ...
8         </div>
9         <div class="col-md-8">
10          ...
11        </div>
12        <div class="col-md-2">
13          ...
14        </div>
15      </div>
16    </div>
17  </div>
18 </div>

score.html
1 <div class="score-container">
2   <div class="container">
3     <div class="score-page score-column1">
4       <div class="score-main">
5         <div class="score-inner">
6           ...
7           <div class="score-structural
8             score-column3-widemiddle">
9             ...
10            <div class="score-left">
11              ...
12            </div>
13            <div class="score-center">
14              ...
15            </div>
16            <div class="score-right">
17              ...
18            </div>
19          </div>
20        </div>
21      </div>
22    </div>
23  </div>
24 </div>
```



# SCORE Building Blocks – Inner Structure

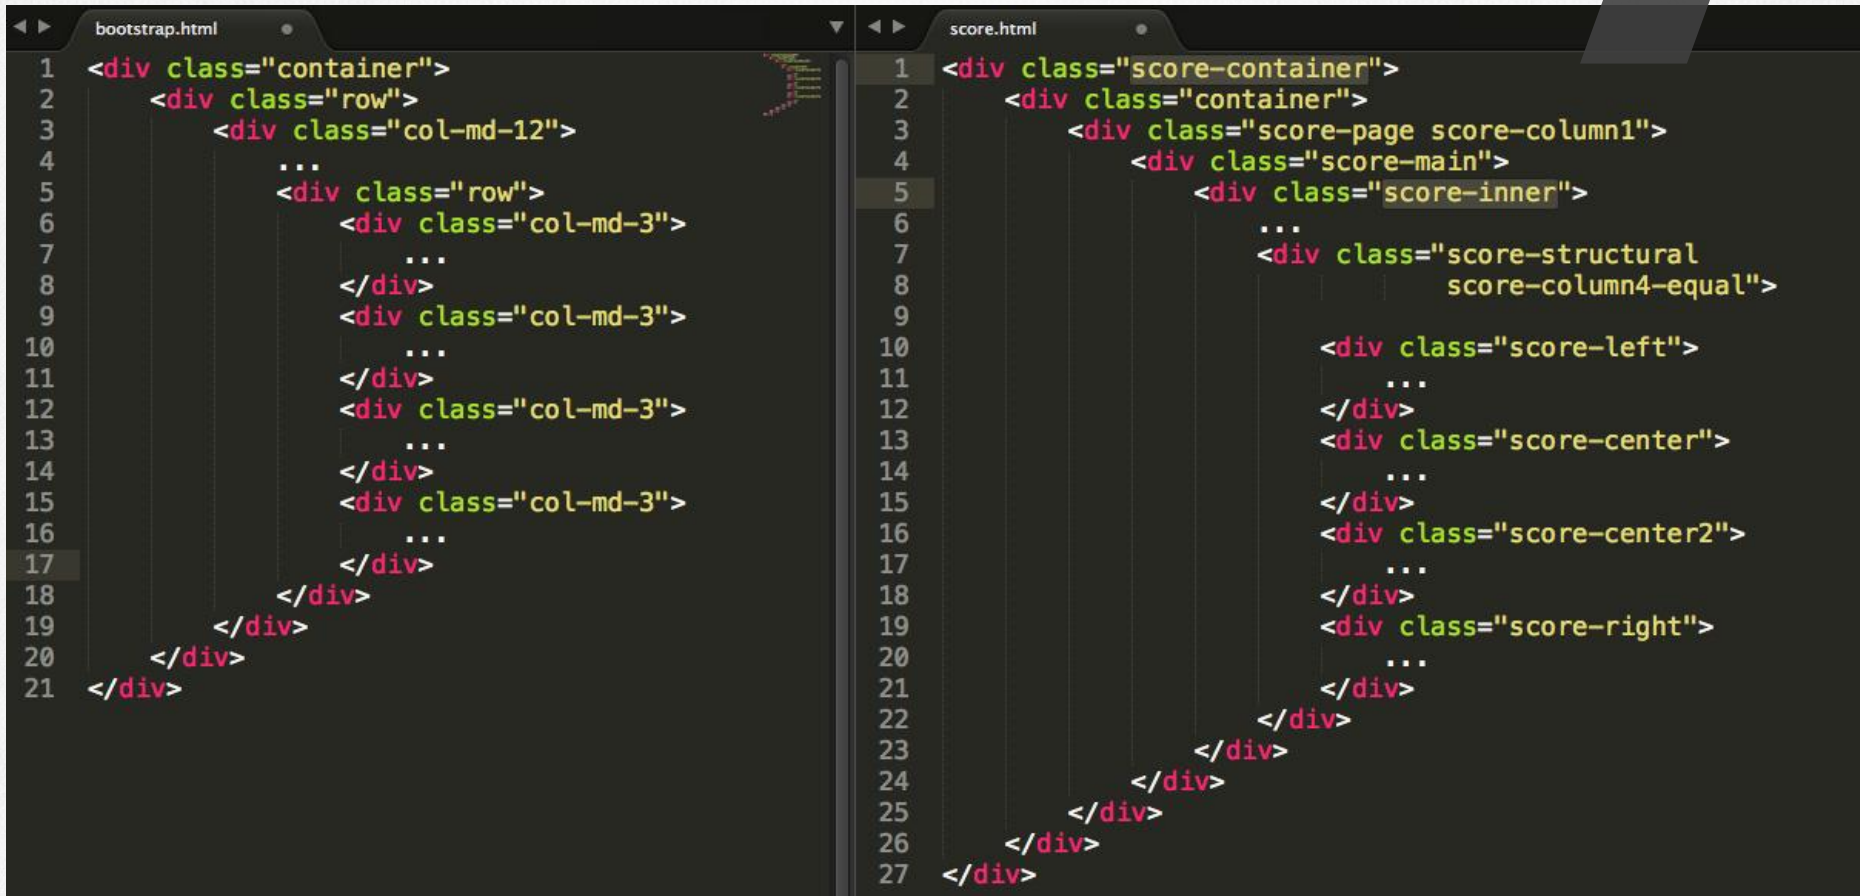

```
bootstrap.html
1 <div class="container">
2   <div class="row">
3     <div class="col-md-12">
4       ...
5       <div class="row">
6         <div class="col-md-3">
7           ...
8         </div>
9         <div class="col-md-3">
10          ...
11        </div>
12        <div class="col-md-3">
13          ...
14        </div>
15        <div class="col-md-3">
16          ...
17        </div>
18      </div>
19    </div>
20  </div>
21</div>

score.html
1 <div class="score-container">
2   <div class="container">
3     <div class="score-page score-column1">
4       <div class="score-main">
5         <div class="score-inner">
6           ...
7           <div class="score-structural
8             score-column4-equal">
9             ...
10            <div class="score-left">
11              ...
12            </div>
13            <div class="score-center">
14              ...
15            </div>
16            <div class="score-center2">
17              ...
18            </div>
19            <div class="score-right">
20              ...
21            </div>
22          </div>
23        </div>
24      </div>
25    </div>
26  </div>
27</div>
```

# SCORE Building Blocks – Stripe



Stripe

# SCORE Building Blocks – Stripe

```
bootstrap.html
1 <div class="container">
2   <div class="row">
3     <div class="col-md-12">
4       ...
5     </div>
6   </div>
7 </div>
8 <div class="full-width-wrapper">
9   <div class="container">
10    <div class="row">
11      <div class="col-md-12">
12        ...
13      </div>
14    </div>
15  </div>
16 </div>
17 <div class="container">
18   <div class="row">
19     <div class="col-md-12">
20       ...
21     </div>
22   </div>
23 </div>

score.html
1 <div class="score-container">
2   <div class="container">
3     <div class="score-page score-column1">
4       <div class="score-main">
5         <div class="score-inner">
6           ...
7         </div>
8       </div>
9     </div>
10  </div>
11 </div>
12 <div class="score-stripe">
13   <div class="score-container">
14     <div class="container">
15       <div class="score-page score-column1">
16         <div class="score-main">
17           <div class="score-inner">
18             ...
19           </div>
20         </div>
21       </div>
22     </div>
23   </div>
24 </div>
25 <div class="score-container">
26   <div class="container">
27     <div class="score-page score-column1">
28       <div class="score-main">
29         <div class="score-inner">
30           ...
31         </div>
32       </div>
33     </div>
34   </div>
35 </div>
```



# Responsive Grid Mixins

- Grid mixins make or modify rows and columns at the CSS level
- These mixins can be used to create custom page and structural layouts
  - Change default 2-column wide left from an 8/4 pair into a 7/5 or 9/3 pair
  - Make default medium columns into large, small, or extra-small columns

```
3 .score-structural {  
4   .make-row();  
5   &.score-column {  
6     & > .score-center {  
7       .make-md-column(12);  
8     }  
9   }  
10  &.score-column2-equal {  
11    & > .score-left {  
12      .make-md-column(6);  
13    }  
14    & > .score-right {  
15      .make-md-column(6);  
16    }  
17  }
```



# SCORE Building Blocks



- Bootstrap makes use of containers, rows, and columns
- Containers CANNOT be nested inside other containers
- All rows should be inside of containers
- All columns MUST be inside of rows
- SCORE makes use of containers, score-pages, score-structurals, score-columns and score-stripes
- All score-pages INCLUDE a wrapping container
- A score-page CANNOT be nested inside another score-page
- Score-structurals are ONLY to be nested inside of score-pages (header and footer are exceptions)
- Score-stripes are used to separate score-page(s) for full-width backgrounds

# Class Exercise



- Create basic SCORE grid example
  1. Navigate to 3\_score\_grid\_exercise > grid-exercise.pdf
  2. Identify page layout
  3. Identify structural layout
  4. Identify stripes
  5. Create page/structural markup
  6. `<div class="score-component"></div>` will represent your SCORE component placeholder

Exercise 3 – SCORE Grid

# SCORE Component Docs



- [Parent page for Bootstrap UI components](#)
  - Containers
  - Content
  - Navigation
- Includes example screenshot and HTML output



# 06

## Styling SCORE Components

Overriding Bootstrap and using class selections





# Styling Content Components

- Styles are housed in the site LESS folder
- Typically one LESS file per component
- Site styles often need to override native Bootstrap styles
  - Should be declared on site-specific component less file (ex. site-navigation.less, site-carousel.less, etc.)
  - Should NOT be declared in Bootstrap or SCORE less folder



# Show/Hide Components

- Content administrators can determine to show or hide components for different screen sizes
- Based on Bootstrap's responsive show/hide classes
- Managed in content editor

	Extra small devices Phones (<768px)	Small devices Tablets (≥768px)	Medium devices Desktops (≥992px)	Large devices Desktops (≥1200px)
<code>.visible-xs-*</code>	Visible	Hidden	Hidden	Hidden
<code>.visible-sm-*</code>	Hidden	Visible	Hidden	Hidden
<code>.visible-md-*</code>	Hidden	Hidden	Visible	Hidden
<code>.visible-lg-*</code>	Hidden	Hidden	Hidden	Visible
<code>.hidden-xs</code>	Hidden	Visible	Visible	Visible
<code>.hidden-sm</code>	Visible	Hidden	Visible	Visible
<code>.hidden-md</code>	Visible	Visible	Hidden	Visible
<code>.hidden-lg</code>	Visible	Visible	Visible	Hidden

# Class Selections



- Components that allow class selections include page headers, sub-headers, stripes, carousels, and highlights
- Enables customization of SCORE components and eliminates the need to create custom components
- Stripes, heroes, and carousels have built-in choices for class selection that control the background size
  - Allows for covered, contained, or repeated background image
  - Reference: [Proper implementation of background images with text](#)

Demo – Component Examples



07

## Best Practices

Ensuring the best project experience for  
yourself and your team





# Working with Sitecore

- Always have a POC as an HTML file in initial output
  - Preferably shown at page level based upon designed composition
- Stay in sync with Sitecore developers to avoid confusion and re-work
- All project files are shared between Sitecore and UI developers



# Working with Sitecore

- Avoid creating new components if possible
  - Utilize option of adding classes to SCORE components
  - If a new component must be introduced, talk to Sitecore developer
  - Any new component styles should be saved in "site" folder (site-component-name.less)
- Keep HTML sandbox files up to date with production
- Use browser extensions to test local CSS on production pages
  - CSS Inject, CSS Reloader, Web Developer, etc.



# Code Organization

- Keep LESS files organized and tidy
  - Prevents code bloat and allows code to be easily understood or worked on by another team member
- Stay DRY!!
  - Do your best not to repeat specific styles or blocks of code
  - Use global variables and mixins that can easily be updated and maintained
- Keep nesting under control
  - Maximum of 4 levels deep if possible
  - Styles under highly specific selectors are hard to override in other places
- We recommend NOT changing any Bootstrap LESS files





# Final Exercise

- Create home page proof of concept using SCORE components
  1. Navigate to 4\_poc\_exercise > design-studios > design-studios.psd or .pdf
  2. Identify page layouts
  3. Identify structural layouts
  4. Identify stripes
  5. Identify SCORE components
  6. Identify custom components
  7. Create markup and styles

Exercise 4 – POC



Ben Cato  
ben@brainjocks.com  
770.924.6444

Emily Lord  
emily@brainjocks.com  
770.924.6444

BRAINJOCKS  
SCORE™