

ANEXO IV

PRUEBAS Y VERIFICACIÓN: RESULTADOS DE LAS PRUEBAS (1.5.2)



	ADMINISTRACIÓN	REUNIONES	TÉCNICA	INVITADOS	DMZ	IMPESC	OPENVPN
ADMINISTRACIÓN							
REUNIONES							
TÉCNICA							
INVITADOS							
DMZ							
IMPESC							
OPENVPN							

ADMINISTRACIÓN

```
Terminal - gns3@ClienteRT: ~/Escritorio
Ficheiro  Editar  Ver  Terminal  Lapelas  Axuda

gns3@ClienteRT:~/Escritorio$ ping 192.168.20.2
PING 192.168.20.2 (192.168.20.2) 56(84) bytes of data.
^C
--- 192.168.20.2 ping statistics ---
4 packets transmitted, 0 received, 100% packet loss, time 30
54ms

gns3@ClienteRT:~/Escritorio$ ping 192.168.40.2
PING 192.168.40.2 (192.168.40.2) 56(84) bytes of data.
^C
--- 192.168.40.2 ping statistics ---
3 packets transmitted, 0 received, 100% packet loss, time 20
30ms

gns3@ClienteRT:~/Escritorio$ ping 192.168.30.2
PING 192.168.30.2 (192.168.30.2) 56(84) bytes of data.
^C
--- 192.168.30.2 ping statistics ---
3 packets transmitted, 0 received, 100% packet loss, time 20
42ms

gns3@ClienteRT:~/Escritorio$
```

```
Terminal - gns3@ClienteRT: ~/Escritorio
Ficheiro  Editar  Ver  Terminal  Lapelas  Axuda

gns3@ClienteRT:~/Escritorio$ ip a
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKN
t qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: ens4: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_code
p default qlen 1000
    link/ether 0c:6f:23:91:00:00 brd ff:ff:ff:ff:ff:ff
    altname enp0s4
    altname enx0c6f23910000
    inet 192.168.10.3/24 brd 192.168.10.255 scope global dynamic
ns4
    valid_lft 6809sec preferred_lft 6809sec
    inet6 fe80::7e2e:111a:6787:125b/64 scope link noprefixroute
    valid_lft forever preferred_lft forever
gns3@ClienteRT:~/Escritorio$
```

```
Terminal - gns3@ClienteRT: ~/Escritorio
Ficheiro  Editar  Ver  Terminal  Lapelas  Axuda

gns3@ClienteRT:~/Escritorio$ ping 192.168.10.2
PING 192.168.10.2 (192.168.10.2) 56(84) bytes of data.
64 bytes from 192.168.10.2: icmp_seq=1 ttl=64 time=0.616 ms
^C
--- 192.168.10.2 ping statistics ---
1 packets transmitted, 1 received, 0% packet loss, time 0ms
rtt min/avg/max/mdev = 0.616/0.616/0.616/0.000 ms
gns3@ClienteRT:~/Escritorio$ ping 10.0.100.2
PING 10.0.100.2 (10.0.100.2) 56(84) bytes of data.
64 bytes from 10.0.100.2: icmp_seq=1 ttl=63 time=2.93 ms
^C
--- 10.0.100.2 ping statistics ---
1 packets transmitted, 1 received, 0% packet loss, time 0ms
rtt min/avg/max/mdev = 2.928/2.928/2.928/0.000 ms
gns3@ClienteRT:~/Escritorio$ ping 192.168.50.2
PING 192.168.50.2 (192.168.50.2) 56(84) bytes of data.
64 bytes from 192.168.50.2: icmp_seq=1 ttl=63 time=2.52 ms
^C
--- 192.168.50.2 ping statistics ---
1 packets transmitted, 1 received, 0% packet loss, time 0ms
rtt min/avg/max/mdev = 2.521/2.521/2.521/0.000 ms
gns3@ClienteRT:~/Escritorio$
```

```
Terminal - gns3@ClienteRT: ~/Escritorio
Ficheiro  Editar  Ver  Terminal  Lapelas  Axuda

gns3@ClienteRT:~/Escritorio$ ip a
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKN
t qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: ens4: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_code
p default qlen 1000
    link/ether 0c:6f:23:91:00:00 brd ff:ff:ff:ff:ff:ff
    altname enp0s4
    altname enx0c6f23910000
    inet 192.168.10.3/24 brd 192.168.10.255 scope global dynamic
ns4
    valid_lft 6809sec preferred_lft 6809sec
    inet6 fe80::7e2e:111a:6787:125b/64 scope link noprefixroute
    valid_lft forever preferred_lft forever
gns3@ClienteRT:~/Escritorio$
```

REUNIONES

```
Terminal - gns3@ClienteRT: ~/Escritorio
Ficheiro Editar Ver Terminal Lapelas Axuda
gns3@ClienteRT:~/Escritorio$ ping 192.168.10.2
PING 192.168.10.2 (192.168.10.2) 56(84) bytes of data.
^C
--- 192.168.10.2 ping statistics ---
3 packets transmitted, 0 received, 100% packet loss, time 2059ms

gns3@ClienteRT:~/Escritorio$ ping 192.168.20.2
PING 192.168.20.2 (192.168.20.2) 56(84) bytes of data.
^C
--- 192.168.20.2 ping statistics ---
4 packets transmitted, 0 received, 100% packet loss, time 3069ms

gns3@ClienteRT:~/Escritorio$ ping 192.168.40.2
PING 192.168.40.2 (192.168.40.2) 56(84) bytes of data.
^C
--- 192.168.40.2 ping statistics ---
3 packets transmitted, 0 received, 100% packet loss, time 2056ms

gns3@ClienteRT:~/Escritorio$

Terminal - gns3@ClienteRT: ~/Escritorio
Ficheiro Editar Ver Terminal Lapelas Axuda
gns3@ClienteRT:~/Escritorio$ ip a
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state U
   t qlen 1000
   link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
   inet 127.0.0.1/8 scope host lo
       valid_lft forever preferred_lft forever
   inet6 ::1/128 scope host noprefixroute
       valid_lft forever preferred_lft forever
2: ens4: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq
   p default qlen 1000
   link/ether 0c:c3:96:0a:00:00 brd ff:ff:ff:ff:ff:ff
   altnam enp0s4
   altnam enx0cc3960a0000
   inet 192.168.30.2/24 brd 192.168.30.255 scope global dyna
   ns4
       valid_lft 6644sec preferred_lft 6644sec
   inet6 fe80::ec3:96ff:fe0a:0/64 scope link noprefixroute
       valid_lft forever preferred_lft forever
gns3@ClienteRT:~/Escritorio$
```

```
Terminal - gns3@ClienteRT: ~/Escritorio
Ficheiro Editar Ver Terminal Lapelas Axuda
gns3@ClienteRT:~/Escritorio$ ping 192.168.30.3
PING 192.168.30.3 (192.168.30.3) 56(84) bytes of data.
64 bytes from 192.168.30.3: icmp_seq=1 ttl=64 time=0.855 ms
64 bytes from 192.168.30.3: icmp_seq=2 ttl=64 time=0.749 ms
^C
--- 192.168.30.3 ping statistics ---
2 packets transmitted, 2 received, 0% packet loss, time 1002ms
rtt min/avg/max/mdev = 0.749/0.802/0.855/0.053 ms
gns3@ClienteRT:~/Escritorio$ ping 10.0.100.2
PING 10.0.100.2 (10.0.100.2) 56(84) bytes of data.
64 bytes from 10.0.100.2: icmp_seq=1 ttl=63 time=3.21 ms
^C
--- 10.0.100.2 ping statistics ---
1 packets transmitted, 1 received, 0% packet loss, time 0ms
rtt min/avg/max/mdev = 3.212/3.212/3.212/0.000 ms
gns3@ClienteRT:~/Escritorio$ ping 192.168.50.2
PING 192.168.50.2 (192.168.50.2) 56(84) bytes of data.
64 bytes from 192.168.50.2: icmp_seq=1 ttl=63 time=2.52 ms
^C
--- 192.168.50.2 ping statistics ---
1 packets transmitted, 1 received, 0% packet loss, time 0ms
rtt min/avg/max/mdev = 2.522/2.522/2.522/0.000 ms
gns3@ClienteRT:~/Escritorio$

Terminal - gns3@ClienteRT: ~/Escritorio
Ficheiro Editar Ver Terminal Lapelas Axuda
gns3@ClienteRT:~/Escritorio$ ip a
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state U
   t qlen 1000
   link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
   inet 127.0.0.1/8 scope host lo
       valid_lft forever preferred_lft forever
   inet6 ::1/128 scope host noprefixroute
       valid_lft forever preferred_lft forever
2: ens4: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq
   p default qlen 1000
   link/ether 0c:c3:96:0a:00:00 brd ff:ff:ff:ff:ff:ff
   altnam enp0s4
   altnam enx0cc3960a0000
   inet 192.168.30.2/24 brd 192.168.30.255 scope global dyna
   ns4
       valid_lft 6644sec preferred_lft 6644sec
   inet6 fe80::ec3:96ff:fe0a:0/64 scope link noprefixroute
       valid_lft forever preferred_lft forever
gns3@ClienteRT:~/Escritorio$
```

TÉCNICA

```
Terminal - gns3@ClienteRT: ~/Escritorio
Ficheiro Editar Ver Terminal Lapelas Axuda
gns3@ClienteRT:~/Escritorio$ ping 192.168.10.2
PING 192.168.10.2 (192.168.10.2) 56(84) bytes of data.
^C
--- 192.168.10.2 ping statistics ---
2 packets transmitted, 0 received, 100% packet loss, time 1008ms

gns3@ClienteRT:~/Escritorio$ ping 192.168.30.2
PING 192.168.30.2 (192.168.30.2) 56(84) bytes of data.
^C
--- 192.168.30.2 ping statistics ---
2 packets transmitted, 0 received, 100% packet loss, time 1013ms

gns3@ClienteRT:~/Escritorio$ ping 192.168.40.2
PING 192.168.40.2 (192.168.40.2) 56(84) bytes of data.
^C
--- 192.168.40.2 ping statistics ---
2 packets transmitted, 0 received, 100% packet loss, time 1009ms

gns3@ClienteRT:~/Escritorio$
```

```
Terminal - gns3@ClienteRT: ~/Escritorio
Ficheiro Editar Ver Terminal Lapelas Axuda
gns3@ClienteRT:~/Escritorio$ ip a
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue sta
t qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid lft forever preferred lft forever
    inet6 ::1/128 scope host noprefixroute
        valid lft forever preferred lft forever
2: ens4: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc
p default qlen 1000
    link/ether 0c:38:74:34:00:00 brd ff:ff:ff:ff:ff:ff
    altnam enp0s4
    altnam enx0c3874340000
    inet 192.168.20.2/24 brd 192.168.20.255 scope global
ns4
        valid lft 6488sec preferred lft 6488sec
    inet6 fe80::e38:74ff:fe34:0/64 scope link noprefixrou
        valid lft forever preferred_lft forever
gns3@ClienteRT:~/Escritorio$
```

```
Terminal - gns3@ClienteRT: ~/Escritorio
Ficheiro Editar Ver Terminal Lapelas Axuda
gns3@ClienteRT:~/Escritorio$ ping 192.168.20.3
PING 192.168.20.3 (192.168.20.3) 56(84) bytes of data.
64 bytes from 192.168.20.3: icmp_seq=1 ttl=64 time=1.14 ms
^C
--- 192.168.20.3 ping statistics ---
1 packets transmitted, 1 received, 0% packet loss, time 0ms
rtt min/avg/max/mdev = 1.138/1.138/1.138/0.000 ms

gns3@ClienteRT:~/Escritorio$ ping 10.0.100.2
PING 10.0.100.2 (10.0.100.2) 56(84) bytes of data.
64 bytes from 10.0.100.2: icmp_seq=1 ttl=63 time=2.75 ms
^C
--- 10.0.100.2 ping statistics ---
1 packets transmitted, 1 received, 0% packet loss, time 0ms
rtt min/avg/max/mdev = 2.753/2.753/2.753/0.000 ms

gns3@ClienteRT:~/Escritorio$ ping 192.168.50.2
PING 192.168.50.2 (192.168.50.2) 56(84) bytes of data.
64 bytes from 192.168.50.2: icmp_seq=1 ttl=63 time=2.74 ms
^C
--- 192.168.50.2 ping statistics ---
1 packets transmitted, 1 received, 0% packet loss, time 0ms
rtt min/avg/max/mdev = 2.737/2.737/2.737/0.000 ms

gns3@ClienteRT:~/Escritorio$
```

```
Terminal - gns3@ClienteRT: ~/Escritorio
Ficheiro Editar Ver Terminal Lapelas Axuda
gns3@ClienteRT:~/Escritorio$ ip a
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue sta
t qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid lft forever preferred lft forever
    inet6 ::1/128 scope host noprefixroute
        valid lft forever preferred lft forever
2: ens4: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc
p default qlen 1000
    link/ether 0c:38:74:34:00:00 brd ff:ff:ff:ff:ff:ff
    altnam enp0s4
    altnam enx0c3874340000
    inet 192.168.20.2/24 brd 192.168.20.255 scope global
ns4
        valid lft 6488sec preferred lft 6488sec
    inet6 fe80::e38:74ff:fe34:0/64 scope link noprefixrou
        valid lft forever preferred_lft forever
gns3@ClienteRT:~/Escritorio$
```

INVITADOS

```
Terminal - gns3@ClienteRT: ~/Escritorio
Ficheiro  Editar  Ver  Terminal  Lapelas  Axuda
gns3@ClienteRT:~/Escritorio$ ping 192.168.10.2
PING 192.168.10.2 (192.168.10.2) 56(84) bytes of data.
^C
--- 192.168.10.2 ping statistics ---
2 packets transmitted, 0 received, 100% packet loss, time 1019ms

gns3@ClienteRT:~/Escritorio$ ping 192.168.20.2
PING 192.168.20.2 (192.168.20.2) 56(84) bytes of data.
^C
--- 192.168.20.2 ping statistics ---
2 packets transmitted, 0 received, 100% packet loss, time 1007ms

gns3@ClienteRT:~/Escritorio$ ping 192.168.30.2
PING 192.168.30.2 (192.168.30.2) 56(84) bytes of data.
^C
--- 192.168.30.2 ping statistics ---
2 packets transmitted, 0 received, 100% packet loss, time 1015ms

gns3@ClienteRT:~/Escritorio$ ping 192.168.50.2
PING 192.168.50.2 (192.168.50.2) 56(84) bytes of data.
^C
--- 192.168.50.2 ping statistics ---
2 packets transmitted, 0 received, 100% packet loss, time 1032ms

gns3@ClienteRT:~/Escritorio$

Terminal - gns3@ClienteRT: ~/Escritorio
Ficheiro  Editar  Ver  Terminal  Lapelas  Axuda
gns3@ClienteRT:~/Escritorio$ ip a
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state U
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: ens4: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_
    link/ether 0c:24:64:62:00:00 brd ff:ff:ff:ff:ff:ff
    altname enx0c2464620000
    inet 192.168.40.2/24 brd 192.168.40.255 scope global dyna
    ns4
        valid_lft 6336sec preferred_lft 6336sec
    inet6 fe80::e24:64ff:fe62:0/64 scope link noprefixroute
        valid_lft forever preferred_lft forever
gns3@ClienteRT:~/Escritorio$
```

```
Terminal - gns3@ClienteRT: ~/Escritorio
Ficheiro  Editar  Ver  Terminal  Lapelas  Axuda
gns3@ClienteRT:~/Escritorio$ ping 192.168.40.3
PING 192.168.40.3 (192.168.40.3) 56(84) bytes of data.
64 bytes from 192.168.40.3: icmp_seq=1 ttl=64 time=0.854 ms
^C
--- 192.168.40.3 ping statistics ---
1 packets transmitted, 1 received, 0% packet loss, time 0ms
rtt min/avg/max/mdev = 0.854/0.854/0.854/0.000 ms

gns3@ClienteRT:~/Escritorio$ ping 10.0.100.2
PING 10.0.100.2 (10.0.100.2) 56(84) bytes of data.
64 bytes from 10.0.100.2: icmp_seq=1 ttl=63 time=2.69 ms
64 bytes from 10.0.100.2: icmp_seq=2 ttl=63 time=2.35 ms
^C
--- 10.0.100.2 ping statistics ---
2 packets transmitted, 2 received, 0% packet loss, time 1002ms
rtt min/avg/max/mdev = 2.354/2.522/2.690/0.168 ms

gns3@ClienteRT:~/Escritorio$

Terminal - gns3@ClienteRT: ~/Escritorio
Ficheiro  Editar  Ver  Terminal  Lapelas  Axuda
gns3@ClienteRT:~/Escritorio$ ip a
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state U
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: ens4: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_
    link/ether 0c:24:64:62:00:00 brd ff:ff:ff:ff:ff:ff
    altname enx0c2464620000
    inet 192.168.40.2/24 brd 192.168.40.255 scope global dyna
    ns4
        valid_lft 6336sec preferred_lft 6336sec
    inet6 fe80::e24:64ff:fe62:0/64 scope link noprefixroute
        valid_lft forever preferred_lft forever
gns3@ClienteRT:~/Escritorio$
```


DMZ


```
Terminal - gns3@ClienteRT: ~/Escritorio
Ficheiro  Editar  Ver  Terminal  Lapelas  Axuda
gns3@ClienteRT:~/Escritorio$ ping 192.168.50.2
PING 192.168.50.2 (192.168.50.2) 56(84) bytes of data.
64 bytes from 192.168.50.2: icmp_seq=1 ttl=63 time=4.74 ms
^C
--- 192.168.50.2 ping statistics ---
1 packets transmitted, 1 received, 0% packet loss, time 0ms
rtt min/avg/max/mdev = 4.741/4.741/4.741/0.000 ms
gns3@ClienteRT:~/Escritorio$ ip a
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: ens4: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel state UP group default qlen 1000
    link/ether 0c:e8:a7:c7:00:00 brd ff:ff:ff:ff:ff:ff
    altname enp0s4
    altname enx0ce8a7c70000
    inet 10.0.100.2/24 brd 10.0.100.255 scope global dynamic noprefixroute ens4
        valid_lft 7049sec preferred_lft 7049sec
    inet6 fe80::ee8:a7ff:fec7:0/64 scope link noprefixroute
        valid_lft forever preferred_lft forever
gns3@ClienteRT:~/Escritorio$
```

IMPESC

```
Terminal - gns3@ClienteRT: ~/Escritorio
Ficheiro  Editar  Ver  Terminal  Lapelas  Axuda
gns3@ClienteRT:~/Escritorio$ ping 10.0.100.2
PING 10.0.100.2 (10.0.100.2) 56(84) bytes of data.
64 bytes from 10.0.100.2: icmp_seq=1 ttl=63 time=3.02 ms
^C
--- 10.0.100.2 ping statistics ---
1 packets transmitted, 1 received, 0% packet loss, time 0ms
rtt min/avg/max/mdev = 3.017/3.017/3.017/0.000 ms
gns3@ClienteRT:~/Escritorio$ ip a
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default
qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: ens4: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel state UP group
default qlen 1000
    link/ether 0c:87:53:fd:00:00 brd ff:ff:ff:ff:ff:ff
    altname enp0s4
    altname enx0c8753fd0000
    inet 192.168.50.2/24 brd 192.168.50.255 scope global dynamic noprefixroute ens
4
        valid_lft 7142sec preferred_lft 7142sec
    inet6 fe80::e87:53ff:fed:0/64 scope link noprefixroute
        valid_lft forever preferred_lft forever
gns3@ClienteRT:~/Escritorio$
```

OPENVPN

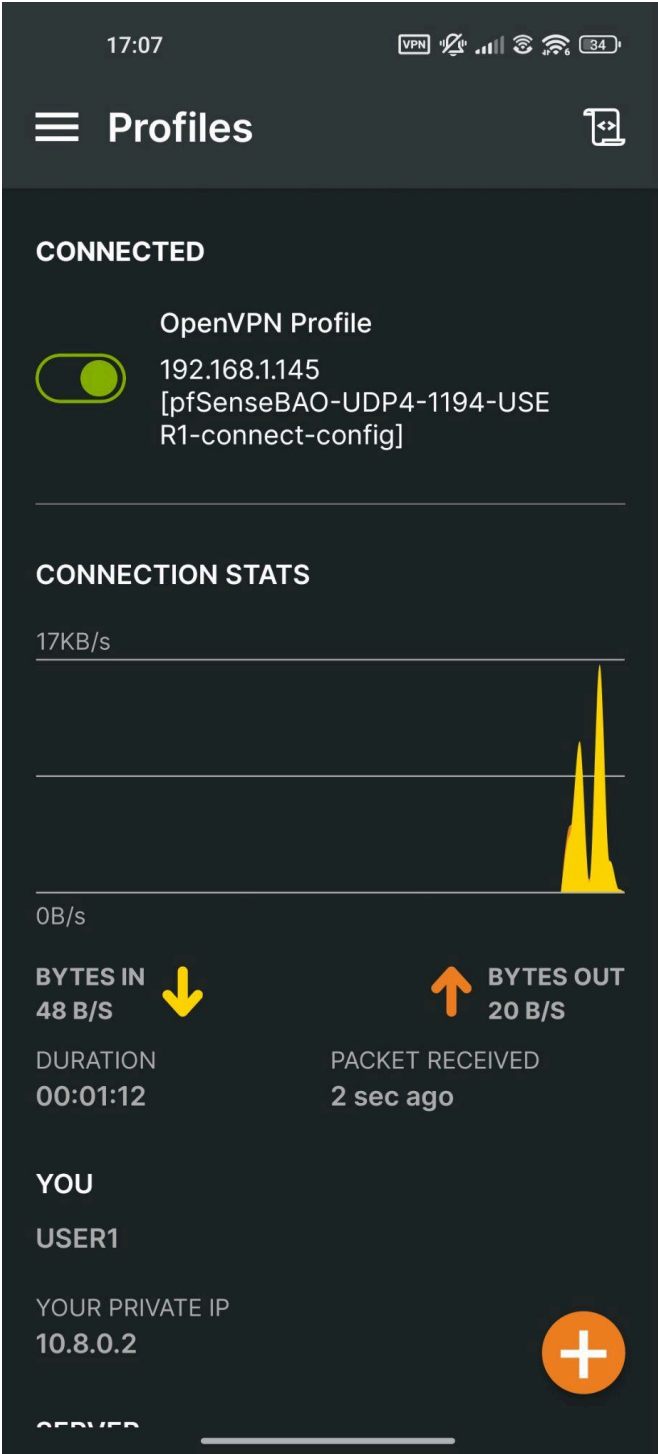

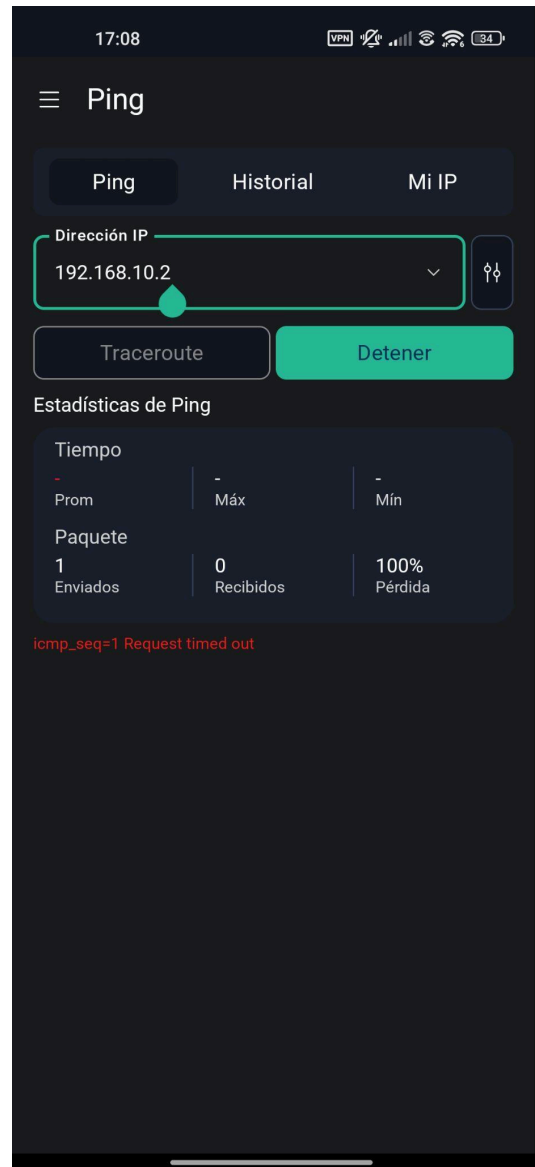





PINGS DESDE LA VPN CONECTADA EN LINUX

```
profesorado@PCA110-padron:~$ ping 192.168.10.2
PING 192.168.10.2 (192.168.10.2) 56(84) bytes of data.
^C
--- 192.168.10.2 ping statistics ---
2 packets transmitted, 0 received, 100% packet loss, time 1002ms

profesorado@PCA110-padron:~$ ping 192.168.30.2
PING 192.168.30.2 (192.168.30.2) 56(84) bytes of data.
^C
--- 192.168.30.2 ping statistics ---
2 packets transmitted, 0 received, 100% packet loss, time 1003ms

profesorado@PCA110-padron:~$ ping 192.168.40.2
PING 192.168.40.2 (192.168.40.2) 56(84) bytes of data.
^C
--- 192.168.40.2 ping statistics ---
2 packets transmitted, 0 received, 100% packet loss, time 1003ms

profesorado@PCA110-padron:~$ ping 192.168.50.2
PING 192.168.50.2 (192.168.50.2) 56(84) bytes of data.
^C
--- 192.168.50.2 ping statistics ---
2 packets transmitted, 0 received, 100% packet loss, time 1019ms

profesorado@PCA110-padron:~$
```


```
profesorado@PCA110-padron:~$ ping 192.168.20.2
PING 192.168.20.2 (192.168.20.2) 56(84) bytes of data.
64 bytes from 192.168.20.2: icmp_seq=1 ttl=63 time=2.62 ms
64 bytes from 192.168.20.2: icmp_seq=2 ttl=63 time=3.55 ms
64 bytes from 192.168.20.2: icmp_seq=3 ttl=63 time=1.61 ms
^C
--- 192.168.20.2 ping statistics ---
3 packets transmitted, 3 received, 0% packet loss, time 2004ms
rtt min/avg/max/mdev = 1.612/2.595/3.553/0.792 ms
profesorado@PCA110-padron:~$ ping 10.0.100.2
PING 10.0.100.2 (10.0.100.2) 56(84) bytes of data.
64 bytes from 10.0.100.2: icmp_seq=1 ttl=63 time=3.04 ms
64 bytes from 10.0.100.2: icmp_seq=2 ttl=63 time=3.37 ms
64 bytes from 10.0.100.2: icmp_seq=3 ttl=63 time=3.61 ms
^C
--- 10.0.100.2 ping statistics ---
3 packets transmitted, 3 received, 0% packet loss, time 2003ms
rtt min/avg/max/mdev = 3.042/3.342/3.612/0.233 ms
profesorado@PCA110-padron:~$ ifconfig
docker0: flags=4099<UP,BROADCAST,MULTICAST> mtu 1500
    inet 172.17.0.1 netmask 255.255.0.0 broadcast 172.17.255.255
    ether 12:9f:4e:26:63:52 txqueuelen 0 (Ethernet)
    RX packets 0 bytes 0 (0.0 B)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 0 bytes 0 (0.0 B)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

enp1s0: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500
    inet 192.168.220.137 netmask 255.255.255.0 broadcast 192.168.220.255
    inet6 fe80::593a:b20d:a5ce:258c prefixlen 64 scopeid 0x20<link>
    ether 7c:57:58:39:ac:5a txqueuelen 1000 (Ethernet)
    RX packets 42698 bytes 56925597 (56.9 MB)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 18435 bytes 1609506 (1.6 MB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

lo: flags=73<UP,LOOPBACK,RUNNING> mtu 65536
    inet 127.0.0.1 netmask 255.0.0.0
    inet6 ::1 prefixlen 128 scopeid 0x10<host>
    loop txqueuelen 1000 (Local Loopback)
    RX packets 601 bytes 63842 (63.8 KB)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 601 bytes 63842 (63.8 KB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

tun0: flags=4305<UP,POINTOPOINT,RUNNING,NOARP,MULTICAST> mtu 1500
    inet 10.8.0.3 netmask 255.255.255.0 destination 10.8.0.3
    inet6 fe80::251:ae9a:47af:3c37 prefixlen 64 scopeid 0x20<link>
    unspec 00-00-00-00-00-00-00-00-00-00-00-00-00-00-00 txqueuelen 500 (UNSPEC)
    RX packets 215 bytes 22485 (22.4 KB)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 480 bytes 56426 (56.4 KB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0
```

PINGS DESDE LA VPN CONECTADA DESDE WINDOWS

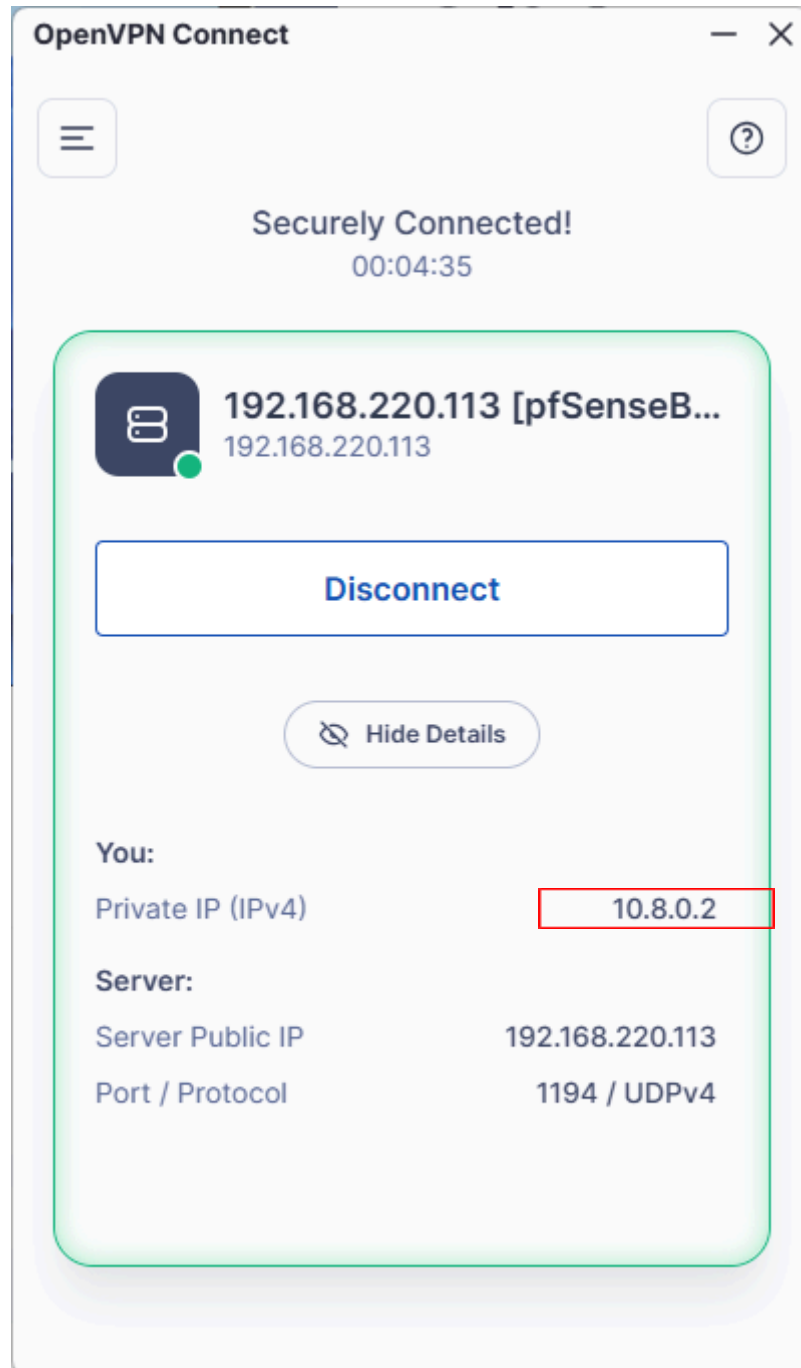

```
C:\Users\Alumno st2>ping 192.168.10.2
```

```
Haciendo ping a 192.168.10.2 con 32 bytes de datos:
```

```
Control-C
```

```
^C
```

```
C:\Users\Alumno st2>ping 192.168.30.2
```

```
Haciendo ping a 192.168.30.2 con 32 bytes de datos:
```

```
Control-C
```

```
^C
```

```
C:\Users\Alumno st2>ping 192.168.40.2
```

```
Haciendo ping a 192.168.40.2 con 32 bytes de datos:
```

```
Control-C
```

```
^C
```

```
C:\Users\Alumno st2>ping 192.168.50.2
```

```
Haciendo ping a 192.168.50.2 con 32 bytes de datos:
```

```
Control-C
```

```
^C
```

```
C:\Users\Alumno st2>
```

Microsoft Windows [Versión 10.0.26200.8246]
(c) Microsoft Corporation. Todos los derechos reservados.

C:\Users\Alumno st2>ping 192.168.20.2

Haciendo ping a 192.168.20.2 con 32 bytes de datos:
Respuesta desde 192.168.20.2: bytes=32 tiempo=4ms TTL=63
Respuesta desde 192.168.20.2: bytes=32 tiempo=4ms TTL=63
Respuesta desde 192.168.20.2: bytes=32 tiempo=13ms TTL=63

Estadísticas de ping para 192.168.20.2:
Paquetes: enviados = 3, recibidos = 3, perdidos = 0
(0% perdidos),
Tiempos aproximados de ida y vuelta en milisegundos:
Mínimo = 4ms, Máximo = 13ms, Media = 7ms

Control-C

^C

C:\Users\Alumno st2>ping 10.0.100.2

Haciendo ping a 10.0.100.2 con 32 bytes de datos:
Respuesta desde 10.0.100.2: bytes=32 tiempo=4ms TTL=63
Respuesta desde 10.0.100.2: bytes=32 tiempo=4ms TTL=63
Respuesta desde 10.0.100.2: bytes=32 tiempo=5ms TTL=63

Estadísticas de ping para 10.0.100.2:
Paquetes: enviados = 3, recibidos = 3, perdidos = 0
(0% perdidos),
Tiempos aproximados de ida y vuelta en milisegundos:
Mínimo = 4ms, Máximo = 5ms, Media = 4ms

Control-C

^C

C:\Users\Alumno st2>ipconfig

Configuración IP de Windows

Adaptador desconocido Conexión de área local:

Sufijo DNS específico para la conexión. . . :
Vínculo: dirección IPv6 local. . . : fe80::858f:1bcf:60ec:9bbf%4
Dirección IPv4. : 10.8.0.2
Máscara de subred : 255.255.255.0
Puerta de enlace predeterminada :

PINGS ENTRE USUARIOS VPN

```
braisjrz@VMNTT:~$ ifconfig
eth0: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500
    inet 192.168.1.142 netmask 255.255.255.0 broadcast 192.168.1.255
    inet6 fe80::9d53:bae1:1295:385e prefixlen 64 scopeid 0x20<link>
    ether 00:0c:29:78:cf:fa txqueuelen 1000 (Ethernet)
    RX packets 829755 bytes 1237241155 (1.2 GB)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 28114 bytes 4538078 (4.5 MB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

lo: flags=73<UP,LOOPBACK,RUNNING> mtu 65536
    inet 127.0.0.1 netmask 255.0.0.0
    inet6 ::1 prefixlen 128 scopeid 0x10<host>
    loop txqueuelen 1000 (Bucle local)
    RX packets 1298 bytes 138236 (138.2 KB)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 1298 bytes 138236 (138.2 KB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

tun0: flags=4305<UP,POINTOPOINT,RUNNING,NOARP,MULTICAST> mtu 1500
    inet 10.8.0.2 netmask 255.255.255.0 destination 10.8.0.2
    inet6 fe80::9821:d7b9:38c7:9031 prefixlen 64 scopeid 0x20<link>
    unspec 00-00-00-00-00-00-00-00-00-00-00-00-00-00-00-00 txqueuelen 500 (UNSPEC)
    RX packets 25692 bytes 31384744 (31.3 MB)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 4626 bytes 1010929 (1.0 MB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

braisjrz@VMNTT:~$ ping 10.8.0.3
PING 10.8.0.3 (10.8.0.3) 56(84) bytes of data.
64 bytes from 10.8.0.3: icmp_seq=1 ttl=128 time=5.80 ms
^C
--- 10.8.0.3 ping statistics ---
1 packets transmitted, 1 received, 0% packet loss, time 0ms
rtt min/avg/max/mdev = 5.801/5.801/5.801/0.000 ms
```

```
Símbolo del sistema
Sufijo DNS específico para la conexión. . . :
Vínculo: dirección IPv6 local. . . : fe80::d0f2:a58b:3b43:a879%24
Dirección IPv4. . . . . : 10.8.0.3
Máscara de subred. . . . . : 255.255.255.0
Puerta de enlace predeterminada. . . . . :

Adaptador de Ethernet Ethernet0:

Sufijo DNS específico para la conexión. . . :
Vínculo: dirección IPv6 local. . . : fe80::d173:926e:7db6:9788%11
Dirección IPv4. . . . . : 192.168.1.141
Máscara de subred. . . . . : 255.255.255.0
Puerta de enlace predeterminada. . . . . : 192.168.1.1

Adaptador desconocido OpenVPN Connect DCO Adapter:

Estado de los medios. . . . . : medios desconectados
Sufijo DNS específico para la conexión. . . :

C:\Users\NTT_User>ping 10.8.0.2

Haciendo ping a 10.8.0.2 con 32 bytes de datos:
Respuesta desde 10.8.0.2: bytes=32 tiempo=9ms TTL=63
Respuesta desde 10.8.0.2: bytes=32 tiempo=8ms TTL=63

Estadísticas de ping para 10.8.0.2:
    Paquetes: enviados = 2, recibidos = 2, perdidos = 0
            (0% perdidos),
    Tiempos aproximados de ida y vuelta en milisegundos:
        Mínimo = 8ms, Máximo = 9ms, Media = 8ms
```

