


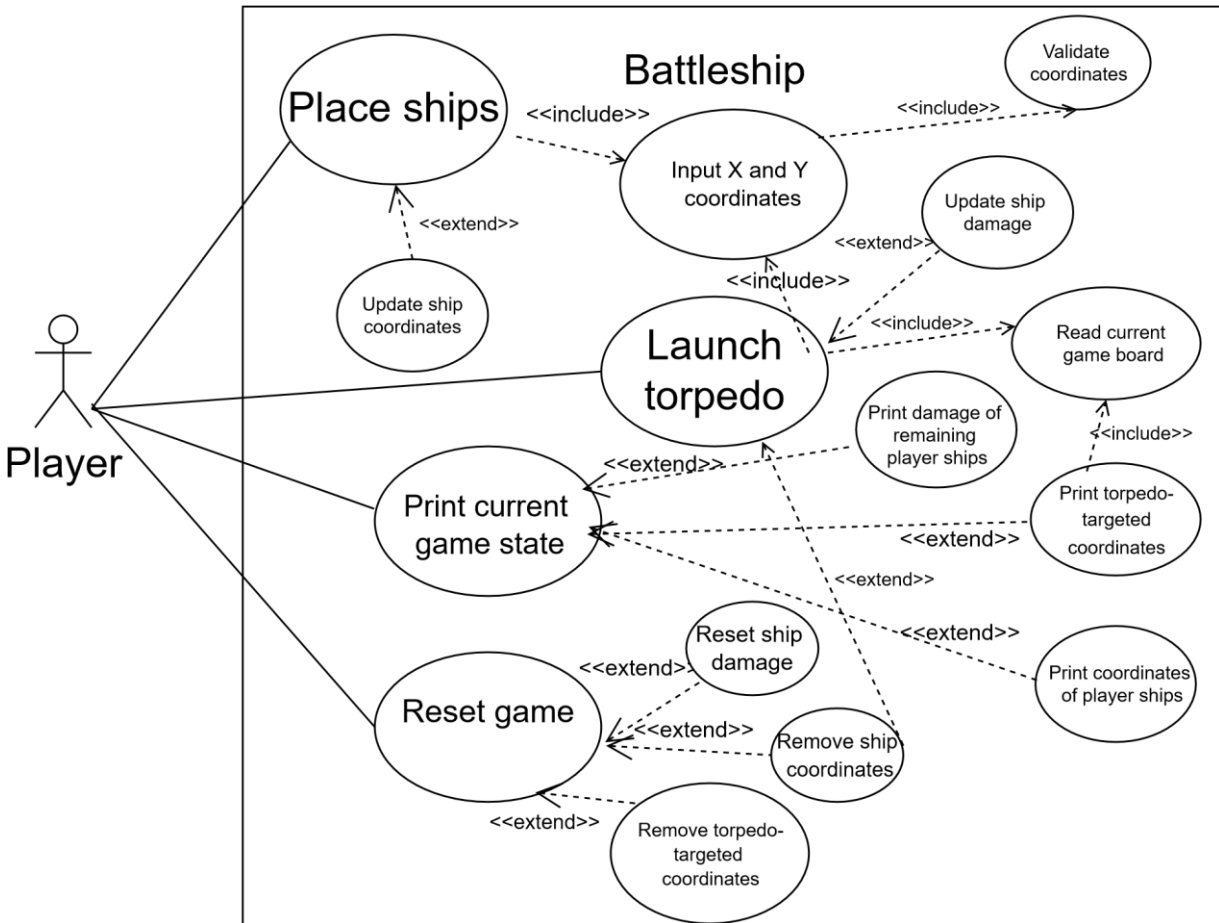

Use Case: Launch torpedo

Description: Launch a torpedo at a specific coordinate on the board

Actors: Player

Precondition: The X and Y values designating the coordinates must be inputted.

Main success scenario:

User

1. Player requests to launch torpedo
3. The player provides the X and Y coordinates.

System

2. The system prompts the user for x and y coordinates.
4. The system launches a torpedo at the specified location.
5. Update ship damage if hit, done after reading the game board.
6. Remove ship coordinates if sank, done if ship damage reaches max.

Alternative:

None

Exceptional:

Player inputs are invalid (out of bounds, not number, etc); the system prompts user for new coordinates.

Use Case: Place ships

Description: Set the locations for the ships

Actors: Player

Precondition: Must be done at the start of every game; can only be done once.

Main success scenario:

User

2. The user inputs sets of coordinates for their ships

System

1. Prompts player to specify the coordinates of each ship.

3. The system updates ship coordinates on the board.

Alternative:
None

Exceptional:

Player inputs are invalid (out of bounds, not numbers, etc); the system prompts the user for new coordinates.

Use Case: Reset game

Description: Resets the current game

Actors: Player

Precondition: None

Main success scenario:

User

1. User requests to reset the game.
3. The user confirms their decision.

System

2. The system prompts the user for a confirmation.
4. The system resets both players' ship damage, coordinates, and torpedo-targeted coordinates, effectively resetting the entire game.

Alternative: None

Exceptional: None