


MOSS-Image global architecture

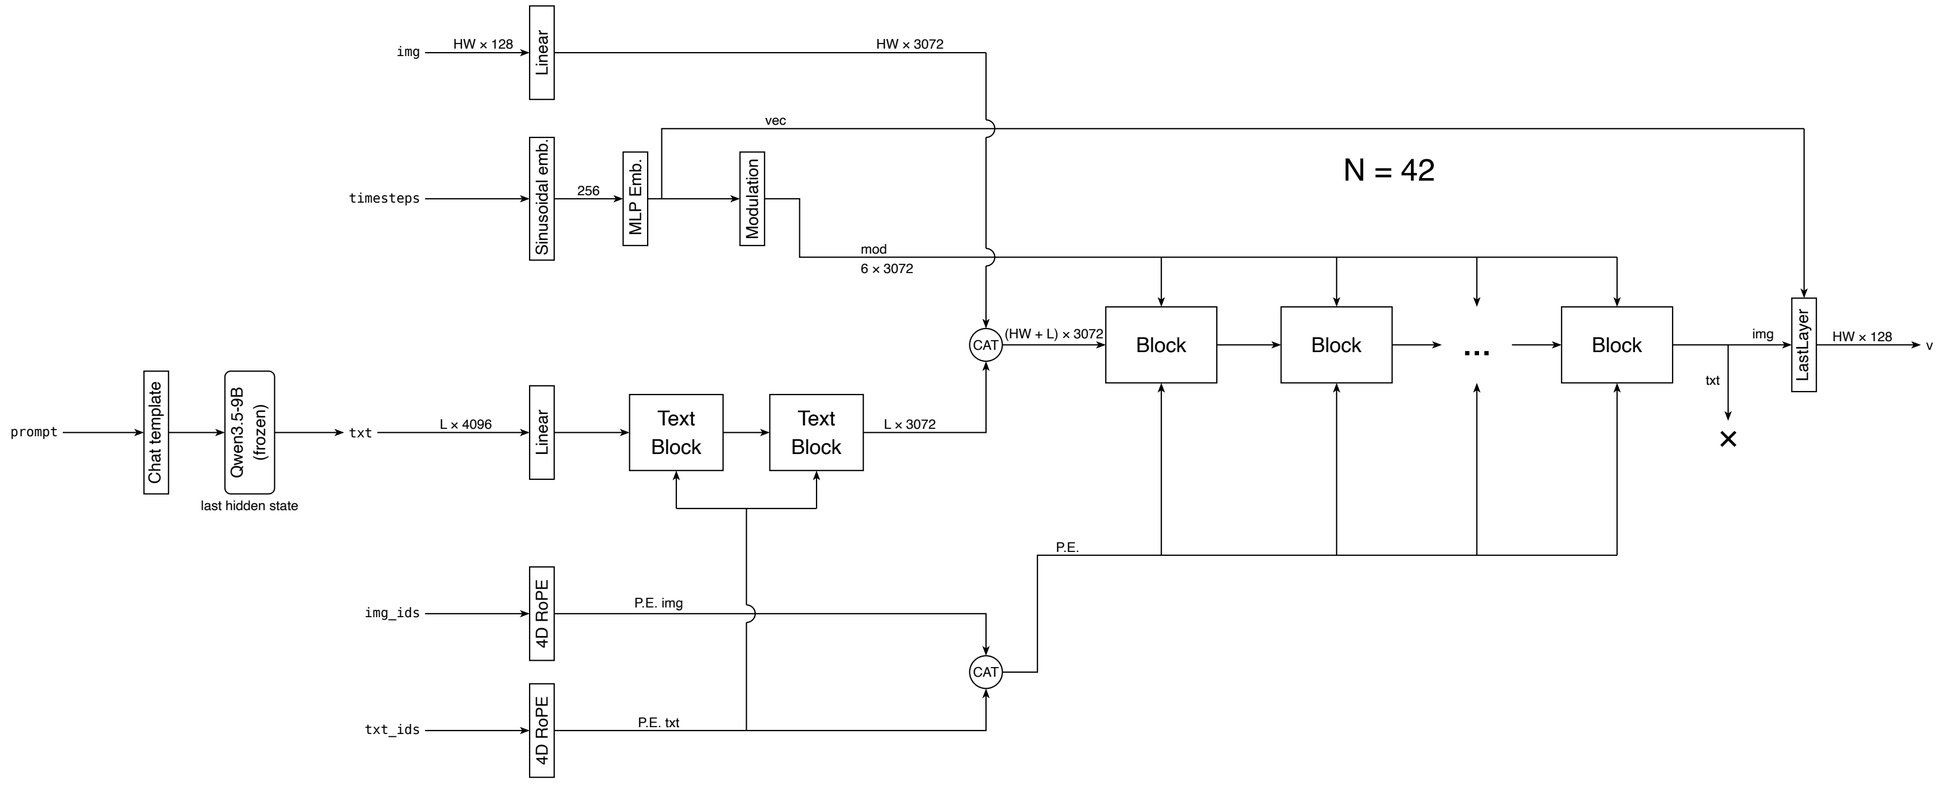

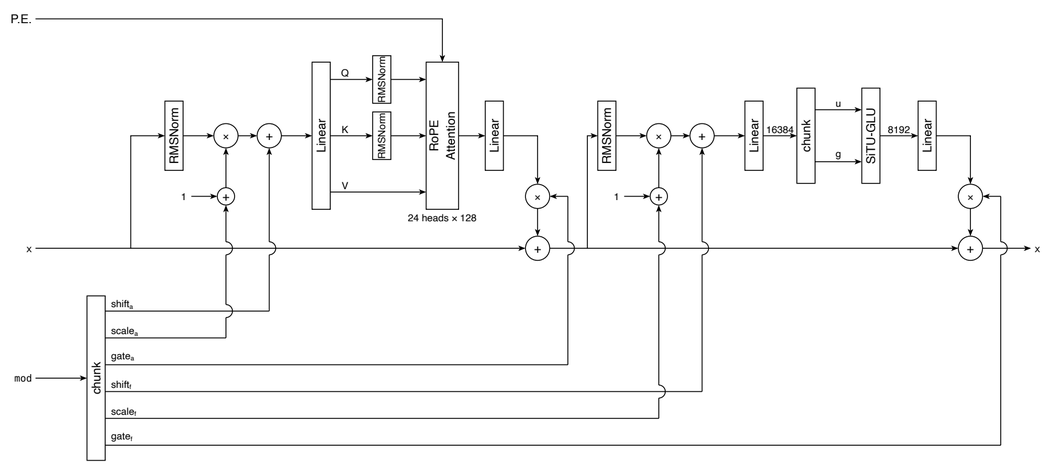


Block


same `mod` for all 42 blocks

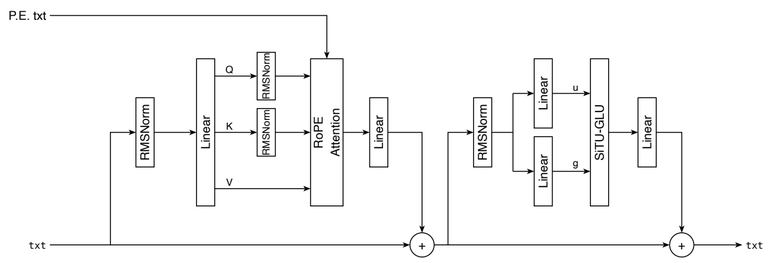

Text Block




MLP Emb.




Modulation

computed once from `vec`, shared by every block




LastLayer

image tokens only




SiTU-GLU




Softcap


$\mathrm{softcap}_\beta(x) = \beta \tanh(x / \beta)$

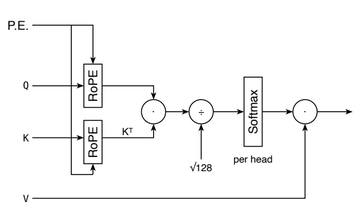

RoPE Attention




RoPE




token	r	t	h	w
image (i, j)	0	L	i − (H − 1) / 2	j − (W − 1) / 2
text k	0	k	0	0

4D RoPE

r = 0 for every token, so the r quarter of each head is never rotated

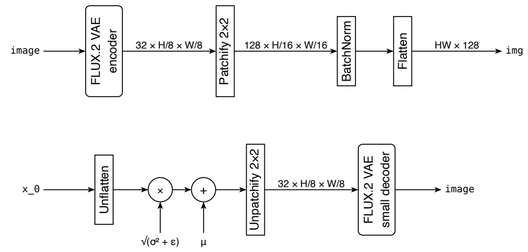

FLUX.2 latent space

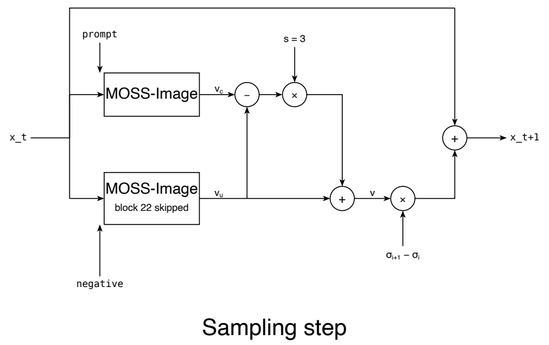

Sampling step

default: 50 Euler steps, shift 5, CFG 3

References

- source code: github.com/OpenMOSS/MOSS-Image (`pipeline_moss_image.py`) and ComfyUI `comfy/ldm/moss_image`
- MOSI.AI, *MOSS-Image Technical Report*, 2026 (arXiv:2610.23374)
- shared modulation: Black Forest Labs, FLUX, 2024
- SiTU-GLU: Kimi Team, *Kimi K3: Open frontier intelligence*, 2026
- H, W: latent token grid (image size / 16), L: number of prompt tokens